

Slide Unit/Double Rod Type

Series CX2

Slide Bearing: ø10, ø15, ø25

How to Order

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø10, ø15
	Rc 1/8	
TN	NPT 1/8	ø25
TF	G 1/8	

CX2 **N** **15** **-** **100** **B** **-**

With auto switch

C **DB** **X2** **N** **15** **-** **100** **B** **-** **J79W** **-**

Cylinder with auto switch

Symbol	Specifications/Mounting
DB	With auto switch/ Housing mounting
DP	With auto switch/ Plate mounting

Type

N	Non-lube type
H	Air-hydro type (Except ø10)

Bore size/Stroke (mm)

ø10	25, 50, 75, 100
ø15	25, 50, 75, 100, 125, 150, 175, 200
ø25	25, 50, 75, 100, 125, 150, 175, 200

For ø15 and ø25, strokes up to 300 are available as made-to-order. (-XB11)

Made to Order

* Refer to page 465 for Made to Order specifications.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* For the applicable auto switch model, refer to the table below.

Cushion (Option)

Nil	With adjusting bolt (2 pcs.)
B	With shock absorber (2 pcs.)
BS	With shock absorber (1 pc.)

Applicable Auto Switch/Refer to pages 1719 to 1827 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch part no.		Applicable cylinder size		Lead wire length (m)				Pre-wired connector	Applicable load								
					DC	AC	Electrical entry		Housing mounting	Plate mounting	0.5 (Nil)	3 (L)	5 (Z)	None (N)										
							Perpendicular	In-line																
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5V, 12V	—	F7NV	F79	ø15	ø10	●	●	○	—	○	IC circuit	Relay PLC							
		3-wire (PNP)		F7PV			F7P	●			●	○	—	○										
	Connector	2-wire		12V	J79C		—	●			●	○	—	○	—									
		3-wire (NPN)		5V, 12V	F7NWX		F79W	●			●	○	—	○		IC circuit								
	3-wire (PNP)	—		F7PW	●		●	○			—	○												
	Grommet	2-wire		12V	F7BWV		J79W	●			●	○	—	○	—									
				F7BAV	F7BA		—	●			○	—	○											
	With diagnostic output (2-color indication)	4-wire (NPN)		5V, 12V	—		F79F	●			●	○	—	○	IC circuit									
Reed switch	—	Grommet	Yes	3-wire	—	5V	—	A76H	ø15	ø10	●	●	—	—	—	IC circuit	—							
				—	—	200V	A72	A72H			●	●	—	—	—	—								
				2-wire	12V	100V	A73	A73H			●	●	●	—	—	—								
					5V, 12V	100 V or less	A80	A80H			●	●	—	—	—	IC circuit								
		Connector	No	24V	12V	—	A73C	—		ø25	ø15	●	●	●	●	—		—	—					
					5V, 12V	24 V or less	A80C	—				●	●	●	●	—		—	—	IC circuit				
					Grommet	Yes	3-wire	—				5V	—	—	E76A	ø10		—	●	●	—	—	—	—
							12V	100V				—	E73A	●	●				—	—	—	—		
		2-wire	5V, 12V	100 V or less			—	E80A		●	●	—	—	—	—				IC circuit					
			—	—			—	—		—	—	—	—	—	—				—					

* Lead wire length symbols: 0.5 m Nil

3 m L

5 m Z

None N

(Example) F79W

(Example) F79WL

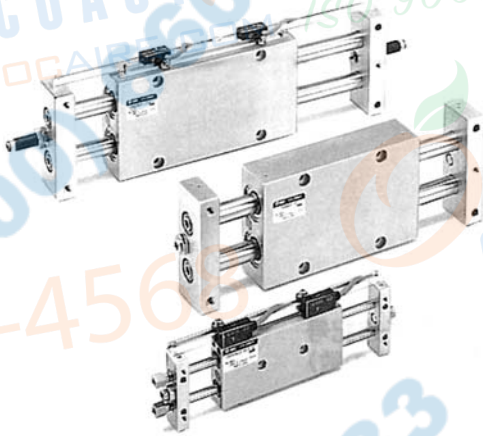
(Example) F79WZ

(Example) J79CN

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Refer to pages 1784 and 1785 for details of auto switches with a pre-wired connector.

* Auto switches are shipped together (not assembled).

Specifications

Type	Non-lube	Air-hydro type
Fluid	Air	Hydraulic fluid
Proof pressure	1.5 MPa	
Max. operating pressure	1.0 MPa	
Min. operating pressure	CX2N10	0.15 MPa
	CX2□15	0.15 MPa
	CX2□25	0.10 MPa
Ambient and fluid temperature	-10°C to +60°C	
Piston speed (Non-lube)	With adjusting bolt	30 to 200 mm/s
	With shock absorber	30 to 500 mm/s
Cushion	With shock absorber (Option)	
Stroke adjustable range	Standard stroke: ±2 mm	
Max. load mass ⁽¹⁾	CX2N10	9.8 N
	CX2□15	29.4 N
	CX2□25	58.8 N
Non-rotating accuracy (Except piston rod) deflection	CX2N10	±0.1°
	CX2□15	±0.04°
	CX2□25	±0.02°
Accessory (Option)	Straight knock pin (2 pcs.), Adjusting bolt (-X138) ⁽²⁾ Shock absorber	

Note 1) Place the center of gravity of the load as close to the center of the slide unit as possible during operation. If they are placed far apart, consult with SMC.

Note 2) "-X138" has a stroke adjustable range of 12.5 mm on one side.

Table (1) Air-hydro/Piston Speed

Model	Plate mounting	Housing mounting
CX2H15	Refer to the below. ^{Note 1)}	5 to 50 mm/s
CX2H25	5 to 40 mm/s	5 to 100 mm/s

Note 1) Consult with SMC when the air-hydro type is mounted on a plate.

Note 2) Consult with SMC when units are used at a low speed (10 mm/s or faster) (when intermediate stops are not required) since -XB13 (Low speed specification) is available.

Note 3) When using the air-hydro type, use the double side hydro unit.

Shock Absorber Specifications

Shock absorber	RB0805	RB1006
Applicable slide unit	CX2N10, CX2□15	CX2□25
Maximum energy absorption (J)	0.98	3.92
Stroke absorption (mm)	5	6
Max. collision speed (m/sec)	0.05 to 5	
Max. operating frequency (cycle/min)	80	70
Max. allowable thrust (N)	147	353
Ambient temperature range (°C)	-10 to 80	
Spring force (N)	Extended	1.96
	Retracted	3.83
Mass (g)	15	25

*The above shows the maximum absorption energy per cycle. Accordingly, the operating frequency can be increased in accordance with the absorption energy.

*The shock absorber service life is different from that of the cylinder body depending on the operating conditions. Refer to the RB Series Specific Product Precautions for the replacement period.

Theoretical Output

Model	Rod size (mm)	Piston area (mm ²)	Operating pressure (MPa)								
			0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	(N)
CX2N10	6	101	20	30	40	51	61	71	81	91	
CX2□15	8	207	41	62	83	104	124	145	166	186	
CX2□25	14	597	119	179	239	299	358	418	478	537	

Note) Theoretical output (N) = Pressure (MPa) x Piston area (mm²)



Made to Order Specifications
(For details, refer to pages 1851 to 2021.)

Symbol	Specifications
-XB11	Long stroke type
-XB13	Low speed cylinder (5 to 50 mm/s)
-X146	Hollow piston rod
-X138	Adjustable stroke
-X168	CX helical insert thread
-X169	2 built-in magnets
-XC22	Fluororubber seals

CX2**CXW****CXT****CXSJ****CXS****D-□****-X□**Individual
-X□