

Direct Operated Regulator for 6.0 MPa (Relieving Type)

Series **VCHR**

Service life: 10 million cycles


Using **NSF-H1-certified grease** on the guide ring (sliding) part.

Improved durability under a high pressure environment with a **polyurethane elastomer poppet**

Adopting a **metal-sealed relief valve** to improve durability.

Special fluoro-resin sealant is adopted for the sliding part.

Stable responsiveness after extended disuse.
No likely to subject to a pressure.

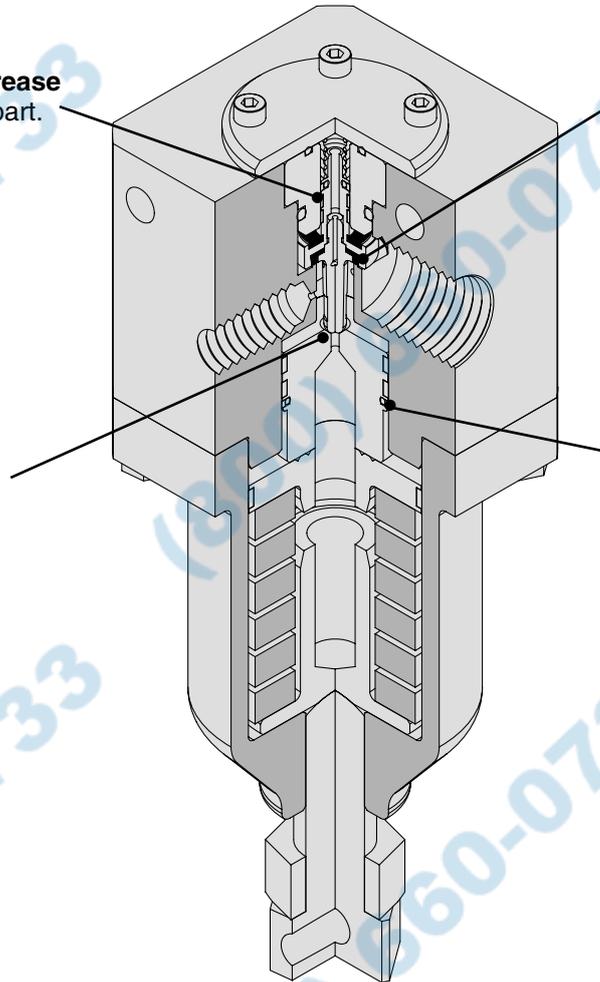

Made to Order
(Refer to page 635 for details.)

How to Order

VCHR 30 06 G

Body size

30
40

Thread type
(Conforming to ISO1179-1 on the pneumatic/hydraulic G thread)

Port size

Symbol	Port size	VCHR30	VCHR40
06	3/4	●	
10	1	●	●
14	1½		●

Symbol

