

# Tube Cutter

RoHS



## ■ Perpendicular cutting

Air leakage due to cutting failure reduced

## ■ Blade is replaceable

## ■ Safety lock contained

Model	TK-6
Applicable tubing material	Nylon, Soft nylon, Polyurethane, and other soft plastic tubing
Maximum tubing O.D. that can be cut	16 mm or less
Weight	130 g
Replacement blade part no.	TK6KAEHA (5 replacement blades + 2 mounting screws)

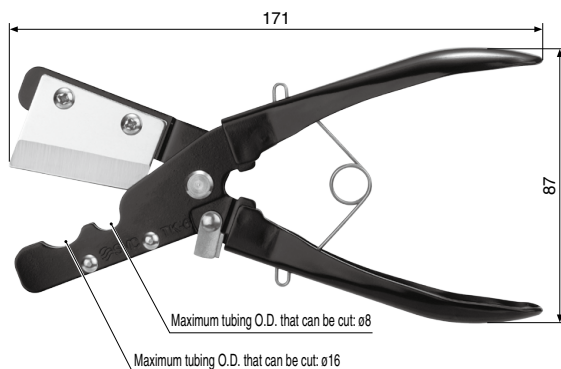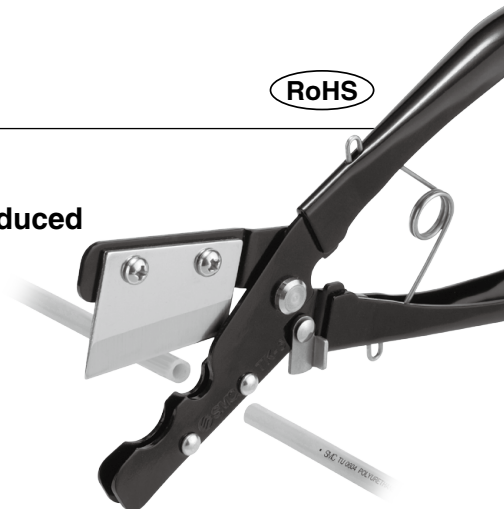

## ⚠ Precautions

Be sure to read before handling.



Refer to page 1154 for Safety Instructions. For Fittings and Tubing Precautions, refer to "Handling Precautions for SMC Products" and the Operation Manual on SMC website, <http://www.smcworld.com>

## ⚠ Caution

1. This is a resin tube cutter. Do not use this for cutting electric wires, etc.
2. Do not apply lateral load to the blade to prevent damage.  
Do not use it with the blade damaged.
3. Never touch the blade in order to prevent injury.
4. Lock the tube cutter with the stopper to avoid exposure of the blade when not using it.



## How to Use

The stopper is unlocked to cut the tubing.



Unlocked

Ensure that the stopper is locked so that the blade is not exposed after using it to prevent injury.



Locked

Replacement blade is available. (Part no.: TK6KAEHA)

# TK-6