


Piping Module

Series KB

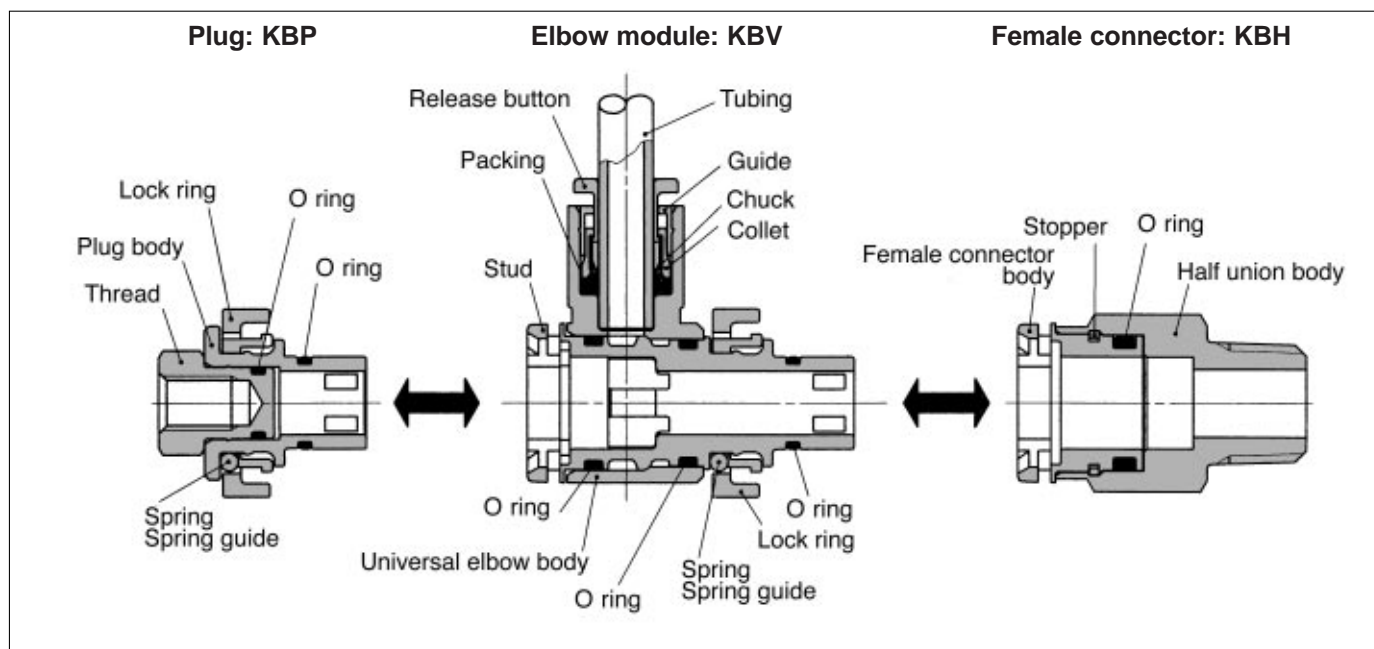

Suitable for centralized distribution of supply air!

Easy distribution utilizing One-touch fittings!

One-touch fitting installation without the use of tools.

Locking system makes the use of tools unnecessary and piping more efficient.

Air output direction possible through 360°.

Universal construction allows for changes in air output direction after connections are completed.



Applicable Tubing

Tube material	Nylon, Soft nylon, Polyurethane
Tube O.D.	ø4, ø6, ø8, ø10, ø12, ø16

Applicable Thread Size

Male thread	R(PT) 1/8, R(PT) 1/4, R(PT) 3/8, R(PT) 1/2
Female thread	M5 X 0.8, M6 X 1, Rc(PT) 1/8, Rc(PT) 1/4, Rc(PT) 3/8, Rc(PT) 1/2

Specifications

Operating fluid		Air
Max.operating pressure		1.0MPa
Max.operating vacuum pressure		−100kPa
Proof pressure		3.0MPa
Ambient and fluid temperature		−5 to 60°C (No freezing)
Thread	Thread portion	JIS B 0203 (Taper pipe thread)
		JIS B 0209, Class 2 (Metric coarse thread)
	Nut	JIS B 0211, Class 2 (Metric fine thread)
Sealant (Male thread)		With sealant (standard)
Copper-free specification		All brass parts electroless nickel plated (standard)

Component Materials

Body	C3604BD, PBT, POM
Stud	POM
Lock ring	POM
Spring	SUS304WPB
Spring guide	POM
Stopper	POM
Thread	C3604BD
Guide	SUS304, C3604BD, POM
Collet, Release button	POM
Packing, O ring	NBR
Chuck	Stainless steel (SUS304)

K□

M□

H□

D□

MS

T□

How to Order

1

Air Output Port: KBV, KBZ (P.2.1-76)

KB V 1 04


Style

Body size

Tube size/
Connecting female
thread size


Branch elbow module: KBZ

Part No.	Tube O.D.
KBZ1-04	4
KBZ1-06	6
KBZ2-08	8
KBZ3-10	10
KBZ3-12	12
KBZ4-12	12

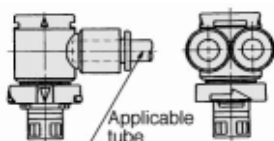


Elbow module: KBV

Part No.	Tube O.D.
KBV1-04	4
KBV1-06	6
KBV2-06	6
KBV2-08	8
KBV3-08	8
KBV3-10	10
KBV3-12	12
KBV4-12	12
KBV4-16	16



Elbow socket module: KBV

Part No.	T Connecting thread
KBV1-M5	M5 X 0.8
KBV1-M6	M6 X 1
KBV2-M5	M5 X 0.8
KBV2-M6	M6 X 1
KBV2-R1	Rc(PT) 1/8
KBV3-R1	Rc(PT) 1/4
KBV3-R2	Rc(PT) 1/4
KBV4-R2	Rc(PT) 1/4
KBV4-R3	Rc(PT) 3/8



Air supply port: KBE, KBH, KBB, KBS, KBL (P.2.1-77, 2.1-78)

2

KB H 1 R1 S

Style

Body size

Tube size/
Connecting thread size

With sealant (only male thread)
.....standard specification


Male connector socket: KBB

Part No.	T Connecting thread
KBB1-M5	M5 X 0.8
KBB1-M6	M6 X 1
KBB3-R1	Rc(PT) 1/8
KBB4-R2	Rc(PT) 1/4




Bulkhead female connector: KBE

Part No.	Tube O.D.
KBE1-04	4
KBE1-06	6
KBE2-08	8
KBE2-10	10
KBE3-08	8
KBE3-10	10
KBE3-12	12
KBE4-12	12




Female connector union: KBH

Part No.	T Connecting thread
KBH1-R1S	R(PT) 1/8
KBH2-R1S	R(PT) 1/4
KBH2-R2S	R(PT) 3/8
KBH3-R2S	R(PT) 1/4
KBH3-R3S	R(PT) 3/8
KBH3-R4S	R(PT) 1/2
KBH4-R3S	R(PT) 3/8
KBH4-R4S	R(PT) 1/2



Female connector elbow union: KBL

Part No.	T Connecting thread
KBL1-R1S	R(PT) 1/8
KBL2-R1S	R(PT) 1/4
KBL2-R2S	R(PT) 3/8
KBL3-R2S	R(PT) 1/4
KBL3-R3S	R(PT) 3/8
KBL3-R4S	R(PT) 1/2
KBL4-R3S	R(PT) 3/8
KBL4-R4S	R(PT) 1/2




Female connector socket: KBS

Part No.	T Connecting thread
KBS1-R1	Rc(PT) 1/8
KBS2-R2	Rc(PT) 1/4
KBS3-R3	Rc(PT) 3/8
KBS4-R4	Rc(PT) 1/2




3

Other piping material: KBN, KBD, KBR (P.2.1-79)

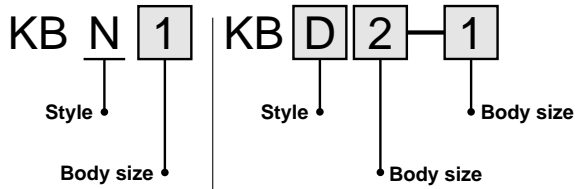


Nipple: KBN

Part No.
KBN1
KBN2
KBN3
KBN4




Different diameter elbow female connector module: KBD

Part No.
KBD2-1
KBD3-2
KBD4-3




Different bore module: KBR

Part No.
KBR2-1
KBR3-2
KBR4-3




4

Plug/Cap: KBP, KBC (P.2.1-80)

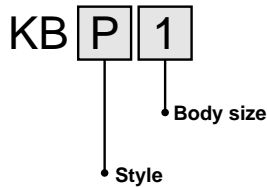


Plug: KBP

Part No.
KBP1
KBP2
KBP3
KBP4




Cap: KBC

Part No.
KBC1
KBC2
KBC3
KBC4





5

Bracket: KBX (P.2.1-80)

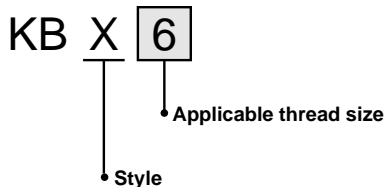


Bracket: KBX


Part No.
KBX6
KBX12
KBX14
KBX16
KBX20
KBX22




Combination Examples

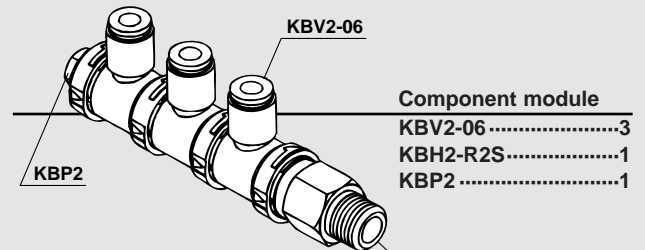


Component module
KBV2-063
KBH2-R2S1
KBP21

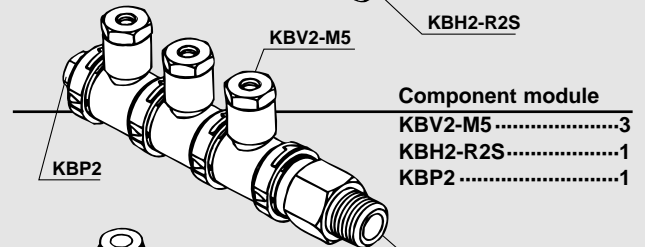


Component module
KBV2-M53
KBH2-R2S1
KBP21

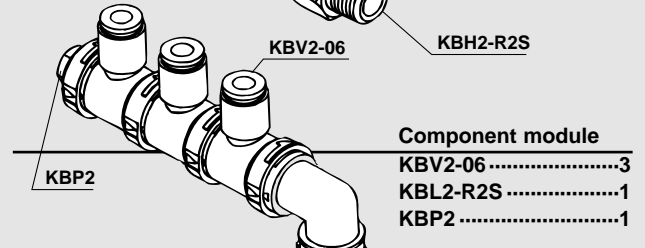


Component module
KBV2-063
KBL2-R2S1
KBP21

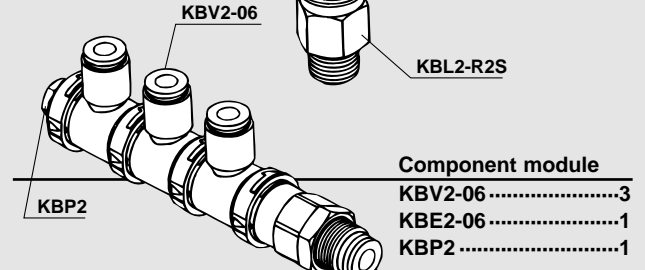


Component module
KBV2-063
KBE2-061
KBP21

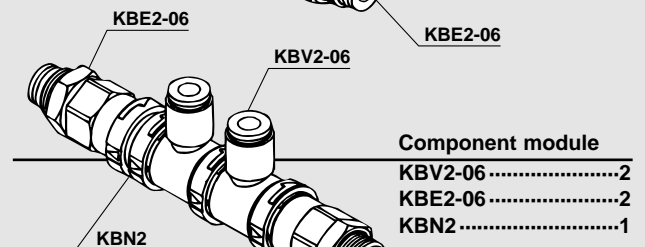

Component module
KBV2-062
KBE2-062
KBN21

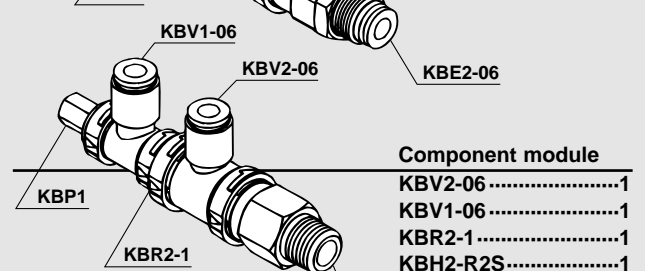

Component module
KBV2-061
KBV1-061
KBR2-11
KBH2-R2S1
KBP11

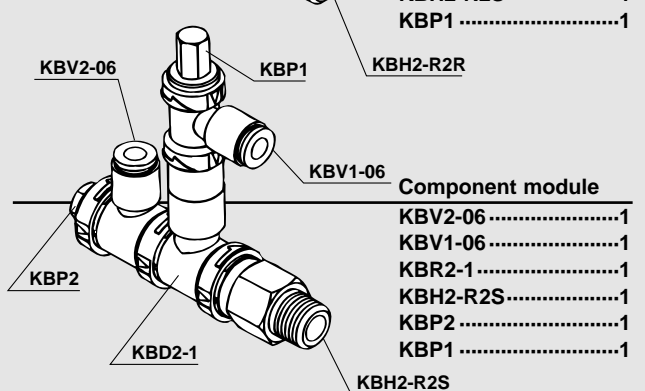

Component module
KBV2-061
KBV1-061
KBR2-11
KBH2-R2S1
KBP21
KBP11

K□

M□

H□

D□

MS

T□


⚠ Precautions

Be sure to read before handling.
Refer to p.0-26 and 0-27 for Safety Instructions and common precautions on the products mentioned in this catalog, and refer to p.2.0-7 and 2.0-8 for more detailed precautions of every series.


How to Install

⚠ Caution

- ① Insert each piping module by matching the arrows on the lock ring and the body of the other module. Insert together. If it becomes difficult to match both modules, rotate modules to left and right while pushing together. When a match is not done, piping material will eject under pressure.
*Refer to piping module insertion and removal diagram.
(To secure rigidity, it is slightly stiff.)




- ② Confirm insertion by turning modules to right and left or pulling on them. But do not touch the lock ring in the process.

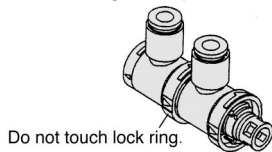


How to Remove

⚠ Caution

- ① Exhaust the pressure in pipe before removing. If lock is released under pressure, piping material will eject. Turn the lock ring 90° clockwise (in the direction of the arrow). This will cancel out the effects of the lock ring. You need not hold lock ring in place. Lock ring will hold automatically in this position

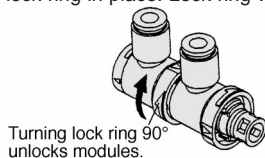

- ② Remove the modules by pulling apart. Do not touch the lock ring. After removal, the lock ring will return to normal position automatically because of a return spring.

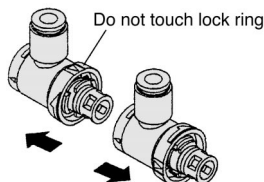

Others


⚠ Caution

- ① If unit is longer than 5 stations, please use brackets to prevent deflection and/or bending of unit.
- ② Each type of module materials is capable of being piped with all other materials.
- ③ When attaching female connector union and female connector elbow union, use the body's hexagon surface and tighten threads with a suitable wrench. Use the root nearest the thread when tightening with a wrench.


Piping Module-Insertion and Removal Structural Drawing

Piping Module-Male Side


Piping Module-Female Side

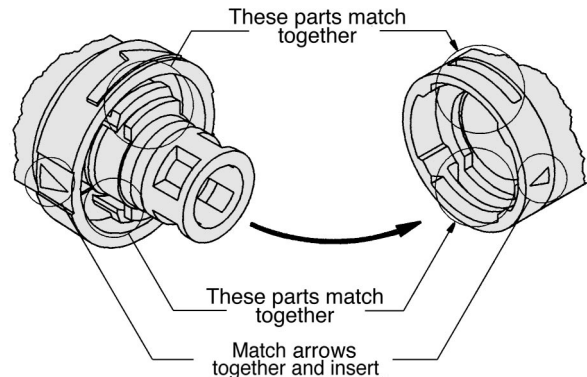


- ① Match arrows together and insert piping module male side into female side.

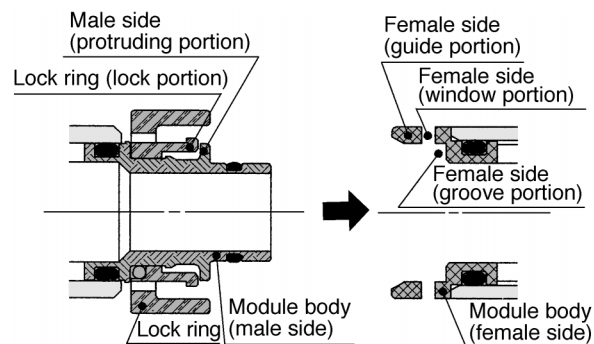

- ② By inserting the lock ring, the lock portion touches female side guide portion and falls into the direction shown with the arrow.



- ③ By pushing tighter, lock portion goes over female side guide portion and snaps into window slot portion. Male side protruding portion snaps into female side groove portion. This performs the function of a detent.




Male module inserted fully into position.


- ④ To remove, rotate lock ring 90° to release lock portion from female side window slot, then the lock is released. Removal is complete.

1 Air Output Port

Elbow module: KBV




Part No.	Tube O.D.	D1	D2	D3	L1	L2	L3	L4	A	M	Weight (g)
KBV1-04	4	10.4	13.6	16.8	22.0	33.0	10.4	13.0	19.5	16.0	4.3
KBV1-06	6	12.8			24.0					17.0	4.9
KBV2-06			17.6	21.0	25.0	36.0	10.1	15.5	22.5		7.3
KBV2-08	8	15.2			28.5					18.5	8.3
KBV3-08					29.5			20.5			15.0
KBV3-10	10	18.5	25.2	28.6	31.5	42.6	11.4	19.5	27.0	21.0	17.5
KBV3-12	12	20.9			34.0						19.3
KBV4-12			27.0	30.4	35.0	41.4	12.2	18.0	25.0		20.2
KBV4-16	16	26.5	32.3		39.0	55.0		24.0	38.5	25.0	36.4

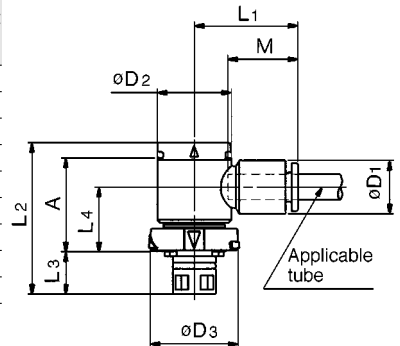

Elbow socket module: KBV





Part No.	T Connecting thread	H (Hex.)	D1	D2	D3	L1	L2	L3	L4	A	Weight (g)
KBV1-M5	M5 X 0.8	12	12.8	13.6	16.8	25.0	33.0	10.4	13.0	19.5	12.4
KBV1-M6	M6 X 1			17.6	21.0	26.0	36.0	10.1	15.5	22.5	14.8
KBV2-M5	M5 X 0.8	14	15.2			29.5					15.3
KBV2-R1	M6 X 1			25.2	28.6	30.5	42.6	11.4	20.5	27.0	22.0
KBV3-R1	Rc(PT) 1/8	19	18.5			32.0			19.5		27.0
KBV3-R2	Rc(PT) 1/4	22	20.9	27.0	30.4	36.5	41.4	12.2	18.0	25.0	40.6
KBV4-R2						43.0					44.7
KBV4-R3	Rc(PT) 3/8										

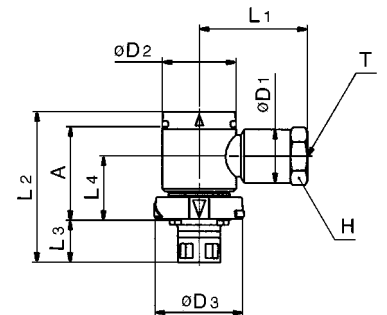

Branch elbow module: KBZ



Part No.	Tube O.D.	D1	D2	D3	L1	L2	L3	L4	A	M	P	Weight (g)
KBZ1-04	4	10.4	13.6	16.8	22.0	33.0	10.4	13.0	19.5	16.0	10.4	5.8
KBZ1-06	6	12.8			24.0					17.0	12.8	7.1
KBZ2-08	8	15.2	17.6	21.0	28.5	36.0	10.1	15.5	22.5	18.5	15.2	11.6
KBZ3-10	10	18.5	25.2	28.6	31.5	42.6	11.4	19.5	27.0	21.0	18.5	24.4
KBZ3-12	12	20.9			34.0							27.1
KBZ4-12			27.0	30.4	35.0	41.4	12.2	18.0	25.0	22.0	20.9	28.5

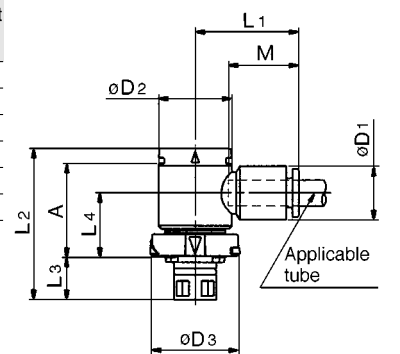

K□

M□

H□

D□

MS

T□

Series KB


2 Air Supply Port

Female connector union: KBH



Part No.	T Connecting thread	H (Hex.)	D	L	A*	Weight (g)
KBH1-R1S	R(PT) 1/8	14	13.6	27.0	20.0	13.4
KBH2-R1S				29.0	21.5	19.2
KBH2-R2S	R(PT) 1/4	17	17.6	32.0	22.5	23.3
KBH2-R3S	R(PT) 3/8			27.5	17.5	22.5
KBH3-R2S	R(PT) 1/4	19	25.2	35.5	25.4	26.5
KBH3-R3S	R(PT) 3/8			31.0	20.5	23.2
KBH3-R4S	R(PT) 1/2	22			19.0	41.5
KBH4-R3S	R(PT) 3/8	24	27.0	35.5	24.5	44.5
KBH4-R4S	R(PT) 1/2			31.5	19.0	36.5

* Reference dimensions after R(PT) thread installation.

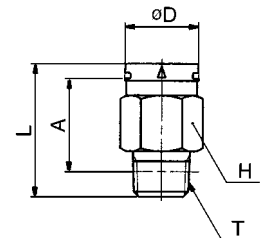


Female connector elbow union: KBL



Part No.	T Connecting thread	H (Hex.)	D	L1	L2	A1*	A2	Weight (g)
KBL1-R1S	R(PT) 1/8	14	13.6	18	38.0	27.0	15.0	14.8
KBL2-R1S					43.5	30.5		23.2
KBL2-R2S	R(PT) 1/4	17	17.6	19	46.5	31.5	15.5	27.3
KBL2-R3S	R(PT) 3/8				42.0	26.5		26.5
KBL3-R2S	R(PT) 1/4	19	25.2	22	56.0	37.5	18.0	32.6
KBL3-R3S	R(PT) 3/8				51.5	32.5		29.3
KBL3-R4S	R(PT) 1/2	22				31.0		47.6
KBL4-R3S	R(PT) 3/8	24	27.0	24	61.5	41.5	19.5	57.6
KBL4-R4S	R(PT) 1/2				57.5	36.0		48.8


* Reference dimensions after R(PT) thread installation.

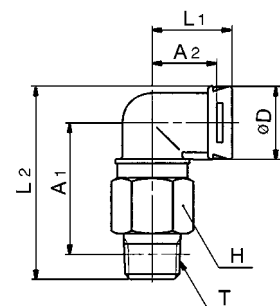

Bulkhead female connector: KBE



Part No.	Tube O.D.	T Connecting thread	H1 (Hex.)	H2 (Hex.)	D	L	A1	A2	M	Weight (g)
KBE1-04	4	M12 X 1	14	14	13.6	34.5	15.0	31.5	16.0	17.9
KBE1-06	6	M14 X 1	17	17		35.5	15.5	32.0	17.0	27.0
KBE2-06						37.5	17.0	33.5		26.0
KBE2-08	8	M16 X 1		19	17.6	39.0	15.5	35.5	18.5	29.5
KBE2-10	10	M20 X 1		24		41.5	15.5	38.0	21.0	57.5
KBE3-08	8	M16 X 1	22	19	25.2	43.5	19.5	39.5	18.5	51.6
KBE3-10	10	M20 X 1		24		45.0	18.5	41.0	21.0	63.0
KBE3-12	12	M22 X 1	24	27	27.0	46.0		42.0	22.0	83.4
KBE4-12						44.0	18.0	41.5		66.6

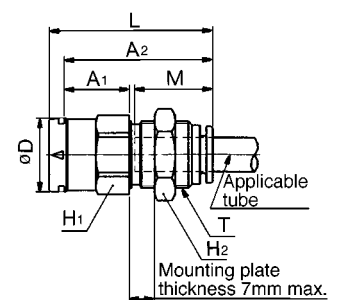


2 Air Supply Port


Male connector socket: KBB




Part No.	T Connecting thread	H (Hex.)	D	L1	L2	A	Weight (g)
KBB1-M5	M5 X 0.8	8	16.8	29.5	11.5	19.0	6.0
KBB2-M6	M6 X 1	10	21.0	23.0	5.0	12.5	6.3
KBB3-R1	Rc(PT)1/8	14	28.6	27.5	6.5	16.0	11.4
KBB4-R2	Rc(PT)1/4	19	30.4	31.5	9.5	19.5	24.1

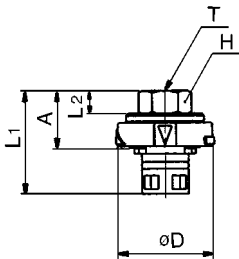

Female connector socket: KBS



Part No.	T Connecting thread	H (Hex.)	D	L1	L2	A	Weight (g)
KBS1-R1	Rc(PT)1/8	14	13.6	28.0	11.0	25.0	17.8
KBS2-R2	Rc(PT)1/4	17	17.6	33.5	14.0	30.0	28.5
KBS3-R3	Rc(PT)3/8	19	25.2	38.5	17.0	34.5	33.8
KBS4-R4	Rc(PT)1/2	24	27.0	39.0	20.0	35.0	57.1

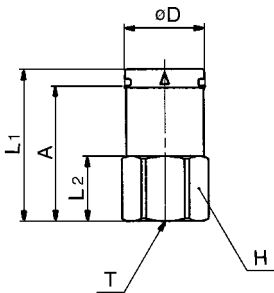

- K** ☐
- M** ☐
- H** ☐
- D** ☐
- MS** ☐
- T** ☐


Series KB

3 Other Piping Material


Nipple: KBN




Part No.	D	L	A	Weight (g)
KBN1	16.8	35.0	14.0	2.9
KBN2	21.0		15.0	4.6
KBN3	28.6	39.0	16.5	7.2
KBN4	30.4	41.5	17.0	10.2



Elbow different diameter female connector module: KBD

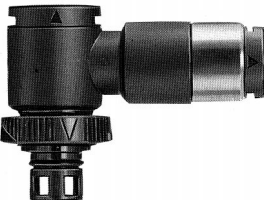


Part No.	D1	D2	D3	L1	L2	L3	L4	A1	A2	Weight (g)
KBD2-1	15.2	17.6	21.0	39.0	36.0	10.1	15.5	22.5	35.5	18.0
KBD3-2	20.9	25.2	28.6	38.0	42.6	11.4	19.5	27.0	34.5	28.9
KBD4-3	26.5	32.3	30.4	44.5	55.0	12.2	24.0	38.5	40.0	59.5

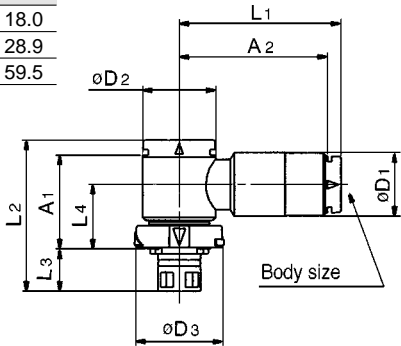

Different diameter module: KBR



Part No.	D	L	A	Weight (g)
KBR2-1	21.0	21.5	8.0	2.8
KBR3-2	28.6	25.0	10.0	4.3
KBR4-3	30.4	30.5	14.0	8.8

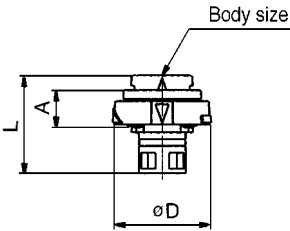


4 Plug/Cap

Plug: KBP




Part No.	H (Hex.)	D	L1	L2	A	Weight (g)
KBP1	8	16.8	29.5	11.5	19.0	5.6
KBP2	10	21.0	23.0	5.0	12.5	6.8
KBP3	14	28.6	25.5		14.0	13.4
KBP4	19	30.4	27.0		15.0	24.0


Bracket mounting thread
M6 X 1 X 8ℓ



Cap: KBC



Part No.	H (Hex.)	D	L1	L2	A	Weight (g)
KBC1	14	13.6	30.0	13.0	26.5	23.4
KBC2	17	17.6	32.5		28.5	37.0
KBC3	19	25.2	35.5	14.0	31.5	46.7
KBC4	24	27.0	34.0	15.0	29.5	74.4

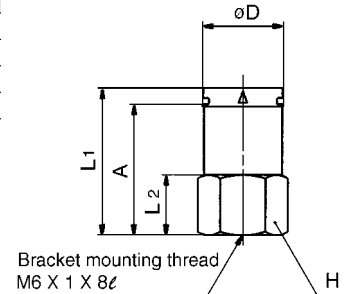


5 Bracket

Bracket: KBX



Part No.	A	Applicable model	Weight (g)
KBX6	7	KBP, KBC	27.5
KBX12	13	KBE1-04	26.1
KBX14	15	KBE1-06, KBE2-06	25.4
KBX16	17	KBE2-08, KBE3-08	24.4
KBX20	21	KBE2-10, KBE3-10	22.6
KBX22	23	KBE3-12, KBE4-12	21.6

* In case of KBX6, use the enclosed mounting screws designed for KBP (plug) and KBC (cap).
Screw size: Cross recessed round head screw (M6 X 1 X 8ℓ)
Screw color: Black

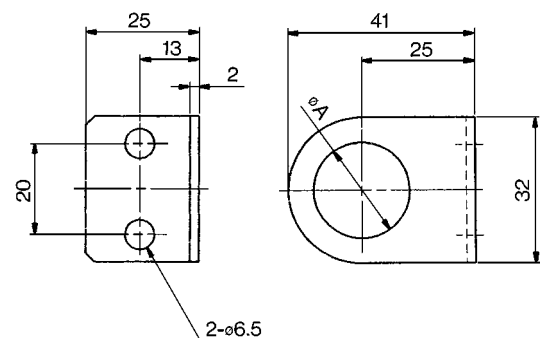

K□

M□

H□

D□

MS

T□