


Polyurethane Coil Tubing

Series TCU



For flexible tubing
Compact piping possible

Burst Pressure Characteristics Curve

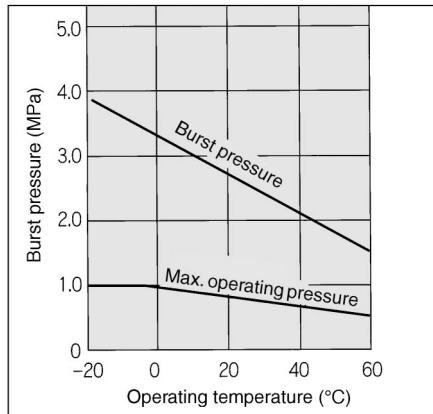

Specifications

Model	TCU 0425B-1	TCU 0425B-2	TCU 0425B-3	TCU 0604B-1	TCU 0604B-2	TCU 0604B-3	TCU 0805B-1
Number of tubes	1	2	3	1	2	3	1
Tube O.D. (mm)	4			6			8
Tube I.D. (mm)	2.5			4			5
Fluid	Air ⁽¹⁾						
Max. operating pressure ⁽²⁾	0.8MPa at 20°C						
Burst prssure	Refer to pressure characteristics curve.						
Operating temperature	-20 to +60°C						
Material	Polyurethane						
Color	Black						




Note 1) Consult SMC if using for other fluids than air.

Note 2) Refer to burst pressure characteristics curve for other temperatures.

Avoid abnormal temperature rises.

Dimensions

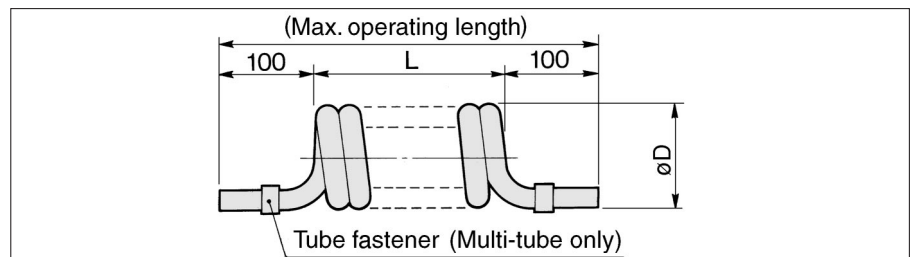


Spec. Part No.	Tube size (mm)		Dimension of coil (mm)		No. of tubes	No. coil windings per tube length	Max. operating length (m)	Standard unit of packing
	O.D.	I.D.	L	øD				
TCU0425B-1	4	2.5	210	18	1	52	1.5	5 tubes/case
TCU0425B-2			280	28	2	35		
TCU0425B-3			265	28	3	22		
TCU0604B-1	6	4	325	24	1	54	2	
TCU0604B-2			305	37	2	27	1.5	
TCU0604B-3					3	17	1	
TCU0805B-1	8	5	330	31	1	41	2	

* Dimensions are changeable due to material.

Made to Order

Change of coil turns, Color change

(Consult SMC for detailed specifications, dimensions and delivery.)

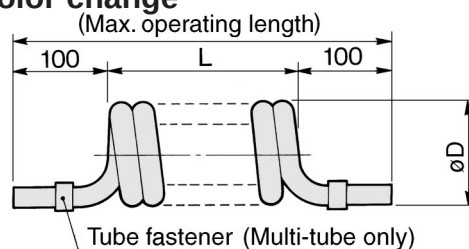

Spec. Part No.	Tube size (mm)		Coil (mm)		No. of tubes	No. coil windings per tube length	Max. operating length (mm)
	O.D.	I.D.	L	øD			
TCU0425□-1-N-X6	4	2.5	N X 4	18	1	3 to 90	L X 5.9 + 200
TCU0425□-2-N-X6			N X 8	28	2	3 to 90	L X 4.4 + 200
TCU0425□-3-N-X6			N X 12	28	3	3 to 63	L X 2.9 + 200
TCU0604□-1-N-X6	6	4	N X 6	24	1	3 to 90	L X 5.3 + 200
TCU0604□-2-N-X6			N X 12	37	2	3 to 66	L X 3.8 + 200
TCU0604□-3-N-X6			N X 18	37	3	3 to 44	L X 2.5 + 200

□ → B (Black), W (White), R (Red), BU (Blue), Y (Yellow), G (Green), C (Clear), YR (Orange)

Spec. Part No.	Tube size (mm)		Coil (mm)		No. of tubes	No. coil windings per tube length	Max. operating length (mm)
	O.D.	I.D.	L	øD			
TCU0805□-1-N-X6	8	5	N X 8	31	1	3 to 90	L X 5.2 + 200
TCU0805□-2-N-X6			N X 16	42	2	3 to 40	L X 3 + 200
TCU1065□-1-N-X6	10	6.5	N X 10	52	1	3 to 45	L X 5 + 200
TCU1065□-2-N-X6			N X 20	52	2	3 to 35	L X 3 + 200
TCU1208□-1-N-X6	12	8	N X 12	67	1	3 to 35	L X 5 + 200
TCU1208□-2-N-X6			N X 24	67	2	3 to 30	L X 3 + 200

K□

M□

H□

D□

MS

T□