



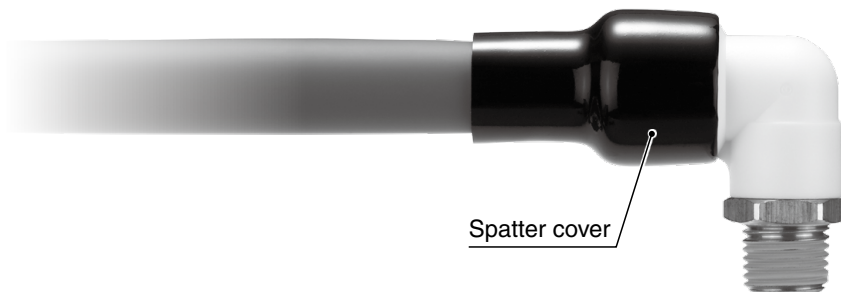


Flame Resistant (Equivalent to UL-94 Standard V-0) Spatter Cover

- Prevents the adhesion and entry of welding spatter
- Uses a flame-retardant material (Equivalent to UL-94 Standard V-0 Soft PVC)

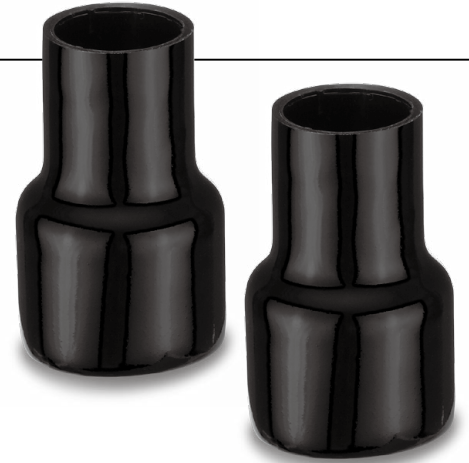

■ Applicable model and size

		FR One-touch Fitting KR-W2 Series	Flame Resistant Speed Controller with One-touch Fitting AS-W2 Series	Flame Resistant Flat Head Screwdriver Adjustable Speed Controller AS-W2D Series
				
Applicable fitting Applicable speed controller	ø6	KR□06-□□W2*1	AS□2□1F-□-06W2	AS□2□1F-□-06W2D
	ø8	KR□08-□□W2*1	AS□2□1F-□-08W2	AS□2□1F-□-08W2D
	ø10	KR□10-□□W2*1	AS□2□1F-□-10W2	AS□2□1F-□-10W2D
	ø12	KR□12-□□W2*1	AS□2□1F-□-12W2	AS□2□1F-□-12W2D
Applicable tubing		FR double layer/TRB, TRBU FR three layer/TRTU		
Applicable tubing O.D. (Inner tubing O.D.)		ø6, ø8, ø10, ø12		
Ambient temperature		-5 to 60°C		

*1 This product cannot be used with fittings such as KRU (union "Y") that have tube insertion parts close to each other.
For KRH (male connector) and KRE (bulkhead union) fittings, this product can only protect the release button and resin component parts.

*2 Sales unit: 10 pcs.

KR-□C-X1807



21-E776

KR-□C-X1807


How to Order

KR-**08**C-X1807

• Applicable tubing O.D.

06	ø6
08	ø8
10	ø10
12	ø12

Dimensions

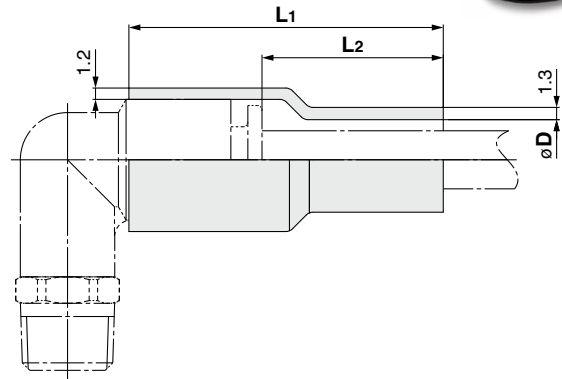

[mm]

Model	Applicable tubing O.D.	øD	L1	L2
KR-06C-X1807	6	8.5	33.3	19.2
KR-08C-X1807	8	10.5	34.5	19.3
KR-10C-X1807	10	12.5	37.2	20.2
KR-12C-X1807	12	14.5	37.9	20.2

⚠ Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.