


Solid State Auto Switch UL/CSA Certified



- UL, CSA certified
- UL, CSA certified + Compatible with material restrictions for secondary battery manufacture

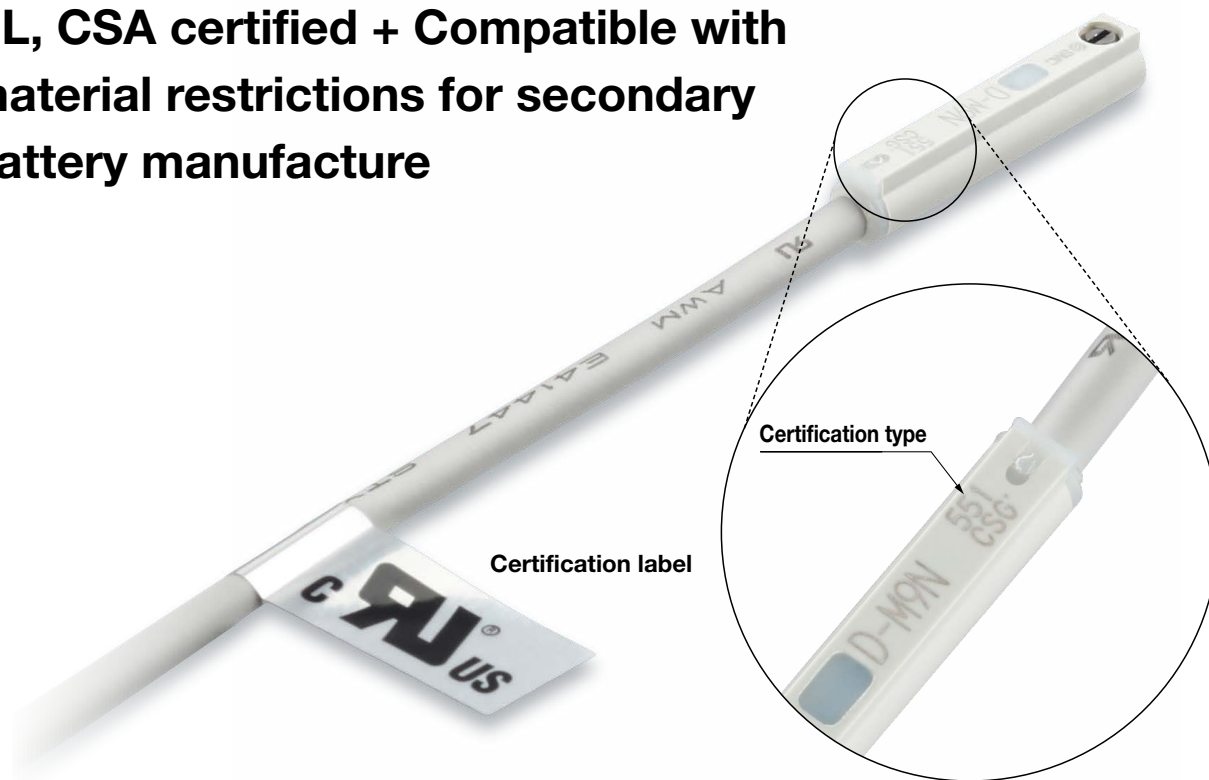

How to Order

Caution Auto switches must be ordered separately. They will be packaged separately. The auto switch cannot be ordered or shipped together with an actuator.

D-M9 -

Output type

Symbol	Specifications
B	DC 2-wire type
N	DC 3-wire type NPN output
P	DC 3-wire type PNP output

Indicator light

Symbol	Specifications
Nil	1 color

Electrical entry direction

Symbol	Specifications
Nil	Axial entry
V	Perpendicular entry

Certification type

Symbol	Specifications
551	UL, CSA certified
918	UL/CSA certified, Secondary battery compatible

Lead wire length + Connector


Symbol	Specifications
Nil	0.5 [m]
L	3 [m]
SAPC	M8-3 pin 0.5 [m]
SDPC	M12-4 pin 0.5 [m]

D-M9 **-551/918**




D-M9□-551/918

How to Identify Certified Products

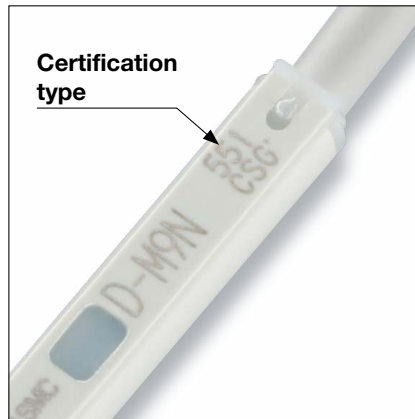

Dimensions and Specifications

The same as those of the standard (general purpose) D-M9□ auto switch
Refer to the **Web Catalog** for dimensions and specifications.

 Safety Instructions	Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.
--	--

SMC Corporation

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.
© 2025 SMC Corporation All Rights Reserved

D-G