

2-Color Display

New

Digital Flow Switch



Applicable fluid **Dry air, N₂, Ar, CO₂**

Wide range of flow measurement with one product

Flow ratio*1 **100:1** Smallest settable increment: **0.01 L/min**

*1 Excludes the PF2M725


(0.1 L/min for the flow ranges of 25, 50, 100 L/min)

	Port size	Flow range [L/min]								
		0.1	0.3	0.5	1	10	25	50	100	
PF2M710	C6	0.1					10			
PF2M725	C6		0.3				25			
PF2M750	C6			0.5				50		
PF2M711	C8				1				100	

Improved drainage and resistance to foreign matter


Bypass construction reduces the moist air or foreign matter in contact with the sensor, reducing accuracy deterioration and damage of the sensor.

Air containing moisture or foreign matter



Compact, Lightweight

Weight **27.3%** reduction (55 g → 40 g)

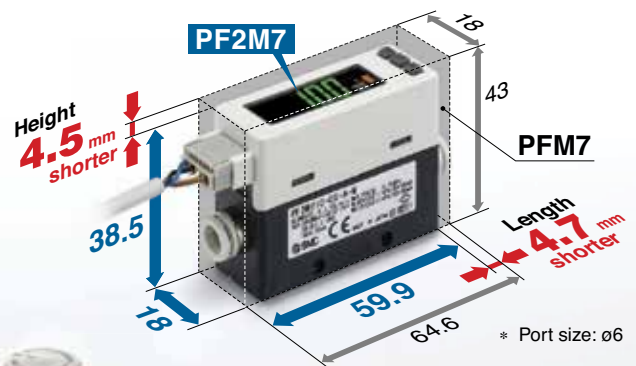

Low current consumption: 35 mA or less


* PFM7: 55 mA or less



PF2M7 Series

Reversible display mode

When the product is used upside down, the orientation of the display can be rotated to make it easier to read.

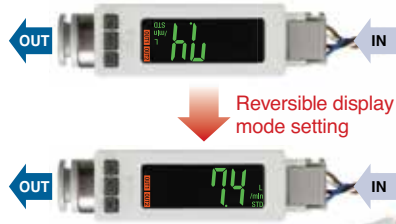

Flow adjustment valve is integrated.

- Space-saving design
- Reduced piping labor

Flow adjustment valve



Piping variations (Straight)

One-touch fitting: $\phi 6$

One-touch fitting: $\phi 8$



Display OFF mode



Unnecessary LEDs can be turned off and checked only when necessary. Can be used as a remote sensor

Mounting variations



Bracket




DIN rail



Panel mount


Analog free span function

The analog span point (5 V (10 V), 20 mA) can be changed within the rated pressure range of 10 to 105% with respect to the displayed value.

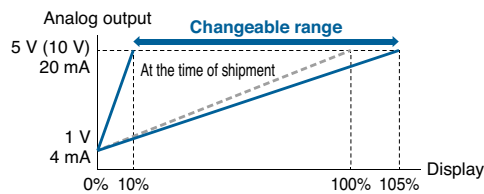

Application example

When it is required to output 5 V from the flow switch at 75 L/min, using a sensor that outputs 1 to 5 V at 1 to 100 L/min.

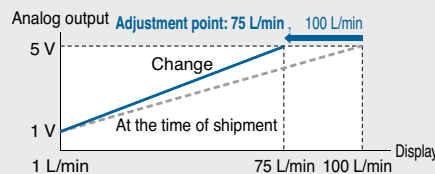

Delay time setting

Can be set between 0 and 60 s

The delay time can be set according to the application.

Grease-free


Functions p. 16

Output operation	Key lock
Forced output	Reset to the default settings
Analog free span	Delay time setting
Display color	Error display
Selection of display OFF mode	Setting of security code
Selectable analog output	Display mode
Reference condition	Display with zero cut-off setting
Peak/Bottom value display	Accumulated value hold
Reversible display	Simple setting
Digital filter setting	Zero clear


Selectable analog output function

1 to 5 V or 0 to 10 V can be selected.

Digital flow switch to save energy!

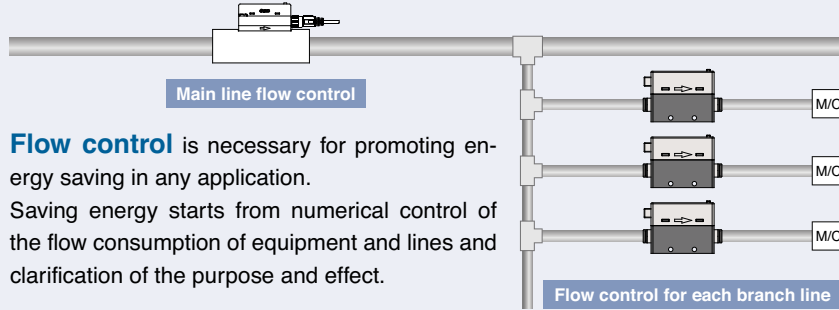

Flow control is necessary for promoting energy saving in any application. Saving energy starts from numerical control of the flow consumption of equipment and lines and clarification of the purpose and effect.

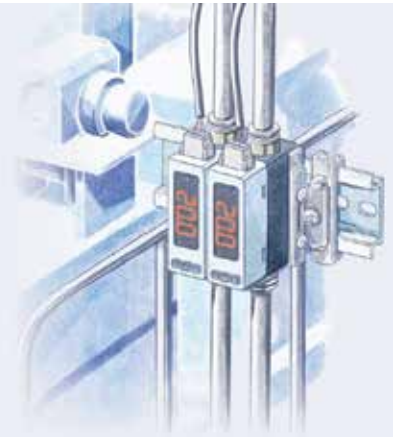


Digital display allows visualization of flow rate.



2-color display, Improved visibility



Can be selected according to the fluid used

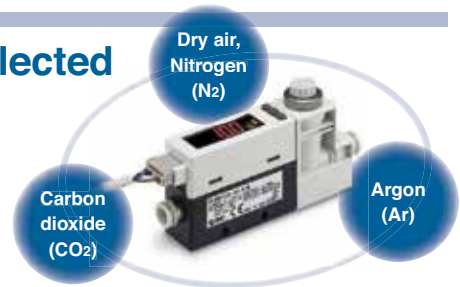

Recommended pneumatic circuit examples

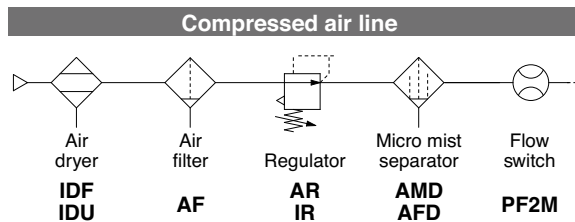

Applications

Control of metal wire tension

Air blow

- Flow control of N₂ gas to prevent lead frame oxidation
- N₂ blow prevents distortion of camera image due to air turbulence.

Welding machine

Models compatible with argon (Ar) and carbon dioxide (CO₂) mixed gas are available.
* Please contact SMC for details.


N₂ gas cylinder peripheral equipment








Accumulated indication shows the operating flow rate or residual amount (of N₂, etc.) in a gas cylinder.

Suction verification







Unit conversion table is located inside back cover.

Flow Switch Flow Rate Variations

Series	Applicable fluid	Detection method	Rated flow range [L/min]									
			-3	-2	-1	-0.5	0	0.5	1	2	3	
PFMV 	Dry air N ₂	Thermal type (MEMS)					0	0.5				
							0	1				
								0	3			

Series	Applicable fluid	Detection method	Smallest settable increment	Rated flow range [L/min]																							
				0.1	0.3	0.5	1	2	5	10	20	25	50	100	150	200	300	500	600	1000	2000	3000	6000	12000			
PF2M7 	Dry air N ₂ Ar CO ₂	Thermal type (MEMS)	0.01 L/min																								
			0.1 L/min																								
PFMB 	Dry air N ₂	Thermal type (MEMS)	1 L/min																								
		PFG300 	Bypass flow type																								
PFMC 	Dry air N ₂	Thermal type (MEMS)	1 L/min																								
		PFG300 	Bypass flow type																								
PF2A 	Air N ₂	Thermal type (Thermistor)	0.1 L/min																								
			0.5 L/min																								
			1 L/min																								
			2 L/min																								
			5 L/min																								
PF3A7□H 	Air N ₂	Thermal type (Platinum sensor)	2 L/min																								
			5 L/min																								
			10 L/min																								

Flow Switch Variations / Basic Performance Table

Series	PFMV 	PF2M7 	PFMB 	PFMC 	PF2A 	PF3A7□H 
Enclosure	IP40	IP40	IP40	IP65 [Monitor unit IP40]	IP65	IP65 [Monitor unit IP40]
Fluid	Dry air, N ₂	Dry air, N ₂ , Ar, CO ₂	Dry air, N ₂	Dry air, N ₂	Air, N ₂	Air, N ₂
Setting	Digital	Digital	Digital	Digital	Digital	Digital
Rated flow range	0 to 0.5 L/min -0.5 to 0.5 L/min 0 to 1 L/min -1 to 1 L/min 0 to 3 L/min -3 to 3 L/min	0.1 to 10 L/min 0.3 to 25 L/min 0.5 to 50 L/min 1 to 100 L/min	2 to 200 L/min 5 to 500 L/min 10 to 1000 L/min 20 to 2000 L/min	5 to 500 L/min 10 to 1000 L/min 20 to 2000 L/min	1 to 10 L/min 5 to 50 L/min 10 to 100 L/min 20 to 200 L/min 50 to 500 L/min	30 to 3000 L/min 60 to 6000 L/min 120 to 12000 L/min
Power supply voltage	12 to 24 VDC ±10%	12 to 24 VDC ±10%	12 to 24 VDC ±10%	12 to 24 VDC ±10%	12 to 24 VDC ±10%	24 VDC ±10%
Temperature characteristics (25°C standard)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit] ±0.5% F.S. (0 to 50°C)	±3% F.S. ±1 digit (15 to 35°C) ±5% F.S. ±1 digit (0 to 50°C)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit] ±0.5% F.S. (0 to 50°C)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit] ±0.5% F.S. (0 to 50°C)	±3% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C)	±5% F.S. (0 to 50°C) [Monitor unit] ±0.5% F.S. (0 to 50°C)
Repeatability	±1% F.S. (Fluid: Dry air) Analog output: ±5% F.S. [Monitor unit] ±0.1% F.S. Analog output: ±0.5% F.S.	±1% F.S. ±1 digit (Fluid: Dry air)	±1% F.S. (Fluid: Dry air) [Monitor unit] ±0.1% F.S.	±1% F.S. (Fluid: Dry air) [Monitor unit] ±0.1% F.S.	±1% F.S. (PF2A7□0) ±2% F.S. (PF2A7□1)	±1% F.S. [Monitor unit] ±0.1% F.S.
Hysteresis	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Fixed (3 digits)	Hysteresis mode: Variable Window comparator mode: Variable
Output	NPN/PNP open collector Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output
Display	[Monitor unit 2-color LCD display]	2-color LCD display	2-color LED display 2-color LCD display [Monitor unit 3-color LCD display]	3-color LCD display	LED display	3-color LCD display

Unit conversion table is located inside back cover.

* The monitor unit shows the PFG300 and PFMV3.

CONTENTS

2-Color Display Digital Flow Switch *PF2M7 Series*



How to Order	p. 6
Specifications	p. 7
Flow Range	p. 8
Flow/Analog Output	p. 8
Pressure Loss (Reference Data): Without Flow Adjustment Valve	p. 8
Flow Rate Characteristics (Reference Data)	p. 9
Flow Rate Characteristics at Negative Pressure (Reference Data)	p. 9
Internal Circuits and Wiring Examples	p. 10
Construction: Parts in Contact with Fluid	p. 11
Dimensions	p. 12
Function Details	p. 16
Safety Instructions	Back cover

2-Color Display

Digital Flow Switch

PF2M7 Series



RoHS



How to Order

PF2M7 10 [] - C6 - A [] - M [] []

Type
7 Integrated display

Rated flow range

10	0.1 to 10 L/min
25	0.3 to 25 L/min
50	0.5 to 50 L/min
11	1 to 100 L/min

Flow adjustment valve

Nil	None
S	Yes

Port size

Symbol	Port size	Rated flow range			
		10	25	50	11
C6	ø6	●	●	●	
C8	ø8				●

Output specification

Symbol	OUT1	OUT2
A	NPN	NPN
B	PNP	PNP
C	NPN	Analog 1 to 5 V ⇔ Analog 0 to 10 V*1
D	NPN	Analog 4 to 20 mA
E	PNP	Analog 1 to 5 V ⇔ Analog 0 to 10 V*1
F	PNP	Analog 4 to 20 mA

*1 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5 V.

Calibration certificate*4

Nil	None
A	Yes

*4 Made to order Certificate in both English and Japanese

Unit specification

M	SI unit only*2
Nil	Unit selection function*3

*2 Fixed unit: Instantaneous flow: L/min
Accumulated flow: L

*3 This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.) Unit can be changed. Instantaneous flow: L/min ⇔ cfm
Accumulated flow: L ⇔ ft³

Option 2

	Nil	R	S
No bracket		<p>Bracket (For without flow adjustment valve) ZS-33-M</p> <p>With 2 tapping screws</p>	<p>Bracket (For with flow adjustment valve) ZS-33-MS</p> <p>With 3 tapping screws</p>
		* Interchangeable with the existing PFM series	* Interchangeable with the existing PFM series
	T	V	
Panel mount adapter (For without flow adjustment valve) ZS-33-2J	<p>Panel mount adapter</p> <p>Panel mount adapter B</p> <p>Mounting bracket</p>	<p>Panel mount adapter (For with flow adjustment valve) ZS-33-2JS</p> <p>Panel mount adapter S</p> <p>Panel mount adapter B</p> <p>Mounting bracket</p>	

* Options are shipped together with the product but do not come assembled.

Option 1

Nil	W
Lead wire with connector (2 m)	Lead wire with connector (2 m) + Rubber cover for connector (Silicone rubber)
<p>ZS-33-D</p> <p>* Interchangeable with the existing PFM series</p>	<p>ZS-33-F ZS-33-D</p> <p>* Interchangeable with the existing PFM series</p>
N	
Without lead wire with connector	


DIN Rail Mounting Bracket (Ordered Separately)

ZS-33-R 3

Stations

1	1 station
2	2 stations
3	3 stations
4	4 stations
5	5 stations

* Interchangeable with the existing PFM series

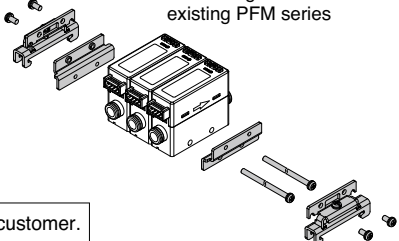

· DIN rail is prepared by customer.

Unit conversion table is located inside back cover.



PF2M7 Series

For flow switch precautions and specific product precautions, refer to the Operation Manual on the SMC website.

Specifications

Model		PF2M710	PF2M725	PF2M750	PF2M711	
Fluid	Applicable fluid*1	Dry air, N ₂ , Ar, CO ₂ (JIS B 8392-1 1.1.2 to 1.6.2, ISO 8573-1 1.1.2 to 1.6.2)				
	Fluid temperature range	0 to 50°C				
Flow	Detection method		Thermal type (Bypass flow type)			
	Rated flow range	Dry air, N ₂ , Ar	0.1 to 10 L/min	0.3 to 25 L/min	0.5 to 50 L/min	1 to 100 L/min
		CO ₂	0.1 to 5 L/min	0.3 to 12.5 L/min	0.5 to 25 L/min	1 to 50 L/min
	Set point range	Instantaneous flow	-5 to 105% (For the maximum rated flow rate)			
		Accumulated flow	0.0 to 99999999.9 L	0 to 999999999 L		
	Smallest settable increment	Instantaneous flow	0.01 L/min	0.1 L/min		
		Accumulated flow	0.1 L	1 L		
	Accumulated volume per pulse		0.1 L/pulse			1 L/pulse
Accumulated value hold function*2		Intervals of 2 or 5 minutes can be selected.				
Pressure	Rated pressure range*3		-0.07 to 0.75 MPa			
	Proof pressure		1.0 MPa			
	Pressure loss		Refer to the "Pressure Loss" graph.			
	Pressure characteristics		±5% F.S. ±1 digit (0.35 MPa standard)			
Electrical	Power supply voltage*4		12 to 24 VDC ±10%			
	Current consumption		35 mA or less			
	Protection		Polarity protection			
Accuracy*5	Display accuracy		±3% F.S. ±1 digit			
	Analog output accuracy		±3% F.S.			
	Repeatability		±1% F.S. ±1 digit (±2% F.S. ±1 digit when the digital filter is set to 0.05 s)			
	Temperature characteristics		±3% F.S. ±1 digit (15 to 35°C; 25°C standard) ±5% F.S. ±1 digit (0 to 50°C; 25°C standard)			
Switch output	Output type		NPN/PNP open collector			
	Output mode		Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.			
	Switch operation		Select from Normal or Reversed output.			
	Maximum load current		80 mA			
	Maximum applied voltage		28 VDC (NPN only)			
	Internal voltage drop		NPN: 1 V or less (Load current: 80 mA) PNP: 1.5 V or less (Load current: 80 mA)			
	Response time*6		50 ms or less			
	Delay time*7		Select from 0 to 0.10 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, 30 s, 40 s, 50 s, or 60 s.			
	Hysteresis*8		Variable from 0			
	Protection		Short circuit protection			
Analog output*9	Output type		Voltage output: 1 to 5 V (0 to 10 V can be selected)*10, Current output: 4 to 20 mA			
	Impedance	Voltage output	Output impedance: Approx. 1 kΩ			
		Current output	Maximum load impedance: 600 Ω at power supply voltage of 24 V, 300 Ω at power supply voltage of 12 V			
	Response time*6		50 ms ±40%			
Display	Reference condition*11		Select from Standard condition (STD) or Normal condition (NOR).			
	Display mode		Select from Instantaneous flow or Accumulated flow.			
	Unit*12	Instantaneous flow	L/min, cfm			
		Accumulated flow	L, ft ³			
	Display range	Instantaneous flow	-0.5 to 10.5 L/min	-1.3 to 26.3 L/min	-2.5 to 52.5 L/min	-5 to 105 L/min
		Zero cut-off range	0 to ±10% F.S. (Select per 1% F.S. for the maximum rated flow rate.)			
	Accumulated flow*13		0.0 to 99999999.9 L	0 to 999999999 L		
Display Indicator LED		LCD, Color: Red/Green, 4 digits, 7 segments LED ON when switch output is ON (OUT1/2: Orange)				
Digital filter*14	Select from 0.05 s, 0.1 s, 0.5 s, 1 s, 2 s, or 5 s.					
Environmental resistance	Enclosure		IP40			
	Withstand voltage		1000 VAC for 1 minute between terminals and housing			
	Insulation resistance		50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing			
	Operating temperature range		Operating: 0 to 50°C, Stored: -10 to 60°C (No condensation or freezing)			
Operating humidity range		Operating/Stored: 35 to 85% RH (No condensation or freezing)				
Standards CE marking (EMC Directive, RoHS Directive)						
Piping*15	Piping specification		C6 (ø6)		C8 (ø8)	
	Piping entry direction		Straight			
Main materials of parts in contact with fluid PPS, PBT, FKM, Stainless steel 304, Brass (Electroless nickel plating), Si, Au, GE4F						
Weight	Body		40 g		48 g	
	Flow adjustment valve				+34 g	
	Lead wire				+35 g	
	Bracket				+20 g	
	Panel mount adapter				+15 g	
	DIN rail mounting bracket				+65 g	

*1 Refer to the "Recommended pneumatic circuit examples" on page 2.
 *2 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 3.7 million times. If the product is operated 24 hours per day, the product life will be as follows:
 • 5 min interval: life is calculated as 5 min x 3.7 million = 18.5 million min = 35 years
 • 2 min interval: life is calculated as 2 min x 3.7 million = 7.4 million min = 14 years
 *3 Negative pressure indicates the pressure value on the IN side (inlet side).
 *4 When multiple products are installed closely, the upper limit of the power supply voltage is 24 VDC.
 *5 The accuracy value is based on dry air as a fluid. For other fluids, it is a reference value.
 *6 Value when the digital filter is set at 0.05 s.
 *7 The time from when the instantaneous flow reaches the set value to when the switch output operates can be set.
 *8 If the flow fluctuates around the set value, the hysteresis must be set to a value more than the fluctuating width. Otherwise, chattering will occur.

*9 When using a product with an analog output
 *10 When selecting 0 to 10 V, refer to the analog output graph for the allowable load current.
 *11 Standard condition (STD): 20 [°C], 101.3 [kPa] (Absolute pressure), 65 [% RH] (The flow rate given in the specifications is the value under standard conditions.)
 Normal condition (NOR): 0 [°C], 101.3 [kPa] (Absolute pressure), 0 [% RH]
 *12 Setting is only possible for models with the unit selection function.
 *13 Power value is displayed for accumulated flow. The first 4 digits of the measurement value are always displayed.
 *14 The time for the digital filter can be set to the sensor input. The response time indicates when the set value is 90% in relation to the step input.
 *15 Check the precautions for One-touch fitting before use. When the piping condition is changed, for example due to piping on the back of the product, use a general purpose fitting (KQ□L series). Some piping conditions may have negative effects on the flow accuracy.
 * Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

Flow Range



Model	Flow range					
	-5 L/min	0 L/min	10 L/min	25 L/min	50 L/min	100 L/min
PF2M710	0.1 L/min		10.0 L/min			
	-0.5 L/min		10.5 L/min			
	-0.5 L/min		10.5 L/min			
PF2M725	0.3 L/min		25.0 L/min			
	-1.3 L/min		26.3 L/min			
	-1.3 L/min		26.3 L/min			
PF2M750	0.5 L/min		50.0 L/min			
	-2.5 L/min		52.5 L/min			
	-2.5 L/min		52.5 L/min			
PF2M711	1.0 L/min		100.0 L/min			
	-5.0 L/min		105.0 L/min			
	-5.0 L/min		105.0 L/min			

Rated flow range
 Set point range
 Display range

Flow/Analog Output

	A	B		C
		PF2M710/50/11	PF2M725	
Voltage output (1 to 5 V)	1 V	1.04 V	1.05 V	5 V
Current output (4 to 20 mA)	4 mA	4.16 mA	4.19 mA	20 mA

	E	F		G
		PF2M710/50/11	PF2M725	
Voltage output (0 to 10 V)*1	0 V	0.10 V	0.12 V	10 V

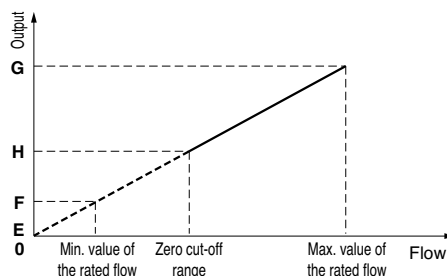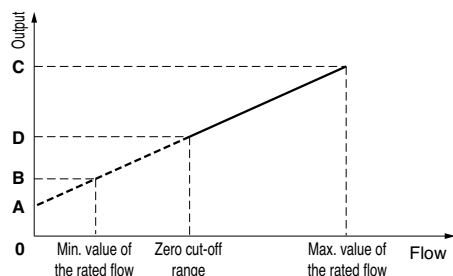

*1 The analog output current from the connected equipment should be 20 μ A or less when selecting 0 to 10 V.


When more than 20 μ A current flows, it is possible that the accuracy is not satisfied at less than or equal to 0.5 V.

* D or H fluctuates depending on the setting of the zero cut-off function.


When the zero cut-off function is set to "0," the flow rate display value starts from 0 L/min. but in conditions other than horizontal installation and supply pressure of 0.35 MPa, the output may not be 0 L/min.

Pressure Loss (Reference Data): Without Flow Adjustment Valve


PF2M710 (10 L/min)

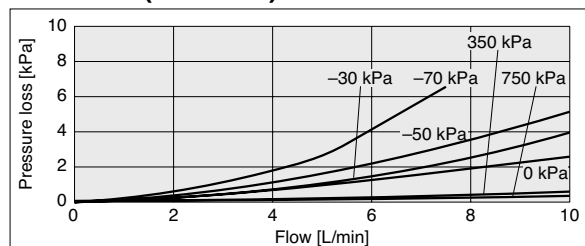


PF2M725 (25 L/min)

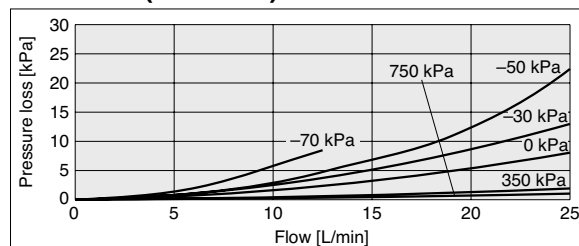

PF2M750 (50 L/min)

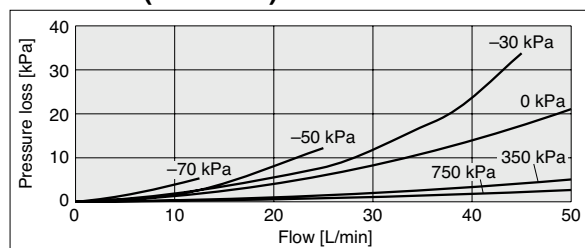

PF2M711 (100 L/min)

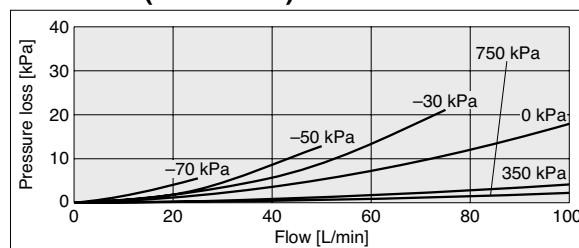


Unit conversion table is located inside back cover.


PF2M7 Series

Flow Rate Characteristics (Reference Data)


PF2M710 (10 L/min)

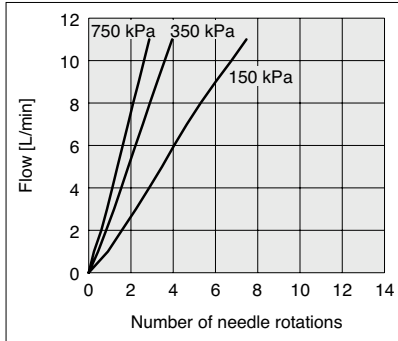


PF2M725 (25 L/min)

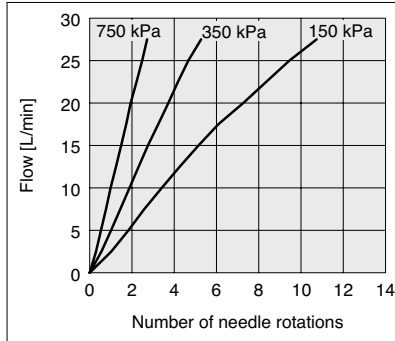

PF2M750 (50 L/min)

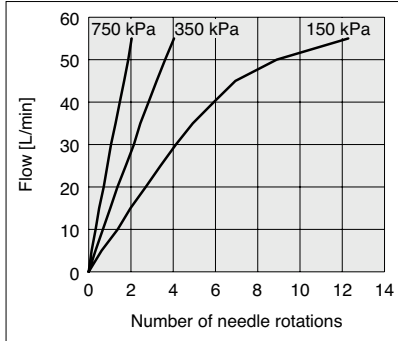


PF2M711 (100 L/min)

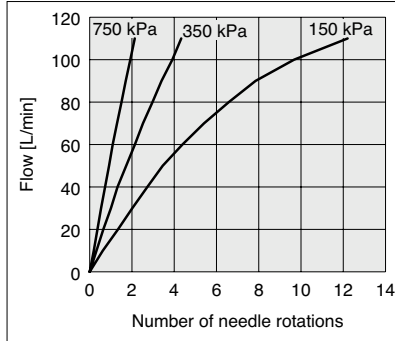


Flow Rate Characteristics at Negative Pressure (Reference Data)

When the PF2M series is used with negative pressure (-70 to 0 kPa), the measurable range varies depending on the flow range. Select the flow range referring to the graph below.


PF2M710 (10 L/min)

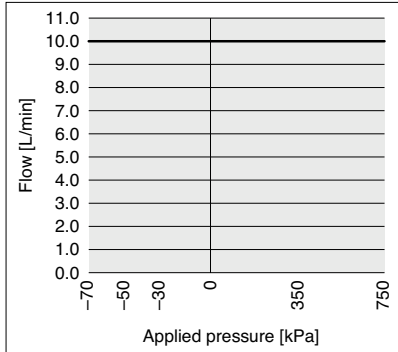


PF2M725 (25 L/min)

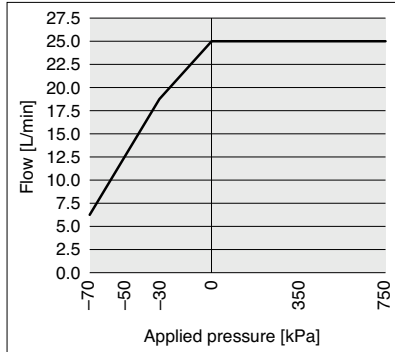

PF2M750 (50 L/min)

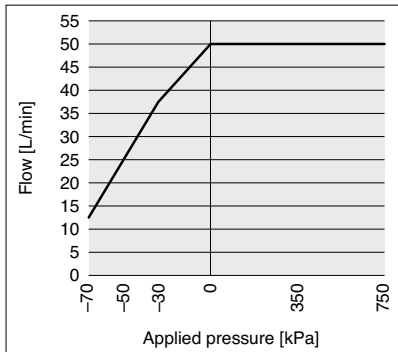


PF2M711 (100 L/min)

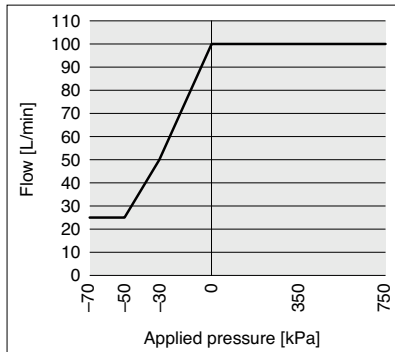


Internal Circuits and Wiring Examples

NPN + NPN output type
PF2M7□□-□-**A**□-□□□

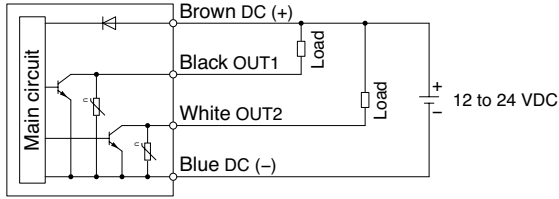


Max. applied voltage: 28 V, Max. load current: 80 mA,
Internal voltage drop: 1 V or less

PNP + PNP output type
PF2M7□□-□-**B**□-□□□

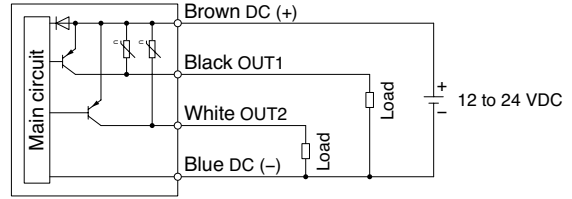


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

NPN + Analog output type
PF2M7□□-□-**C/D**□-□□□

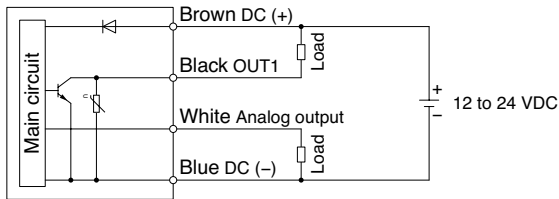

Max. applied voltage: 28 V, Max. load current: 80 mA,
Internal voltage drop: 1 V or less
C: Analog output: 1 to 5 V or 0 to 10 V can be selected.
Output impedance: 1 kΩ
D: Analog output: 4 to 20 mA
Load impedance: 50 to 600 Ω

PNP + Analog output type
PF2M7□□-□-**E/F**□-□□□


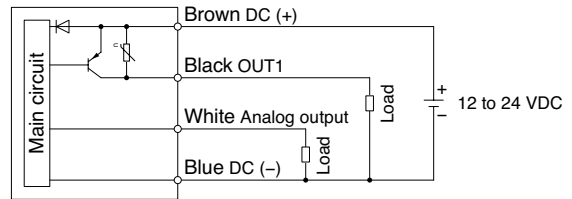


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less
E: Analog output: 1 to 5 V or 0 to 10 V can be selected.
Output impedance: 1 kΩ
F: Analog output: 4 to 20 mA
Load impedance: 50 to 600 Ω

Accumulated pulse output wiring examples



NPN + NPN output type
PF2M7□□-□-**A**□-□□□

NPN + Analog output type
PF2M7□□-□-**C**□-□□□
PF2M7□□-□-**D**□-□□□

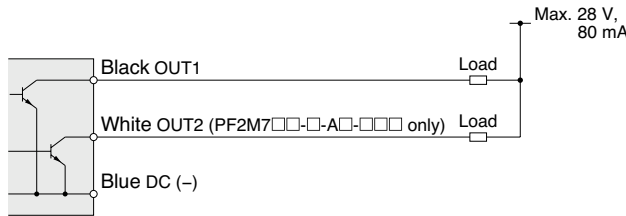

PNP + PNP output type
PF2M7□□-□-**B**□-□□□



PNP + Analog output type
PF2M7□□-□-**E**□-□□□
PF2M7□□-□-**F**□-□□□

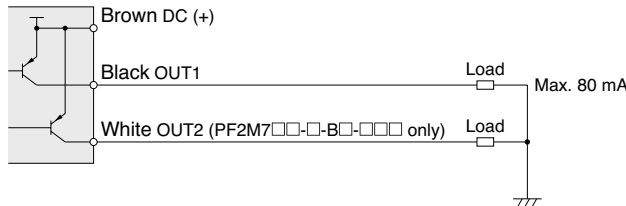

PF2M7 Series

Construction: Parts in Contact with Fluid

PF2M710/725/750/711

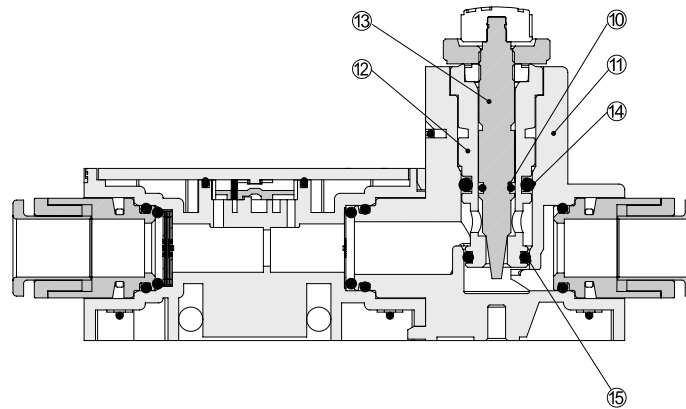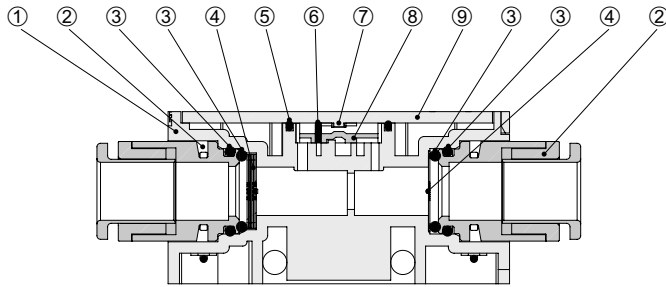


Component Parts


No.	Description	Material	Note
1	Body	PPS	
2	Fitting for piping	Brass	Electroless nickel plating
3	O-ring	FKM	
4	Flow rectifier	Stainless steel 304	
5	Seal	FKM	
6	Flow rectifier	Stainless steel 304	
7	Sensor chip	Silicon	
8	Body B	PPS	
9	Printed circuit board	GR4F	
10	O-ring	FKM	Fluoro coating
11	Flow adjustment valve body	PBT	
12	Body	Brass	Electroless nickel plating
13	Needle	Brass	Electroless nickel plating
14	O-ring	FKM	Fluoro coating
15	O-ring	FKM	Fluoro coating

Dimensions

PF2M710/25/50-C6

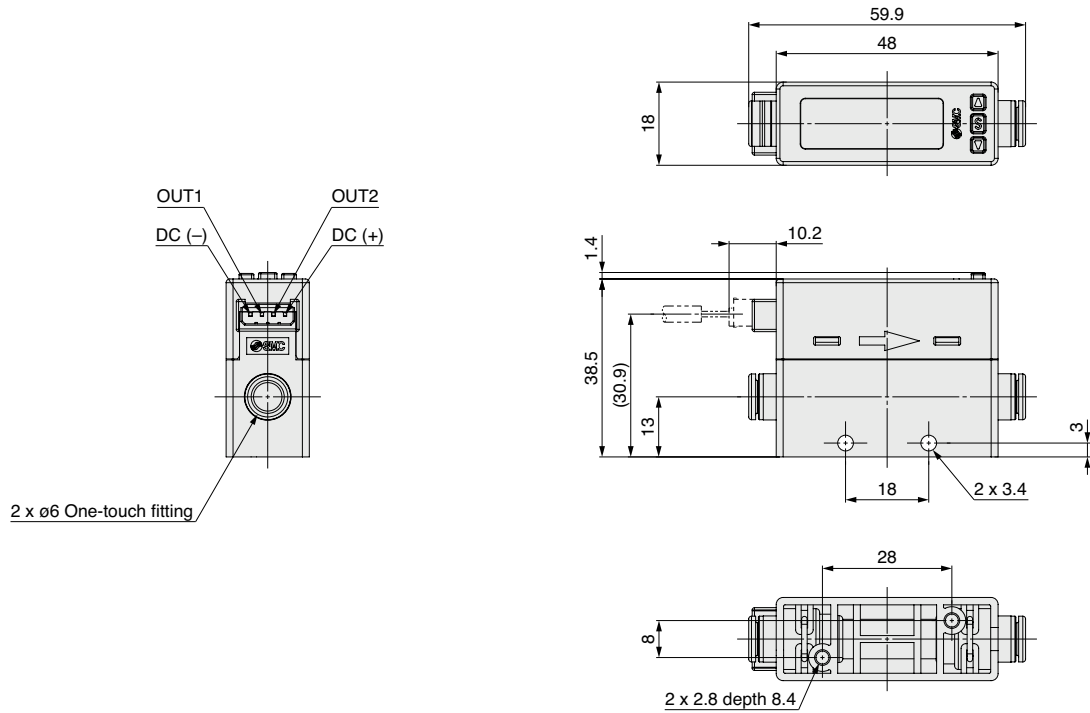


PF2M711-C8

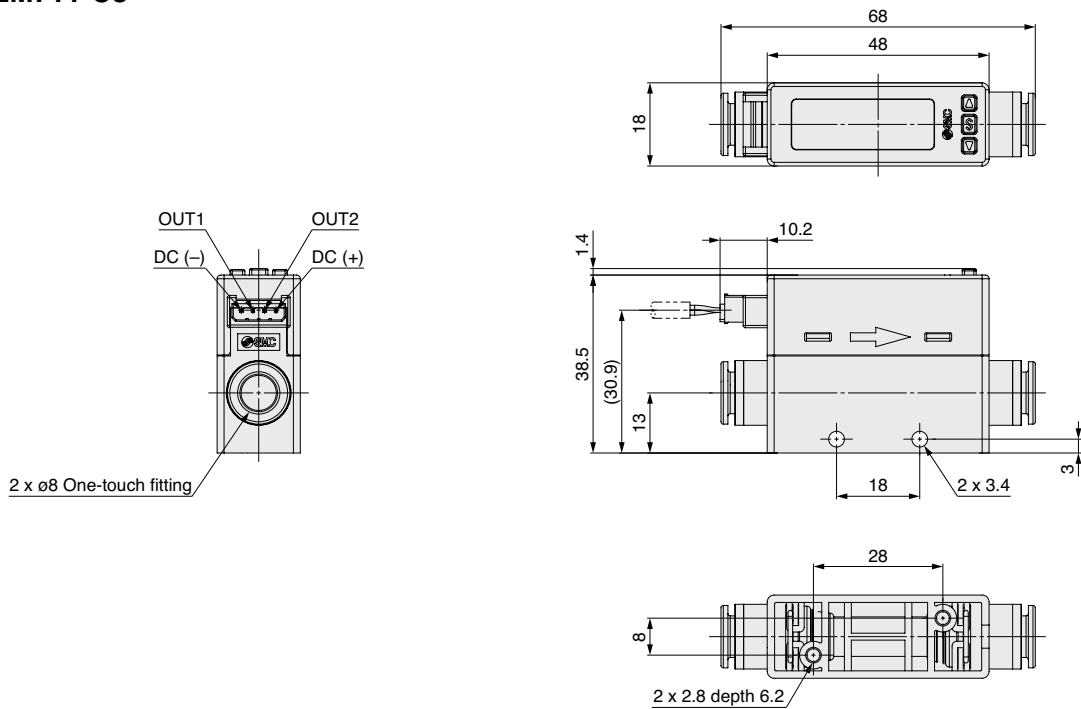


PF2M7 Series

Dimensions

PF2M710/25/50S-C6

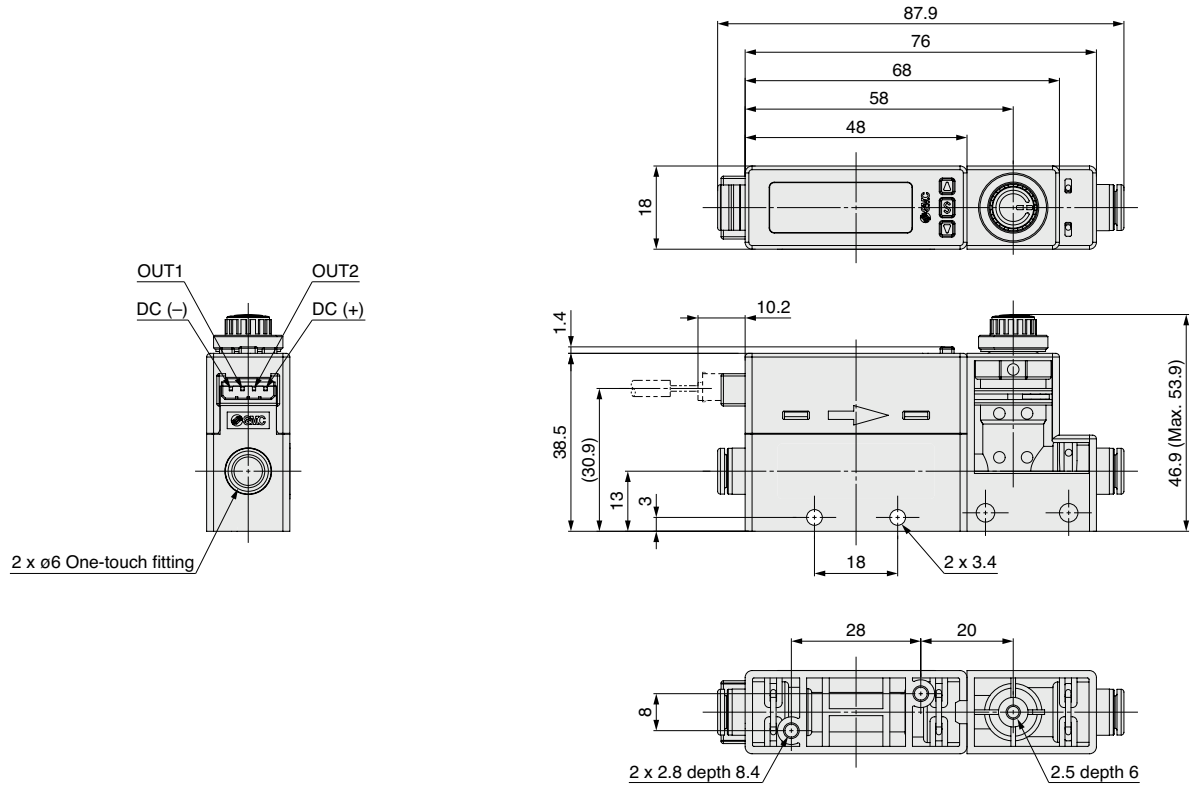


PF2M711S-C8

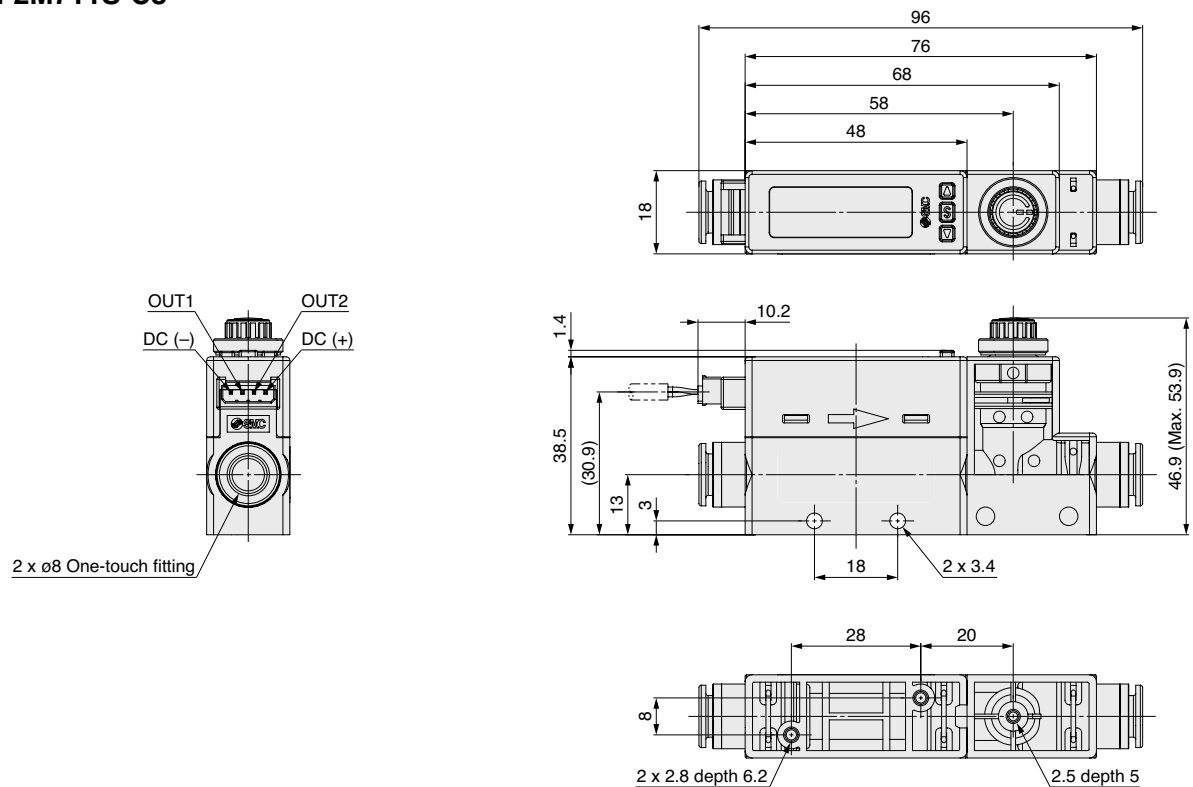

Dimensions


PF2M710/25/50/11

Panel mount/Without flow adjustment valve/Straight

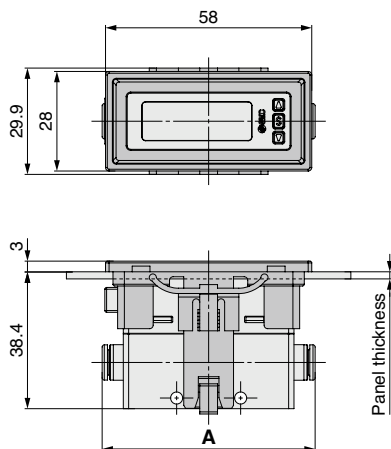

Applicable tubing O.D. for One-touch fittings	A
ø6	59.9
ø8	68


Panel Fitting Dimensions

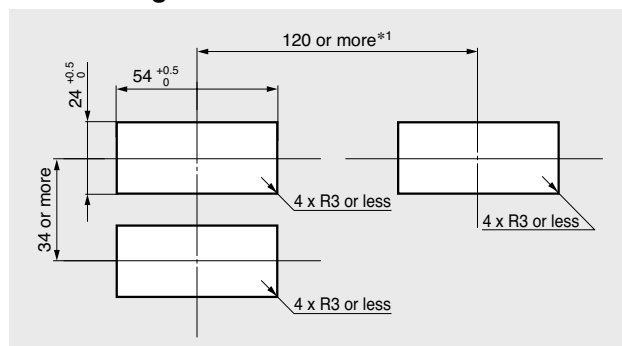


Panel thickness 1 to 3.2 mm

*1 Port direction: As the piping inlet is straight type, please design the layout with consideration to the tubing and piping materials. If a bend (R) is used, limit it to R3 or less.

With bracket/Without flow adjustment valve

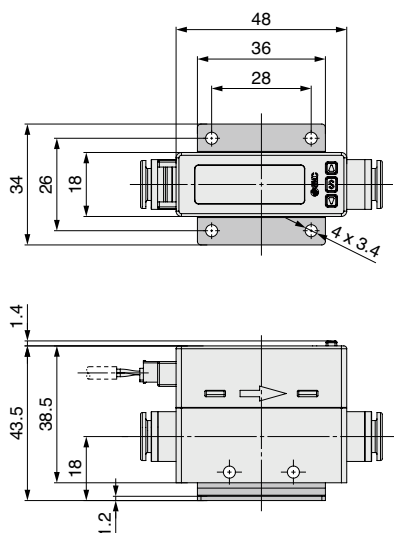


Panel mount/With flow adjustment valve/Straight

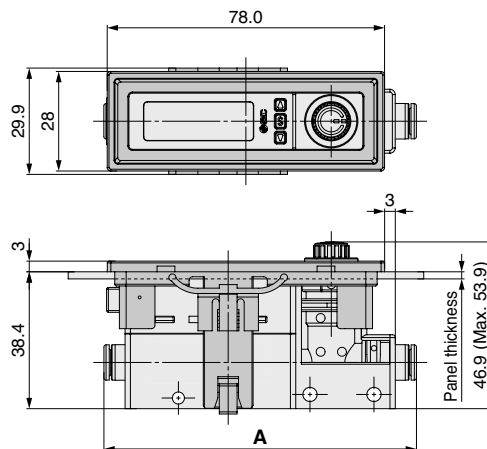

Applicable tubing O.D. for One-touch fittings	A
ø6	87.9
ø8	96


Panel Fitting Dimensions

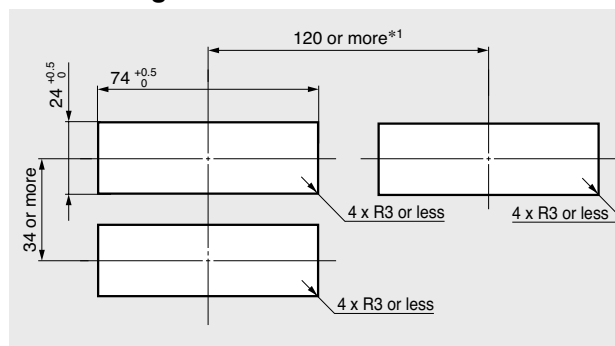

Panel thickness 1 to 3.2 mm

*1 Port direction: As the piping inlet is straight type, please design the layout with consideration to the tubing and piping materials. If a bend (R) is used, limit it to R3 or less.


With bracket/With flow adjustment valve

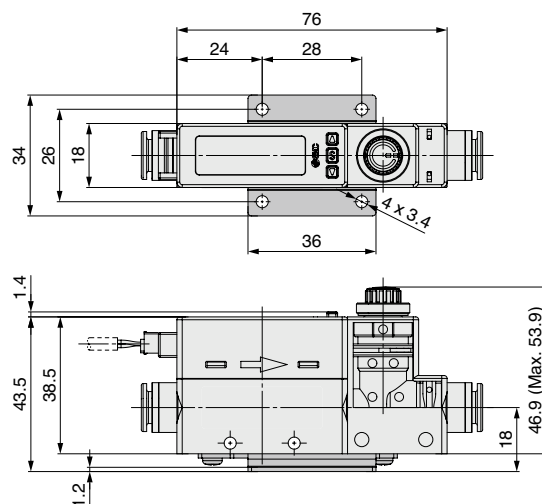

PF2M7 Series


Dimensions

PF2M710/25/50/11 DIN rail mounting

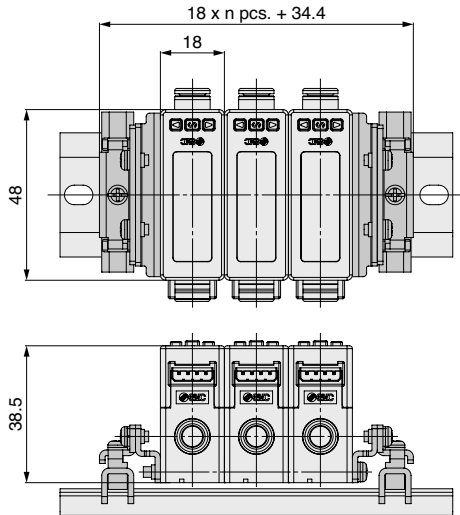

· DIN rail is prepared by customer.

Lead wire with connector ZS-33-D

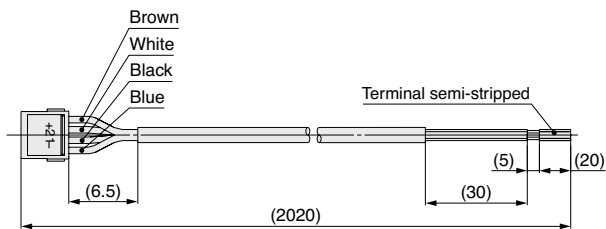

Cable Specifications

Conductor	Nominal cross section	AWG 26
	Outside diameter	Approx. 0.50 mm
Insulator	Outside diameter	Approx. 1.00 mm
	Color	Brown, White, Black, Blue
Sheath	Material	Oil-resistant PVC
Finished outside diameter		ø3.5

* For wiring, refer to the Operation Manual from the SMC website Documents/Download --> Instruction Manuals.

PF2M7 Series Function Details

For setting of functions and operation method, refer to the Operation Manual from the SMC website Documents/Download --> Instruction Manuals.

Output operation

The output operation can be selected from the following:

Output corresponding to instantaneous flow (Hysteresis mode, Window comparator mode)

- Hysteresis mode is the mode where the switch output will turn ON when the flow is greater than the set value, and will turn OFF when the flow falls below the set value by the amount of hysteresis or more.
- Window comparator mode is the mode where an operating mode in which the switch output is turned on and off depending on whether the flow is inside or outside the range of two set values.

Output corresponding to accumulated flow (Accumulated output mode, Accumulated pulse output mode)

- In accumulated output mode, the switch output will start at the set accumulated flow rate value.
- Accumulated pulse output is a pulse signal which is output every time a predefined accumulated flow has passed.

Others (Error output, Switch output OFF)

- The error output function outputs the switch output when an error is displayed.
- The switch output off function turns off the switch output.

* Default setting: Hysteresis mode, Normal output

Simple setting mode

Only the set values for instantaneous flow and accumulated flow can be changed. Output mode, output type, display color, and accumulate pulse output cannot be changed.

Display color

The display color can be selected for each output condition. The selection of the display color provides visual identification of abnormal values.

Green for ON, Red for OFF
Red for ON, Green for OFF
Red all the time
Green all the time

Reference condition

The display unit can be selected from standard condition or normal condition.

Standard condition: Flow rate converted to a volume at 20°C, 101.3 kPa (absolute pressure), and 65% RH
Normal condition: Flow rate converted to a volume at 0°C, 101.3 kPa (absolute pressure), and 0% RH

Delay time setting

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

The total switching time is the switch operation time and the set delay time. (Default setting: 0 s)

0 to 0.10 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s
40 s
50 s
60 s

Digital filter setting

The time for the digital filter can be set to the sensor input. Setting the digital filter can reduce chattering of the switch output and flickering of the analog output and the display.

The response time indicates when the set value is 90% in relation to the step input. (Default setting: 1 s)

0.05 s
0.1 s
0.5 s
1 s
2 s
5 s

Selectable analog output function

1 to 5 V or 0 to 10 V can be selected for the analog voltage output type. (Default setting: 1 to 5 V)

Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables the confirmation of wiring and prevents system errors due to unexpected output.

For the analog output type: When ON, the output will be 5 V (or 10 V when 0 to 10 V is selected) or 20 mA, and when OFF, 1 V (or 0 V when 0 to 10 V is selected) or 4 mA.

* Also, an increase or decrease of the flow will not change the on/off status of the output while the forced output function is activated.

Accumulated value hold

The accumulated value will be stored even if the power supply is turned off. The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned on again.

The maximum writable limit of the memory device is 3.7 million times, which should be taken into consideration.

Peak/Bottom value display

The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.

Display OFF mode

This function will turn the display OFF. In this mode, “_ _ _” will flash on the main screen. If any button is pressed during this mode, the display reverts to normal for 30 seconds to allow checking of the flow, etc.

Setting of security code

The user can select whether a security code must be entered to release the key lock. At the time of factory shipment, it is set so that a security code is not required.

Key-lock function


Prevents operation errors such as accidentally changing setting values

Reset to the default settings

The product can be returned to its factory default settings.

Reversible display mode

When the switch is used upside down, the orientation of the display can be rotated to make it easier to read by using the reversible display function.

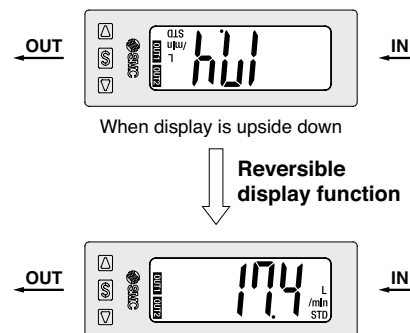

Zero cut-off function

When the flow is close to 0 L/min, the product will round the value down and zero will be displayed. A flow value may be displayed even when the flow rate is 0 L/min due to high pressure or depending on the installation. The zero cut-off function will force the display to zero.

Zero-clear function


The measured flow rate indication can be adjusted to zero.

The adjustment range is $\pm 5\%$ F.S. of the initial factory setting.

PF2M7 Series

■ Analog free span function

This function allows a flow that generates an output of 5 V (or 10 V when 0 to 10 V is selected) or 20 mA to be changed. The value can be changed between 10% of the maximum value of the rated flow and the maximum value of the display range.

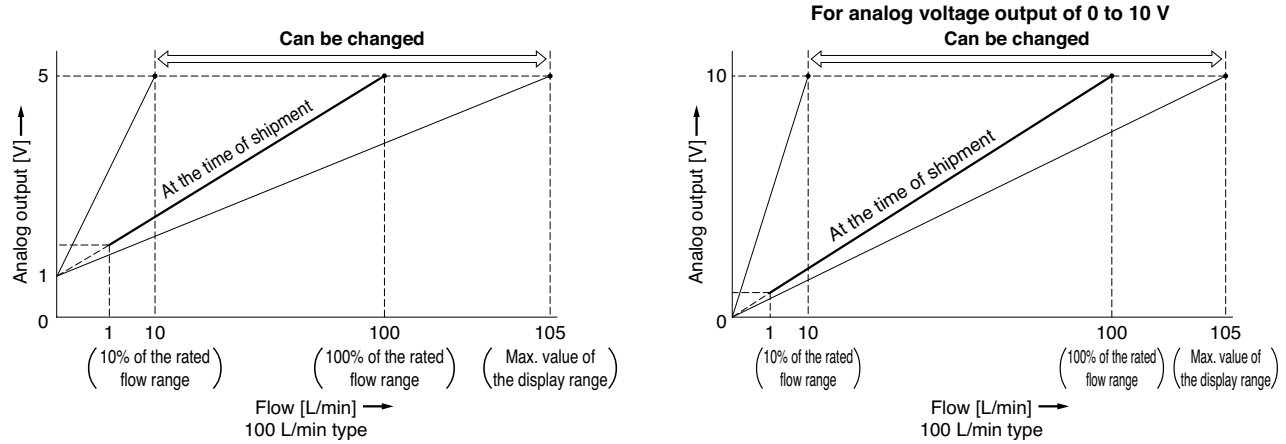

■ Error display function

When an error or abnormality arises, the location and contents are displayed.

Display	Error name	Description	Action
Er 1	OUT1 over current error	The switch output (OUT1) load current of 80 mA or more flows.	Turn the power OFF and remove the cause of the over current. Then turn the power ON again.
Er 2	OUT2 over current error	The switch output (OUT2) load current of 80 mA or more flows.	Turn the power OFF and remove the cause of the over current. Then turn the power ON again.
HHH	Instantaneous flow error	The flow has exceeded the upper limit of the flow display range.	Decrease the flow rate.
LLL		The flow has exceeded the lower limit of the flow display range.	Change the flow to the correct direction.
9999 <small>Accumulated flow is displayed. (Flashing)</small>	Accumulated flow error*1	The accumulated flow has exceeded the accumulated flow range. (For accumulated increment) (The decimal point position varies depending on the flow range or measurement unit setting.)	Reset the accumulated flow. (Press the SET and DOWN buttons simultaneously for 1 second or longer.)
0000 <small>Accumulated flow is displayed. (Flashing)</small>		The accumulated flow has reached the set accumulated flow value. (For accumulated decrement) (The decimal point position varies depending on the flow range or measurement unit setting.)	
Er 3	Outside of zero-clear range	During zero-clear operation, the flow rate of $\pm 5\%$ F.S. or more is applied. (The mode is returned to measurement mode after 1 second.)	Retry the zero-clear operation without applying fluid.
Er 0	System error	An internal data error has occurred.	Turn the power OFF and turn it ON again.
Er 4			
Er 6			
Er 7			
Er 8			
Er 14			
Er 16			
Er 40			

*1 A decimal point will be displayed depending on the flow range or measurement unit setting.

* If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.


■ Unit display function


The unit displayed on the screen differs depending on the unit setting in measurement mode.


Standard condition (STD)	Instantaneous flow unit L/min	Accumulated flow unit L
<p>[STD] turns on.</p>	<p>[L] and [/min] turn on.</p>	<p>[L] turns on. At the upper right of the display, the index [x10⁰] or [x10³] will turn on based on the accumulated flow.</p>
<p>[STD] turns off.</p>	<p>[L] turns off and [/min] turns on.</p>	<p>[L] turns off. At the upper right of the display, the index [x10³] or [x10⁶] will turn on based on the accumulated flow.</p>

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)*1), and other safety regulations.

 **Caution:** Caution indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

 **Warning:** Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

 **Danger:** Danger indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

*1) ISO 4414: Pneumatic fluid power – General rules relating to systems.
ISO 4413: Hydraulic fluid power – General rules relating to systems.
IEC 60204-1: Safety of machinery – Electrical equipment of machines.
(Part 1: General requirements)
ISO 10218-1: Manipulating industrial robots – Safety.
etc.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

Caution

1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.
If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.
Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.*2)
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

*2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.
Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Caution

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

UNIT CONVERSIONS

	unit	conversion	result		unit	conversion	result
length	m	x 3.28	psi	pressure	MPa	x 145	psi
	mm	x 0.04	psi		kPa	÷ 6.895	psi
mass	g	x 0.04	°F	temperature	°C	x1.8 then add 32	°F
volume	cm ³	÷ 16.387	ft-lb	torque	N·m	x 0.738	ft-lb
	L	x 61.024	lbf	force	N	÷ 4.448	lbf
speed	mm/s	÷ 25.4	cfm	flow	L/min	÷ 28.317	cfm

Global Manufacturing, Distribution and Service Network

Worldwide Subsidiaries

EUROPE

AUSTRIA
SMC Pneumatik GmbH (Austria)

BELGIUM
SMC Pneumatics N.V./S.A.

BULGARIA
SMC Industrial Automation Bulgaria EOOD

CROATIA
SMC Industrijska Automatika d.o.o.

CZECH REPUBLIC
SMC Industrial Automation CZ s.r.o.

DENMARK
SMC Pneumatik A/S

ESTONIA
SMC Pneumatics Estonia

FINLAND
SMC Pneumatics Finland OY

FRANCE
SMC Pneumatique S.A.

GERMANY
SMC Pneumatik GmbH

GREECE
SMC Hellas EPE

HUNGARY
SMC Hungary Ipari Automatizálási Kft.

IRELAND
SMC Pneumatics (Ireland) Ltd.

ITALY
SMC Italia S.p.A.

KAZAKHSTAN
LLP "SMC Kazakhstan"

LATVIA
SMC Pneumatics Latvia SIA

LITHUANIA
UAB "SMC Pneumatics"

NETHERLANDS
SMC Pneumatics B.V.

NORWAY
SMC Pneumatics Norway AS

POLAND
SMC Industrial Automation Polska Sp. z o.o.

ROMANIA
SMC Romania S.r.l.

RUSSIA
SMC Pneumatik LLC.

SLOVAKIA
SMC Priemyselná Automatizácia, Spol s.r.o.

SLOVENIA
SMC Industrijska Avtomatika d.o.o.

SPAIN / PORTUGAL
SMC España, S.A.

SWEDEN
SMC Pneumatics Sweden AB

SWITZERLAND
SMC Pneumatik AG

TURKEY
SMC Pnömatik Sanayi Ticaret ve Servis A.Ş.

UK
SMC Pneumatics (U.K.) Ltd.

ASIA / OCEANIA

AUSTRALIA
SMC Pneumatics (Australia) Pty. Ltd.

CHINA
SMC (China) Co., Ltd.
SMC Pneumatics (Guangzhou) Ltd.

HONG KONG
SMC Pneumatics (Hong kong) Ltd.

INDIA
SMC Pneumatics (India) Pvt. Ltd.

INDONESIA
PT. SMC Pneumatics Indonesia

JAPAN
SMC Corporation

MALAYSIA
SMC Pneumatics (S.E.A.) Sdn. Bhd.

NEW ZEALAND
SMC Pneumatics (N.Z.) Ltd.

PHILIPPINES
Shoketsu SMC Corporation

SINGAPORE
SMC Pneumatics (S.E.A.) Pte. Ltd.

SOUTH KOREA
SMC Pneumatics Korea Co., Ltd.

TAIWAN
SMC Pneumatics (Taiwan) Co., Ltd.

THAILAND
SMC (Thailand) Ltd.

UNITED ARAB EMIRATES
SMC Pneumatics Middle East FZE

VIETNAM
SMC Pneumatics (VN) Co., Ltd

AFRICA

SOUTH AFRICA
SMC Pneumatics (South Africa) Pty Ltd

NORTH, CENTRAL & SOUTH AMERICA

ARGENTINA
SMC Argentina S.A.

BOLIVIA
SMC Pneumatics Bolivia S.R.L.

BRAZIL
SMC Pneumáticos do Brasil Ltda.

CANADA
SMC Pneumatics (Canada) Ltd.

CHILE
SMC Pneumatics (Chile) S.A.

COLOMBIA
SMC Colombia Sucursal de SMC Chile, S.A.

MEXICO
SMC Corporation (Mexico) S.A. de C.V.

PERU
SMC Corporation Peru S.A.C.

USA
SMC Corporation of America

VENEZUELA
SMC Neumatica Venezuela S.A.

U.S. & Canadian Sales Offices

WEST

Austin
Dallas
Los Angeles
Phoenix
Portland
San Jose

CENTRAL

Chicago
Cincinnati
Cleveland
Detroit
Des Moines
Grand Rapids
Indianapolis
Kansas City
Milwaukee
Minneapolis
St. Louis

EAST

Albany
Atlanta
Birmingham
Boston
Charlotte
Knoxville
Nashville
New Jersey
Rochester
Tampa

CANADA

Montreal
Quebec City
Toronto
Vancouver
Windsor

