



Compact Direct Operated

2/3-Port Solenoid Valve for Chemical Liquids

Low Particle

Fluid contact parts

Oil-free

Metal-free

Isolated structure

Direct operated rocker type/poppet type

The solenoid drive body is separated from the fluid area by a diaphragm.

Power consumption

(With power saving circuit)

1.0*1 W or less

Change in volume

(Pumping volume)

0.01 μ L or less



[Option]

RoHS



New Variations/Options

7 mm width
LVM07 Series



Body ported
LVM09 Series



Plug connector, With light/surge
voltage suppressor



Plug connector



Light



With reverse
mounting prevention
pin



LVM Series

NC406-A
(ES70-30C)

Direct Operated Rocker Type

LVM07, 09/090, 10/100, 15/150, 20/200

p. 7

p. 11


p. 17

p. 24

p. 29

Isolated structure

The solenoid drive body is separated from the fluid area by a diaphragm.

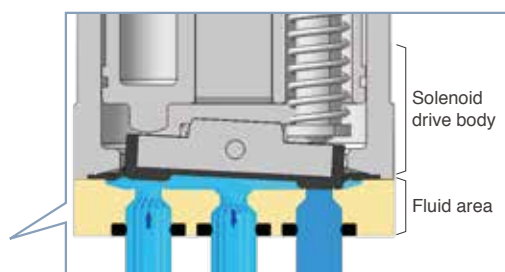
Fluid contact material
(Metal-free)

Body/Plate

PEEK

Diaphragm

Choice of EPDM, FKM, or Kalrez®

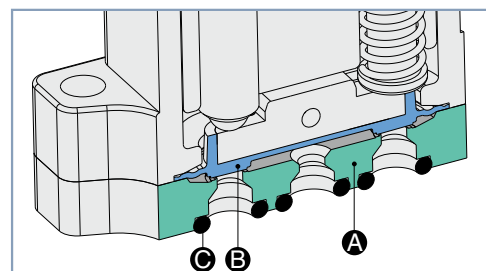

A Body/Plate material*1: PEEK


B Diaphragm material: EPDM, FKM, or Kalrez®

C Interface gasket/O-ring material: EPDM, FKM, or Kalrez®

*1 PFA can be selected for the plate material of the LVM10/100 base-mounted type.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Change in volume (Pumping volume)

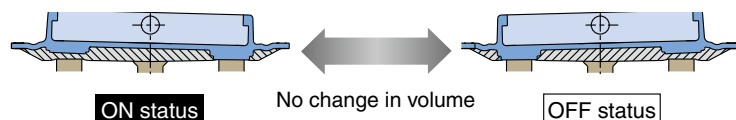0.01 μL or less

With a normal diaphragm valve, because the valve chamber volume varies depending on the ON or OFF status, the difference in volume is discharged into the outlet side of the valve when the valve is switched from ON to OFF. However, with a rocker type valve, there is almost no change in volume, and thus **no fluid is discharged into the outlet side of the valve.**

Valve chamber volume

Residual liquid is reduced by suppressing the valve chamber volume.

Model	New				
	LVM07	LVM09/090	LVM10/100	LVM15/150	LVM20/200
Valve chamber volume [μL]	8	18 (29)*1	20 (28)*1	50 (60)*1	84
Orifice diameter [mm]	0.8	1 (1.1)*2	1.4	1.6	2

*1 (): For R6

*2 (): For the base-mounted type


A type with a power saving circuit can be selected.

- Holding power consumption can be reduced substantially.
- Continuous energization for extended periods of time is possible.

Model		LVM07	LVM09/090	LVM10/100	LVM15/150	LVM20/200
Power consumption [W]	Inrush	2.8	3.3	2.5	5.5	4
	Holding	0.8	0.9	1	1	0.6

Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time or used with a manifold.

Space saving

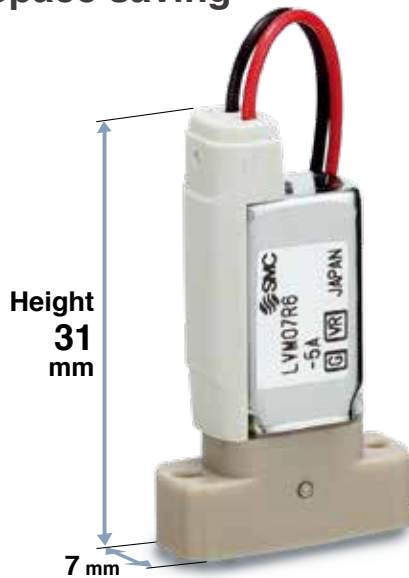


New LVM07 Series

- Valve width: 7 mm
- Compact & Lightweight
 - Volume: 3.9 cm³
 - Height: 31 mm
 - Weight: 7 g

Unit: mm

Model	Valve width	Manifold pitch
New LVM07	7	8
LVM09/090	9.5	10.5
LVM10/100	13	14
LVM15/150	16	17
LVM20/200	20	21



Required space reduced by
50%

Reduction in piping volume,
Manifold can be designed to
suit the space


Weight reduced by
70%

Weight reduced by
using resin material

No piping work required


No piping work
required between
components

Composite Manifold (Made to order)

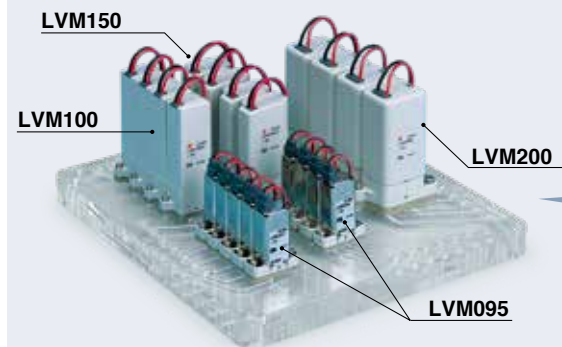

Flow passage style with high flexibility

Three-dimensional flow passage that
cannot be created by machining or
injection molding



New Options

Plug connector, With light/surge voltage suppressor


Applicable models

Model	LVM07	LVM09/090	LVM10/100	LVM15/150	LVM20/200
Plug connector	—	•	•	•	•
With light/surge voltage suppressor	—	•	•	•	•

With reverse mounting prevention pin












Applicable models

LVM07	LVM09/090	LVM10/100	LVM15/150	LVM20/200
•	•	•	•	•



Direct Operated Rocker Type

Series Variations

	Model	Valve type			Operating pressure range	Orifice dia. [mm]	Volume of valve chamber [μ L]	Valve width [mm]	Weight [g]	Power consumption [W]	Options			
		N.C. (2-port)	N.O. (2-port)	Universal (3-port)							Reverse mounting prevention pin	Electrical entry		With light/surge voltage suppressor
Base mounted	Without sub-plate p. 7 	New LVM07R6	•		–75 kPa to 0.1 MPa	0.8	8	7	7	Holding: 0.8 (With power saving circuit)	•	•	—	—
Body ported	p. 11 	New LVM09R1	•		–75 kPa to 0.2 MPa	1	18	9.5	22	Standard: 2 Power saving option Holding: 0.9 (With power saving circuit)	—	•	•	•
		New LVM09R2		•										
		New LVM092R		•										
Base mounted	Without sub-plate p. 11 	LVM09R3	•		–75 kPa to 0.2 MPa	1.1	18	9.5	20	Standard: 2 Power saving option Holding: 0.9 (With power saving circuit)	•	•	•	•
		LVM09R4		•										
		New LVM09R6	•				29							
		LVM095R		•			18							
Body ported	p. 17 	LVM10R1	•		–75 kPa to 0.25 MPa	1.4	20	13	34	Standard: 1.5 Power saving option Holding: 1 (With power saving circuit)	—	•	•	•
		LVM10R2		•										
		LVM102R		•										
Base mounted	p. 17  Without sub-plate  With sub-plate	LVM10R3	•		–75 kPa to 0.25 MPa	1.4	20	13	34	Standard: 1.5 Power saving option Holding: 1 (With power saving circuit)	•	•	•	•
		LVM10R4		•										
		LVM10R6	•				28							
		LVM105R		•			20							
Base mounted	p. 24  Without sub-plate  With sub-plate	LVM15R3	•		–75 kPa to 0.25 MPa [Max. 0.6 MPa]	1.6 [1]	50	16	45	Holding: 1 (With power saving circuit)	•	•	•	•
		LVM15R4		•										
		New LVM15R6	•				60							
		LVM155R		•			50							
Body ported	p. 29 	LVM20R1	•		–75 kPa to 0.25 MPa	2	84	20	80	Standard: 2.5 Power saving option Holding: 0.6 (With power saving circuit)	—	•	•	•
		LVM20R2		•										
		LVM202R		•										
Base mounted	p. 29  Without sub-plate  With sub-plate	LVM20R3	•		–75 kPa to 0.3 MPa	2	84	20	80	Standard: 2.5 Power saving option Holding: 0.6 (With power saving circuit)	•	•	•	•
		LVM20R4		•										
		LVM205R		•										

The [] indicate the values of the high-pressure type.

Piping/Mounting Variations

	Body ported	Base mounted		Page
		Without sub-plate	With sub-plate	
LVM07	—		—	7
LVM09/090			—	11
LVM10/100	 <p>Manual override (Option)</p> <p>Tubing (Provided by the customer)</p> <p>Bracket</p>	 <p>Base (Provided by the customer)</p> <p>Ring</p>	 <p>Material: PFA or PVDF</p>	17
LVM15/150	—		 <p>Material: PVDF</p>	24
LVM20/200			 <p>Material: PVDF</p>	29

Direct Operated Poppet Type


LVM11/13

Less clogging due to the poppet construction

• Isolated structure

The solenoid drive body is separated from the fluid area by a diaphragm.

• Fluid contact material (Metal-free)

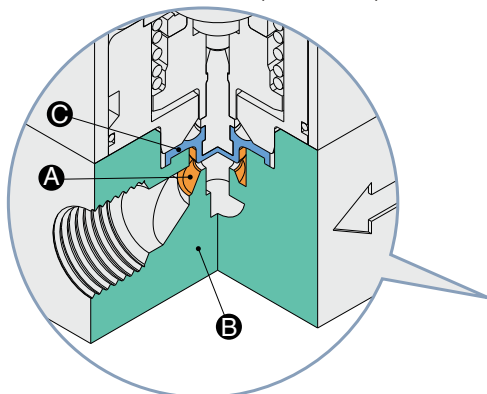

A Volume of valve chamber

B Body material: PEEK

C Diaphragm material: EPDM, FKM, or Kalrez®

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

• Electrical entry

Grommet



Plug connector



• Orifice diameter: 1.5 mm

• Volume of valve chamber

Unit: μL

Model	LVM11	LVM13
Volume of valve chamber	11	13

• Power saving circuit standardized

Holding power consumption can be reduced substantially.
Continuous energization for extended periods of time is possible.

Unit: W

Model		LVM11	LVM13
Power consumption	Inrush	2.5	2.5
	Holding	1	1

Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time or used with a manifold.

• With light/surge voltage suppressor

• With reverse mounting prevention pin (Option)

• Application:
Liquid discharge, etc.

Series Variations

	Model	Valve type		Operating pressure range	Orifice dia. [mm]	Volume of valve chamber [μL]	Valve width [mm]	Weight [g]	Power consumption [W]	Options				Base mounted		Page
		N.C. (2-port)	N.O. (2-port)							Reverse mounting prevention pin	Electrical entry	With light/surge voltage suppressor	Body ported	Without sub-plate	With sub-plate	
Body ported	LVM11	•		0 to 0.25 MPa	1.5	11	13	30	Inrush: 2.5 Holding: 1	—	•	•	•	•	—	36
Base mounted	New LVM13	•		0 to 0.25 MPa	1.5	13	13	30	Inrush: 2.5 Holding: 1	•	•	•	—	•	—	

CONTENTS

Compact Direct Operated 2/3-Port Solenoid Valve for Chemical Liquids *LVM Series*



Direct Operated Rocker Type LVM07 Series

How to Order	p. 7
Specifications	p. 8
Flow Rate Characteristics	p. 8
Construction: Base mounted	p. 9
Dimensions: Base mounted	p. 10

Direct Operated Rocker Type LVM09/090 Series

How to Order	p. 11
Specifications	p. 12
Flow Rate Characteristics	p. 12
Construction: Body ported	p. 13
Construction: Base mounted	p. 14
Dimensions: Body ported	p. 15
Dimensions: Base mounted	p. 16

Direct Operated Rocker Type LVM10/100 Series

How to Order	p. 17
Specifications	p. 18
Flow Rate Characteristics	p. 18
Construction: Body ported	p. 19
Construction: Base mounted	p. 20
Dimensions: Body ported	p. 21
Dimensions: Base mounted	p. 22

Direct Operated Rocker Type LVM15/150 Series

How to Order	p. 24
Specifications	p. 25
Flow Rate Characteristics	p. 25
Construction: Base mounted	p. 26
Dimensions: Base mounted	p. 27

Direct Operated Rocker Type LVM20/200 Series

How to Order	p. 29
Specifications	p. 30
Flow Rate Characteristics	p. 30
Construction: Body ported	p. 31
Construction: Base mounted	p. 32
Dimensions: Body ported	p. 33
Dimensions: Base mounted	p. 34

Direct Operated Poppet Type LVM11/13 Series

How to Order	p. 36
Specifications	p. 37
Flow Rate Characteristics	p. 37
Construction	p. 38
Dimensions: Body ported	p. 39
Dimensions: Base mounted	p. 40

Specific Product Precautions	p. 41
Spare Parts	p. 44
Safety Instructions	Back cover

Direct Operated Rocker Type



Compact Direct Operated 2-Port Solenoid Valve for Chemical Liquids

LVM07 Series

How to Order

Base mounted

LVM 07R6 - 5 A - -

1
2
3
4
5
6
7



Without sub-plate
Base mounted

① Number of ports, Valve type

Symbol	Number of ports	Valve type	
07R6	2	N.C.	

② Power saving circuit

Nil	None (Standard type)
Y1	Yes

③ Coil voltage

Symbol	Voltage
5	24 VDC
6	12 VDC

④ Fluid contact material

Symbol	Body	Diaphragm
A	PEEK	EPDM
B	PEEK	FKM
C	PEEK	Kalrez®

⑤ Reverse mounting prevention pin

Nil	None
P	Yes

⑥ Lead wire length

Nil	150 mm
3	300 mm
6	600 mm

⑦ CE-compliant

Nil	No
Q	CE-compliant

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Mounting screws are included. (2 pcs.)
M1.6 x 8.5/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

Specifications



Without sub-plate
Base mounted

Model			Base mounted	
			LVM07R6	
Valve construction			Direct operated rocker type	
Valve type			N.C.	
Number of ports			2	
Fluid*1			Air, Water, DI water (Pure water), Diluent, or Cleaning fluid	
Operating pressure range			−75 kPa to 0.1 MPa	
Orifice diameter			0.8 mm	
Response time*8			10 ms or less (at pneumatic pressure)	
Leakage			Zero leakage, both internal or external (at water pressure)	
Proof pressure*2			0.15 MPa	
Ambient temperature*9			0 to 50°C (No condensation)	
Fluid temperature*9			0 to 50°C	
Volume of valve chamber*3			8 μL	
Mounting orientation*4			Free	
Enclosure			IP40 or equivalent	
Weight			7 g	
Rated voltage			12, 24 VDC	
Allowable voltage fluctuation*5			±10% of rated voltage	
Type of coil insulation			Class B	
Power consumption (When rated voltage is at 24 V)	Standard type		2.8 W (0.12 A)*6	
	With power saving circuit	Inrush	2.8 W (0.12 A)	
		Holding	0.8 W	
Coil switching noise*7			50 dB	

*1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.


*2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test

*3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted

*4 When residual liquid needs to be taken into consideration, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.

*5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.

*6 The LVM07R6 (standard type) requires power saving control. Conduct power saving control according to the figure below.

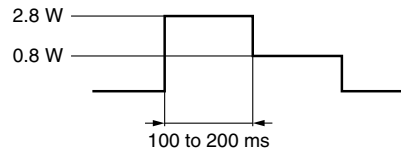

*7 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.

*8 In compliance with JIS B 8419:2010 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)

The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.

*9 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).

Flow Rate Characteristics

Water		Air	
Kv	Cv	C	b
0.004	0.005	0.02	0.2


* The values of Kv and Cv are based on JIS B 2005:1995;
the values of C and b are based on JIS B 8390:2000.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM07 Series

Construction

Base mounted
LVM07R6

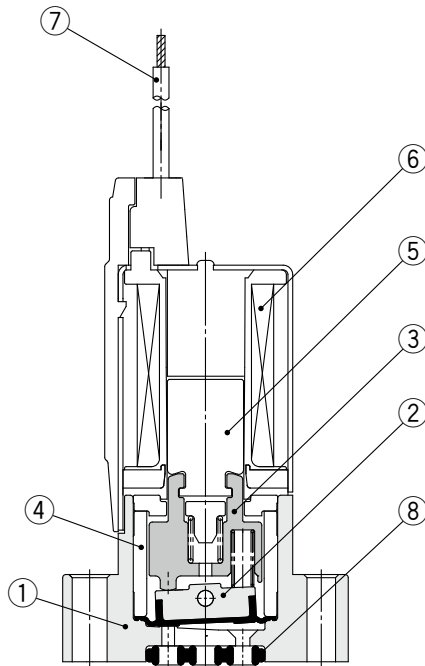


Component Parts

No.	Description	Material
1	Body	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Slide bushing assembly	PPS/Stainless steel
4	Bushing	PPS
5	Armature	—
6	Coil assembly	—
7	Lead wire	—
8	Interface gasket	EPDM/FKM/Kalrez®

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Dimensions

Base mounted LVM07R6

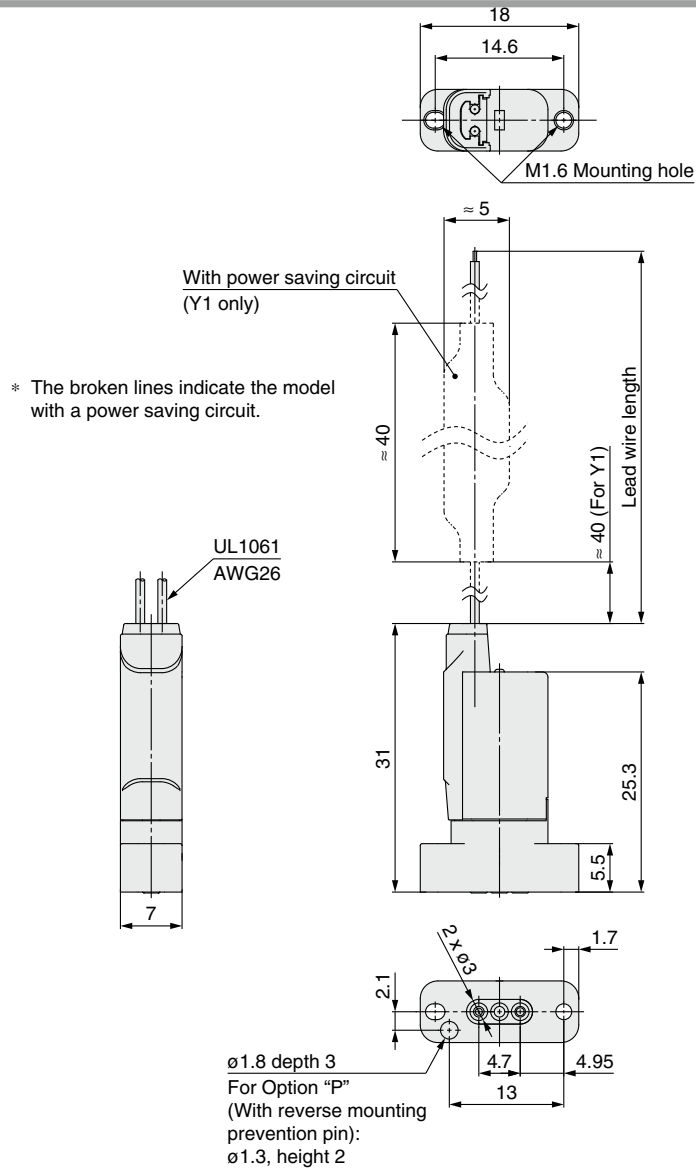

LVM07

LVM09/090

LVM10/100

LVM15/150

LVM20/200


LVM11/13

Specific Product
Precautions

Spare Parts

Recommended interface dimensions * Surface roughness = Rz3.2 or less

When using a positioning pin for mounting, the size should be $\phi 1.5$, and the height should be 2 or less.
For Option "P" (With reverse mounting prevention pin), the size should be $\phi 1.5$, and the depth should be 2.3 or more.

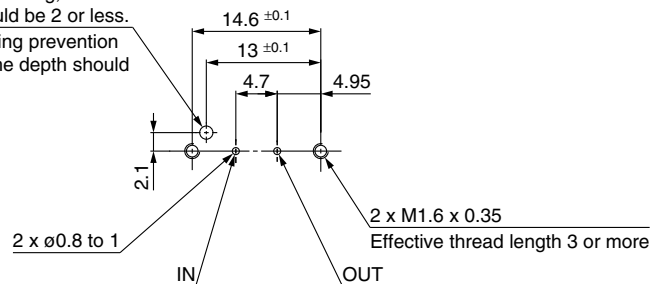


Direct Operated Rocker Type




RoHS

Compact Direct Operated 2/3-Port Solenoid Valve for Chemical Liquids

LVM09/090 Series

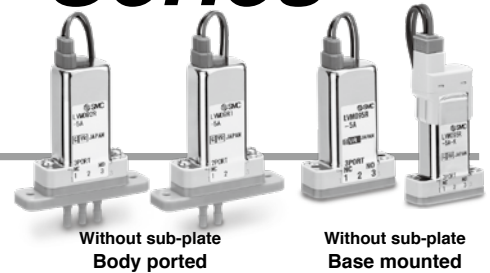

How to Order

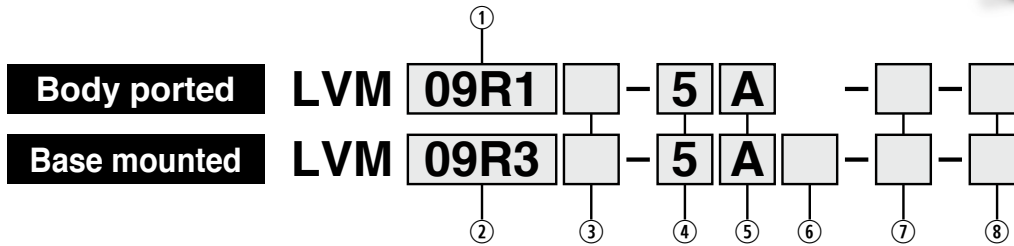

① Number of ports, Valve type

Symbol	Number of ports	Valve type	
09R1	2	N.C.	
09R2		N.O.	
092R	3	Universal	

③ Power saving circuit

Nil	None (Standard type)
Y	Yes (Plug connector)
Y1	Yes (Grommet)

④ Coil voltage

Symbol	Voltage
5	24 VDC
6	12 VDC

⑤ Fluid contact material

Symbol	Plate	Diaphragm
A	PEEK	EPDM
B	PEEK	FKM
C	PEEK	Kalrez®

⑥ Reverse mounting prevention pin

Nil	None
P	Yes

② Number of ports, Valve type

Symbol	Number of ports	Valve type	
09R3	2	N.C.	
09R4		N.O.	
09R6		N.C.	
095R	3	Universal	

⑦ Electrical entry, Lead wire length, Light/surge voltage suppressor

Symbol	Electrical entry, Lead wire length	Light/surge voltage suppressor	
Nil	Grommet, 150 mm	Cannot be selected	
3	Grommet, 300 mm		
6	Grommet, 600 mm		
K	Plug connector, 300 mm	None	
KO	Plug connector, Without connector		
KZ	Plug connector, 300 mm		
KOZ	Plug connector, Without connector	Yes * Power saving circuit "Y" is equipped with a light/surge voltage suppressor.	

* "3" or "6" must be selected for power saving circuit "Y1" (grommet). "Nil" cannot be selected.

* The plug connector is included but does not come assembled.

* If a lead wire length of 600 mm or more is required, select "KO□" (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: SY100 - 30 - 4A -

Lead wire length ●

6	600 mm
10	1000 mm
30	3000 mm

⑧ CE-compliant

Nil	No
Q	CE-compliant

Mounting screws are included with the base-mounted type. (2 pcs.)
M2 x 11/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Specifications

Model			Body ported			Base mounted			
			LVM09R1	LVM09R2	LVM092R	LVM09R3	LVM09R4	LVM09R6	LVM095R
Valve construction			Direct operated rocker type						
Valve type			N.C.	N.O.	Universal	N.C.	N.O.	N.C.	Universal
Number of ports			2		3	2		3	
Fluid*1			Air, Water, DI water (Pure water), Diluent, or Cleaning fluid						
Operating pressure range			-75 kPa to 0.2 MPa						
Orifice diameter			1 mm			1.1 mm			
Response time*7			10 ms or less (at pneumatic pressure)						
Leakage			Zero leakage, both internal or external (at water pressure)						
Proof pressure*2			0.3 MPa						
Ambient temperature*8			0 to 50°C						
Fluid temperature*8			0 to 50°C (No freezing)						
Volume of valve chamber*3			18 μL			18 μL		29 μL	18 μL
Mounting orientation*4			Free						
Enclosure			IP40 or equivalent						
Weight			22 g			20 g			
Rated voltage			12, 24 VDC						
Allowable voltage fluctuation*5			±10% of rated voltage						
Type of coil insulation			Class B						
Power consumption (When rated voltage is at 24 V)	Standard type		2 W (0.08 A)						
	With power saving circuit	Inrush	3.3 W (0.14 A)						
		Holding	0.9 W						
Coil switching noise*6			50 dB						

- *1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.
 *2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test
 *3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted
 *4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.
 *5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
 *6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.
 *7 In compliance with JIS B 8419:2010
 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
 The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.
 *8 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).
 * Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics

Water		Air	
Kv	Cv	C	b
0.015	0.018	0.06	0.2

- * The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.



Without sub-plate
Body ported



Without sub-plate
Body ported



Without sub-plate
Base mounted



Without sub-plate
Base mounted

LVM07

LVM09/090

LVM10/100

LVM15/150

LVM20/200

LVM11/13


Specific Product
Precautions

Spare Parts


LVM09/090 Series

Construction


Body ported
LVM09R1

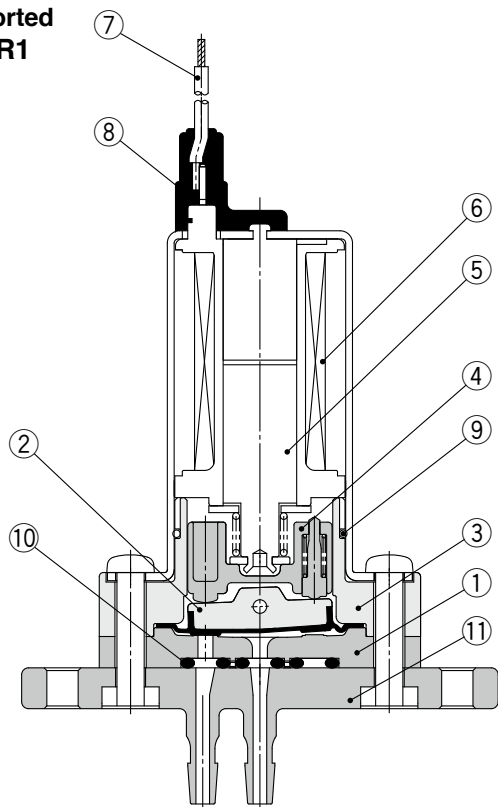

LVM09R2

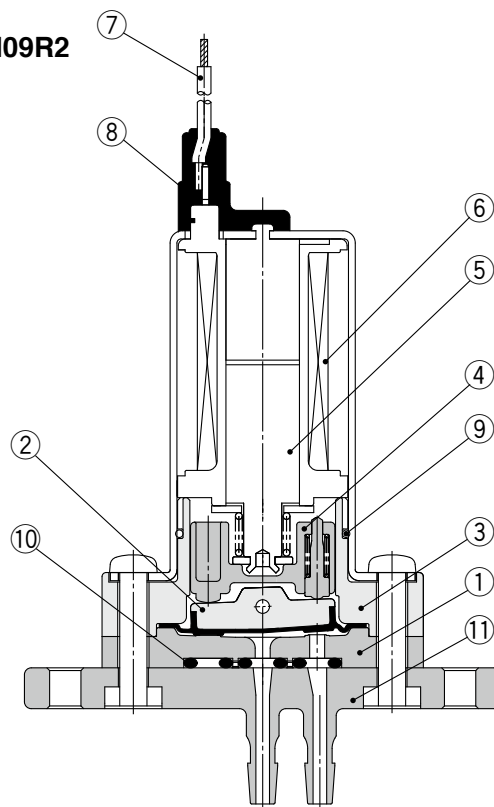

LVM092R

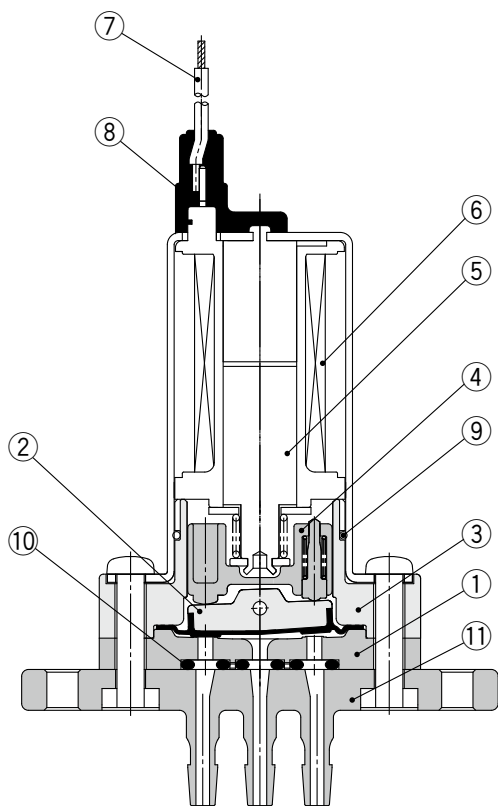

Component Parts: LVM09R1, 09R2, 092R



No.	Description	Material
1	Plate	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Body	PBT
4	Slide bushing assembly	PPS/Stainless steel
5	Armature assembly	—
6	Coil assembly	—
7	Lead wire	—
8	Mold	PET
9	O-ring	NBR
10	Interface gasket	EPDM/FKM/Kalrez®
11	Piping plate	PEEK

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Construction



Base mounted LVM09R3

LVM09R4

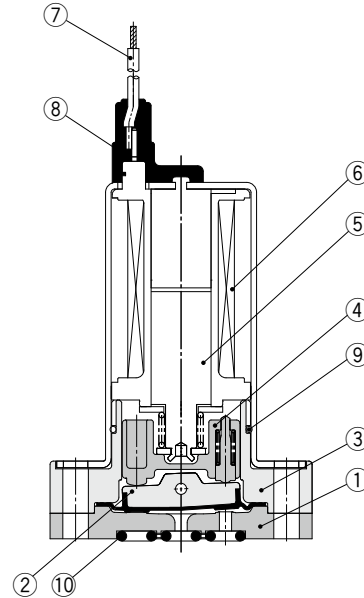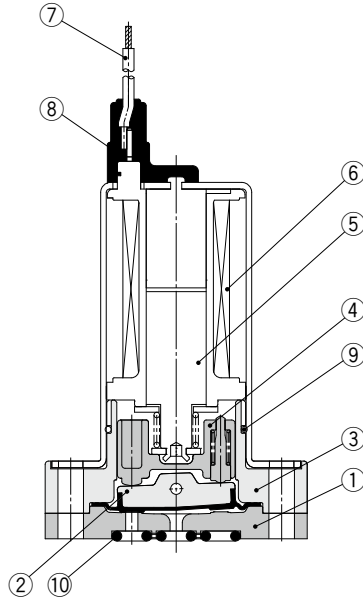

LVM09R6

LVM095R

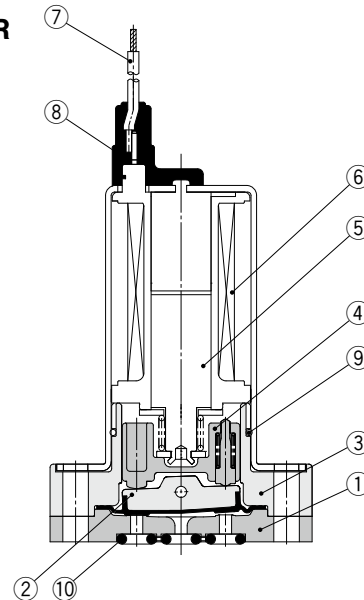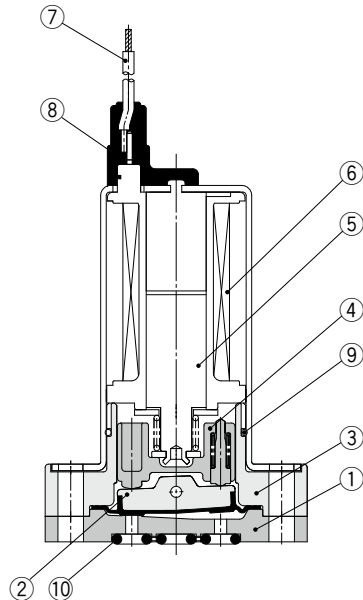

Component Parts: LVM09R3, 09R4, 09R6, 095R

No.	Description	Material
1	Plate	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Body	PBT
4	Slide bushing assembly	PPS/Stainless steel
5	Armature assembly	—

No.	Description	Material
6	Coil assembly	—
7	Lead wire	—
8	Mold	PET
9	O-ring	NBR
10	Interface gasket	EPDM/FKM/Kalrez®

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM09/090 Series



Dimensions

Body ported


LVM09R1

LVM09R2


LVM092R

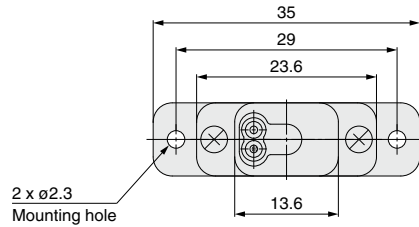

* The broken lines indicate the model with a power saving circuit.


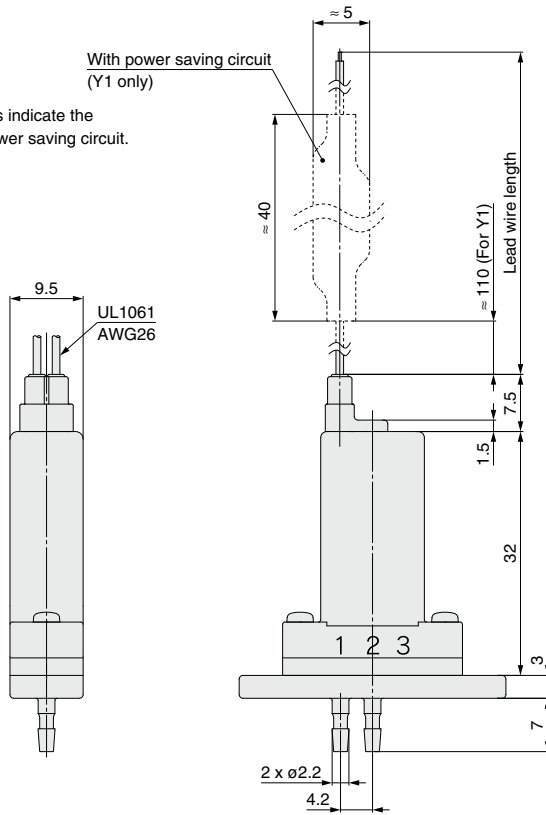


LVM09R1

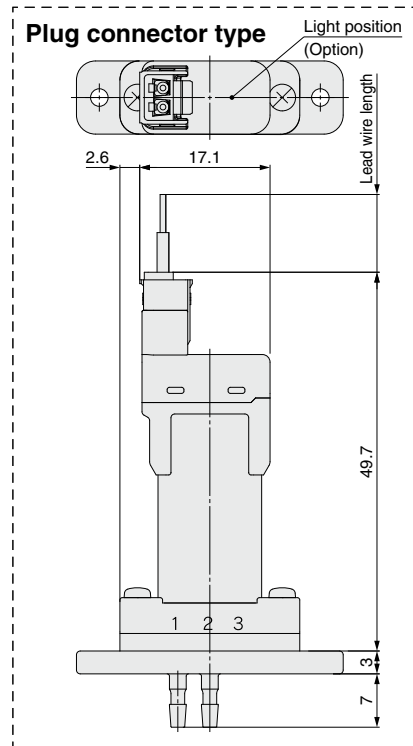

LVM09R2

Details of tube inlet



LVM092R


Dimensions

Base mounted, Without sub-plate






LVM09R3/6-□□-□ (N.C.)

LVM09R4-□□-□ (N.O.)


LVM095R-□□-□ (Universal)

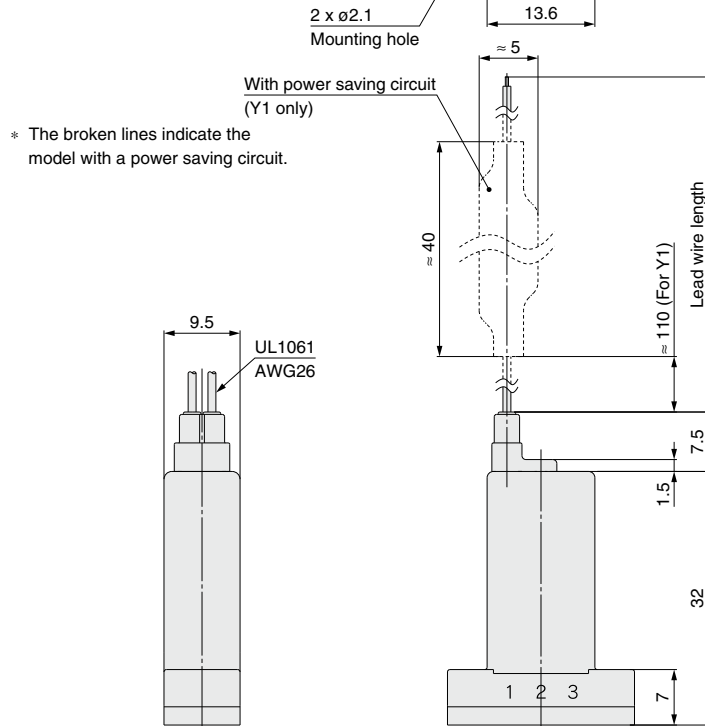

Plug connector type

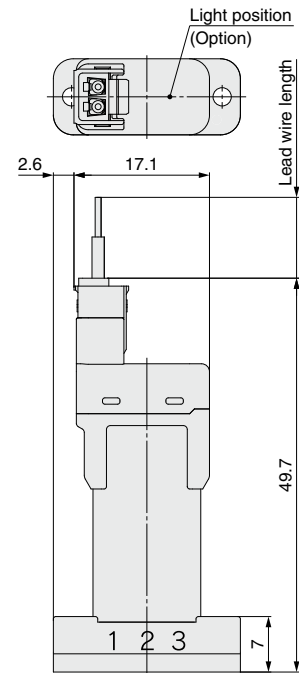


Recommended interface dimensions * Surface roughness = Rz3.2 or less

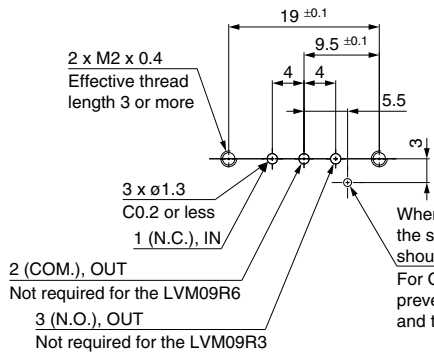

LVM09R3, 09R6, 095R

When using a positioning pin for mounting, the size should be ø1, and the height should be 1.5 or less.
For Option "P" (With reverse mounting prevention pin), the size should be ø1.7, and the depth should be 2.3 or more.

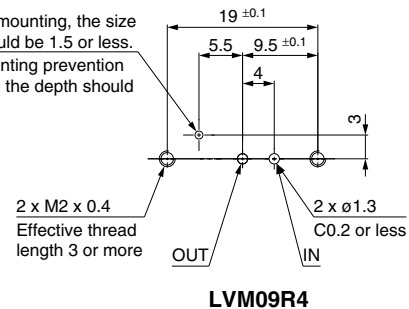

Direct Operated Rocker Type




RoHS

Compact Direct Operated 2/3-Port Solenoid Valve for Chemical Liquids

LVM10/100 Series

How to Order

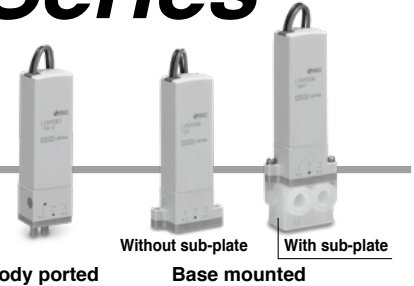




Body ported

LVM 10R1 - 5 A - - -





Base mounted

LVM 10R3 - 5 A 1 - - -

① Number of ports, Valve type

Symbol	Number of ports	Valve type
10R1	2	N.C. 
10R2	2	N.O. 
102R	3	Universal 

④ Number of ports, Valve type

Symbol	Number of ports	Valve type
10R3	2	N.C. 
10R4	2	N.O. 
10R6	2	N.O. 
105R	3	Universal 

⑤ Power saving circuit

Nil	None (Standard type)
Y	Yes

⑥ Coil voltage

Symbol	Voltage
5	24 VDC
6	12 VDC

⑪ CE-compliant

Nil	No
Q	CE-compliant

② Fluid contact material

Symbol	Plate	Diaphragm
A	PEEK	EPDM
B	PEEK	FKM
C	PEEK	Kalrez®

⑦ Fluid contact material

Symbol	Plate	Diaphragm
A	PEEK	EPDM
B	PEEK	FKM
C	PEEK	Kalrez®
E	PFA	EPDM
F	PFA	FKM
G	PFA	Kalrez®

⑨ Option


Nil	None
1	Bracket
2	Manual override
3	Bracket, Manual override

* Without a sub-plate, a bracket cannot be attached.

③ Option

Nil	None
1	Bracket
2	Manual override
3	Bracket, Manual override

⑧ Sub-plate material/port size, Reverse mounting prevention pin

Symbol	Sub-plate Material	Port size	Reverse mounting prevention pin
Nil			None
P	None		Yes 
1	PVDF	M6	None
1U		1/4-28UNF	
2	PFA	M6	
2U		1/4-28UNF	

* "P," "1," and "1U" cannot be selected if the wetted parts material is "E," "F," or "G."
* A sub-plate cannot be mounted for "P" (With reverse mounting prevention pin).

⑩ Electrical entry, Lead wire length, Light/surge voltage suppressor

Symbol	Electrical entry, Lead wire length	Light/surge voltage suppressor
Nil	Grommet, 300 mm	Cannot be selected
6	Grommet, 600 mm	
10	Grommet, 1000 mm	
K	Plug connector, 300 mm	None
KO	Plug connector, Without connector	
KZ	Plug connector, 300 mm	Yes * Power saving circuit "Y" is equipped with a light/surge voltage suppressor.
KOZ	Plug connector, Without connector	

* The plug connector is included but does not come assembled.

* If a lead wire length of 600 mm or more is required, select "KO□" (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: AXT661 - 14A - □

Lead wire length

6	600 mm
10	1000 mm
20	2000 mm
30	3000 mm

Mounting screws are included with the base-mounted type.
(2 pcs.)
M2 x 11/With spring washer
(Material: Stainless steel)

For other spare parts, refer to page 44.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

**Direct Operated Rocker Type Compact Direct Operated
2/3-Port Solenoid Valve for Chemical Liquids** ***LVM10/100 Series***

Specifications



Body ported



Without sub-plate
Base mounted



With sub-plate
Base mounted

Model			Body ported (Tube connection type)			Base mounted			
			LVM10R1	LVM10R2	LVM102R	LVM10R3	LVM10R4	LVM10R6	LVM105R
Valve construction			Direct operated rocker type						
Valve type			N.C.	N.O.	Universal	N.C.	N.O.	N.C.	Universal
Number of ports			2		3	2		3	
Fluid*1			Air, Water, DI water (Pure water), Diluent, or Cleaning fluid						
Operating pressure range			-75 kPa to 0.25 MPa						
Orifice diameter			1.4 mm						
Response time*7			10 ms or less (at pneumatic pressure)						
Leakage			Zero leakage, both internal or external (at water pressure)						
Proof pressure*2			0.38 MPa						
Ambient temperature*8			0 to 50°C						
Fluid temperature*8			0 to 50°C (No freezing)						
Volume of valve chamber*3			20 μL						
Mounting orientation*4			Free						
Enclosure			IP40 or equivalent						
Weight			34 g			34 g (Without sub-plate) 42 g (With sub-plate)			
Rated voltage			12, 24 VDC						
Allowable voltage fluctuation*5			±10% of rated voltage						
Type of coil insulation			Class B						
Power consumption (When rated voltage is at 24 V)	Standard type		1.5 W (0.06 A)						
	With power saving circuit	Inrush	2.5 W (0.1 A)						
		Holding	1 W						
Coil switching noise*6			50 dB						

*1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.

*2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test

*3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted

*4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.

*5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.

*6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.

*7 In compliance with JIS B 8419:2010

(Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.

*8 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).

* Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics

Water		Air	
Kv	Cv	C	b
0.025	0.03	0.1	0.2

* The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.


* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM10/100 Series


Construction

Body ported


LVM10R1

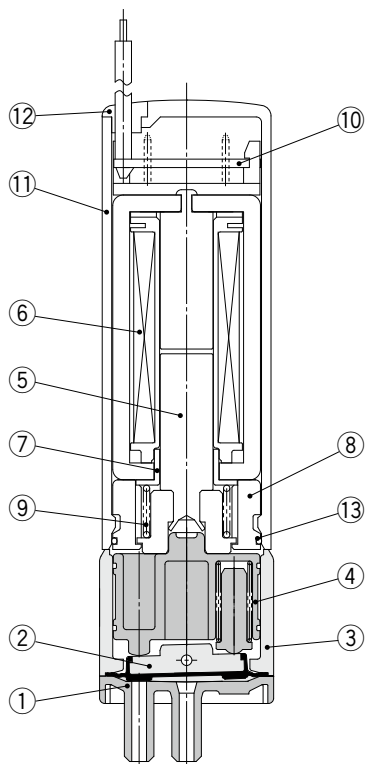

LVM10R2

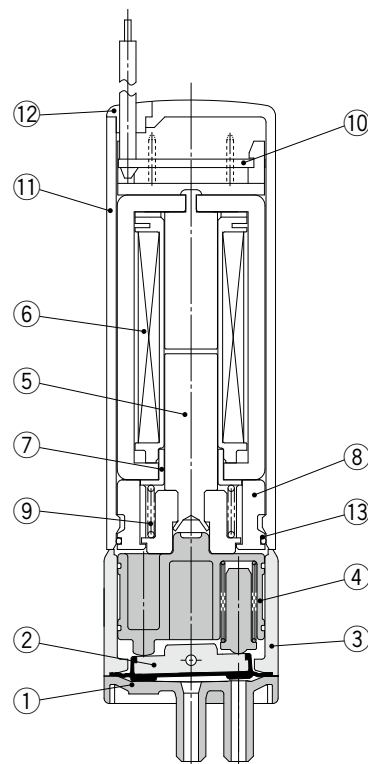

LVM102R

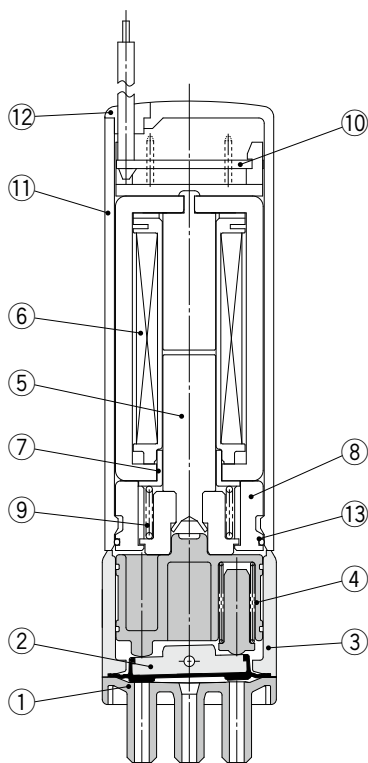


Component Parts: LVM10R1, 10R2, 102R

No.	Description	Material
1	Plate	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Body	PBT
4	Slide bushing assembly	PPS/Stainless steel
5	Armature assembly	Stainless steel/PBT
6	Coil assembly	—
7	Sleeve	SUY (Iron)
8	Spacer	PBT
9	Return spring	Stainless steel
10	Board assembly	—
11	Casing	PBT
12	Plug	NBR
13	O-ring	NBR


* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Construction


Base mounted LVM10R3

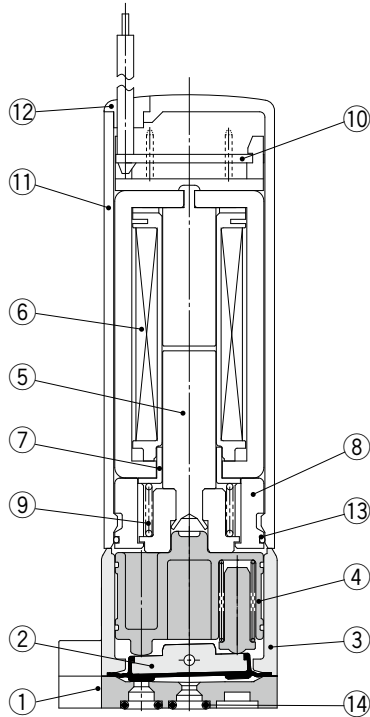


LVM10R4

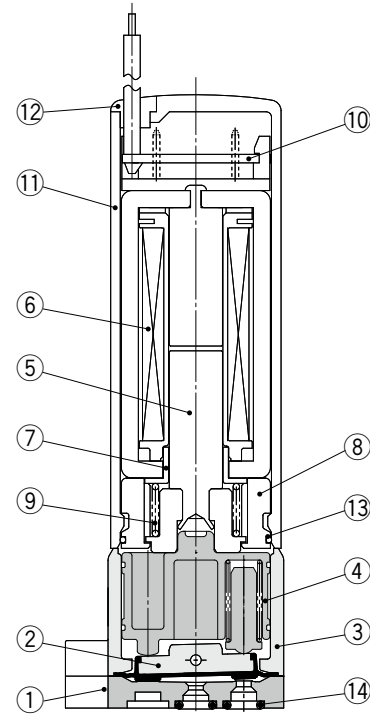

LVM10R6

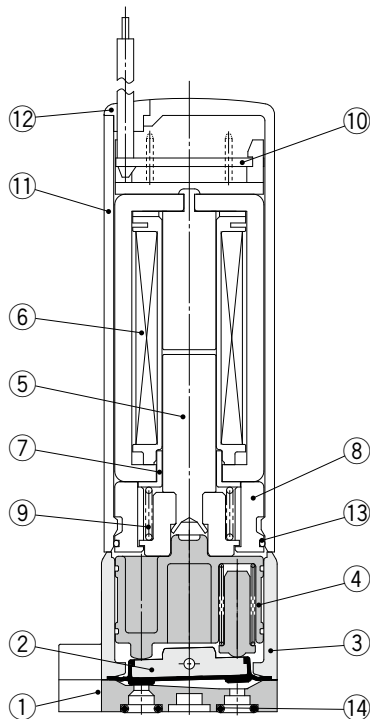

LVM105R

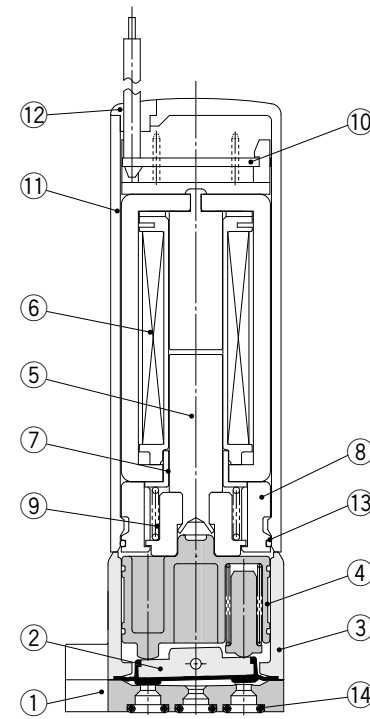

Component Parts: LVM10R3, 10R4, 10R6, 105R

No.	Description	Material
1	Plate	PEEK/PFA
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Body	PBT
4	Slide bushing assembly	PPS/Stainless steel
5	Armature assembly	Stainless steel/PBT
6	Coil assembly	—
7	Sleeve	SUY (Iron)

No.	Description	Material
8	Spacer	PBT
9	Return spring	Stainless steel
10	Board assembly	—
11	Casing	PBT
12	Plug	NBR
13	O-ring	NBR
14	O-ring	EPDM/FKM/Kalrez®

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM10/100 Series


Dimensions

Body ported


LVM10R1-□□-□ (N.C.)

LVM10R2-□□-□ (N.O.)

LVM102R-□□-□ (Universal)

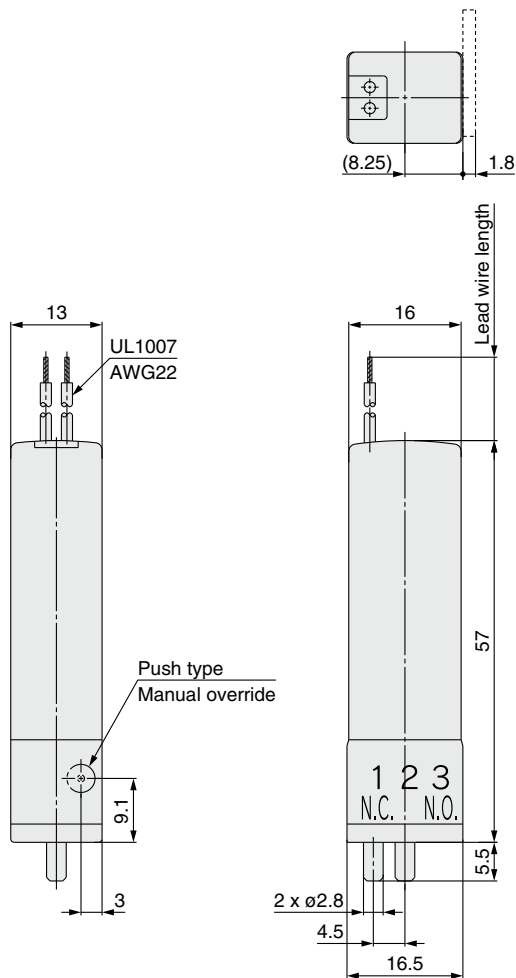


Plug connector type

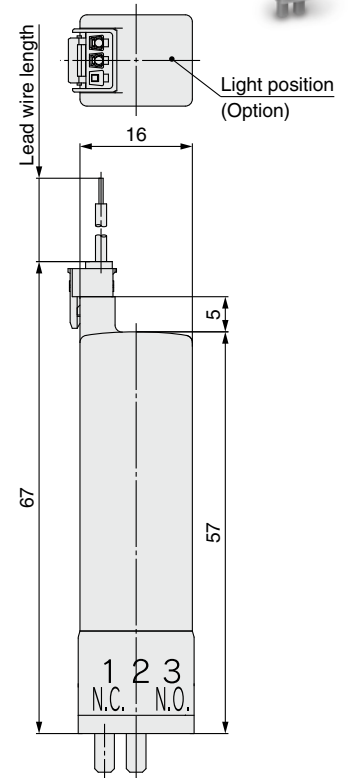

* The broken lines indicate the model with a bracket.

LVM10R2



LVM102R

Dimensions



Base mounted, Without sub-plate

LVM10R3-□□-□ (N.C.)



LVM10R4-□□-□ (N.O.)

LVM10R6-□□-□ (N.C.)


LVM105R-□□-□ (Universal)

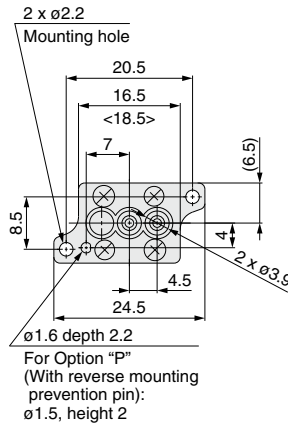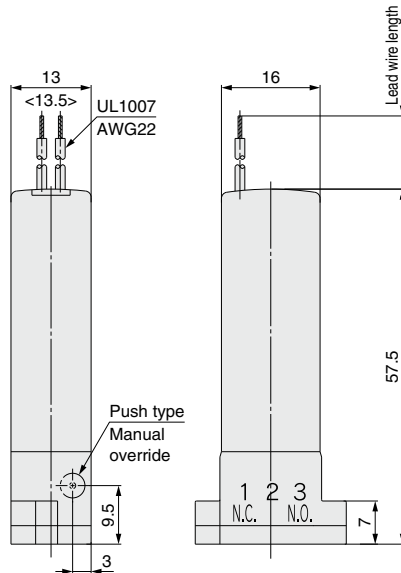


LVM10R4

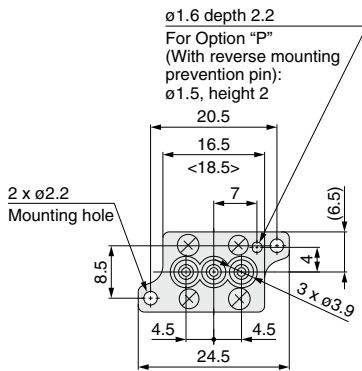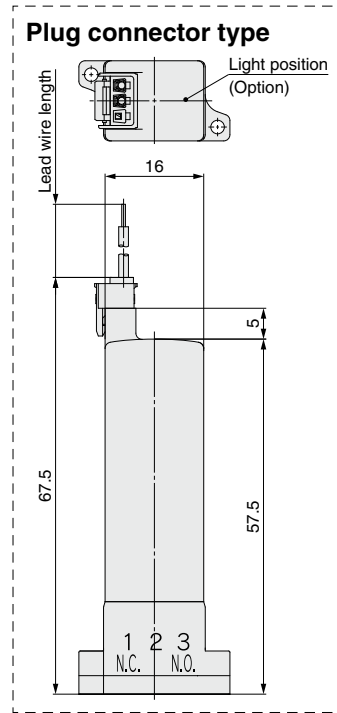

LVM105R

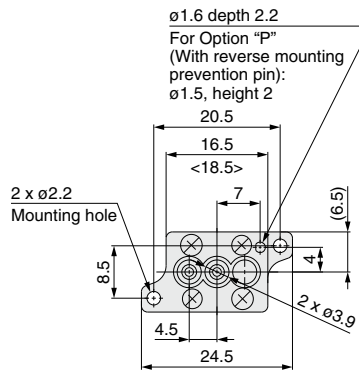

LVM10R3

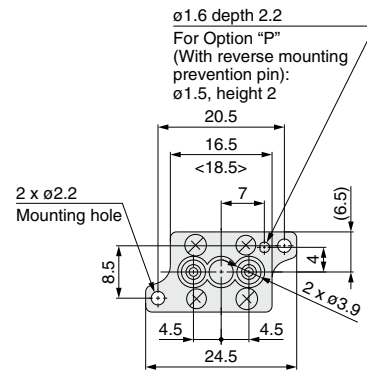


LVM10R6

* The figures in brackets < > indicate the values when PFA is selected as the plate material (wetted parts material "E," "F," or "G"). When PFA is selected as the plate material (wetted parts material "E," "F," or "G"), there is no $\phi 1.6$ positioning hole or $\phi 1.5$ reverse mounting prevention pin.


Recommended interface dimensions

* Surface roughness = Rz3.2 or less

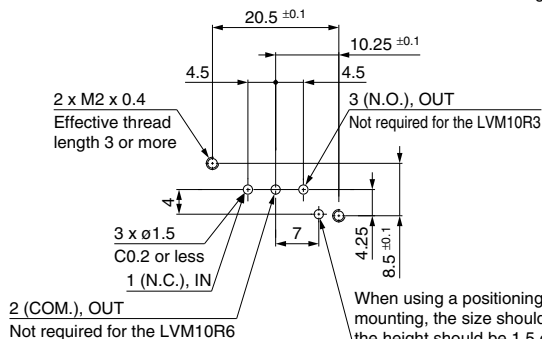

LVM10R3, 10R6, 105R

When using a positioning pin for mounting, the size should be $\phi 1$, and the height should be 1.5 or less.
For Option "P" (With reverse mounting prevention pin), the size should be $\phi 1.7$, and the depth should be 2.3 or more.

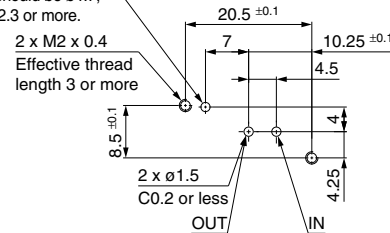

LVM10R4

When using a positioning pin for mounting, the size should be $\phi 1$, and the height should be 1.5 or less.
For Option "P" (With reverse mounting prevention pin), the size should be $\phi 1.7$, and the depth should be 2.3 or more.

LVM10/100 Series

Dimensions


Base mounted, With sub-plate

LVM10R3-□□-□ (N.C.)

LVM10R4-□□-□ (N.O.)

LVM10R6-□□-□ (N.C.)

LVM105R-□□-□ (Universal)

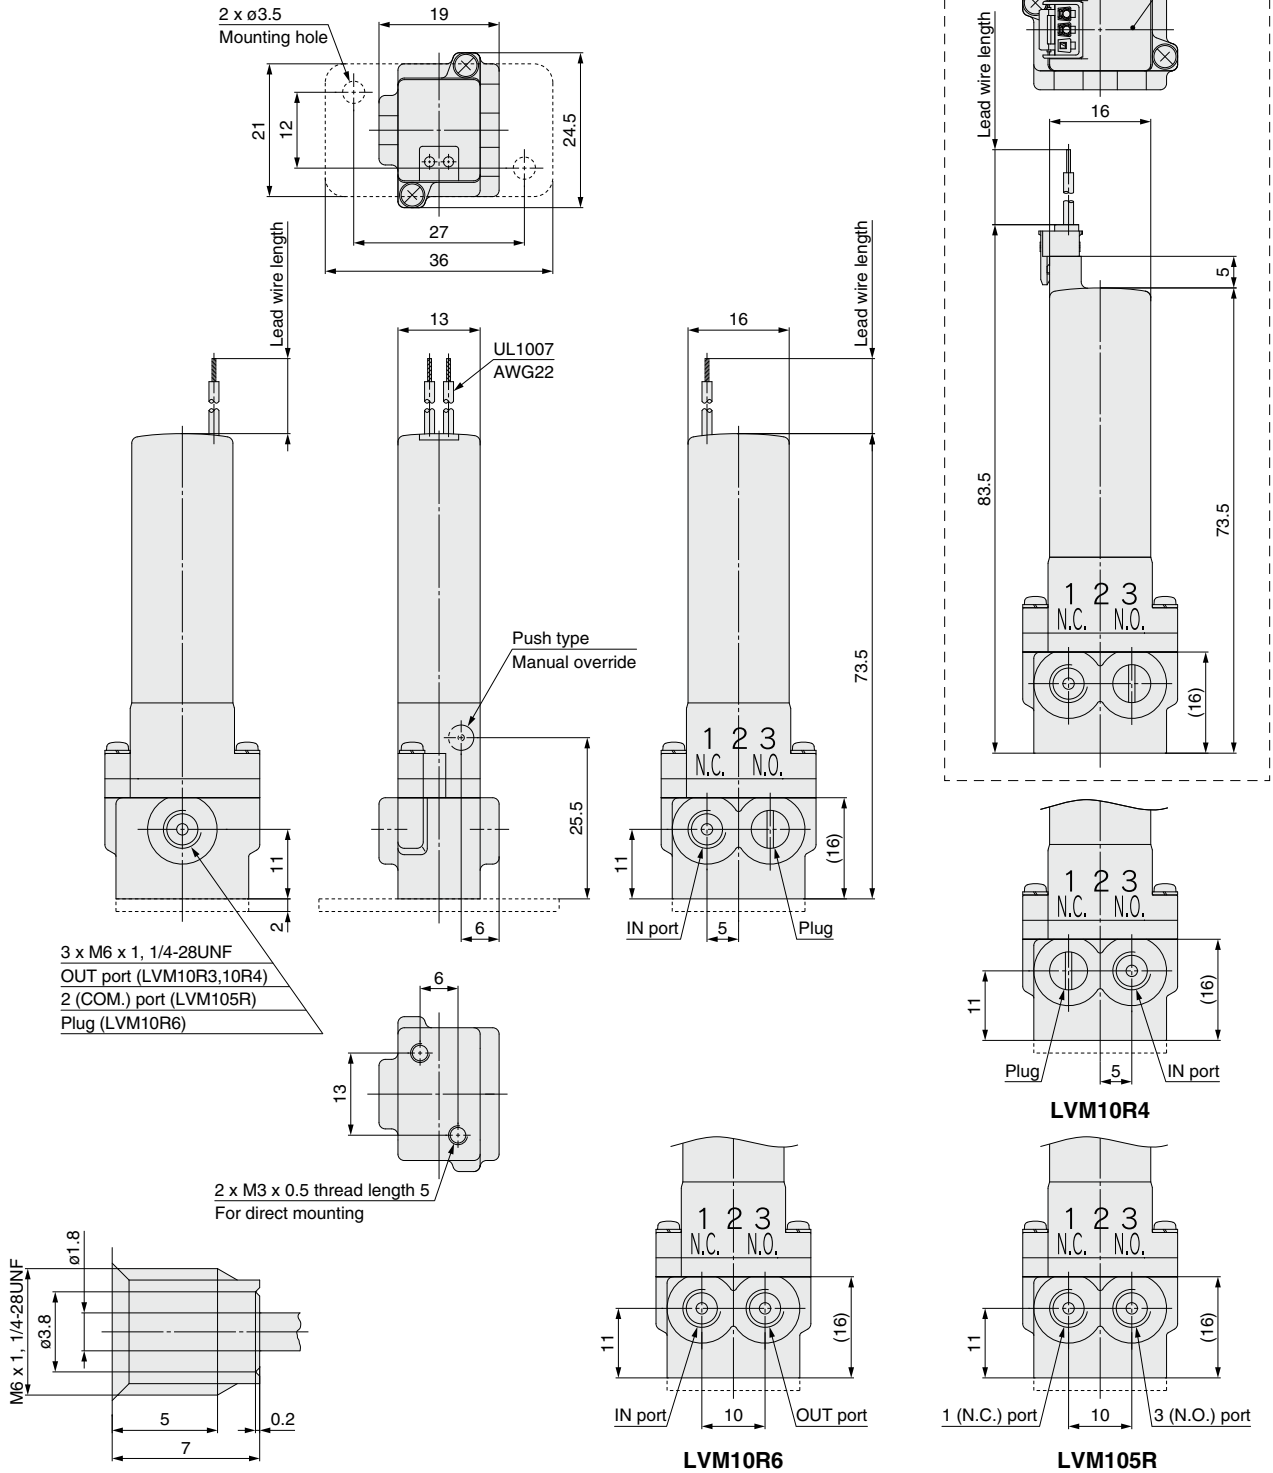

* The broken lines indicate the model with a bracket.

Direct Operated Rocker Type



RoHS

Compact Direct Operated 2/3-Port Solenoid Valve for Chemical Liquids


LVM15/150 Series

How to Order

Base mounted

LVM **15R3** **Y** - **5** **A** **1** - **□** - **□**

① ② ③ ④ ⑤ ⑥ ⑦



① Number of ports, Valve type

Symbol	Number of ports	Valve type	
15R3	2	N.C.	
15R4		N.O.	
15R6		N.C.	
155R	3	Universal	

② Max. operating pressure, Power saving circuit

Symbol	Max. operating pressure	Power saving circuit
Y	0.25 MPa (Standard type)	Yes
HY	0.6 MPa (High-pressure type)	Yes

③ Coil voltage

Symbol	Voltage
5	24 VDC
6	12 VDC

④ Fluid contact material

Symbol	Plate	Diaphragm
A	PEEK	EPDM
B	PEEK	FKM
C	PEEK	Kalrez®

⑤ Sub-plate material/port size, Reverse mounting prevention pin

Symbol	Sub-plate		Reverse mounting prevention pin
	Material	Port size	
Nil	None	None	None
P			Yes
1			 Reverse mounting prevention pin
1U	PVDF	M6 1/4-28UNF	

* A sub-plate cannot be mounted for "P" (With reverse mounting prevention pin).

⑥ Electrical entry, Lead wire length, Light/surge voltage suppressor

Symbol	Electrical entry, Lead wire length	Light/surge voltage suppressor	
Nil	Grommet, 300 mm	Cannot be selected	
6	Grommet, 600 mm		
10	Grommet, 1000 mm		
KZ	Plug connector, 300 mm	Yes	
KOZ	Plug connector, Without connector		

* The plug connector is included but does not come assembled.

* If a lead wire length of 600 mm or more is required, select "KOZ" (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: AXT661 - 14A - □

Lead wire length •

6	600 mm
10	1000 mm
20	2000 mm
30	3000 mm

⑦ CE-compliant

Nil	No
Q	CE-compliant

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Mounting screws are included. (2 pcs.)
M2.5 x 14/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

LVM15/150 Series

Specifications



Model		Base mounted			
		LVM15R3	LVM15R4	LVM15R6	LVM155R
Valve construction		Direct operated rocker type			
Valve type		N.C.	N.O.	N.C.	Universal
Number of ports		2			3
Fluid*1		Air, Water, DI water (Pure water), Diluent, or Cleaning fluid			
Operating pressure range	Standard type	-75 kPa to 0.25 MPa			
	High-pressure type	Max. 0.6 MPa*7			
Orifice diameter	Standard type	1.6 mm			
	High-pressure type	1 mm			
Response time*8		15 ms or less (at pneumatic pressure)			
Leakage		Zero leakage, both internal or external (at water pressure)			
Proof pressure*2	Standard type	0.38 MPa			
	High-pressure type	0.9 MPa			
Ambient temperature*9		0 to 50°C			
Fluid temperature*9		0 to 50°C (No freezing)			
Volume of valve chamber*3		50 μL	60 μL	50 μL	
Mounting orientation*4		Free			
Enclosure		IP40 or equivalent			
Weight		45 g (Without sub-plate), 56 g (With sub-plate)			
Rated voltage		12, 24 VDC			
Allowable voltage fluctuation*5		±10% of rated voltage			
Type of coil insulation		Class B			
Power consumption (When rated voltage is at 24 V)	Inrush	5.5 W (0.23 A)			
	Holding	1 W			
Coil switching noise*6		60 dB			

*1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.

*2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test

*3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted

*4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.

*5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.

*6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.

*7 The high-pressure type can also be used at a pressure level of up to -75 kPa. However, set the maximum operating pressure so that a difference in operating pressure becomes 0.6 MPa or less.

Example) When the valve is used at -50 kPa, the maximum operating pressure is up to 0.55 MPa.

*8 In compliance with JIS B 8419:2010

(Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)

The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.

*9 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).

* Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics

Water		Air	
Kv	Cv	C	b
0.034 [0.012]	0.04 [0.015]	0.13 [0.05]	0.22 [0.2]


The [] indicate the values of the high-pressure type.

* The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.


* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Construction


Base mounted LVM15R3

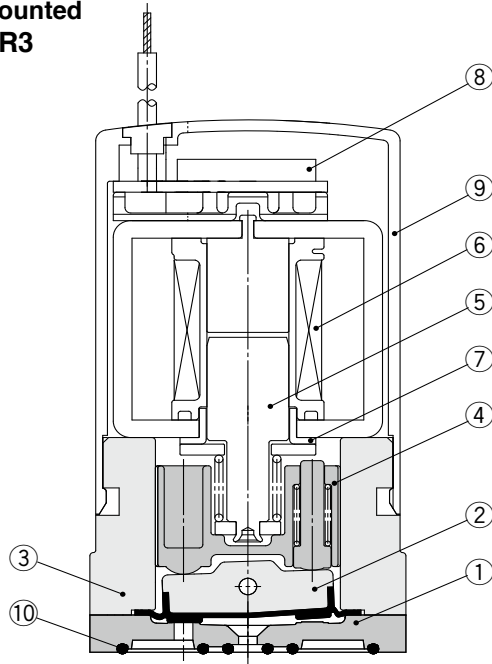


LVM15R4

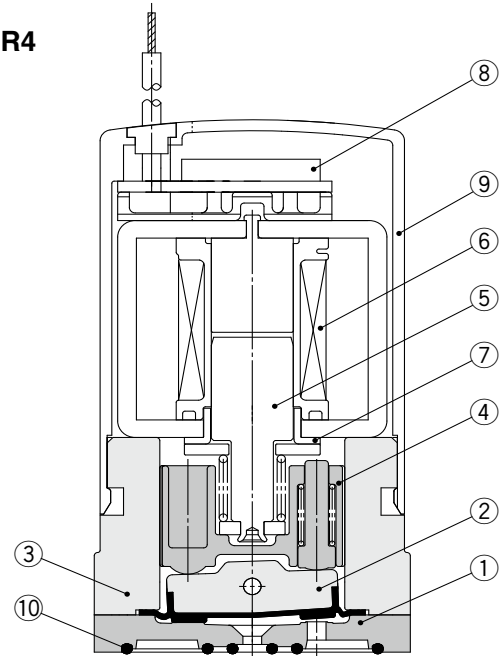

LVM15R6

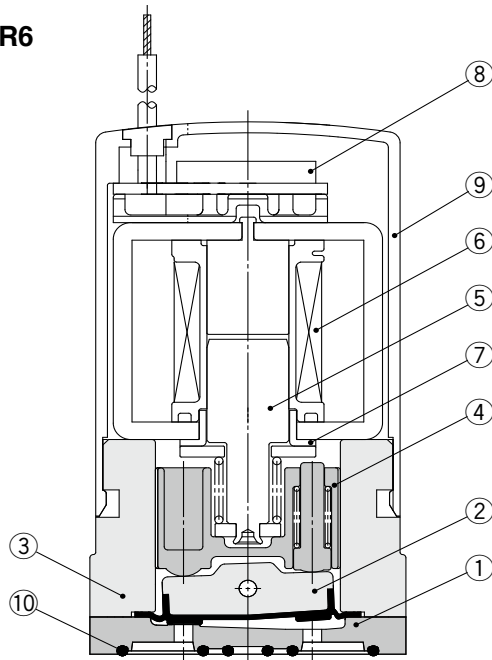

LVM155R

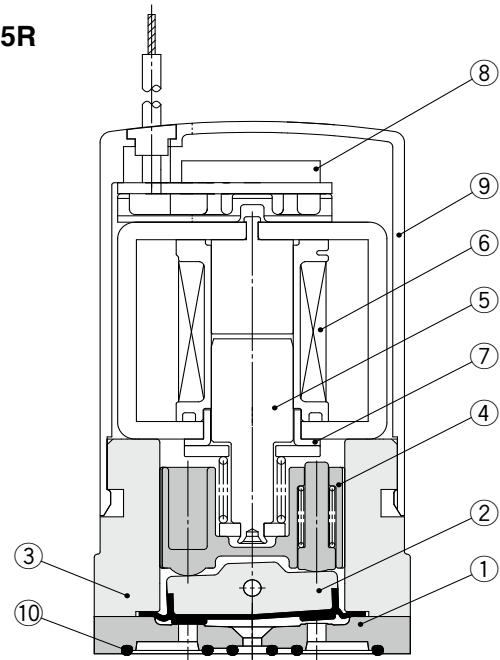

Component Parts: LVM15R3, 15R4, 15R6, 155R

No.	Description	Material
1	Plate	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Body	PBT
4	Slide bushing assembly	PPS/Stainless steel
5	Armature assembly	—
6	Coil assembly	—
7	Sleeve	SUY (Iron)
8	Board assembly	—
9	Casing	PBT
10	Interface gasket	EPDM/FKM/Kalrez®

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM15/150 Series


Dimensions

Base mounted, Without sub-plate


LVM15R3- □□ - □ (N.C.)

LVM15R4- □□ - □ (N.O.)

LVM15R6- □□ - □ (N.C.)

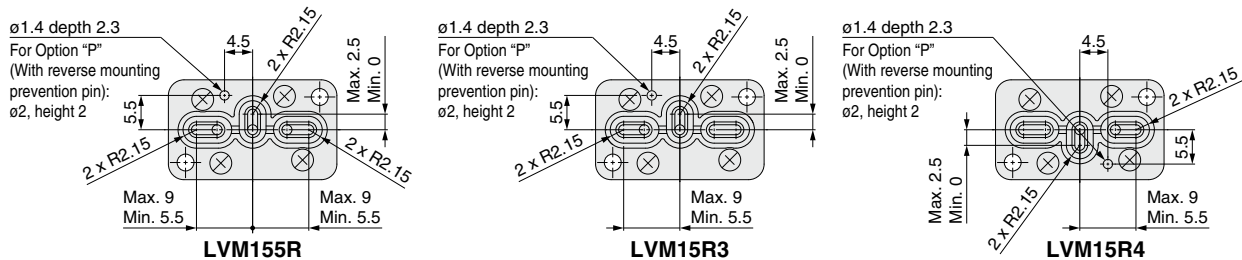LVM155R- □□ - □ (Universal)

Recommended interface dimensions * Surface roughness = Rz3.2 or less

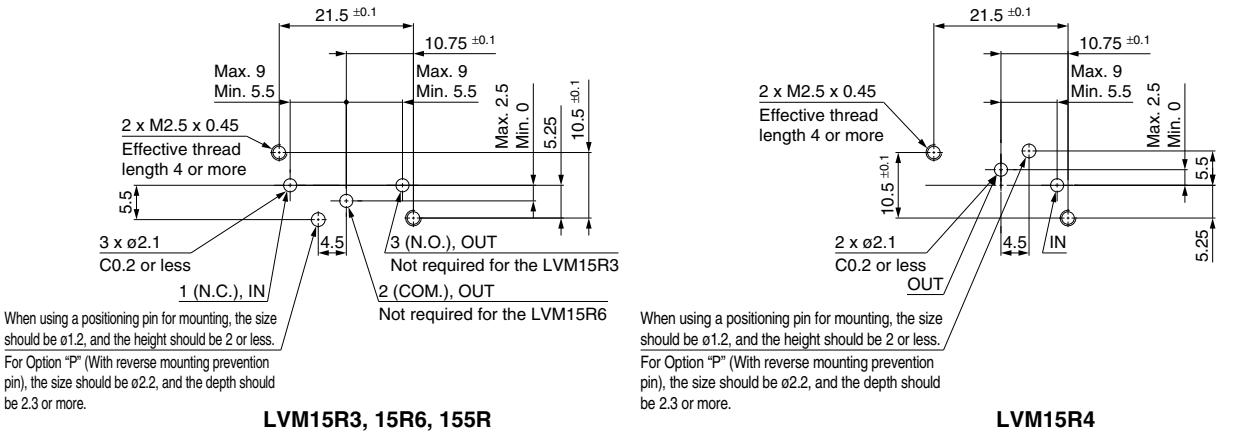

Dimensions







Base mounted, With sub-plate

LVM15R3-□□-□ (N.C.)

LVM15R4-□□-□ (N.O.)

LVM15R6-□□-□ (N.C.)

LVM155R-□□-□ (Universal)

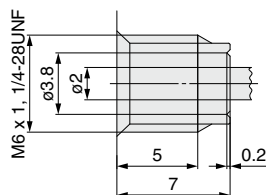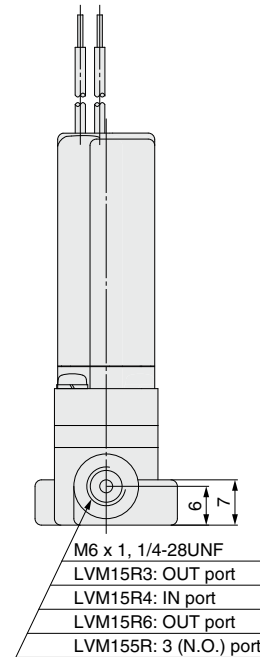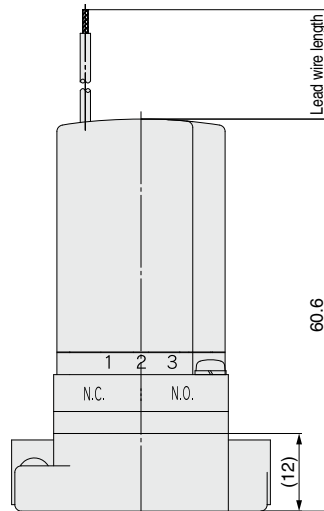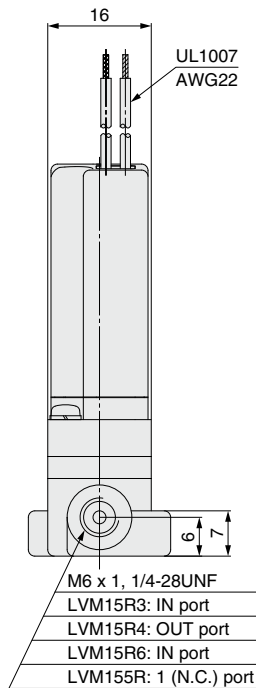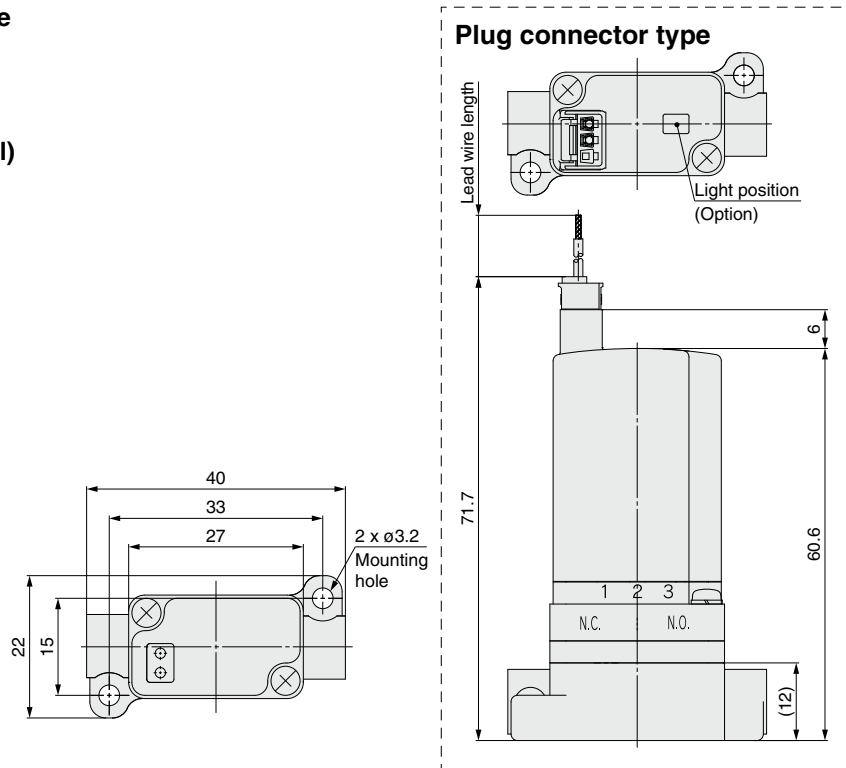

Details of thread

LVM07

LVM09/090

LVM10/100

LVM15/150

LVM20/200

LVM11/13

Specific Product
Precautions

Spare Parts


Direct Operated Rocker Type



Compact Direct Operated 2/3-Port Solenoid Valve for Chemical Liquids

LVM20/200 Series

How to Order

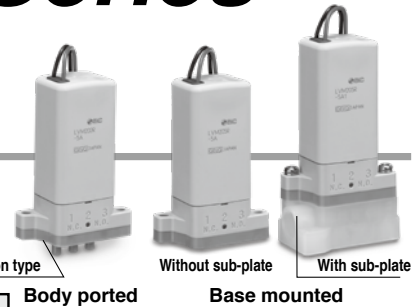


Body ported




LVM 20R1 - 5 A - -

Base mounted




LVM 20R3 - 5 A 1 - -

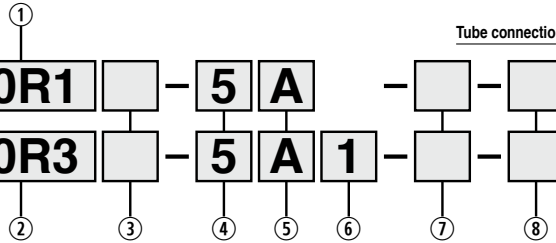

① Number of ports, Valve type

Symbol	Number of ports	Valve type
20R1	2	N.C. 
20R2	2	N.O. 
202R	3	Universal 

② Number of ports, Valve type

Symbol	Number of ports	Valve type
20R3	2	N.C. 
20R4	2	N.O. 
205R	3	Universal 

③ Power saving circuit

Nil	None (Standard type)
Y	Yes


④ Coil voltage

Symbol	Voltage
5	24 VDC
6	12 VDC

⑤ Fluid contact material

Symbol	Plate	Diaphragm
A	PEEK	EPDM
B	PEEK	FKM
C	PEEK	Kalrez®

⑥ Sub-plate material/port size, Reverse mounting prevention pin

Symbol	Sub-plate	Reverse mounting prevention pin
	Material	Port size
Nil		None
P	None	Yes 
1		Rc1/8
1F	PVDF	G1/8
1N		NPT1/8

* A sub-plate cannot be mounted for "P" (With reverse mounting prevention pin).

⑧ CE-compliant

Nil	No
Q	CE-compliant

⑦ Electrical entry, Lead wire length, Light/surge voltage suppressor

Symbol	Electrical entry, Lead wire length	Light/surge voltage suppressor
Nil	Grommet, 300 mm	Cannot be selected
6	Grommet, 600 mm	
10	Grommet, 1000 mm	
K	Plug connector, 300 mm	None
KO	Plug connector, Without connector	
KZ	Plug connector, 300 mm	Yes * Power saving circuit "Y" is equipped with a light/surge voltage suppressor.
KOZ	Plug connector, Without connector	

* The plug connector is included but does not come assembled.

* If a lead wire length of 600 mm or more is required, select "KO" (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: AXT661 - 14A -

Lead wire length

6	600 mm
10	1000 mm
20	2000 mm
30	3000 mm

Mounting screws are included with the base-mounted type. (2 pcs.)
M3 x 14/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Specifications



Model			Body ported (Tube connection type)			Base mounted		
			LVM20R1	LVM20R2	LVM20R3	LVM20R4	LVM20R5	
Valve construction			Direct operated rocker type					
Valve type			N.C.	N.O.	Universal	N.C.	N.O.	Universal
Number of ports			2		3	2		3
Fluid*1			Air, Water, DI water (Pure water), Diluent, or Cleaning fluid					
Operating pressure range			-75 kPa to 0.25 MPa			-75 kPa to 0.3 MPa		
Orifice diameter			2 mm					
Response time*7			20 ms or less (at pneumatic pressure)					
Leakage			Zero leakage, both internal or external (at water pressure)					
Proof pressure*2			0.38 MPa			0.45 MPa		
Ambient temperature*8			0 to 50°C					
Fluid temperature*8			0 to 50°C (No freezing)					
Volume of valve chamber*3			84 μL					
Mounting orientation*4			Free					
Enclosure			IP40 or equivalent					
Weight			80 g			80 g (Without sub-plate), 94 g (With sub-plate)		
Rated voltage			12, 24 VDC					
Allowable voltage fluctuation*5			±10% of rated voltage					
Type of coil insulation			Class B					
Power consumption (When rated voltage is at 24 V)	Standard type		2.5 W (0.1 A)					
	With power saving circuit	Inrush	4 W (0.17 A)					
		Holding	0.6 W					
	Coil switching noise*6			60 dB				

- *1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.
 *2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test
 *3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted
 *4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.
 *5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
 *6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.
 *7 In compliance with JIS B 8419:2010
 (Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)
 The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.
 *8 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).
 * Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics

Water		Air	
Kv	Cv	C	b
0.055	0.065	0.23	0.27


- * The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.


LVM20/200 Series

Construction


Body ported
LVM20R1

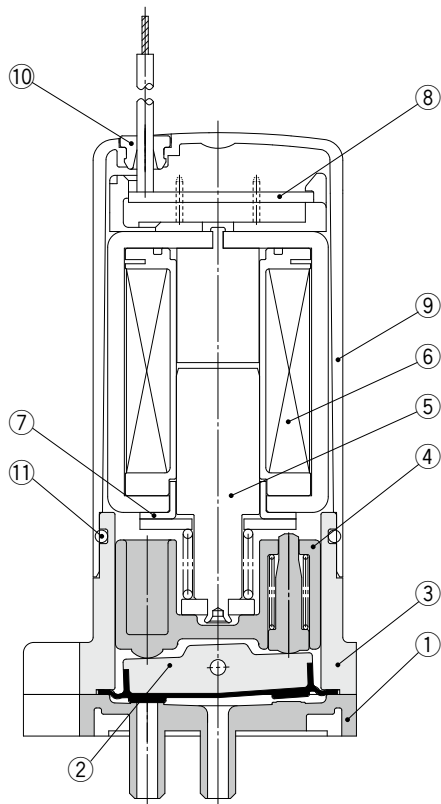

LVM20R2

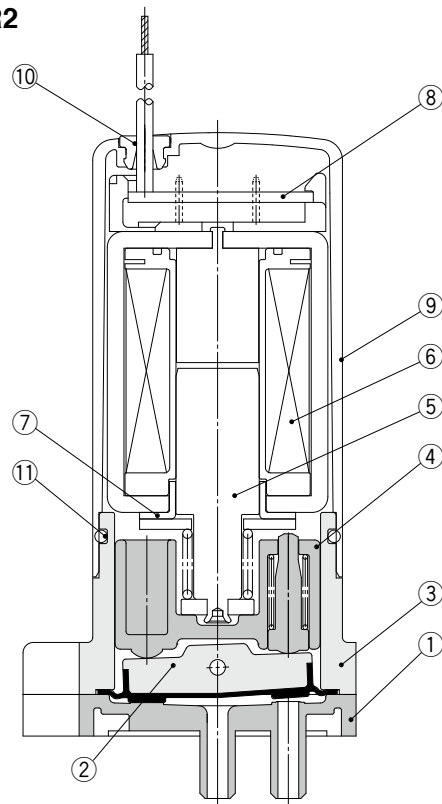

LVM202R

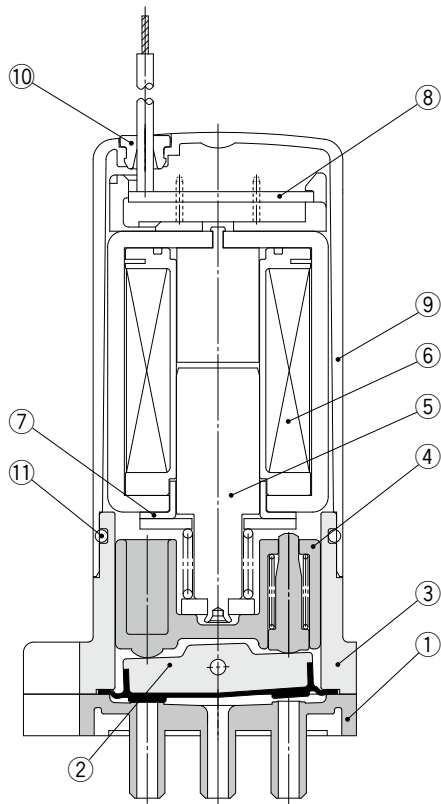


Component Parts: LVM20R1, 20R2, 202R

No.	Description	Material
1	Plate	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Body	PBT
4	Slide bushing assembly	PPS/Stainless steel
5	Armature assembly	—
6	Coil assembly	—
7	Sleeve	SUY (Iron)
8	Board assembly	—
9	Casing	PBT
10	Plug	NBR
11	O-ring	NBR


* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Construction


Base mounted LVM20R3

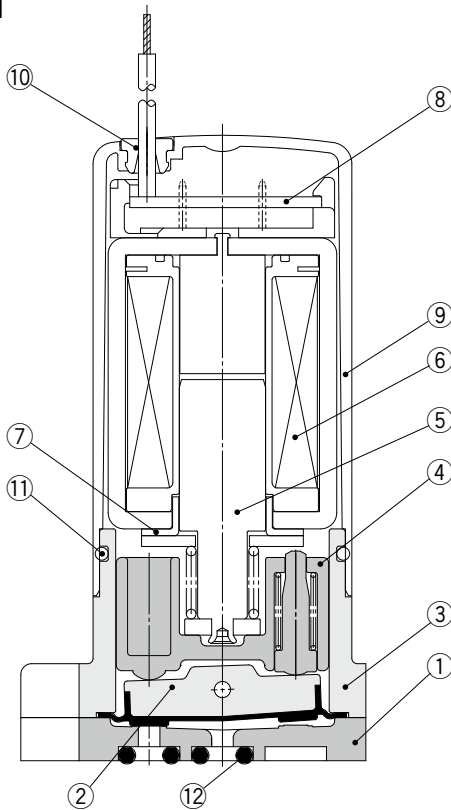

LVM20R4

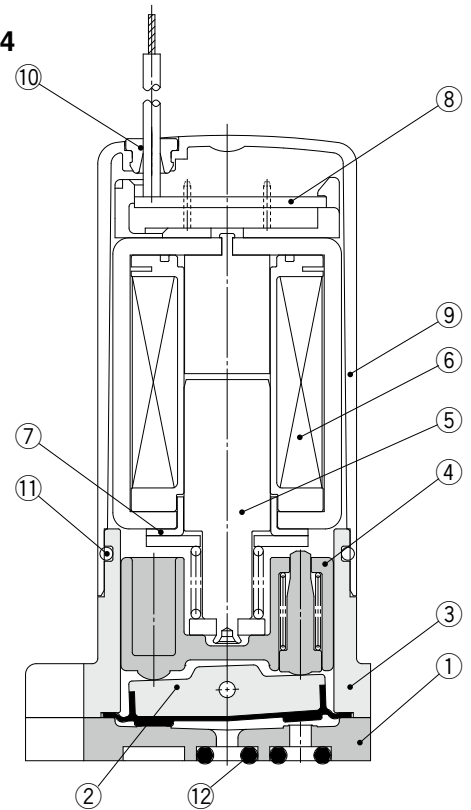

LVM205R

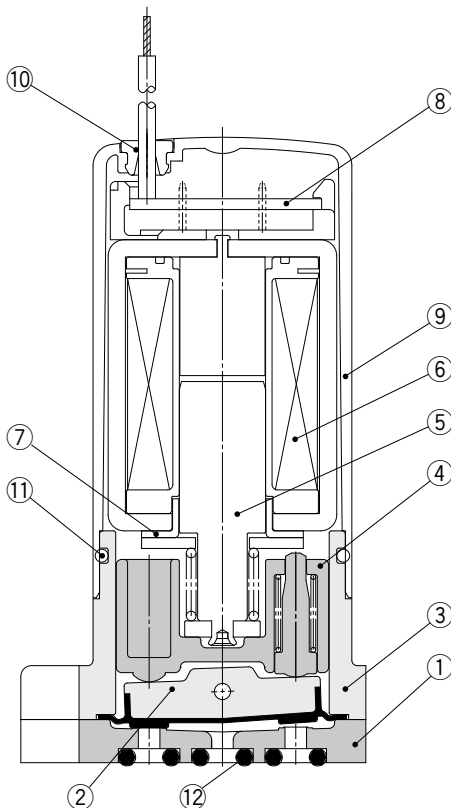

Component Parts: LVM20R3, 20R4, 205R

No.	Description	Material
1	Plate	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Body	PBT
4	Slide bushing assembly	PPS/Stainless steel
5	Armature assembly	—
6	Coil assembly	—
7	Sleeve	SUY (Iron)
8	Board assembly	—
9	Casing	PBT
10	Plug	NBR
11	O-ring	NBR
12	O-ring	EPDM/FKM/Kalrez®

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM20/200 Series




Dimensions

Body ported

LVM20R1-□□-□ (N.C.)



LVM20R2-□□-□ (N.O.)

LVM202R-□□-□ (Universal)

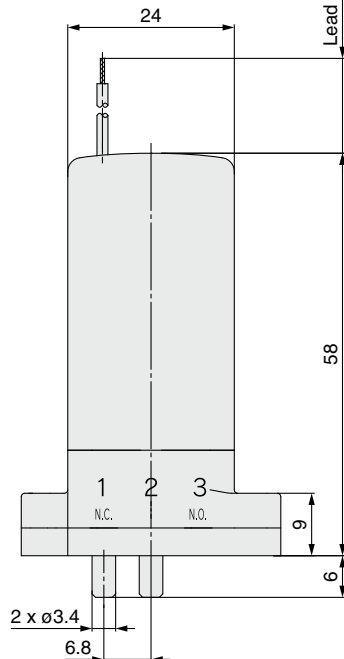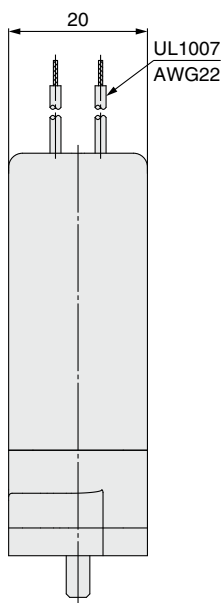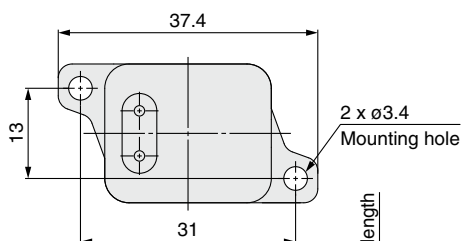


LVM20R1

Plug connector type

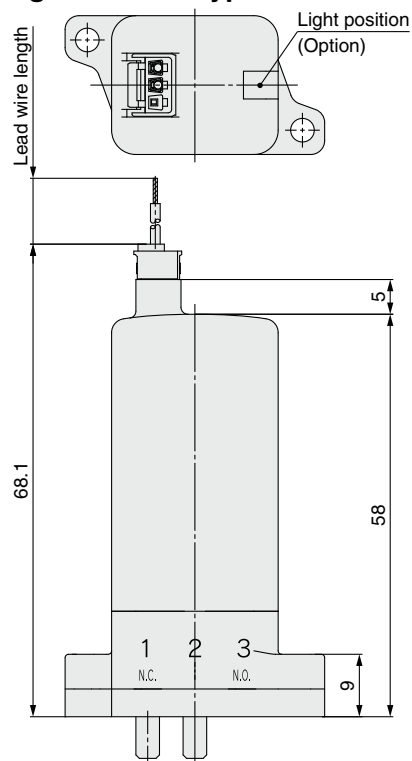

LVM20R2



LVM202R


Dimensions

Base mounted, Without sub-plate


LVM20R3-□□-□ (N.C.)

LVM20R4-□□-□ (N.O.)

LVM205R-□□-□ (Universal)

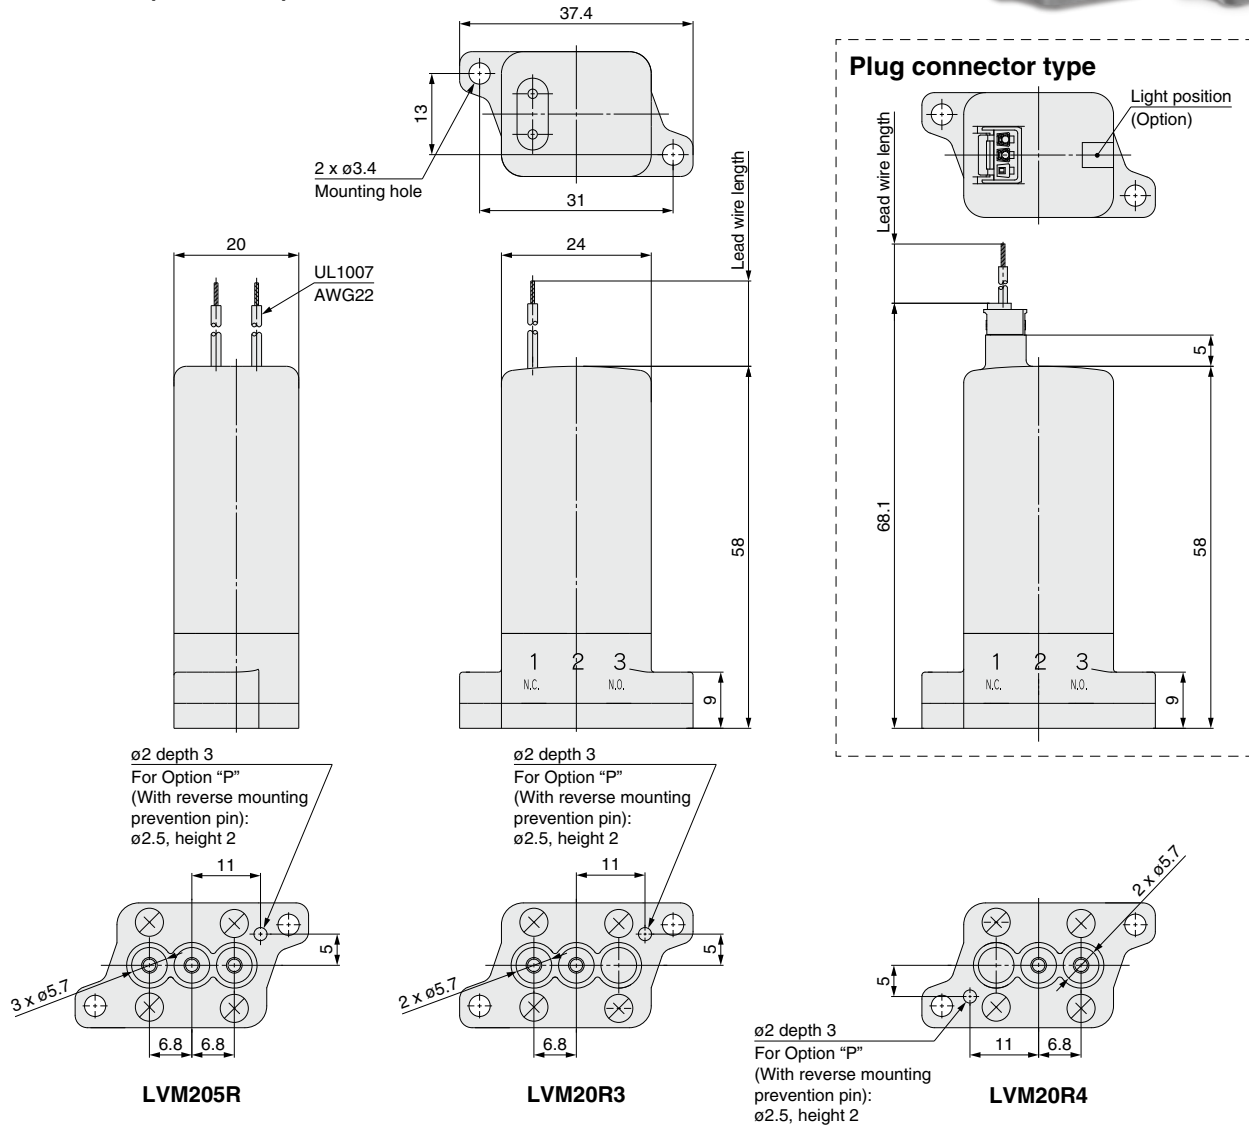

Recommended interface dimensions * Surface roughness = Rz3.2 or less

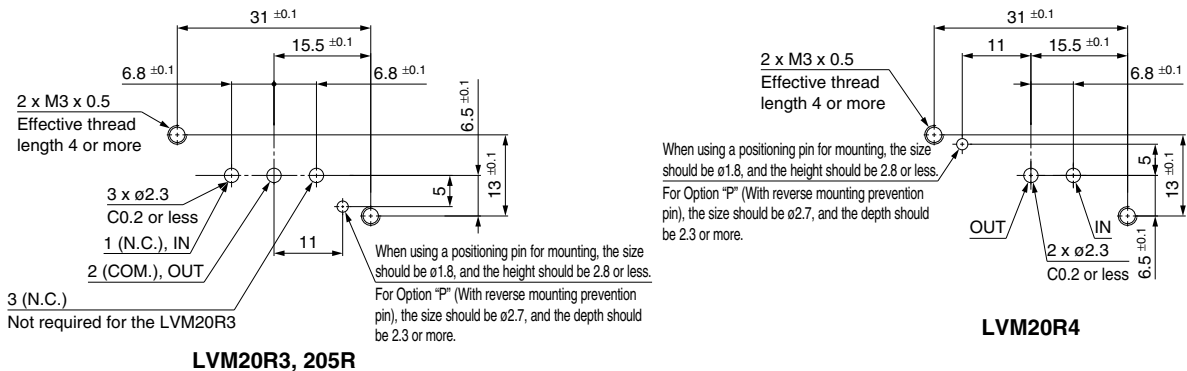

LVM20/200 Series


Dimensions

Base mounted, With sub-plate

LVM20R3-□□-□ (N.C.)

LVM20R4-□□-□ (N.O.)

LVM205R-□□-□ (Universal)

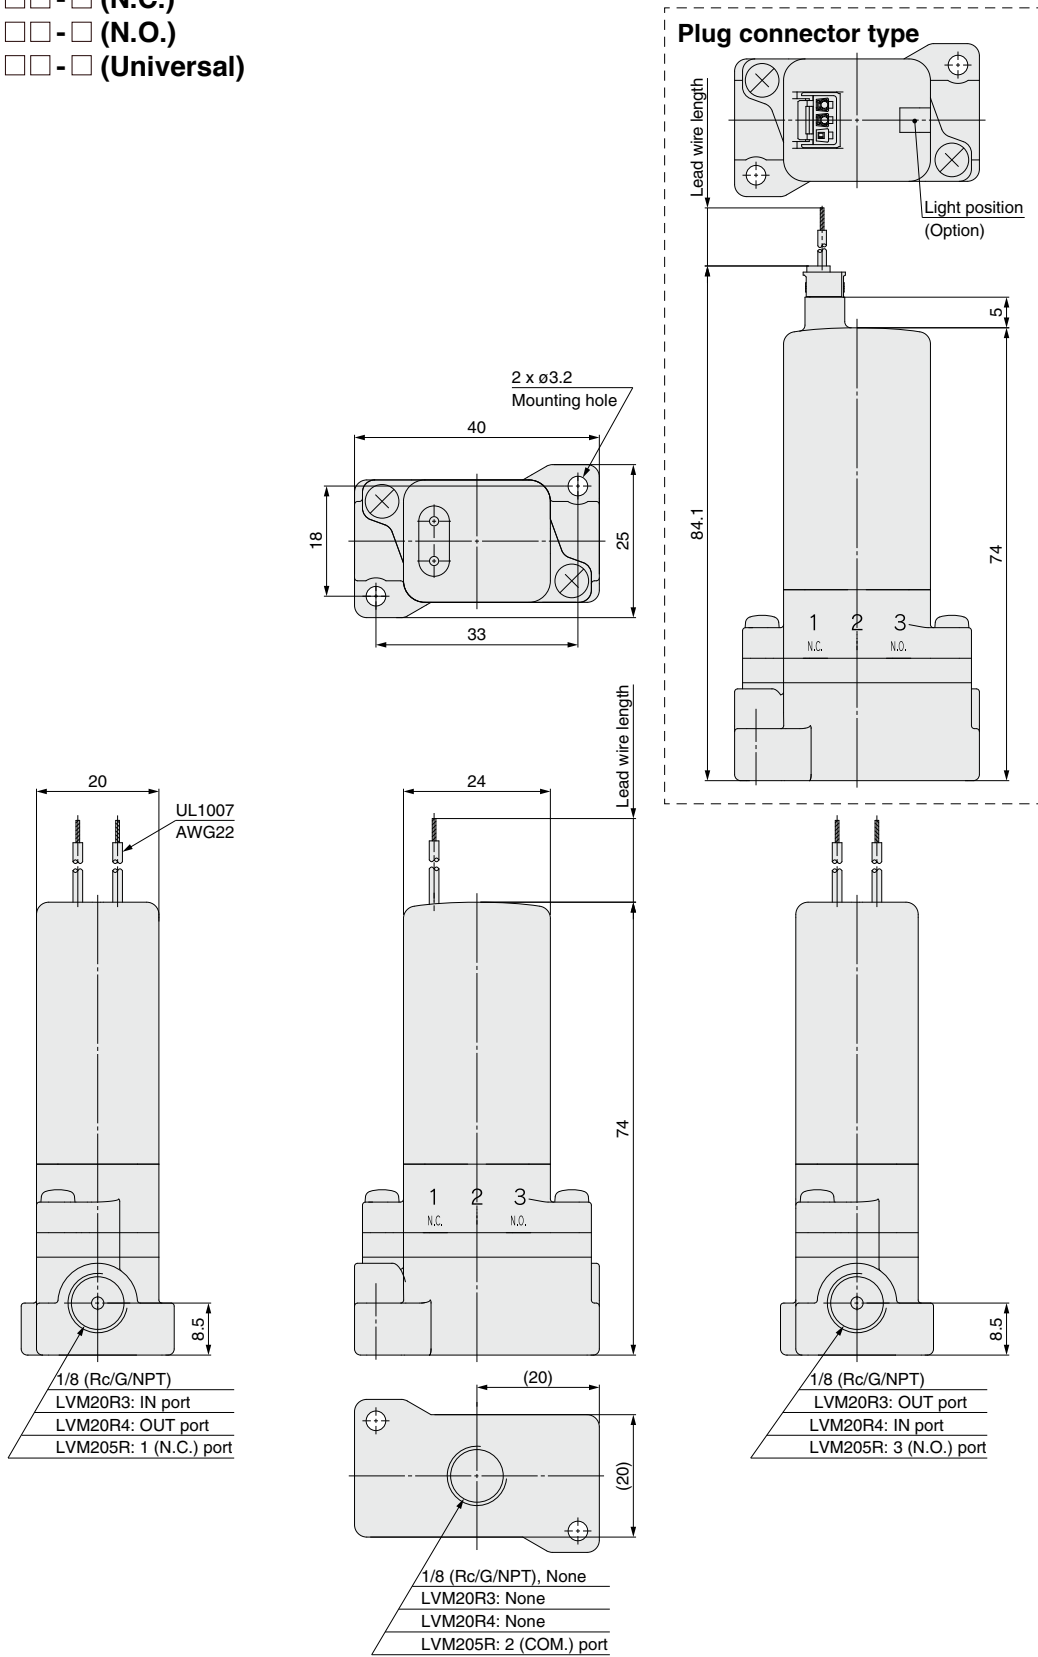


Direct Operated Poppet Type



Compact Direct Operated
2/3-Port Solenoid Valve for Chemical Liquids with Power Saving Circuit

LVM11/13 Series


How to Order

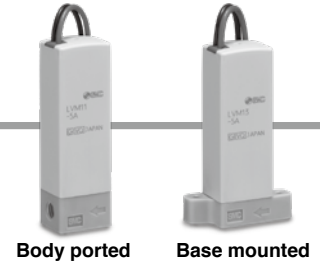

Body ported

Base mounted

Body ported

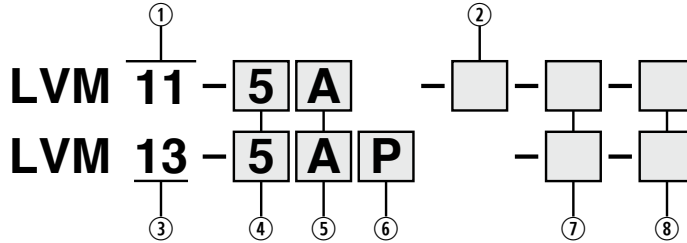

Base mounted

① Number of ports, Valve type

Symbol	Number of ports	Valve type
11	2	N.C.

② Option

Nil	None
1	Bracket

③ Number of ports, Valve type

Symbol	Number of ports	Valve type
13	2	N.C.

④ Coil voltage

Symbol	Voltage
5	24 VDC
6	12 VDC

⑤ Fluid contact material

Symbol	Body	Diaphragm
A	PEEK	EPDM
B	PEEK	FKM
C	PEEK	Kalrez®

⑥ Reverse mounting prevention pin

Nil	None
P	Yes

⑦ Electrical entry, Lead wire length, Light/surge voltage suppressor

Symbol	Electrical entry, Lead wire length	Light/surge voltage suppressor
Nil	Grommet, 300 mm	Cannot be selected
6	Grommet, 600 mm	
10	Grommet, 1000 mm	
KZ	Plug connector, 300 mm	Yes
KOZ	Plug connector, Without connector	

⑧ CE-compliant

Nil	No
Q	CE-compliant

- * The plug connector is included but does not come assembled.
- * If a lead wire length of 600 mm or more is required, select "KOZ" (Without connector) and then add the connector part number shown below under the valve part number when ordering.

Plug connector part no.: AXT661 - 14A -

Lead wire length ●

6	600 mm
10	1000 mm
20	2000 mm
30	3000 mm

Mounting screws are included with the base-mounted type. (2 pcs.)
M2 x 11/With spring washer (Material: Stainless steel)

For other spare parts, refer to page 44.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM11/13 Series

Specifications



Body ported



Base mounted

Model			Body ported		Base mounted	
			LVM11		LVM13	
Valve construction			Direct operated poppet type			
Valve type			N.C.			
Number of ports			2			
Fluid*1			Air, Water, DI water (Pure water), Diluent, or Cleaning fluid			
Operating pressure range			0 to 0.25 MPa			
Orifice diameter			1.5 mm			
Response time*7			10 ms or less (at pneumatic pressure)			
Leakage			Zero leakage, both internal or external (at water pressure)			
Proof pressure*2			0.38 MPa			
Ambient temperature*8			0 to 50°C			
Fluid temperature*8			0 to 50°C (No freezing)			
Volume of valve chamber*3			11 μL		13 μL	
Mounting orientation*4			Free			
Enclosure			IP40 or equivalent			
Weight			30 g			
Rated voltage			12, 24 VDC			
Allowable voltage fluctuation*5			±10% of rated voltage			
Type of coil insulation			Class B			
Power consumption (When rated voltage is at 24 V)	With power saving circuit	Inrush	2.5 W (0.1 A)			
		Holding	1 W			
Coil switching noise*6			50 dB			

*1 Select an appropriate fluid contact material according to the fluid to be used. Additionally, check the chemical resistance beforehand.

*2 Indicates the pressure which does not generate breakage or cracks after a one-minute airtight test

*3 Indicates the volume of clearance inside the valve chamber after the volume of the diaphragm is subtracted

*4 Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended. When residual liquid need not be taken into consideration, any mounting orientation is available.

*5 When response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.

*6 The value is based on SMC's measurement conditions. The noise level will vary according to the actual conditions.

*7 In compliance with JIS B 8419:2010

(Value at ambient and fluid temperatures of 25°C, rated voltage, max. operating pressure (air), and when the N.C. (IN) port is pressurized)

The response time will vary depending on the supply pressure, fluid, piping conditions, and ambient temperature.

*8 When the diaphragm material is Kalrez®, the valve changeover time will be significantly longer at ambient and fluid temperatures of 15°C or less when compared to the valve changeover time at room temperature (≈ 25°C).

* Refer to 10 in "Design / Selection" on page 41 if the valve is to be energized continuously for extended periods of time.

Flow Rate Characteristics


Water		Air	
Kv	Cv	C	b
0.034	0.04	0.13	0.22

* The values of Kv and Cv are based on JIS B 2005:1995; the values of C and b are based on JIS B 8390:2000.

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Construction


Body ported LVM11

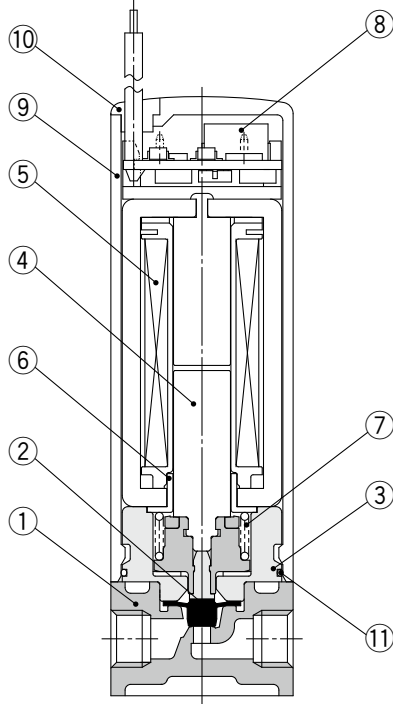

Component Parts: LVM11

No.	Description	Material
1	Body	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Spacer	PBT
4	Armature assembly	Stainless steel/POM
5	Coil assembly	—
6	Sleeve	SUY (Iron)
7	Return spring	Stainless steel
8	Board assembly	—
9	Casing	PBT
10	Plug	NBR
11	O-ring	NBR

Base mounted LVM13

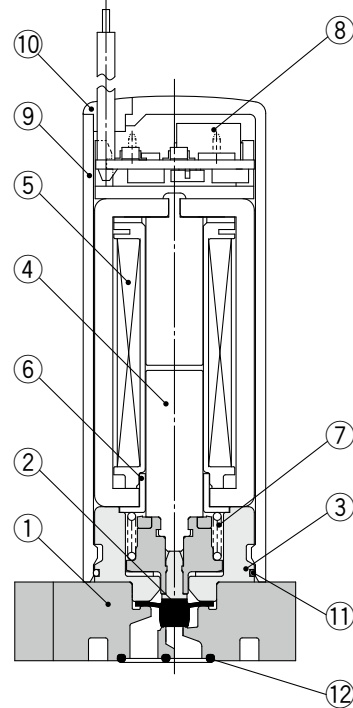

Component Parts: LVM13

No.	Description	Material
1	Body	PEEK
2	Diaphragm assembly	EPDM/FKM/Kalrez®
3	Spacer	PBT
4	Armature assembly	Stainless steel/POM
5	Coil assembly	—
6	Sleeve	SUY (Iron)
7	Return spring	Stainless steel
8	Board assembly	—
9	Casing	PBT
10	Plug	NBR
11	O-ring	NBR
12	Gasket	EPDM/FKM/Kalrez®

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

LVM07

LVM09/090

LVM10/100

LVM15/150

LVM20/200

LVM11/13

Specific Product
Precautions


Spare Parts

LVM11/13 Series


Dimensions

Body ported

LVM11- - (N.C.)

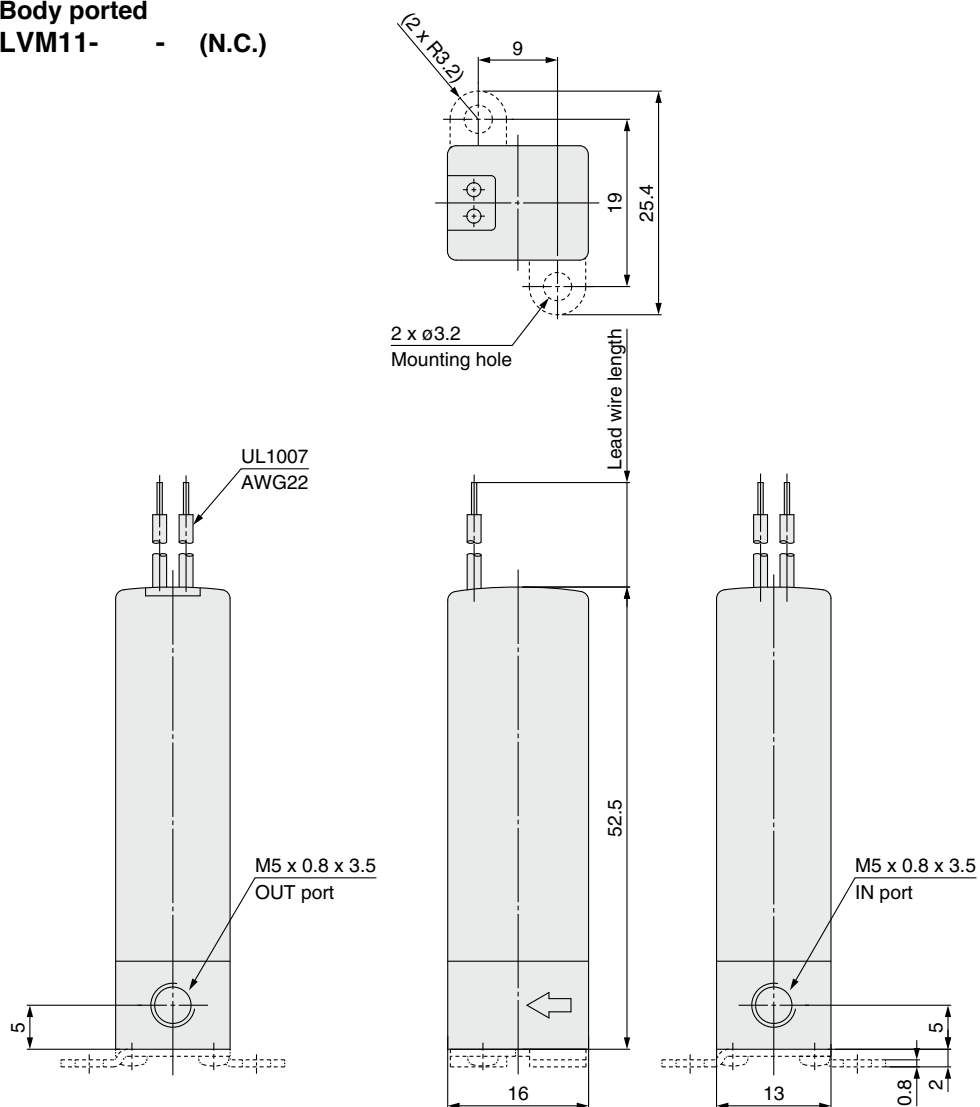

Plug connector type

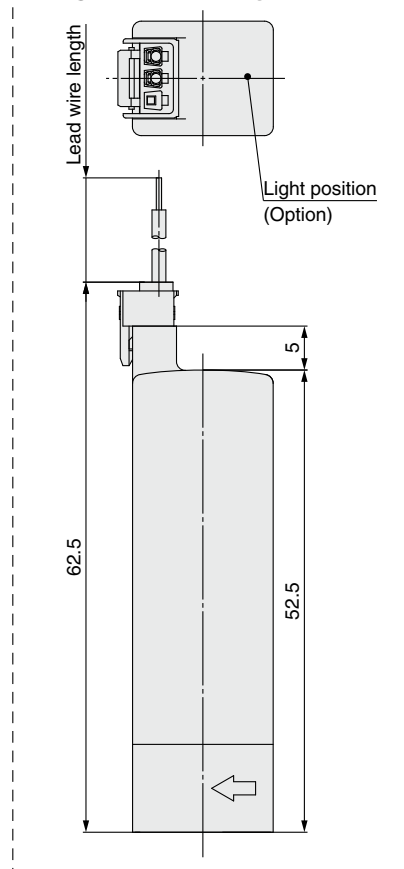


Direct Operated Poppet Type Compact Direct Operated **LVM11/13 Series**
2/3-Port Solenoid Valve for Chemical Liquids with Power Saving Circuit


Dimensions

Base mounted

LVM13-□□-□ (N.C.)

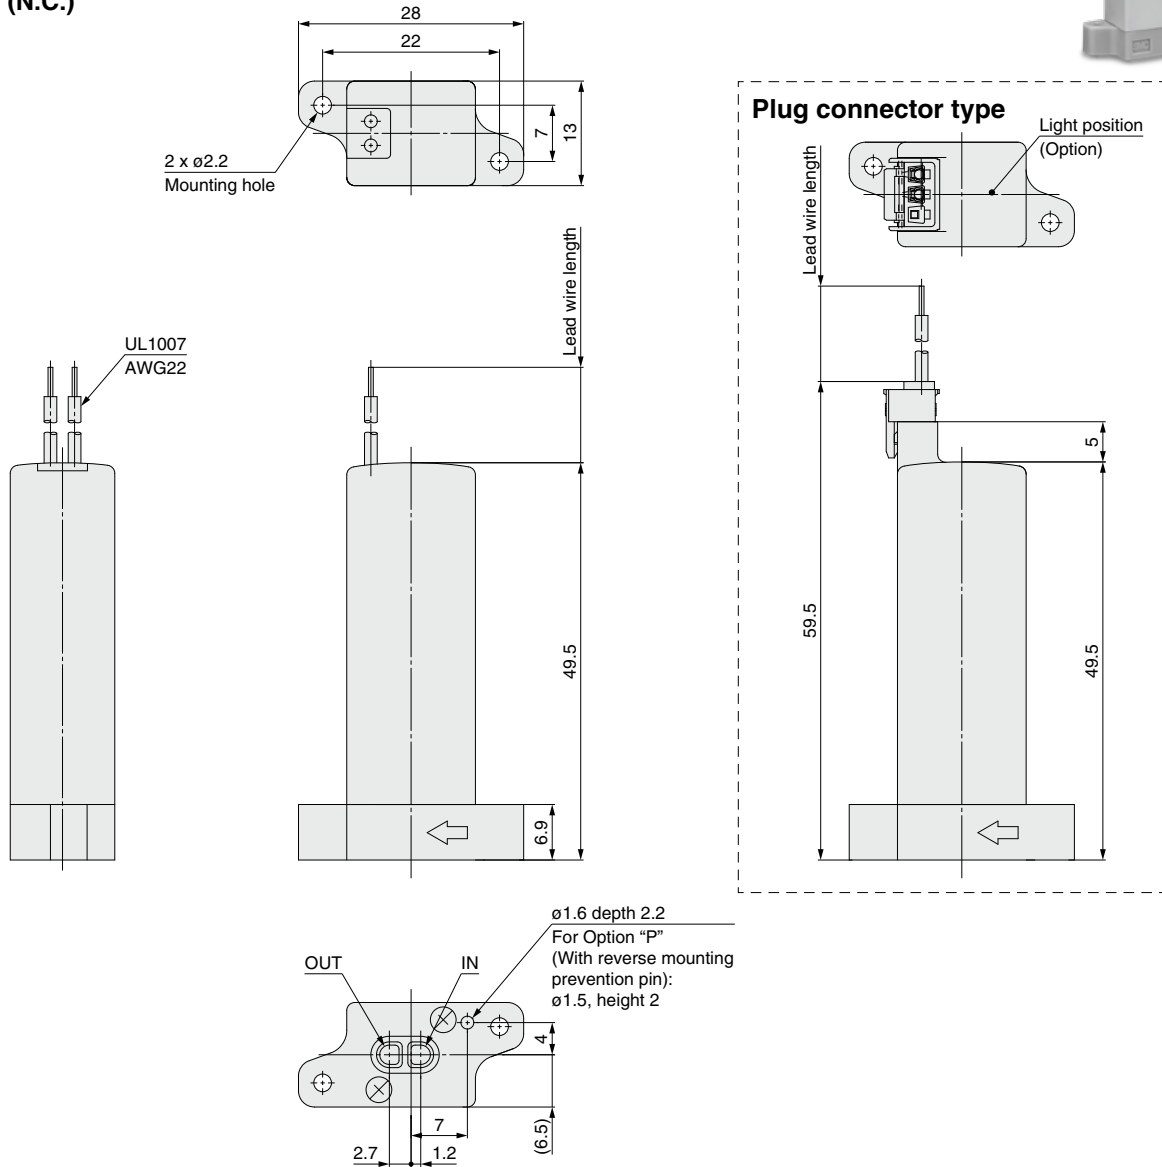

Recommended interface dimensions * Surface roughness = Rz3.2 or less

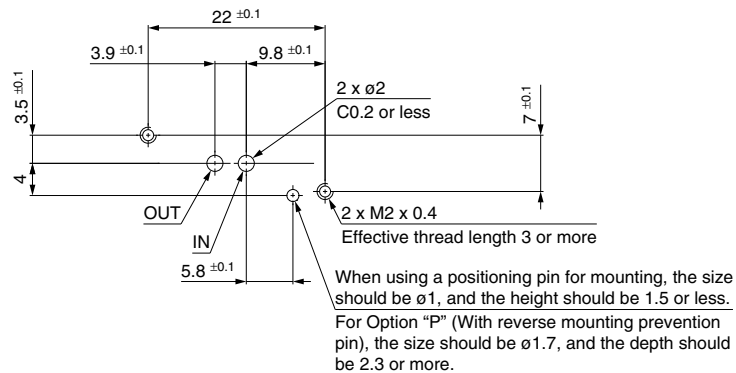



LVM Series

Specific Product Precautions 1

Be sure to read this before handling the products. Please contact SMC when it is used in conditions other than the specifications.

Design / Selection

Warning

1. Do not use this product in applications which may adversely affect human life (e.g. medical equipment connected to the human body for drip infusion).

2. Confirm the specifications.

Give careful consideration to the operating conditions, such as the application, fluid, and environment, and use within the specified operating ranges indicated in the catalog.

3. Fluid

Be sure to confirm the compatibility between the component material and the fluid.

4. Ensure sufficient space for maintenance activities.

When installing the products, allow access for maintenance and inspection.

5. Fluid pressure range

Fluid pressure should be within the allowable pressure range.

6. Ambient environment

Use within the allowable ambient temperature range. Be sure that the liquid or corrosive gas does not touch the external surface of the product.

7. Countermeasures against static electricity

Take measures to prevent static electricity since some fluids can cause static electricity.

8. Pressure (including vacuum) holding

It is not usable for an application such as holding the pressure (including vacuum) inside of a pressure vessel because air leakage is entailed in a valve.


9. Cannot be used as an emergency shut-off valve, etc.

The valves presented in this catalog are not designed for safety applications such as an emergency shut-off valve. If the valves are used in this type of system, other reliable safety assurance measures should also be adopted.

10. Extended periods of continuous energization

If solenoid valves are to be continuously energized for extended periods of time, use valves with power saving circuits to minimize the amount of heat released by the coil.

Power saving circuit waveform (example)

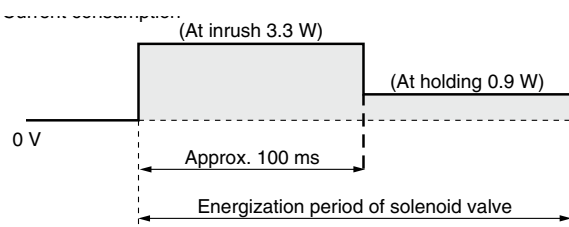

* Power consumption for the waveform shown above is that of the LVM09/090.

* For the LVM15/150, the type with power saving circuit is standard.

When a solenoid valve without a power saving circuit is continuously energized for long periods of time, temperature increase from coil heat release can result in worsening performance and shortened service life of the solenoid valve, as well as adverse effects on peripheral equipment in the vicinity. For this reason, when valves are to be continuously energized for extended periods, use a fan or take other measures to disperse heat and keep valve surface temperatures at 70°C or less.

The table below shows reference values for continuously energized valves (single unit) when surface temperature is 70°C or less.

Model	LVM09/090	LVM10/100	LVM20/200
Period of continuous energization	5 min. or less	30 min. or less	30 min. or less
Duty ratio	50% or less		
Ambient temperature	25°C or less		
Power saving circuit	None		

* Duty ratio: ON time/(ON time + OFF time)

* For the LVM15/150, the type with power saving circuit is standard.

Please use a fan or take other measures to disperse heat and keep temperatures within the specified range when mounting the solenoid valves inside control panels, etc. Be especially careful when using three or more adjacent valves with manifolds and keeping them continuously energized for extended period, as this may result in dramatic increases in temperature.

11. Low temperature environments

Be aware that the valve changeover time becomes extremely long when the ambient and fluid temperature becomes 15°C or less as a reference when compared to the valve changeover time at room temperature (approx. 25°C). Diaphragm material: Kalrez®

* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Selection

Caution

1. Leakage voltage

The leakage voltage should be 2% or less of the rated voltage. If the leakage voltage exceeds this value, solenoid valve may not turn OFF.

2. Valves with a power saving circuit (PWM circuit built-in type)

Valves with a power saving circuit (PWM circuit built-in type) perform the high-speed switching operation with the PWM control circuit inside the valve after the rated power has been applied for several tens of ms to reduce the power consumption.

The problems shown below may occur in this type of valve due to the switch or drive circuit system by the PWM control. Be sure to check the operation with the customer's machine sufficiently when selecting the product.

1) The valve does not turn ON.

1. If the PWM circuit built-in type valve is driven by a mechanical relay, etc., and chattering occurs during the several tens of ms necessary for the valve to reach its rated voltage, the valve may not turn ON correctly.

2. If a filter, etc., is connected between the power supply and the PWM circuit built-in type valve, the current necessary to drive the valve lowers due to the effects of the filter, and then the valve may not turn ON correctly.

2) The valve does not turn OFF.

If the PWM circuit built-in type valve is driven by the photo coupler, the photo coupler cannot turn OFF and the valve is kept in an ON state. Therefore, take great care when using the photo coupler built-in SSR (solid state relay) or drive circuit.



LVM Series

Specific Product Precautions 2

Be sure to read this before handling the products. Please contact SMC when it is used in conditions other than the specifications.

Mounting

⚠ Caution

1. Always tighten threads with the proper tightening torque.

When mounting the solenoid valve, tighten it with the proper tightening torque shown below.

Tightening Torque for Base Mounting

Location	Model	Thread size	Proper tightening torque [N·m]
Base mounted, Body mounting	LVM07R6	M1.6	0.06 to 0.1
	LVM09R3, 09R4, 09R6, 095R	M2	0.1 to 0.14
	LVM13	M2	0.15 to 0.2
	LVM10R3, 10R4, 10R6, 105R	M2	0.15 to 0.2
	LVM15R3, 15R4, 15R6, 155R	M2.5	0.25 to 0.35
	LVM20R3, 20R4, 205R	M3	0.4 to 0.6

2. Mount the solenoid valve on the horizontal surface.

Applicable model: All models

3. Remove dust from the solenoid valve mounting surface completely. The surface roughness of the mounting surface should be Rz3.2 or less.

Applicable model: Base mounted

4. When mounting the solenoid valves next to each other, the valve pitch should be the value or more shown in the table below.

Model	LVM07	LVM09/090	LVM13	LVM10/100	LVM15/150	LVM20/200
Valve pitch	8	10.5	14	14	17	21

Applicable model: All models

⚠ Warning

5. If air leakage increases or equipment does not operate properly, stop operation.

After mounting, perform suitable function and leak tests to confirm that the mounting is correct.

6. Since the body (orifice shape) is designed to eliminate residual liquid, mounting in a vertical direction with the coil at the top is recommended.

When residual liquid need not be taken into consideration, any mounting orientation is available.

Piping

⚠ Caution

1. Preparation before piping

Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil, and other debris from inside the pipe.

2. When tubing is connected to the body-ported solenoid valve, insert the tubing straight to the end of the tube inlet for a complete fit.

Select appropriate tubing while referring to the table below.

Model	Tube inside diameter (I.D.)	Tubing outside diameter (O.D.) (after mounting)
LVM09R1, 09R2, 092R	ø1.9 or less	ø4.2 or less
LVM10R1, 10R2, 102R	ø2.5 or less	ø4.5 or less
LVM20R1, 20R2, 202R	ø3.1 or less	ø6.8 or less

The holding force varies by the tubing material. Be sure to confirm the holding force of each material before operation.

After connecting the tubing, care should be taken not to put excessive force (tensile force, compression, bending, etc.) on the tubing. If an external force of 20 N or more is applied to the tube inlet, the inlet may become damaged, and leakage or breakage could occur.

3. When the tubing is long or according to the operating conditions, tubing may thrash about, causing damage to the tube inlet of the solenoid valve, or the tubing to come off or deteriorate.

In this case, secure the tubing to prevent its uncontrolled movement.

4. When piping the fitting to the solenoid valve, the installation method and tightening torque value may vary depending on the seal structure (shape) or material of the fitting to be used. Check the methods and precautions recommended by the fitting manufacturer to be used, and be sure to check for leakage.

The table below shows the tightening method using the KQ2 series.

Model	Location	Thread size	Tightening method	Tightening torque [N·m] (Reference)
LVM11	Body	M5	After tightening by hand, tighten 1/6 to 1/4 turn with a tightening tool.	Material PEEK: 0.5 to 0.7
LVM10R3, 10R4, 10R6, 105R	Base mounted (With sub-plate)	M6 or 1/4-28UNF	After tightening by hand, tighten 1/6 to 1/4 turn with a tightening tool.	Material PVDF: 0.6 to 0.8 Material PFA: 0.2 to 0.25
LVM15R3, 15R4, 15R6, 155R		M6 or 1/4-28UNF	After tightening by hand, tighten 1/6 to 1/4 turn with a tightening tool.	Material PVDF: 0.6 to 0.8
LVM20R3, 20R4, 205R		Rc1/8 or NPT1/8	Tighten approximately 4 turns.	Material PVDF: 0.5 to 0.6
		G1/8	After tightening by hand, tighten 1/3 to 1/2 turn with a tightening tool.	Material PVDF: 0.4 to 0.6

LVM07

LVM09/090

LVM10/100

LVM15/150

LVM20/200

LVM11/13

Specific Product
Precautions

Spare Parts



LVM Series


Specific Product Precautions 3

Be sure to read this before handling the products. Please contact SMC when it is used in conditions other than the specifications.

Wiring

⚠ Caution

1. **Use electrical circuits which do not generate chattering in their contacts.**
2. **Use voltage which is within $\pm 10\%$ of the rated voltage.**
However, when response time is prioritized, control the voltage so that there is no fluctuation below the rated voltage.
3. **Apply the correct voltage.**
Applying incorrect voltage may cause a malfunction or a burned coil.
4. **Connect the wires so that an external force of 10 N or more is not applied to the lead wire.**
Otherwise, the coil will burn.
5. **Units with power saving circuits use polarized electrical connections.**
Red (+), Black (–)



Fluid Properties

⚠ Warning

Liquid (chemicals)

Component crystallizes or clots depending on its nature. Leakage will occur when a crystallized or clotted component is caught between the sealing parts.
Take measures to clean such component if necessary.

Water

Install a filter strainer of about 100 mesh on the inlet side of the piping.

Air

Compressed air filtered with a filter with filtration rating of $5\ \mu\text{m}$ or less, which is mounted on the inlet side of the piping, should be used.

Operating Environment

⚠ Warning

1. **Do not use the product in a place where there is contact with corrosive gases, chemicals or liquids.**
2. **Do not use in explosive atmospheres.**
3. **Do not use in locations subject to excessive vibration or impact.**
Impact resistance of this solenoid valve is $1\ 5\ 0\ \text{m/s}^2$. Vibration resistance of this solenoid valve is $30\ \text{m/s}^2$.
4. **Do not use in locations where radiated heat will be received from nearby heat sources.**

Maintenance

⚠ Warning

1. **Removing the product**
Shut off the fluid supply and release the fluid pressure in the system.
Shut off the power supply. Remove the product.
2. **Before operating, remove residual chemicals and completely replace it with pure water, air, etc.**
3. **Do not disassemble the product.**
Products which have been disassembled cannot be guaranteed. If disassembly is necessary, please contact SMC.

How to Use Plug Connector


⚠ Caution

Attaching connectors

Hold the lever and connector unit between your fingers and insert straight onto the pins of the solenoid valve so that the lever's pawl is pushed into the groove and locks.

Detaching connectors

Remove the pawl from the groove by pushing the lever downward with your thumb, and pull the connector straight out.

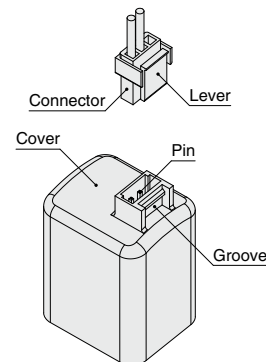

LVM Series Spare Parts

■ Mounting Screw (Base mounted, For Body mounting)

Applicable model	Part number	Qty.
LVM07R6	LVM070-SC	20
LVM09R3, 09R4, 09R6, 095R	LVM090-SC	20
LVM13	LVM100-SC	20
LVM10R3, 10R4, 10R6, 105R		
LVM15R3, 15R4, 15R6, 155R		
LVM20R3, 20R4, 205R	LVM200-SC	20

■ Sub-plate (Base mounted, Option)

Applicable model	Part number		Qty.
LVM10R3, 10R4, 10R6 (Material: PVDF)	LVM100-S2-1-□	□: Port size M6: M6 x 1 28: 1/4-28UNF	1
LVM10R3, 10R4, 10R6 (Material: PFA)	LVM100-S2-2-□		1
LVM105R (Material: PVDF)	LVM100-S1-1-□		1
LVM105R (Material: PFA)	LVM100-S1-2-□		1
LVM15R3, 15R4	LVM150-S2-1-□	□: Port size M6: M6 x 1 28: 1/4-28UNF	1
LVM15R6	LVM150-S6-1-□		1
LVM155R	LVM150-S1-1-□		1
LVM20R3, 20R4	LVM200-S2-1-□	□: Port size 01: Rc1/8 F1: G1/8 N1: NPT1/8	1
LVM205R	LVM200-S1-1-□		1

■ Gasket, O-ring (Base mounted, For Interface mounting)

Applicable model	Part number		Qty.
LVM07R6	LVM070-GS-□	□: Material A: EPDM B: FKM C: Kalrez®	10
LVM09R3, 09R4, 09R6, 095R	LVM090-GS-□		10
LVM13	LVM13-GS-□		10
LVM10R3, 10R4, 10R6, 105R	LVM100-OR-□		30
LVM15R3, 15R4, 15R6, 155R	LVM150-GS-		10
LVM20R3, 20R4, 205R	LVM200-OR-□		30

■ Bracket (Option)

Applicable model	Part number	Qty.	Note
LVM11	LVM10-14A-1	1	With mounting screws
LVM10R1, 10R2, 102R	LVM100-10A-1	1	
LVM10R3, 10R4, 10R6, 105R	LVM100-18A-1	1	


■ Plug Connector


Applicable model	Part number		Qty.
LVM09/090	SY100-30-4A-□	□: Lead wire length Nil: 300 mm 6: 600 mm 10: 1000 mm 30: 3000 mm	1
LVM11/13/10/100/15/150/20/200	AXT661-14A-□	□: Lead wire length Nil: 300 mm 6: 600 mm 10: 1000 mm 20: 2000 mm 30: 3000 mm	1


* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)*1), and other safety regulations.

 **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

 **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

 **Danger :** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

*1) ISO 4414: Pneumatic fluid power – General rules relating to systems.
ISO 4413: Hydraulic fluid power – General rules relating to systems.
IEC 60204-1: Safety of machinery – Electrical equipment of machines.
(Part 1: General requirements)
ISO 10218-1: Manipulating industrial robots – Safety.
etc.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

Caution

1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.
If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.
Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.*2)
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

*2) **Vacuum pads are excluded from this 1 year warranty.**
A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Caution

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

UNIT CONVERSIONS

	unit	conversion	result
length	m	x 3.28	ft
	mm	x 0.04	in
mass	g	x 0.04	oz
volume	cm ³	÷ 16.387	in ³
	L	x 61.024	in ³
speed	mm/s	÷ 25.4	in/s
pressure	MPa	x 145	psi
	kPa	÷ 6.895	psi
temperature	°C	x1.8 then add 32	°F
torque	N·m	x 0.738	ft-lb
force	N	÷ 4.448	lbf
flow	L/min	÷ 28.317	cfm

Global Manufacturing, Distribution and Service Network

Worldwide Subsidiaries

EUROPE

AUSTRIA
SMC Pneumatik GmbH (Austria)

BELGIUM
SMC Pneumatics N.V./S.A.

BULGARIA
SMC Industrial Automation Bulgaria EOOD

CROATIA
SMC Industrijska Automatika d.o.o.

CZECH REPUBLIC
SMC Industrial Automation CZ s.r.o.

DENMARK
SMC Pneumatik A/S

ESTONIA
SMC Pneumatics Estonia

FINLAND
SMC Pneumatics Finland OY

FRANCE
SMC Pneumatique S.A.

GERMANY
SMC Pneumatik GmbH

GREECE
SMC Hellas EPE

HUNGARY
SMC Hungary Ipari Automatizálási Kft.

IRELAND
SMC Pneumatics (Ireland) Ltd.

ITALY
SMC Italia S.p.A.

KAZAKHSTAN
LLP "SMC Kazakhstan"

LATVIA
SMC Pneumatics Latvia SIA

LITHUANIA
UAB "SMC Pneumatics"

NETHERLANDS
SMC Pneumatics B.V.

NORWAY
SMC Pneumatics Norway AS

POLAND
SMC Industrial Automation Polska Sp. z o.o.

ROMANIA
SMC Romania S.r.l.

RUSSIA
SMC Pneumatik LLC.

SLOVAKIA
SMC Priemysel'ná Automatizácia, Spol s.r.o.

SLOVENIA
SMC Industrijska Avtomatika d.o.o.

SPAIN / PORTUGAL
SMC España, S.A.

SWEDEN
SMC Pneumatics Sweden AB

SWITZERLAND
SMC Pneumatik AG

TURKEY
SMC Pnömatik Sanayi Ticaret ve Servis A.Ş.

UK
SMC Pneumatics (U.K.) Ltd.

ASIA / OCEANIA

AUSTRALIA
SMC Pneumatics (Australia) Pty. Ltd.

CHINA
SMC (China) Co., Ltd.
SMC Pneumatics (Guangzhou) Ltd.

HONG KONG
SMC Pneumatics (Hong kong) Ltd.

INDIA
SMC Pneumatics (India) Pvt. Ltd.

INDONESIA
PT. SMC Pneumatics Indonesia

JAPAN
SMC Corporation

MALAYSIA
SMC Pneumatics (S.E.A.) Sdn. Bhd.

NEW ZEALAND
SMC Pneumatics (N.Z.) Ltd.

PHILIPPINES
Shoketsu SMC Corporation

SINGAPORE
SMC Pneumatics (S.E.A.) Pte. Ltd.

SOUTH KOREA
SMC Pneumatics Korea Co., Ltd.

TAIWAN
SMC Pneumatics (Taiwan) Co., Ltd.

THAILAND
SMC (Thailand) Ltd.

UNITED ARAB EMIRATES
SMC Pneumatics Middle East FZE

VIETNAM
SMC Pneumatics (VN) Co., Ltd

AFRICA

SOUTH AFRICA
SMC Pneumatics (South Africa) Pty Ltd

NORTH, CENTRAL & SOUTH AMERICA

ARGENTINA
SMC Argentina S.A.

BOLIVIA
SMC Pneumatics Bolivia S.R.L.

BRAZIL
SMC Pneumáticos do Brasil Ltda.

CANADA
SMC Pneumatics (Canada) Ltd.

CHILE
SMC Pneumatics (Chile) S.A.

COLOMBIA
SMC Colombia Sucursal de SMC Chile, S.A.

MEXICO
SMC Corporation (Mexico) S.A. de C.V.

PERU
SMC Corporation Peru S.A.C.

USA
SMC Corporation of America

VENEZUELA
SMC Neumatica Venezuela S.A.

U.S. & Canadian Sales Offices

WEST

Austin
Dallas
Los Angeles
Phoenix
Portland
San Jose

CENTRAL


Chicago
Cincinnati
Cleveland
Detroit
Des Moines
Grand Rapids
Indianapolis
Kansas City
Milwaukee
Minneapolis
St. Louis

EAST

Albany
Atlanta
Birmingham
Boston
Charlotte
Knoxville
Nashville
New Jersey
Rochester
Tampa

CANADA

Vancouver
Toronto
Windsor
Montreal

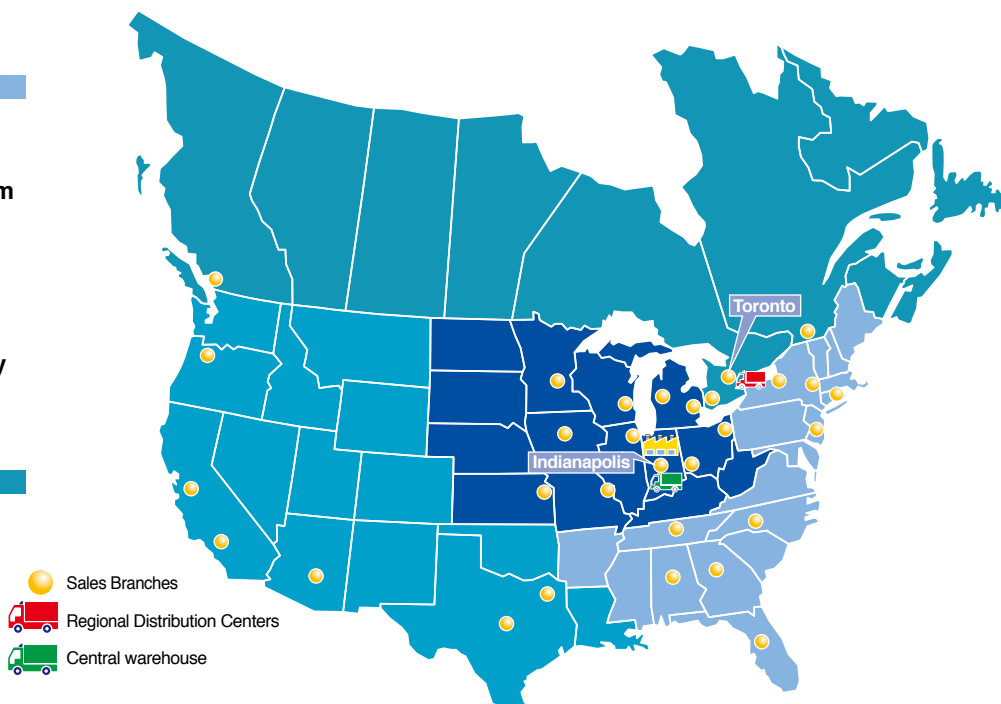

SMC Corporation of America
10100 SMC Blvd., Noblesville, IN 46060
www.smcusa.com

SMC Automation (Canada) Ltd.
www.smcautomation.ca

(800) SMC.SMC1 (762-7621)
e-mail: sales@smcusa.com
International inquiries: www.smcworld.com

