

Your safety is our focus
Safety related special products
5 port valve with position detection
and spring return spool

SY-X30 Series

5 port valve with position detection and spring return spool SY-X30 Series

- ▶ **We focus on machinery safety as a key part of our product development strategy. We have just developed a new version of our SY valve that will help you to satisfy your machine safety system requirements.**



Main Features

- ▶ **A valve with position detection and spring return spool - The concept**

An auto switch integrated into the valve monitors the safe position of the spool. The safe position is the spring-actuated position. A high signal on the auto switch represents the safe position of the spool. Therefore, achieving a high diagnostic coverage is simple.

- ▶ **Validated according to ISO 13849-2**

This product is capable of meeting the relevant basic and well-tried safety principles.

Please request our validation document for the details.

- ▶ **SISTEMA library is available**

SY safety valves data are integrated into SISTEMA free software tool.

Download it from our website and be ready to build your safety function.

- ▶ **Still an option of our SY, the all-purpose valve**

Benefit from the high versatility this series gives you and create your own configuration, tailored to your needs.



Applications

Because of its validated design this valve can be used to implement different types of safety function for pneumatic actuators, particularly short stroke cylinders or grippers

How to Order

SY5100 - 5 1 - M9 W PC - X30

① ② ③ ④ ⑤

① Pilot type

—	Internal pilot
R	External pilot

② Light & surge suppressor

—	W/o indicator light & surge suppressor
R	W/surge suppressor (non polar)
U	W/indicator light & surge suppressor (non polar)
S	W/surge suppressor (positive common)
Z	W/indicator light & surge suppressor (positive common)
NS	W/surge suppressor (negative common)
NZ	W/indicator light & surge suppressor (negative common)

1) Only "Z" and "NZ" type is available for the product with power saving circuit.

③ Wiring and output type

N	3-wire, NPN
P	3-wire, PNP
B	2-wire

④ Cable length

S	0.5 m
M	1 m

⑤ Connector specifications

A	M8-3 pins
B	M8-4 pins
D	M12-4 pins

Selected Part Numbers

Part number	Max. flow rate cfm (l/min)	Operating pressure range	Connector type
SY5100-5U1-M9PWSAPC-X30	36.2 (1042)	22 to 101 psi (0.15 - 0.7 MPa)	M8-3 pins
SY5100R-5U1-M9PWSAPC-X30	36.2 (1042)	-14.5 to 101 psi (-100 kPa to 0.7 MPa)	M8-3 pins

Valve Specifications


Valve type		5 port solenoid valve, spool detection
Valve type		Rubber seal
Type of actuation		2-position single/spring and air return type
Spool detection		Auto switch signal output is active when valve is de-energised
Fluid		Air
Internal pilot operating pressure range		22 to 101 psi (0.15 to 0.7 MPa)
External pilot operating pressure range	Operating pressure range	-14.5 to 101 psi (-100 kPa to 0.7 MPa)
	2-position single	36 to 101 psi (0.25 to 0.7 MPa)
Ambient and fluid temperature		14 to 122 °F (-10 to 50 °C) No freezing
Manual override		Non-locking push type
Min. operating frequency [Hz]		1 cycle every 30 days
Max. operating frequency [Hz]		5
Lubrication		Not required
Mounting orientation		Unrestricted
Impact/Vibration resistance [m/s ²]		150/30
Enclosure		IEC529 standard IP67
Filtration		5 µm filtration or similar
Coil rated voltage [DC]		24 V
Allowable voltage fluctuation [V]		±10 % of rated voltage
Power consumption [W]	X30	0.35 (with indicator light: 0.4)
Surge voltage suppressor		Diode (Varistor for non-polar type)
Indicator light		LED
Pilot exhaust type	Internal pilot	Main/pilot valve common exhaust
	External pilot	Pilot individual exhaust

Auto switch specifications


Auto switch model	D-M9NW	D-M9PW	D-M9BW
Wiring type	3-Wire	2-Wire	
Output type	NPN	PNP	—
Applicable load	IC circuit, Relay, PLC		24 VDC relay PLC
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)		—
Current consumption	10 mA or less		
Load voltage	28 VDC or less	—	24 VDC (10 to 28 VDC)
Load current	40 mA or less		2.5 to 40 mA
Internal voltage drop	0.8 V or less at 10 mA Load current (2 V or less at 40 mA)		4 V or less
Leakage current	100 µA or less at 24 VDC		0.8 mA or less
Operating time	1 ms or less		
Indicator light	Green LED when turned on Red LED when within operating range		
Standard	CE marking, RoHS		
Electrical entry system	Grommet		
Lead wire	Oil-proof heavy-duty vinyl cord 2.7 x 3.2 oval, 0.15 mm ² , 2 wire (D-M9BW), 3 wire (D-M9NW/D-M9PW)		
Withstand voltage	1000 VAC for 1 min (between terminals and housing)		
Insulation resistance	50 MΩ or more at 500 VDC mega		
Ambient temperature	±10 to 60 °C		
Enclosure	IEC529 standard IP67, JISC0920 water-proof construction		

Symbols

Internal Pilot



External Pilot



5 port valve with position detection and spring return spool SY-X30 Series



Manifold Flow characteristics ¹⁾

Plug-in metal base

Series	Piping option	Port size		Valve flow-rate characteristics					
		1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1→4/2 (P→A/B)			4/2→5/3 (A/B→E)		
				C [dm ³ /(s·bar)]	b	Q [l/min] (ANR) ²⁾	C [dm ³ /(s·bar)]	b	Q [l/min] (ANR) ²⁾
SY5000	Side ported	1/4	C8	2.6	0.28	653	2.6	0.14	603
	Bottom ported	1/4	C8	2.7	0.35	709	2.8	0.20	671

Resin base

Series	Piping option	Port size		Valve flow-rate characteristics					
		1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1→4/2 (P→A/B)			4/2→5/3 (A/B→E)		
				C [dm ³ /(s·bar)]	b	Q [l/min] (ANR) ²⁾	C [dm ³ /(s·bar)]	b	Q [l/min] (ANR) ²⁾
SY5000	Side ported	C10	C8	3.3	0.30	839	3.6	0.17	848
	Bottom ported	C10	C8	3.3	0.29	834	4.2	0.26	1042

1) The value is for manifold base with 5 stations and individually operated 2-position type.

2) These values have been calculated according to ISO 6358 and indicate the flow rate under standard conditions with an inlet pressure of 87 psi (0.6 MPa) (relative pressure) and a pressure drop of 14.5 psi (0.1 MPa).

3) These values are applicable to rubber seal type valves.

Dimensions

Dimensions are the same as the standard product.

Other SY safety specials



5 port solenoid valve with spring return spool
SY-X350 Series



5 port solenoid valve with detent
SY-X25 Series



Pilot pressure control valve with position detection
SY-X31 Series



Pilot pressure control valve
SY-X310 Series

Global Manufacturing, Distribution and Service Network

Worldwide Subsidiaries

EUROPE

AUSTRIA
SMC Pneumatik GmbH (Austria)

BELGIUM
SMC Pneumatics N.V./S.A.

BULGARIA
SMC Industrial Automation Bulgaria EOOD

CROATIA
SMC Industrijska Automatika d.o.o.

CZECH REPUBLIC
SMC Industrial Automation CZ s.r.o.

DENMARK
SMC Pneumatik A/S

ESTONIA
SMC Pneumatics Estonia

FINLAND
SMC Pneumatics Finland OY

FRANCE
SMC Pneumatique S.A.

GERMANY
SMC Pneumatik GmbH

GREECE
SMC Hellas EPE

HUNGARY
SMC Hungary Ipari Automatizálási Kft.

IRELAND
SMC Pneumatics (Ireland) Ltd.

ITALY
SMC Italia S.p.A.

KAZAKHSTAN
LLP "SMC Kazakhstan"

LATVIA
SMC Pneumatics Latvia SIA

LITHUANIA
UAB "SMC Pneumatics"

NETHERLANDS
SMC Pneumatics B.V.

NORWAY
SMC Pneumatics Norway AS

POLAND
SMC Industrial Automation Polska Sp. z o.o.

ROMANIA
SMC Romania S.r.l.

RUSSIA
SMC Pneumatik LLC.

SLOVAKIA
SMC Priemyselná Automatizácia, Spol s.r.o.

SLOVENIA
SMC Industrijska Avtomatika d.o.o.

SPAIN / PORTUGAL
SMC España, S.A.

SWEDEN
SMC Pneumatics Sweden AB

SWITZERLAND
SMC Pneumatik AG

TURKEY
SMC Pnömatik Sanayi Ticaret ve Servis A.Ş.

UK
SMC Pneumatics (U.K.) Ltd.

ASIA / OCEANIA

AUSTRALIA
SMC Pneumatics (Australia) Pty. Ltd.

CHINA
SMC (China) Co., Ltd.
SMC Pneumatics (Guangzhou) Ltd.

HONG KONG
SMC Pneumatics (Hong kong) Ltd.

INDIA
SMC Pneumatics (India) Pvt. Ltd.

INDONESIA
PT. SMC Pneumatics Indonesia

JAPAN
SMC Corporation

MALAYSIA
SMC Pneumatics (S.E.A.) Sdn. Bhd.

NEW ZEALAND
SMC Pneumatics (N.Z.) Ltd.

PHILIPPINES
Shoketsu SMC Corporation

SINGAPORE
SMC Pneumatics (S.E.A.) Pte. Ltd.

SOUTH KOREA
SMC Pneumatics Korea Co., Ltd.

TAIWAN
SMC Pneumatics (Taiwan) Co., Ltd.

THAILAND
SMC (Thailand) Ltd.

UNITED ARAB EMIRATES
SMC Pneumatics Middle East FZE

VIETNAM
SMC Pneumatics (VN) Co., Ltd

AFRICA

SOUTH AFRICA
SMC Pneumatics (South Africa) Pty Ltd

NORTH, CENTRAL & SOUTH AMERICA

ARGENTINA
SMC Argentina S.A.

BOLIVIA
SMC Pneumatics Bolivia S.R.L.

BRAZIL
SMC Pneumáticos do Brasil Ltda.

CANADA
SMC Pneumatics (Canada) Ltd.

CHILE
SMC Pneumatics (Chile) S.A.

COLOMBIA
SMC Colombia Sucursal de SMC Chile, S.A.

MEXICO
SMC Corporation (Mexico) S.A. de C.V.


PERU
SMC Corporation Peru S.A.C.

USA
SMC Corporation of America

VENEZUELA
SMC Neumatica Venezuela S.A.

U.S. & Canadian Sales Offices

- | | |
|----------------|---------------|
| WEST | EAST |
| Austin | Albany |
| Dallas | Atlanta |
| Los Angeles | Birmingham |
| Phoenix | Boston |
| Portland | Charlotte |
| San Jose | Knoxville |
| | Nashville |
| CENTRAL | New Jersey |
| Chicago | Rochester |
| Cincinnati | Tampa |
| Cleveland | |
| Detroit | CANADA |
| Des Moines | Vancouver |
| Grand Rapids | Toronto |
| Indianapolis | Windsor |
| Kansas City | Montreal |
| Milwaukee | |
| Minneapolis | |
| St. Louis | |

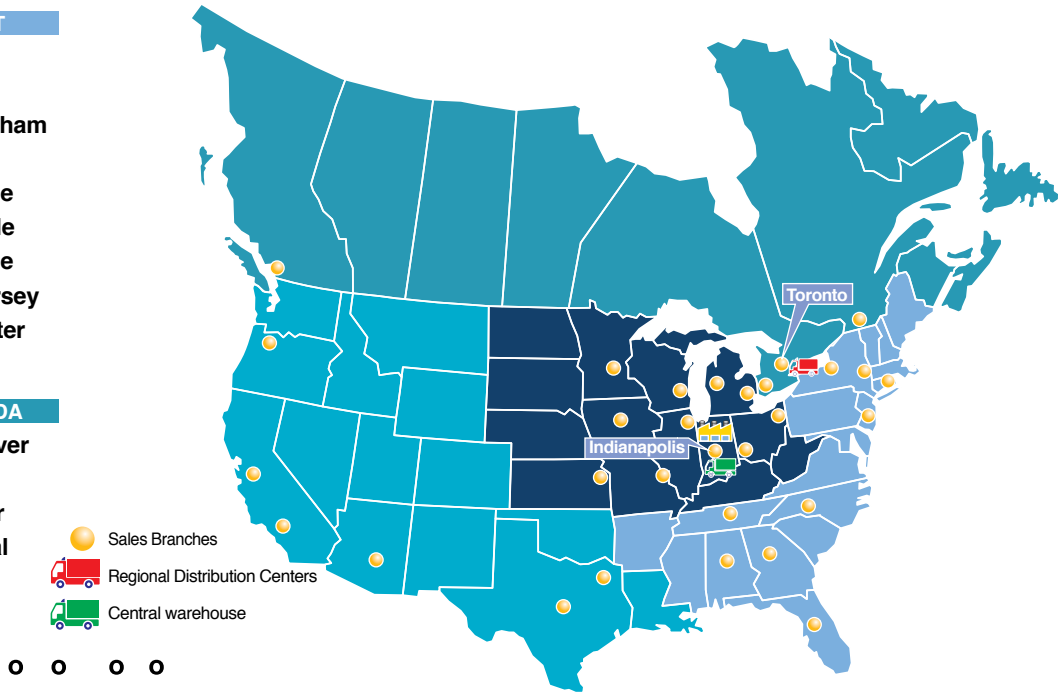

r o o om