


Proposal for CO₂ Emission-reducing Products

An introduction to products that can contribute to energy saving and CO₂ emission-reduction through centralized control, air saving, compactness, and weight reduction



Centralized Control

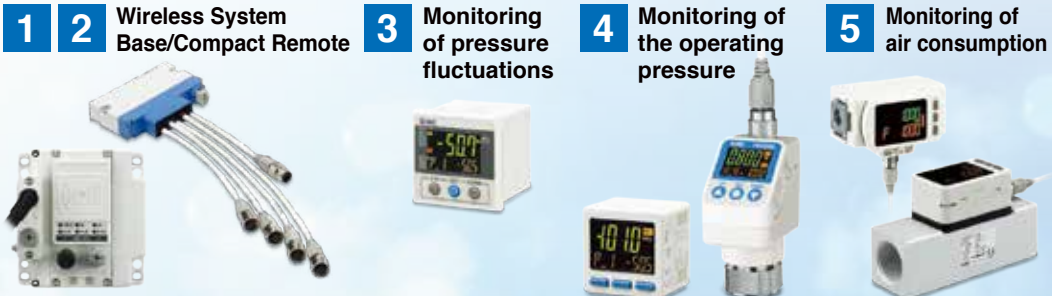


Air Saving/Compact/Lightweight



By using topology optimization*1 in the designing process, energy saving, compactness, and weight reduction can be achieved. In addition, visualization allows for optimization via centralized control.

■ Centralized data control of line pressure and equipment air consumption

In order to calculate the amount of air being consumed by an air pressure system and to measure the effectiveness of energy-saving measures, the flow rate and pressure must be controlled. To maintain and monitor the effectiveness of these measures, it is recommended that the flow rate and pressure measurement data of each device be centrally controlled.

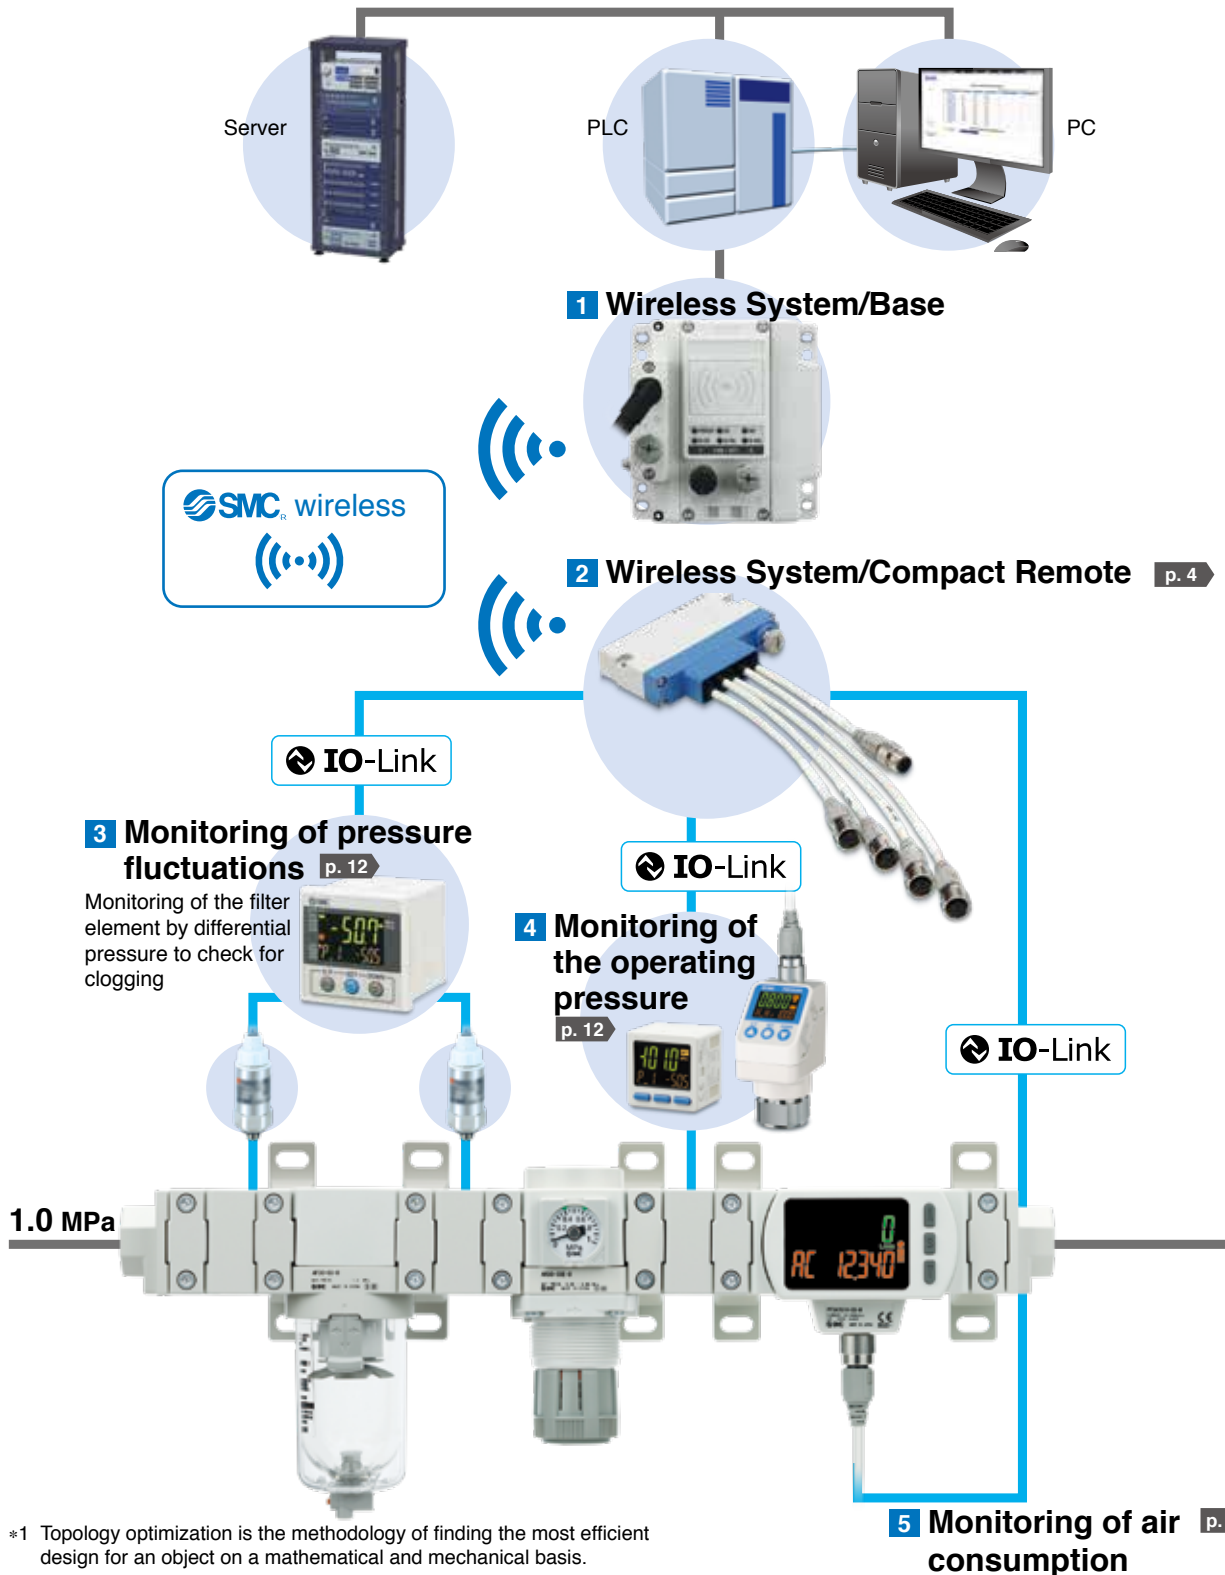

*1 Topology optimization is the methodology of finding the most efficient design for an object on a mathematical and mechanical basis.

SMC offers a lineup of products which can aid you in eliminating partial losses of thrust and in reducing air consumption.

An effective way to reduce air consumption is to lower the supply pressure of a compressor, called pressure reduction. While this approach is both easy and immediate, from the customer's perspective, a partial loss of supply pressure to machine equipment could interfere with production.

Current situation

The cylinder thrust is sufficient even at 0.4 MPa.

0.4 MPa

e.g.) Cylinder currently in use:

ø32 (322 N)



Measures to prevent thrust loss

Increase output without taking up more space!

0.4 MPa

High pressure and high thrust are available to the line that requires them!

6 Air-saving Booster Regulator p. 13



0.68 MPa

Increase output without taking up more space!
Save more air!
Air consumption reduced by max. 46%

Only the push side requires output.

0.4 MPa

8 Polygonal Piston Type p. 18 and on

Double Force Cylinder
ø32 x 2 (644 N)



ø40 (503 N)



A compact cylinder is about the same size as a regular cylinder of one size smaller. Therefore, you can increase the cylinder size without taking up more space.
* The double force cylinder has the same width but has a greater height dimension.

e.g.) Cylinder currently in use:

ø32 (547 N)



Allows for high pressure to be supplied only to the line that requires it. The required output can be maintained even when the cylinder is in use.

Measures to prevent thrust loss

+

Air saving

9 Air-saving Type Polygonal Piston Type p. 37 and on

ø40 (503 N)



Double Force Cylinder
ø32 x 2 (644 N)



Features a built-in exhaust return circuit but is the same size as the polygonal piston type. The cylinder size can be increased without taking up more space. You can further reduce air consumption by 46%.
* The double force cylinder has the same width but has a greater height dimension.

Save even more air!
Air consumption reduced by 46%

The cylinder thrust is sufficient even at 0.4 MPa. Only the push side requires output.

0.4 MPa

7 Air-saving Type (Built-in exhaust return circuit) p. 15

ø32 (322 N)



Exhaust return circuit use reduces air consumption by 46%.
* The size cannot be increased.

Air saving

Save air by selecting an appropriate bore size!

Even at 0.4 MPa, there is sufficient room for cylinder thrust.

0.4 MPa

10 Intermediary Bore Size Cylinder p. 46



If adequate cylinder thrust can be obtained after switching to a lower pressure, air consumption can be reduced by selecting a bore size according to the required thrust.

Appropriate size

Bore size [mm]	ø40	ø45	ø50	ø56	ø63	ø67	ø80	ø85	ø100
Air consumption L (ANR)	1.4	1.8	2.2	2.8	3.6	4.1	5.8	6.6	9.1

Conditions/Supply pressure: 0.5 MPa,
Load factor: 50%, 100 mm stroke

18% reduction

22% reduction

29% reduction

27% reduction

C O N T E N T S

Centralized Control



1 2 Wireless System Base/Compact Remote

Wireless System Compact Remote **EX600-W Series** p. 4

3 Monitoring of Pressure Fluctuations

High-Precision Digital Pressure Switch **ZSE20B(F)-L/ISE20B-L Series** p. 12

4 Monitoring of the Operating Pressure

High-Precision Digital Pressure Switch **ISE7□/7□G Series** p. 12


3-Screen Display Multi-channel Digital Sensor Monitor **PSE200A Series** p. 12

5 Monitoring of Air Consumption

3-Color Display Digital Flow Switch for Large Flow **PF3A7□H-L Series** p. 12

2-Color Display Digital Flow Switch **PF2M7-L Series** p. 12

Air Saving/Compact/Lightweight

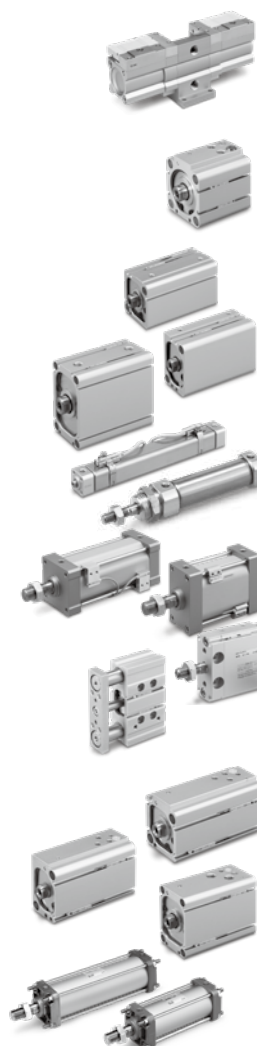

6 Air-saving Booster Regulator

Booster Regulator **VBA-X3145** p. 13

7 Air-saving Type

Compact Cylinder/Air-saving Type **CDQ2B-X3150** p. 15

8 Polygonal Piston Type

Compact Cylinder/Polygonal Piston Square Type **CDQ2B-X3162** p. 19

Compact Cylinder/Polygonal Piston Rectangle Type **CDQ2B-X3164** p. 21

Compact Cylinder/Double Force Type **CDQ2B-X3166** p. 23

Square Shape Compact Cylinder **CU-X3160** p. 25

Air Cylinder **CJ2 Compact Type CJ2-X3175** p. 27

Air Cylinder/Compact Type **MB-X3155** p. 29

Air Cylinder/Double Force Type **MB-X3157** p. 31

Free Mount Cylinder **Compact Type CDU-X3178** p. 33

Compact Guide Cylinder/Rectangular Piston Type **MGPM-X3159** p. 35

9 Air-saving Type Polygonal Piston Type

Compact Cylinder Air-saving Type/Polygonal Piston Square Type **CDQ2B-X3205** p. 39

Compact Cylinder Air-saving Type/Polygonal Piston Rectangle Type **CDQ2B-X3206** p. 43

Compact Cylinder Air-saving Type/Double Force Type **CDQ2B-X3207** p. 47

10 Intermediary Bore Size

Air Cylinder **JMB Series** p. 50

Wireless System Compact Remote



Compact

Lightweight

Area Approx. **61%** reduction^{*1}

59.8 cm² ← 155 cm²


Volume Approx. **86%** reduction^{*1}

159 cm³ ← 1,139 cm³



Weight Approx. **87%** reduction^{*1}

130 g ← 965 g


^{*1} For the e-CON type
Compared with the existing remote, M8 connector/digital
8 inputs specification

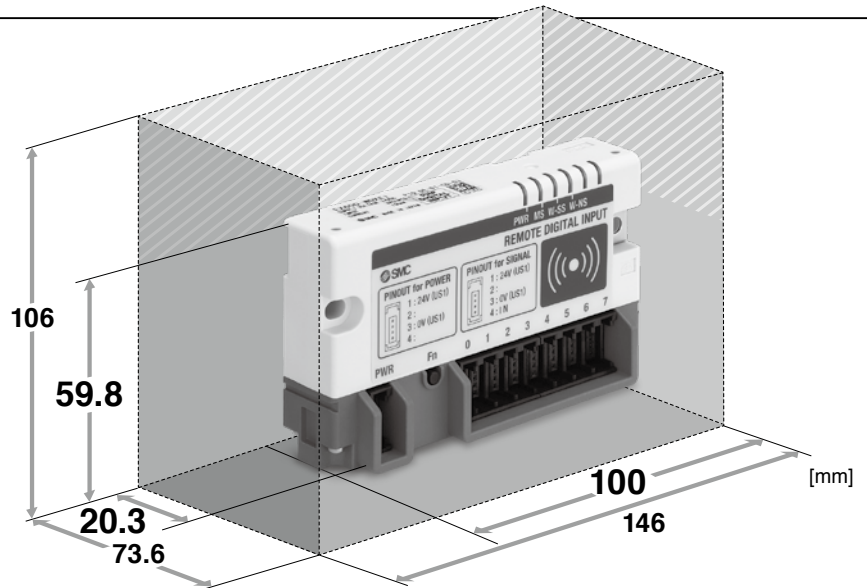

Variations

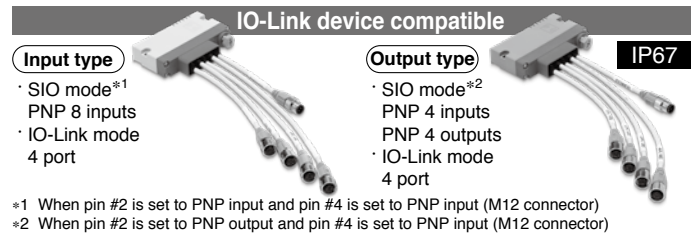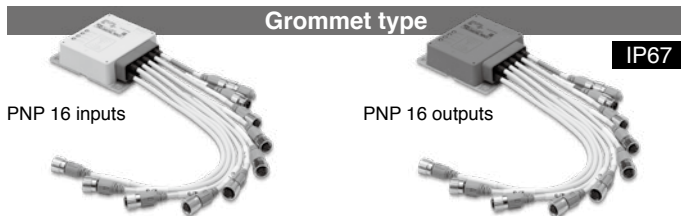

Applicable to existing wireless systems

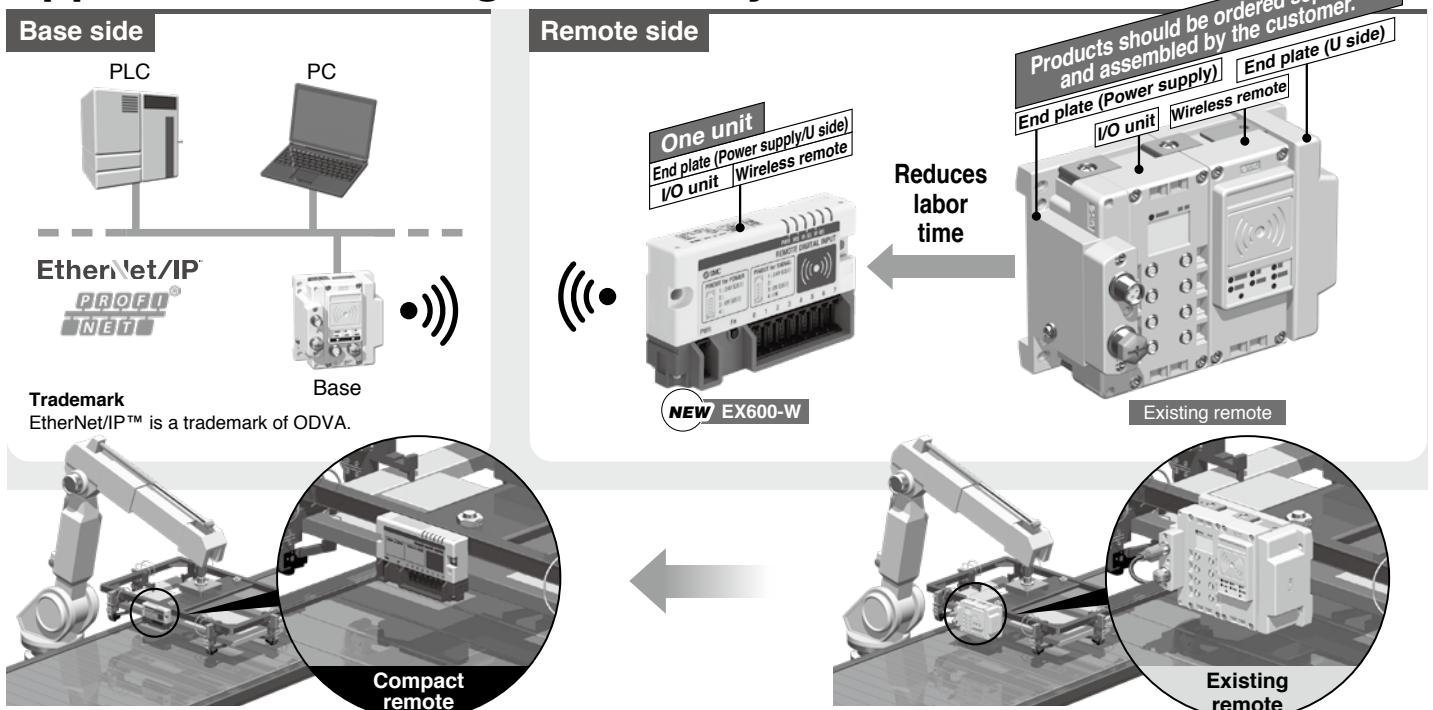

EX600-W Series

This product is only compliant with the Japanese Radio Law.
Note that this product cannot be used outside Japan.



EX600-W Series

Specifications

Wireless Communication Specifications

Protocol	SMC original protocol
Radio wave type	Frequency Hopping Spread Spectrum (FHSS)
Frequency	2.4 GHz (2403 to 2481 MHz)
Number of frequency channels	79 ch (Bandwidth: 1.0 MHz)
Communication speed	250 kbps
Communication distance	10 m (Depending on the operating environment)
Radio Law certificate	Japanese Radio Law (Japan)

IO-Link Communication Specifications^{*1}

Communication speed	COM1 (4.8 kBaud) COM2 (38.4 kBaud) COM3 (230.4 kBaud) Automatically switched according to the device to be connected
---------------------	---

Ports for IO-Link devices
^{*1} Parameter setting for IO-Link devices is not supported. Set using the dedicated tool before connecting the product.
^{*2} Only process data can be sent and received.

General Specifications

Type		e-CON type		Grommet type		IO-Link device compatible	
		PNP input EX600-WDXE1	PNP output EX600-WDYE1	PNP input EX600-WDXA1	PNP output EX600-WDYA1	PNP input EX600-WLXB1	PNP output EX600-WLYB1
Power supply for control and input (US1)	Power supply voltage	24 VDC ±10%					
	Current consumption*1	100 mA or less	50 mA or less	100 mA or less	50 mA or less	100 mA or less	100 mA or less
Power supply for output (US2)	Power supply voltage	—	24 VDC ±10%	—	24 VDC ±10%	—	24 VDC ±10%
	Max. load current (per unit)		800 mA		2 A*2		2 A*2
	Max. load current (per output)		100 mA (per output)		100 mA (per output)		100 mA (per output)
Electrical specifications (Common)	Number of points	8 inputs (1 input/connector)	8 outputs (1 output/connector)	16 inputs (2 inputs/connector)	16 outputs (2 outputs/connector)	8 inputs (2 inputs/connector)*3	4 outputs (1 output/connector)*3
	Type	PNP (-COM)					
	Connector type	e-CON (4-pin)		M12 5-pin socket (Female)			
	Max. sensor supply current	2 A/unit, 0.3 A/connector		2 A/unit, 0.3 A/connector		1 A/unit, 0.3 A/connector	
Input	Input resistance	1.5 kΩ	—	1.5 kΩ	—	—	—
	Rated input current	5 mA or less		5 mA or less		2.5 mA or less (Pin #2) 5.5 mA or less (Pin #4)	5.5 mA or less (Pin #4)
	Signal OFF-judgement	5 VDC/2 mA or less		5 VDC/2 mA or less		5 VDC/2 mA or less	—
	Signal ON-judgement	15 VDC/5 mA or more		15 VDC/5 mA or more		15 VDC/5 mA or more	—
	Protection	Short-circuit protection		Short-circuit protection		Short-circuit protection	
Output	Max. load current	—	100 mA (per output)	—	100 mA (per output)	—	100 mA (per output)
	Protection	—	Short-circuit protection	—	Short-circuit protection	—	Short-circuit protection
Cable tensile strength		10 N		100 N			
Operating ambient temperature		0 to +50°C					
Storage ambient temperature		-10 to +60°C					
Ambient humidity		35 to 85%RH					
Withstand voltage		10 MΩ or more (500 VDC between external terminals and metallic parts)					
Insulation resistance		500 VAC for 1 minute between external terminals and metallic parts					
Vibration resistance		Compliant with EN61131-2, 5 ≤ f < 8.4 Hz 3.5 mm, 8.4 ≤ f < 150 Hz 9.8 m/s ²					
Impact resistance		Compliant with EN61131-2, 147 m/s ² , 11 ms					
Enclosure		IP20		IP67			
Mounting		M4 screw through hole 2 locations		M5 screw through hole 4 locations		M4 screw through hole 2 locations	
Weight		130 g		480 g		230 g	

^{*1} When an external device is not connected (Body only)




^{*2} (Per unit) See the output specifications for the load current for each signal.

^{*3} Max. number of points when set to SIO-mode

* Number of connections when the setting enabling IO-Link devices is selected

Dimensions

e-CON Type

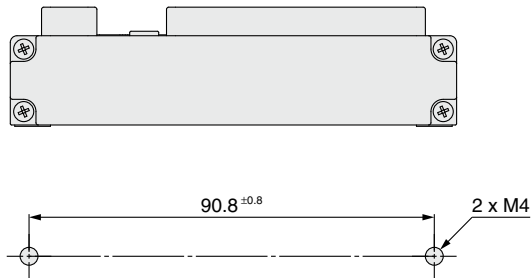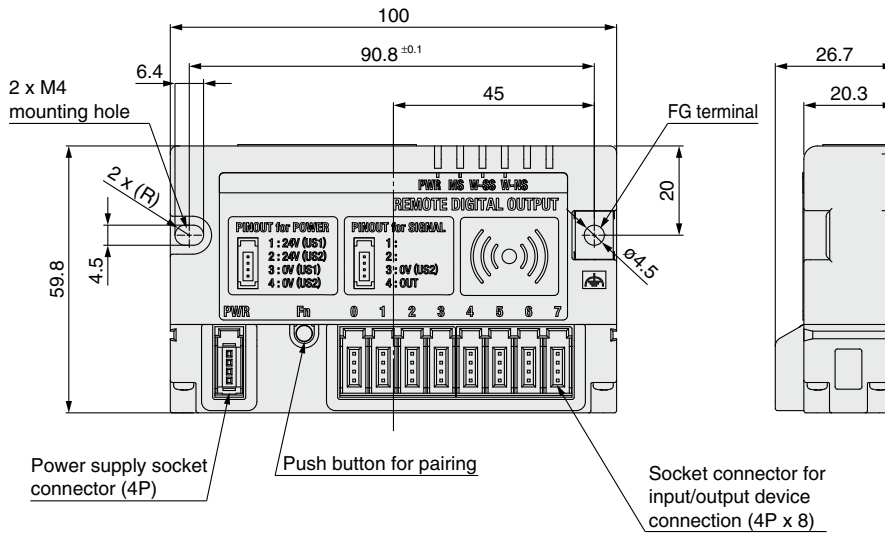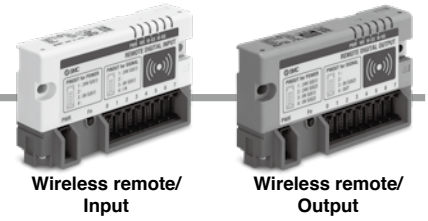

Recommended screw tightening torque:
1.35 to 1.65 N·m

**Recommended mounting
thread hole dimension**

Applicable Connectors for Connection


Part no.	AWG No.	Conductor area [mm ²]	Finished outside diameter [mm]	Cover color
ZS-28-C-1	24 to 26	0.14 to 0.2	ø1.0 to ø1.2	Yellow
ZS-28-C-2			ø1.2 to ø1.6	Orange
ZS-28-C-3	22 to 20	0.3 to 0.5	ø1.0 to ø1.2	Green
ZS-28-C-4			ø1.2 to ø1.6	Blue
ZS-28-C-5			ø1.6 to ø2.0	Gray
ZS-28-CA-1	—	0.1 to 0.5	ø0.6 to ø0.9	Orange
ZS-28-CA-2			ø0.9 to ø1.0	Red
ZS-28-CA-3			ø1.0 to ø1.15	Yellow
ZS-28-CA-4			ø1.15 to ø1.35	Blue
ZS-28-CA-5			ø1.35 to ø1.6	Green

EX600-W Series

e-CON Type/Connector Specifications (Input/Output)


Input

Power supply socket connector wiring specifications




Pin no.	Terminal name
1	24 V (For control/input)
2	N.C.
3	0 V (For control/input)
4	N.C.

Socket connector for input device connection wiring specifications



Pin no.	Terminal name
1	24 V (For control/input)
2	N.C.
3	0 V (For control/input)
4	IN

Socket for input device connection x 8 (0 to 7)

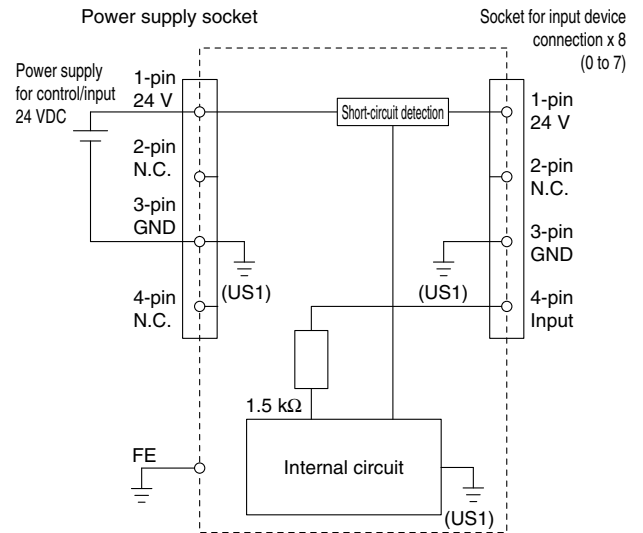


Wireless remote/Input




Output

Power supply socket connector wiring specifications




Pin no.	Terminal name
1	24 V (For control/input)
2	24 V (For output)
3	0 V (For control/input)
4	0 V (For output)

Socket connector for output device connection wiring specifications



Pin no.	Terminal name
1	N.C.
2	N.C.
3	0 V (For output)
4	OUT

Socket for output device connection x 8 (0 to 7)



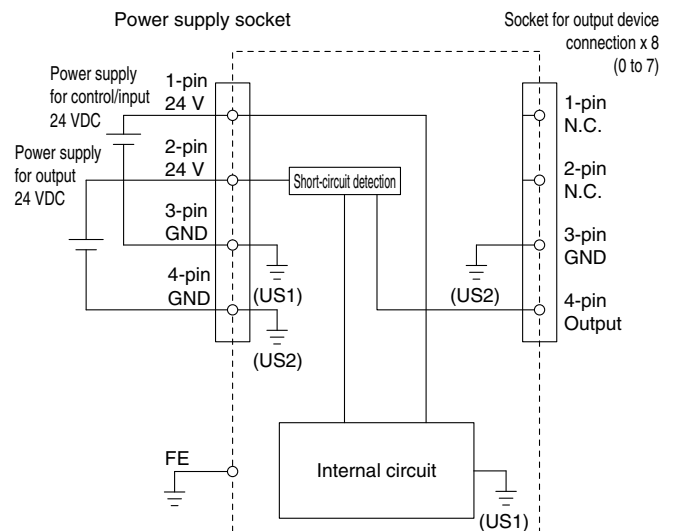


Wireless remote/Output



Dimensions


Grommet Type

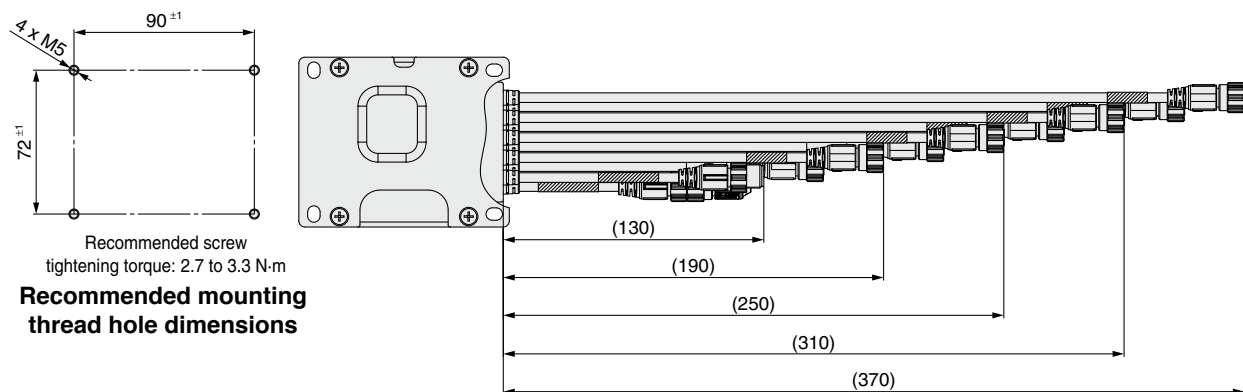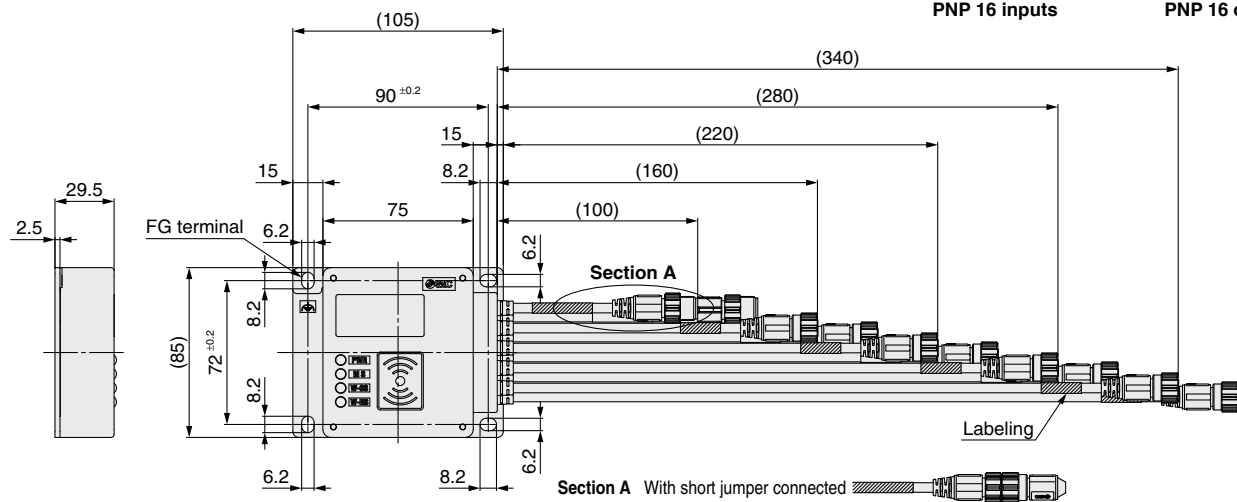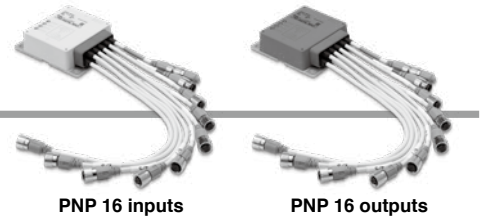

EX600-W Series

Grommet Type/Connector Specifications (Input/Output)

Input





Connector Arrangement Specifications

No.	Description	Cable length [mm]	Labeling	Cable with M12 connector	
0	Pairing line	100	PAIRING	M12, 4-pin, plug (Male)	
1	Power supply line	130	POWER		
2	Input E/F	160	E/F		
3	Input C/D	190	C/D		
4	Input A/B	220	A/B		
5	Input 8/9	250	8/9		
6	Input 6/7	280	6/7		
7	Input 4/5	310	4/5		
8	Input 2/3	340	2/3		
9	Input 0/1	370	0/1		

Connector Specifications

Labeling	PAIRING	POWER	0/1 to E/F	M12, 4-pin plug	M12, 5-pin socket
Pin no.	Description				
1	Short jumper Connected: Normal mode (3-pin to 4-pin short) Not connected: Pairing mode	Power supply for control: + (COM)	Power supply for control: + (COM)		
2		N.C.	Input n + 1		
3		Power supply for control: - (COM)	Power supply for control: - (COM)		
4	Not connected: Pairing mode	N.C.	Input n		
5		—	N.C.		

Input cable x 8 (0 to F)

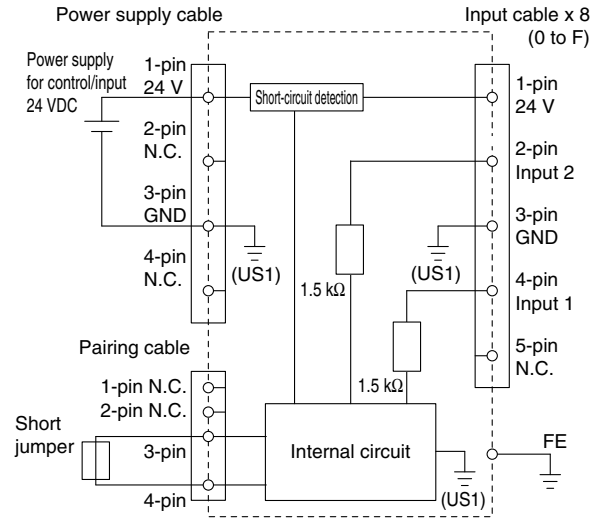

Output


Connector Arrangement Specifications

No.	Description	Cable length [mm]	Labeling	Cable with M12 connector	
0	Pairing line	100	PAIRING	M12, 4-pin, plug (Male)	
1	Power supply line	130	POWER		
2	Output E/F	160	E/F		
3	Output C/D	190	C/D		
4	Output A/B	220	A/B		
5	Output 8/9	250	8/9		
6	Output 6/7	280	6/7		
7	Output 4/5	310	4/5		
8	Output 2/3	340	2/3		
9	Output 0/1	370	0/1		

Connector Specifications



Labeling	PAIRING	POWER	0/1 to E/F	M12, 4-pin plug	M12, 5-pin socket
Pin no.	Description				
1	Short jumper Connected: Normal mode (3-pin to 4-pin short) Not connected: Pairing mode	Power supply for control: + (COM)	N.C.		
2		Power supply for output: + (COM)	Output n + 1		
3		Power supply for control: - (COM)	Power supply for output: - (COM)		
4	Not connected: Pairing mode	Power supply for output: - (COM)	Output n		
5		—	N.C.		

Output cable x 8 (0 to F)

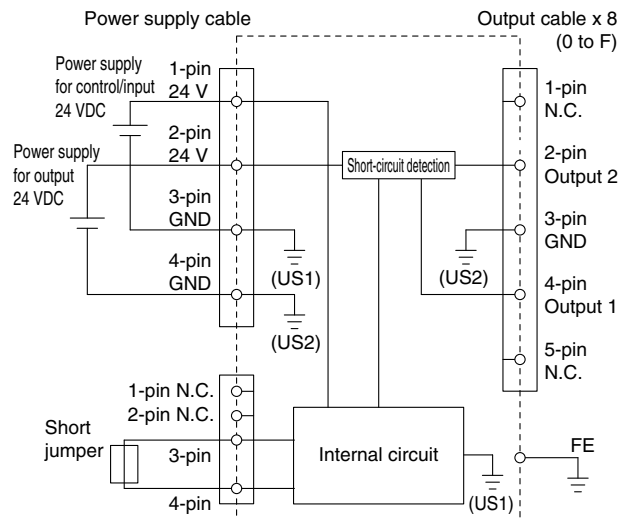

Dimensions

Grommet Type for IO-Link Device

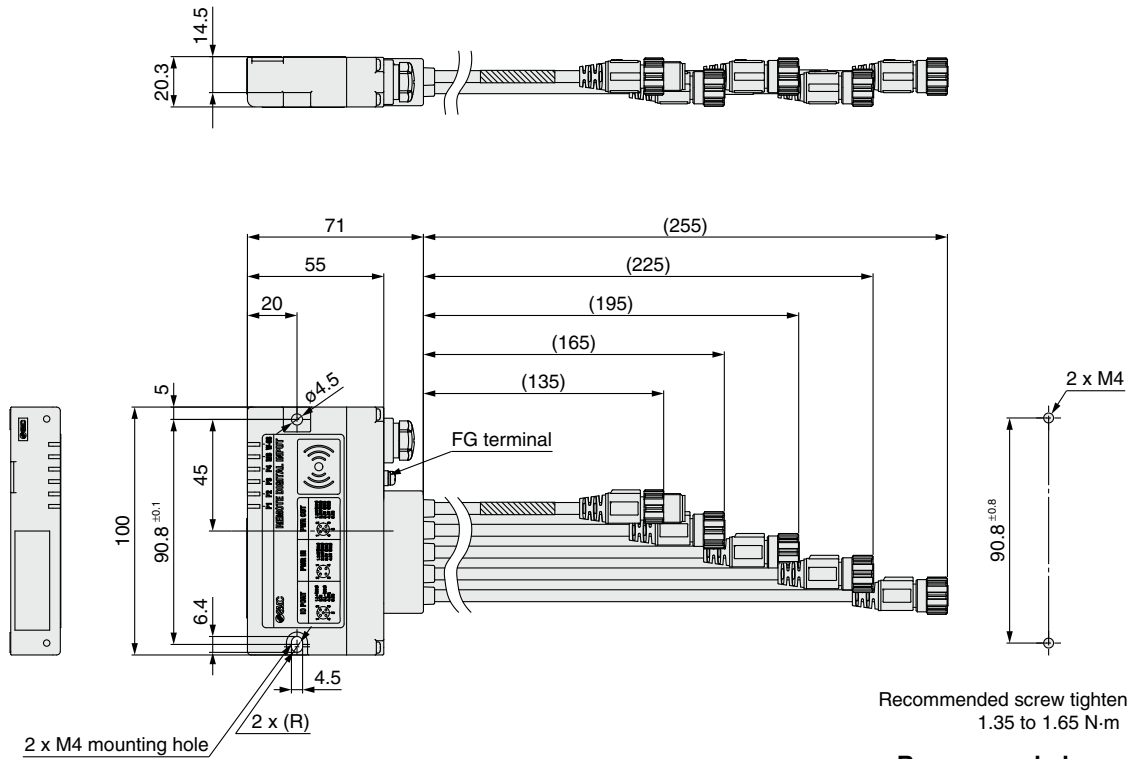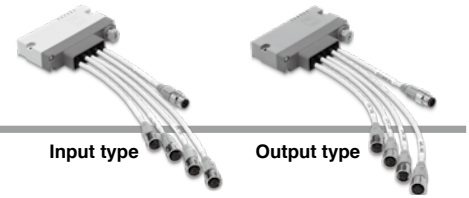


Recommended screw tightening torque:
1.35 to 1.65 N·m

**Recommended mounting
thread hole dimensions**

EX600-W Series

Grommet Type for IO-Link Device/Connector Specifications



Input

Connector Arrangement Specifications

No.	Description	Cable length [mm]	Labeling	Type	
1	PORT1	255	—	M12, 5-pin, socket, A-coded	
2	PORT2	225	—		
3	PORT3	195	—		
4	PORT4	165	—		
5	Power supply IN connector	135	POWER	M12, 4-pin, plug, A-coded	
6	Power supply OUT connector	—	—	M12, 5-pin, socket, A-coded	

IO Connector

Pin no.	Description	M12, 5-pin, socket, A-coded
1	L+ (US1)	
2	DI (Digital input)	
3	L- (US1)	
4	CQ (IO-Link)*1	
5	Not used	


*1 Switchable to IO-Link/digital input (PNP input)

Power Supply IN Connector

Pin no.	Description	M12, 4-pin, plug, A-coded
1	24 V (US1)	
2	24 V (US2)	
3	0 V (US1)	
4	0 V (US2)	

Power Supply OUT Connector

Pin no.	Description	M12, 5-pin, socket, A-coded
1	24 V (US1)	
2	24 V (US2)	
3	0 V (US1)	
4	0 V (US2)	
5	Not used	



Output

Connector Arrangement Specifications

No.	Description	Cable length [mm]	Labeling	Type	
1	PORT1	255	—	M12, 5-pin, socket, A-coded	
2	PORT2	225	—		
3	PORT3	195	—		
4	PORT4	165	—		
5	Power supply IN connector	135	POWER	M12, 4-pin, plug, A-coded	
6	Power supply OUT connector	—	—	M12, 5-pin, socket, A-coded	

IO Connector

Pin no.	Description	M12, 5-pin, socket, A-coded
1	L+ (US1)	
2	DO (Digital output)	
3	L- (US1)	
4	CQ (IO-Link)*1	
5	0 V (US2)	

∴ *1 Switchable to IO-Link/digital input (PNP input)

Power Supply IN Connector

Pin no.	Description	M12, 4-pin, plug, A-coded
1	24 V (US1)	
2	24 V (US2)	
3	0 V (US1)	
4	0 V (US2)	

Power Supply OUT Connector

Pin no.	Description	M12, 5-pin, socket, A-coded
1	24 V (US1)	
2	24 V (US2)	
3	0 V (US1)	
4	0 V (US2)	
5	Not used	

High-Precision Digital Pressure Switch ZSE20B(F)-L/ISE20B-L

IP65



- IO-Link version: V1.1
- Process data length: 2-byte input
- Transmission speed: COM2 (38.4 kbps)
- Minimum cycle time: 2.3 ms

Series	Applicable fluid	Type	Rated pressure range
ZSE20BF-L	Air	Compound pressure	-100 to 100 kPa
ZSE20B-L	Air	Vacuum pressure	0 to -100 kPa
ISE20B-L	Air	Positive pressure	0 to 1 MPa

High-Precision Digital Pressure Switch ISE7□/7□G

IP67



- IO-Link version: V1.1
- Process data length: 2-byte input
- Transmission speed: COM2 (38.4 kbps)
- Minimum cycle time: 2.3 ms
- IO-Link port type: Class A

Series	Applicable fluid	Type	Rated pressure range
ISE70	Air	Positive pressure	0 to 1 MPa
ISE71	Air	Positive pressure	0 to 1.6 MPa
ISE70G	Air General fluids	Positive pressure	0 to 1 MPa
ISE75G	Air General fluids	Positive pressure	0 to 2 MPa
ISE76G	Air General fluids	Positive pressure	0 to 5 MPa
ISE77G	Air General fluids	Positive pressure	0 to 10 MPa

3-Screen Display Multi-channel Digital Sensor Monitor PSE200A



- Up to 4 pressure sensors can be connected!
Centralized control saves installation space.
A single monitor various applications
- It is possible to change the settings while checking the measured value.
- IO-Link compatible

Series	Rated pressure range	Applicable SMC pressure sensor
PSE200A	-0.2 to 2.1 kPa 10 to -105 kPa -105 to 105 kPa -10 to 105 kPa -50 to 525 kPa -0.105 to 1.05 MPa -0.105 to 2.1 MPa -0.25 to 5.25 MPa -0.5 to 10.5 MPa	PSE550 PSE531/PSE541/PSE561 PSE533/PSE543/PSE563/PSE573 PSE532 PSE564/PSE574 PSE530/PSE540/PSE560/PSE570 PSE575 PSE576 PSE577

3-Color Display Digital Flow Switch for Large Flow PF3A7□H-L



- Applicable fluid: Air, N₂
- Flow range: Max. 12000 L/min
- Flow ratio 100:1
Wide range of flow measurement with one product
- Improved drainage and resistance to foreign matter
- Pressure loss: 75% reduction (20 kPa → 5 kPa)
- Through bore construction
- IO-Link compatible

Series	Rated flow range [L/min]
PF3A7□H-L	10 to 1000 20 to 2000 30 to 3000 60 to 6000 120 to 12000

* For the modular type, only 1000 or 2000 L/min can be selected.

2-Color Display Digital Flow Switch PF2M7-L




- Dry air, N₂, Ar, CO₂
- A wide range of flow measurement is possible with 1 product.
Flow ratio: 100 : 1,
Smallest settable increment: 0.01 L/min
- Improved drainage and resistance to foreign matter
- Compact, Lightweight
Weight: 27.3% lighter (55 g → 40 g)
- Low current consumption: 35 mA or less
- Grease-free
- IO-Link compatible

Series	Rated flow range [L/min]
PF2M7-L	0.1 to 10 (0.1 to 5) 0.3 to 25 (0.3 to 12.5) 0.5 to 50 (0.5 to 25) 1 to 100 (1 to 50)

() : For CO₂

Booster Regulator

Size: 10A

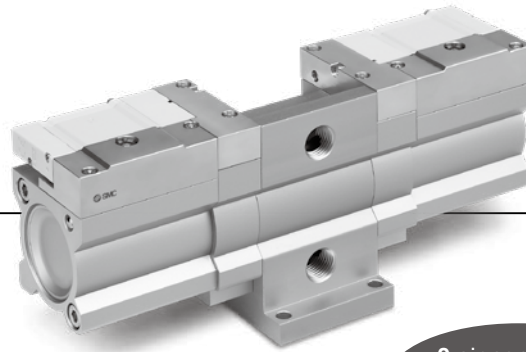


RoHS

Air consumption 40% reduction^{*1}

- 3 piston construction
- The drive chamber on one side can be operated by the exhaust return circuit.

^{*1} Based on SMC's measuring conditions

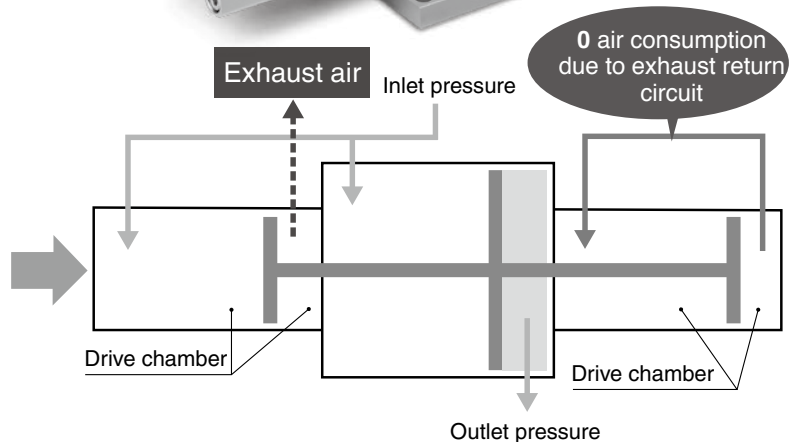

Operation noise: 65 dB(A)^{*1}


^{*1} Based on SMC's measuring conditions

15 dB (A) reduction compared with the existing model (VBA series)


- Exhaust noise: Reduced noise due to exhaust of reused low-pressure air
- Metal noise: Reduced noise due to the adoption of a construction in which the internal switching part doesn't come into contact with any metal parts

Simple, compact shape


- Built-in silencer
- No longer any need for a pressure regulator knob due to the fixed pressure increase ratio

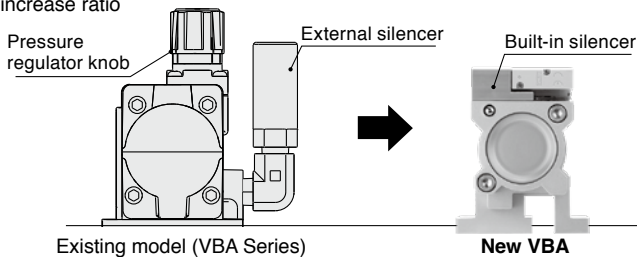

Can be mounted vertically



Charging time: 32% shorter

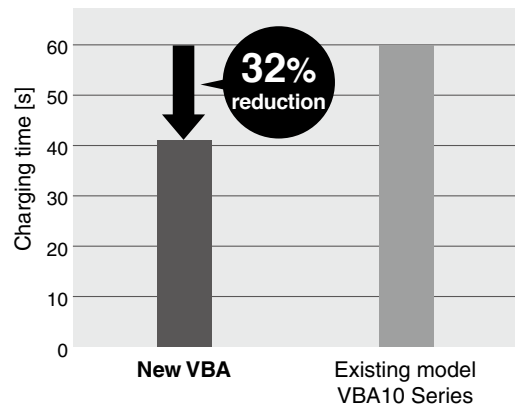

* Inlet pressure: 0.4 MPa, Air tank: 10 L


Mounting compatibility with the existing model (VBA series)

- Can be mounted on an air tank (VBAT series)
(The air tank must be ordered separately.)



VBA-X3145

Specifications

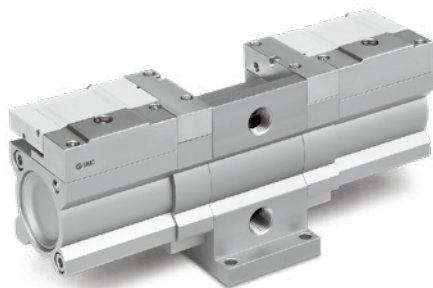


Model		VBA-X3145
Fluid		Compressed air
Pressure increase ratio		1.7 times (Fixed)
Pressure adjustment mechanism		None
Max. flow rate*1	L/min (ANR)	230
Outlet pressure range	MPa	0.3 to 1.2
Inlet pressure range	MPa	0.2 to 0.7
Proof pressure	MPa	1.8
Port size (IN, OUT)		Rc1/4
Tank connection port (with plug)		Rc1/4
Ambient and fluid temperatures	°C	2 to 50 (No freezing)
Installation		Horizontal, Vertical
Lubrication		Grease (Non-lube)
Weight	kg	1.2


*1 Flow rate at IN = OUT = 0.5 MPa.

Flow Rate Characteristics/Charge Characteristics



Flow rate characteristics

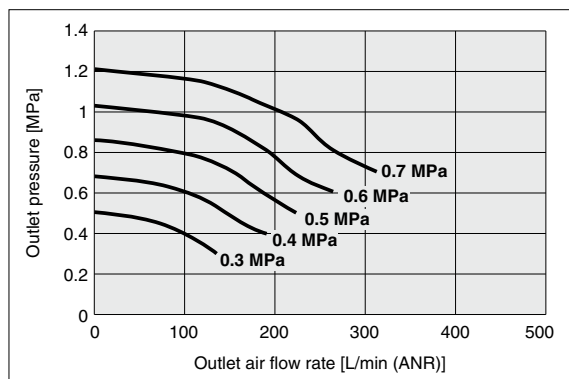

Charge characteristics

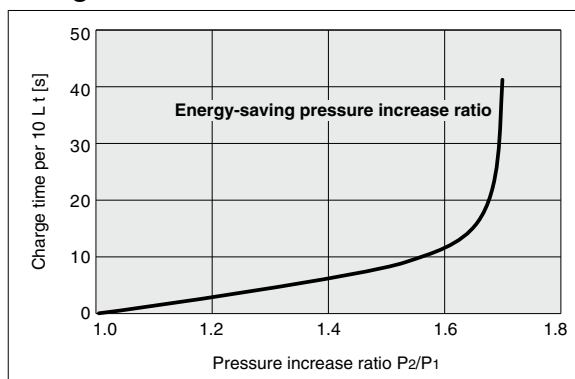

Dimensions

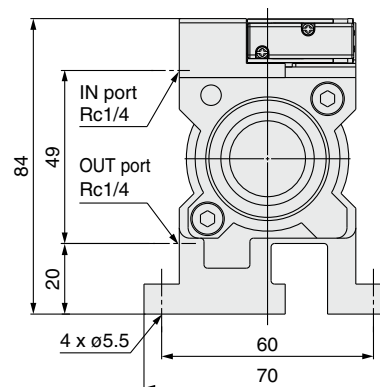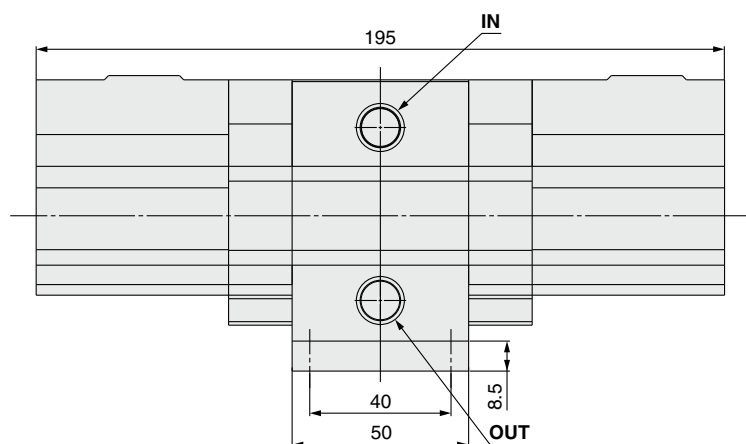


Compact Cylinder/Air-saving Type RoHS

ø32, ø40, ø50

Air consumption


Max. 46% reduction

- Uses the air exhausted from the extension side to supply the retraction side, thus reusing the air (Built-in exhaust return circuit)
- Reduce air consumption just by piping to the product

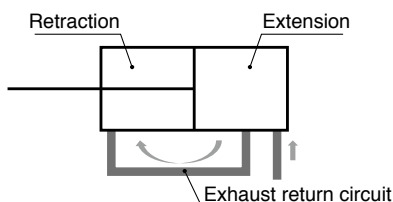


- The dimensions and mounting dimensions are the same as those of the existing CDQ2 series model.

* For the through-hole mounting type only

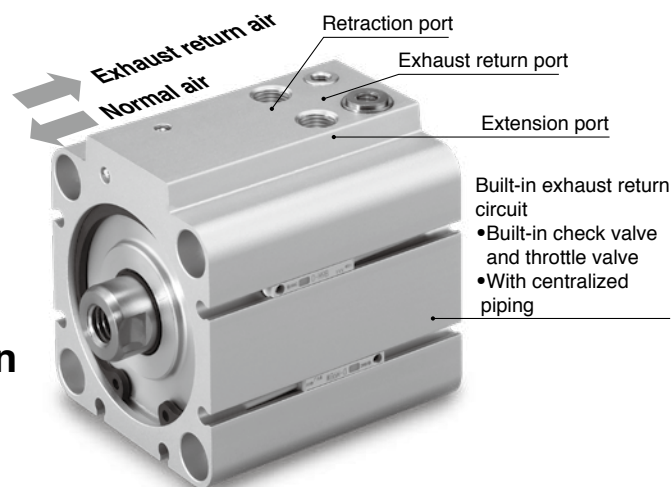

- With rubber bumper
- Small auto switches can be mounted on 3 surfaces.

Applicable auto switch: D-M9□

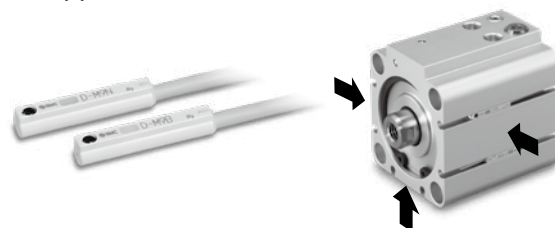

Specifications

Bore size [mm]		32	40	50
Action		Double acting, Single rod		
Fluid		Air		
Proof pressure		1.0 MPa		
Max. operating pressure		0.7 MPa		
Min. operating pressure		0.4 MPa		
Ambient and fluid temperatures		With auto switch: -10 to 60°C (No freezing)		
Lubrication		Not required (Non-lube)		
Piston speed	Extending operation	50 to 500 mm/s		50 to 300 mm/s
	Retracting operation	50 to 300 mm/s		
Stroke length tolerance		0 to +1.0 mm*1		
Cushion		Rubber bumper		
Port size	Retraction port	M5 x 0.8		Rc1/8
	Extension port	M5 x 0.8		Rc1/8
	Exhaust return port	M5 x 0.8		
Mounting orientation		Horizontal lateral, Vertical upward		
Min. theoretical output*2	Retracting operation	32 N	55 N	85 N
	Allowable kinetic energy	0.29 J	0.52 J	0.91 J
Allowable lateral load at rod end (At 30 stroke)		7.6 N	10.9 N	15.8 N
Mounting		Basic type (Through-hole)		

*1 Stroke length tolerance does not include the amount of bumper change.

*2 Be aware that the cylinder output is reduced during the retraction operation.


The cylinder output values in the table above are the min. values. Therefore, depending on the operating conditions, the output may be greater.

Please contact your local sales representative for more details.

Standard Strokes


Bore size	Standard stroke [mm]
32, 40	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100
	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100

Circuit Diagram

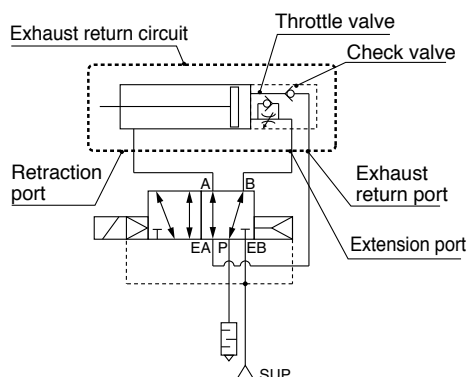

CDQ2B-X3150

Dimensions Bore size **Ø32, Ø40, Ø50**

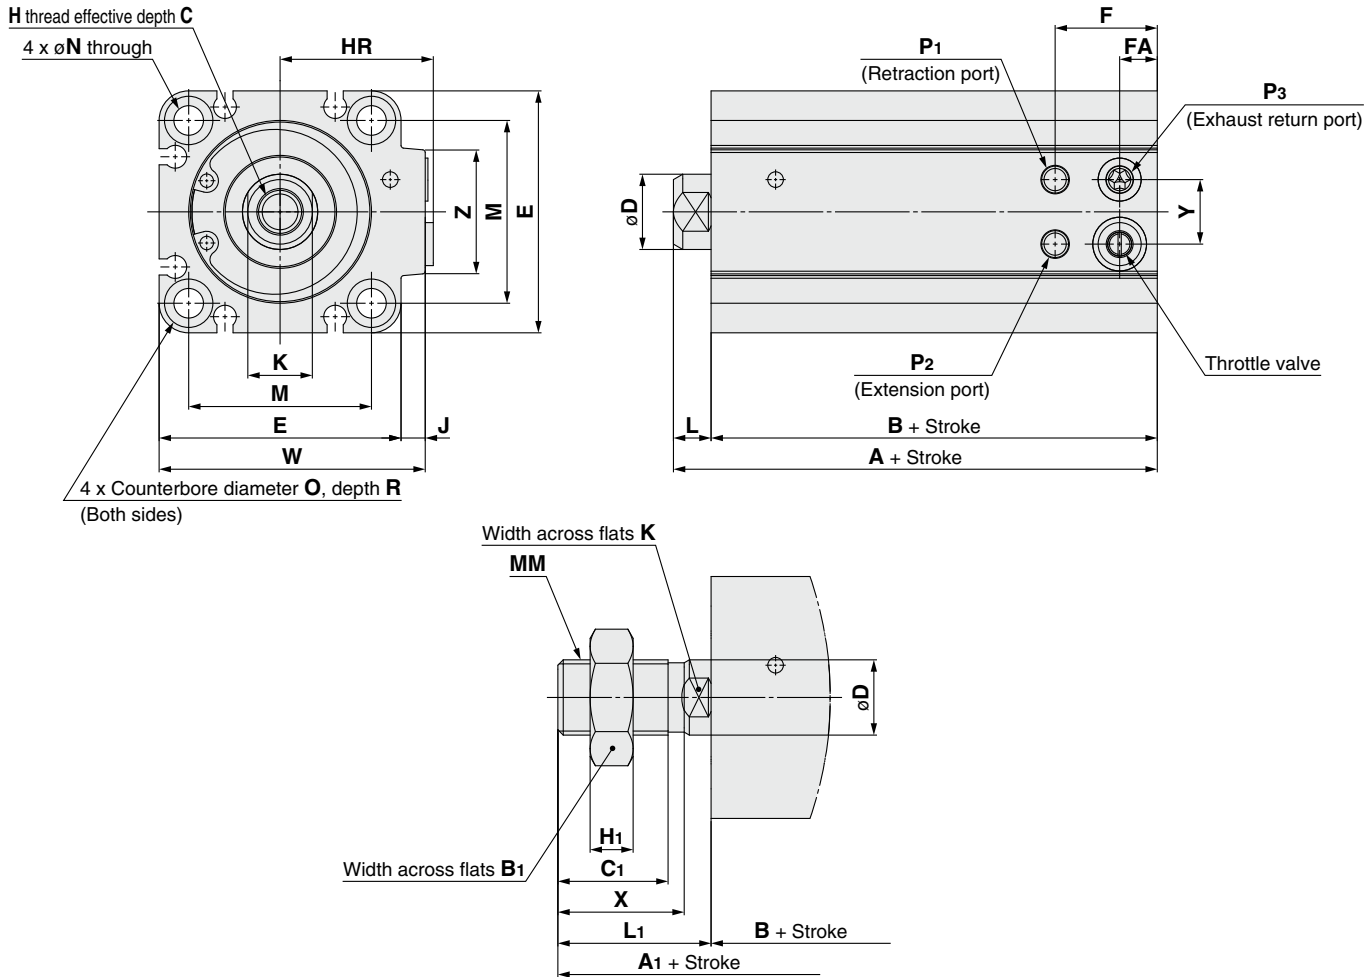

Rod end male threaded

[mm]															
Bore size	Standard stroke					A	B	C	D	E	F	FA	H	HR	N
32	5, 10, 15, 20, 25, 30, 35, 40,					40	33	13	14	45	19	7	M8 x 1.25	28	5.5
40	45, 50, 75, 100					46.5	39.5	13	14	52	20.5	9	M8 x 1.25	32	5.5
50	10, 15, 20, 25, 30, 35, 40, 45,					48.5	40.5	15	18	64	24	9.5	M10 x 1.5	41	6.6
	50, 75, 100														

[mm]															
Bore size	O	P ₁	P ₂	P ₃	R	W	Y	Z	A ₁	B ₁	C ₁	H ₁	L ₁	MM	X
32	9	M5 x 0.8	M5 x 0.8	M5 x 0.8	7	49.5	12	23	61.5	22	20.5	8	28.5	M14 x 1.5	23.5
40	9	M5 x 0.8	M5 x 0.8	M5 x 0.8	7	57	12	23	68	22	20.5	8	28.5	M14 x 1.5	23.5
50	11	Rc1/8	Rc1/8	M5 x 0.8	8	71	18	33	74	27	26	11	33.5	M18 x 1.5	28.5

Handling

⚠ Warning

1. Residual pressure will remain in the exhaust return piping of this circuit.

To completely exhaust all of the residual pressure, install a 3 -port valve for residual pressure exhaust in the exhaust return piping.

2. The adjustment range for the throttle valve for retraction operation speed adjustment is, starting from the fully closed position, within the number of rotations shown in the table below.

Bore size [mm]	Number of rotations
32, 40	3.5 rotations or less
50	4.5 rotations or less

To adjust the throttle valve, use a 3 mm flat head watchmaker's screwdriver.


The adjustment range for the throttle valve is, between the fully closed position and the open position, within the range indicated in the table above.

A retaining mechanism prevents the throttle valve from slipping out; however, it may spring out during operation if it is rotated beyond the range shown above.

⚠ Caution

1. Pipe according to the circuit diagram shown below when using this cylinder.

Circuit diagram

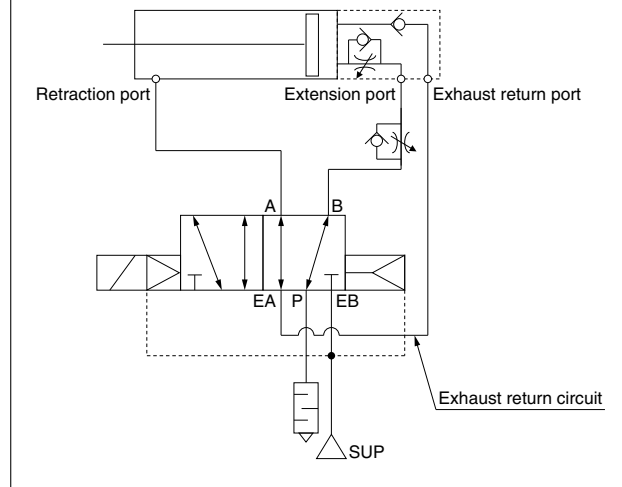

2. For exhaust return, the selection and installation of suitable fittings, tubes, and devices is required. Please contact your local sales representative for more details.
3. For the solenoid valve, select a single unit (body ported or base ported) external pilot type.
4. Follow the instructions below to adjust the speed of this cylinder.
 - Extending operation: Use the speed controller (meter-in) installed between the extension port and the solenoid valve.
 - Retracting operation: Use the built-in throttle valve on the cylinder.
5. As the retracting operation of this cylinder is performed with low pressure and low thrust, refrain from applying more external force than necessary.
6. Pivot brackets cannot be used.

UNIT CONVERSIONS


	unit	conversion	result
length	m	x 3.28	ft
	mm	x 0.04	in
mass	g	x 0.04	oz
volume	cm ³	÷ 16.387	in ³
	L	x 61.024	in ³
speed	mm/s	÷ 25.4	in/s
pressure	MPa	x 145	psi
	kPa	÷ 6.895	psi
temperature	°C	x1.8 then add 32	°F
torque	N·m	x 0.738	ft-lb
force	N	÷ 4.448	lbf
flow	L/min	÷ 28.317	cfm

Compact Cylinder/ Polygonal Piston Square Type

RoHS


Size: 32, 40, 50

Now, more compact and lightweight due to the adoption of a polygonal piston!

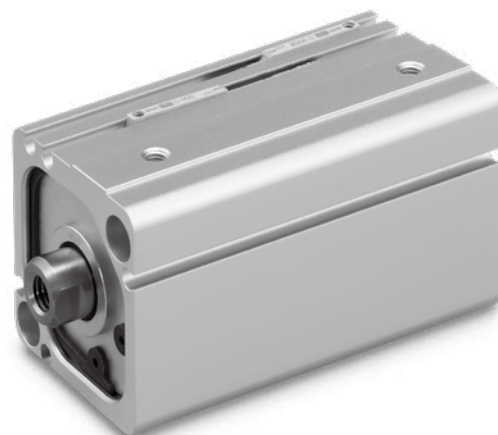


Weight	30%^{*1} reduction 199 g a 139 g
Height	15%^{*1} reduction 49.5 mm a 42 mm
Width	13%^{*1} reduction 45 mm a 39 mm
Overall length	11%^{*1} reduction 50 mm a 44.5 mm


*1 Compared with the CDQ2 series, ø32, 10 mm stroke

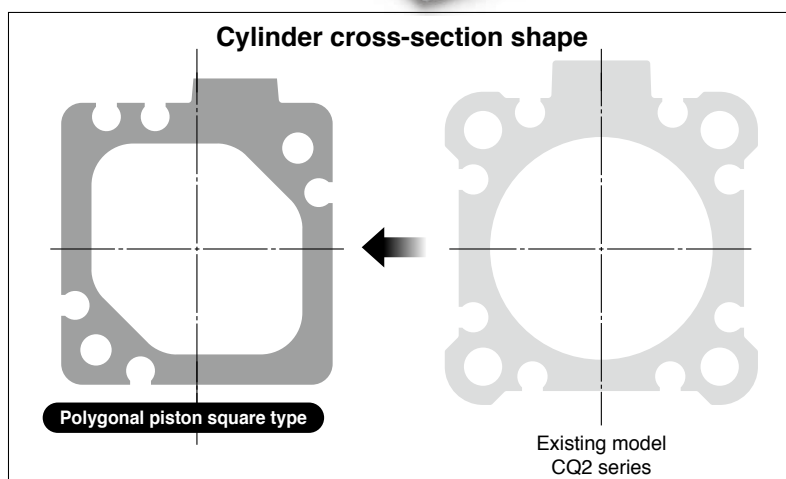

Shortened height
7.5 mm

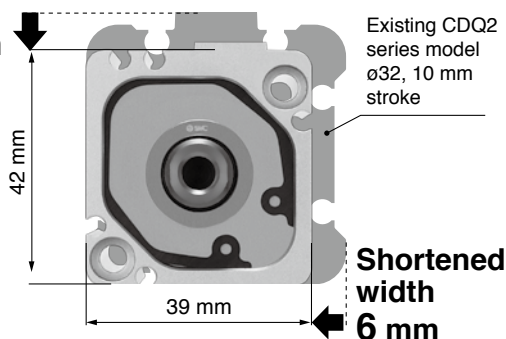


Polygonal piston square type
Size 32, 10 mm stroke

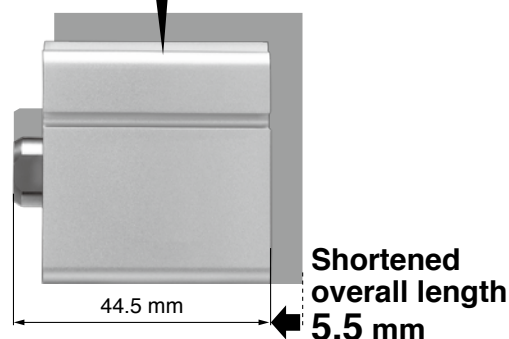

■ Small auto switches can be mounted on 4 surfaces.

Applicable auto switch: D-M9□



CDQ2B-X3162

CDQ2B-X3162

Specifications

Size	32 (Equiv. ø32 piston area)	40 (Equiv. ø40 piston area)	50 (Equiv. ø50 piston area)
Action	Double acting		
Fluid	Air		
Proof pressure	1.0 MPa		
Max. operating pressure	0.7 MPa*2		
Min. operating pressure	0.05 MPa		
Ambient and fluid temperatures	5 to 60°C		
Piston speed	50 to 500 mm/s	50 to 300 mm/s*2	
Cushion	Rubber bumper		
Lubrication	Not required (Non-lube)		
Stroke length tolerance	^{+1.3} ₀ mm*1		
Allowable kinetic energy	0.15 J	0.26 J	0.46 J

*1 Stroke length tolerance does not include the amount of bumper change.

Depending on the system configuration selected, the specified speed may not be satisfied.

*2 Maximum operating pressure and piston speed are different from the existing product (CQ2 series).

Theoretical Output

Size	Rod operating direction	Piston area [mm²]	Operating air pressure [MPa]					
			0.2	0.3	0.4	0.5	0.6	0.7
32	IN	691	138	207	276	345	415	484
	OUT	804	161	241	322	402	482	563
40	IN	1102	220	331	441	551	661	771
	OUT	1256	251	377	502	628	754	879
50	IN	1709	342	512	683	854	1025	1196
	OUT	1963	393	589	785	982	1178	1374

* Theoretical output [N] = Pressure [MPa] x Piston area [mm²]

Dimensions

Size	A	B	C	D	E	EA	F	H	J	K	L	M	N	O	P	Q	X	Z
32	34.5	29.5	12	12	39	40.5	8.5	M6 x 1.0	1.5	10	5	29	4.5	8 depth 6	M5 x 0.8	10	5.5	12.4
40	42	36	13	14	46	48.2	10	M8 x 1.25	0.8	12	6	35	5.5	9 depth 7	M5 x 0.8	15.5	7	12.4
50	49.5	41.5	15	18	55	58.2	11.5	M10 x 1.5	2.3	16	8	42	6.6	11 depth 8	Rc1/8	17.5	10	15

Compact Cylinder/ Polygonal Piston Rectangle Type

RoHS

Size: 32, 40, 50




Now, more compact and lightweight due to the adoption of a polygonal piston!
The same height as the existing model but with reduced width and overall length




Weight	28%^{*1} reduction 278 g → 200 g
Width	27%^{*2} reduction 45 mm → 33 mm
Overall length	7%^{*2} reduction 50 mm → 46.5 mm

*1 Compared with the CDQ2 series, ø32, 30 mm stroke

*2 Compared with the CDQ2 series, ø32, 10 mm stroke

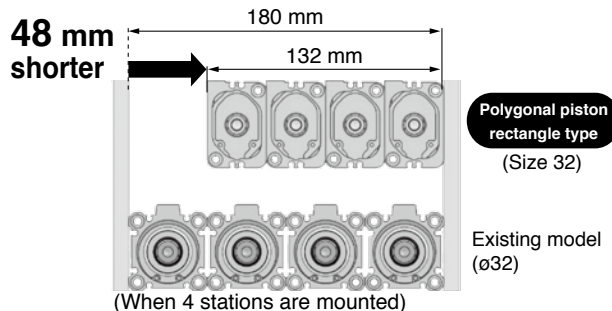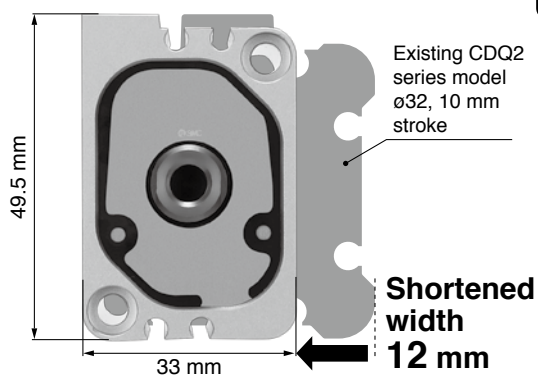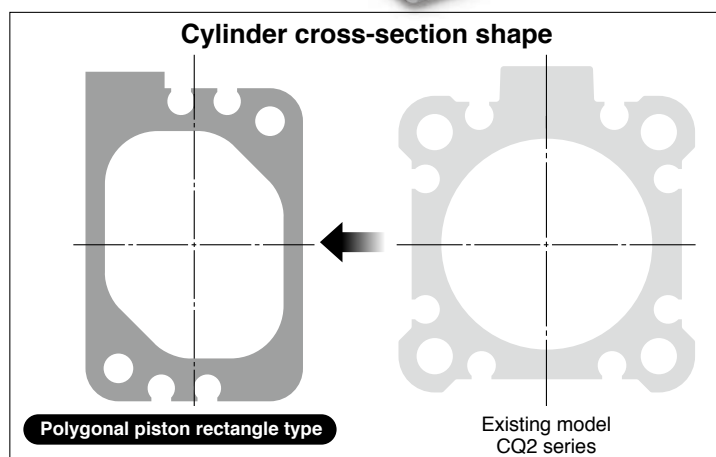


Polygonal piston rectangle type
Size 32, 10 mm stroke

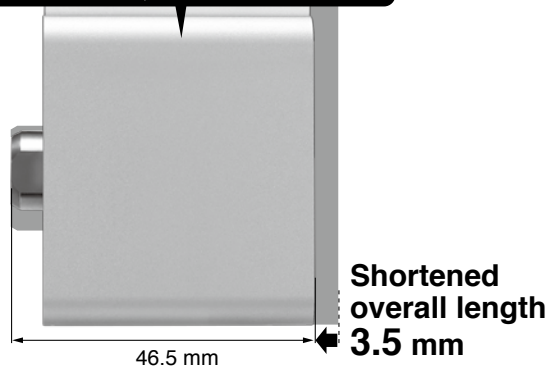

Small auto switches can be mounted on 2 surfaces.

Applicable auto switch: D-M9□



CDQ2B-X3164

CDQ2B-X3164

Specifications

Size	32 (Equiv. ø32 piston area)	40 (Equiv. ø40 piston area)	50 (Equiv. ø50 piston area)
Action	Double acting		
Fluid	Air		
Proof pressure	1.0 MPa		
Max. operating pressure	0.7 MPa*2		
Min. operating pressure	0.05 MPa		
Ambient and fluid temperatures	5 to 60°C		
Piston speed	50 to 500 mm/s	50 to 300 mm/s*2	
Cushion	Rubber bumper		
Lubrication	Not required (Non-lube)		
Stroke length tolerance	^{+1.3} ₀ mm*1		
Allowable kinetic energy	0.15 J	0.26 J	0.46 J

*1 Stroke length tolerance does not include the amount of bumper change.


Depending on the system configuration selected, the specified speed may not be satisfied.

*2 Maximum operating pressure and piston speed are different from the existing product (CQ2 series).

Standard Strokes

Size	Standard stroke
32	10, 20, 30, 40, 50
40	
50	


Theoretical Output



Size	Rod operating direction	Piston area [mm²]	Operating air pressure [MPa]					
			0.2	0.3	0.4	0.5	0.6	0.7
32	IN	693	139	208	277	346	416	485
	OUT	806	161	242	322	403	484	564
40	IN	1104	221	331	442	552	662	773
	OUT	1258	252	377	503	629	755	881
50	IN	1707	341	512	683	853	1024	1195
	OUT	1961	392	588	784	981	1177	1373

* Theoretical output [N] = Pressure [MPa] x Piston area [mm²]

Dimensions

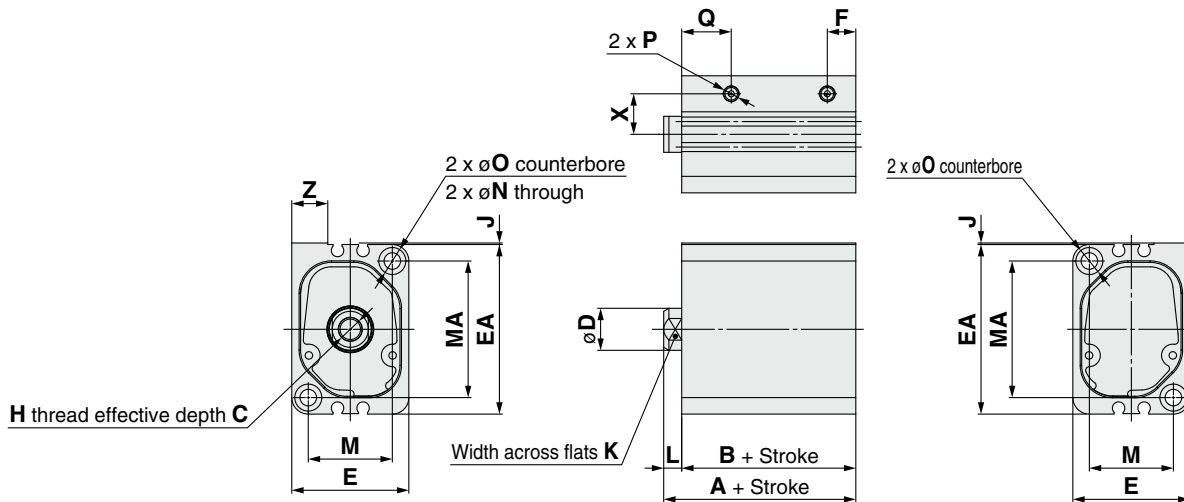

Size	A	B	C	D	E	EA	F	H	J	K	L	M	MA	N	O	P	Q	X	Z
32	36.5	31.5	12	12	33	47.5	8.5	M6 x 1.0	2	10	5	23	37.5	4.5	8 depth 6	M5 x 0.8	12.5	10.3	12
40	44	38	13	14	39	56.5	9.5	M8 x 1.25	0.5	12	6	28	45.5	5.5	9 depth 7	M5 x 0.8	16.5	13.5	12
50	51.5	43.5	15	18	48	68.5	11.5	M10 x 1.5	2.5	16	8	35	55.5	6.6	11 depth 8	Rc1/8	19.5	16.5	15




Compact Cylinder/Double Force Type

RoHS

Size: 45, 57, 71

This product is capable of providing double the force of the CQ2 series, without changing the width, due to the adoption of a rectangular piston.

- * Comparison with dual stroke cylinders satisfying the following conditions: a cylinder of the same width with double the theoretical output.
- * The width of the CQ2 standard model and the CQ2 dual stroke cylinder are the same.

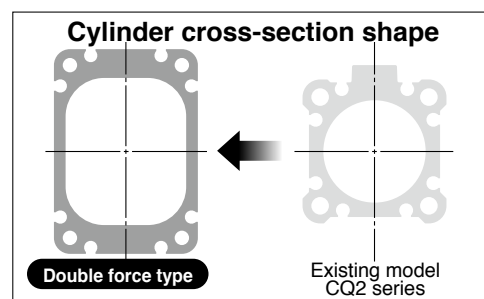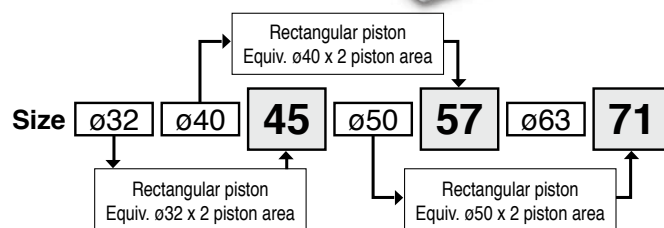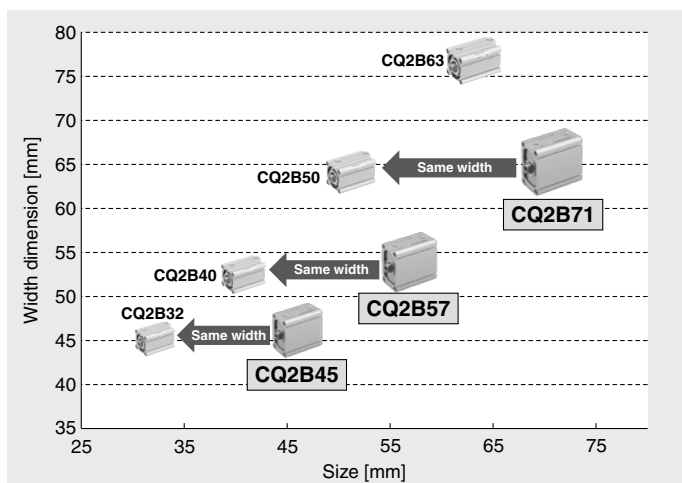


Weight **51%^{*1} reduction**
648 g → 317 g


Overall length **50%^{*1} reduction**
130.5 mm → 65 mm

*1 Comparison with the existing model (CDQ2B32-25+0DCZ-XC11 Dual stroke cylinder)

Width comparison

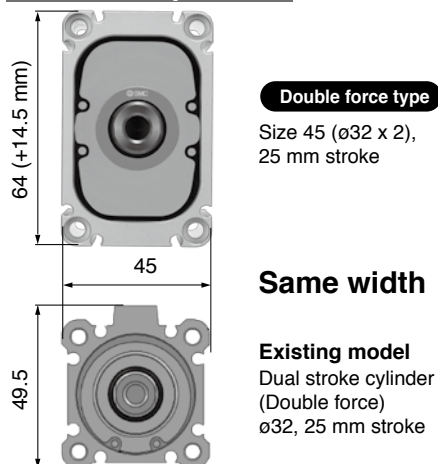


Overall length comparison

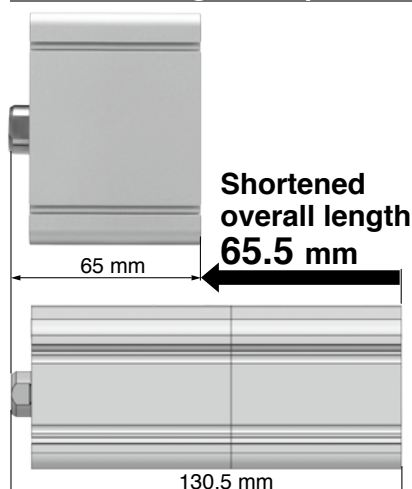


Dual stroke cylinder/ Double force

When air pressure is supplied to the A and C ports at the same time, double the force can be obtained.



Small auto switches can be mounted on 4 surfaces.

Applicable auto switch: D-M9□

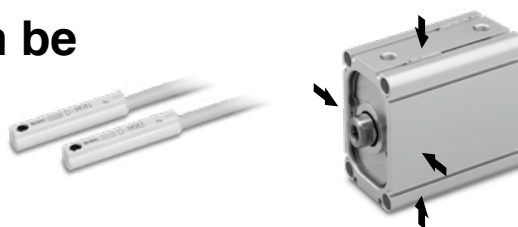

CDQ2B-X3166

CDQ2B-X3166

Specifications

Size	45 (Equiv. $\phi 32 \times 2$ piston area)	57 (Equiv. $\phi 40 \times 2$ piston area)	71 (Equiv. $\phi 50 \times 2$ piston area)
Action	Double acting		
Fluid	Air		
Proof pressure	1.0 MPa		
Max. operating pressure	0.7 MPa*2		
Min. operating pressure	0.05 MPa		
Ambient and fluid temperatures	5 to 60°C		
Piston speed	50 to 300 mm/s*2		
Cushion	Rubber bumper		
Lubrication	Not required (Non-lube)		
Stroke length tolerance	$^{+1.3}_0$ mm*1		
Allowable kinetic energy	0.26 J	0.46 J	0.77 J

*1 Stroke length tolerance does not include the amount of bumper change.


Depending on the system configuration selected, the specified speed may not be satisfied.

*2 Maximum operating pressure and piston speed are different from the existing product (CQ2 series).

Standard Strokes

Size	Standard stroke
45	25, 50
57	
71	


Theoretical Output



Size	Piston area [mm ²]	Rod operating direction	Operating air pressure [MPa]					
			0.2	0.3	0.4	0.5	0.6	0.7
45	1457	IN	291	437	583	729	874	1020
	1611	OUT	322	483	644	806	967	1128
57	2262	IN	452	678	905	1131	1357	1583
	2516	OUT	503	755	1006	1258	1510	1761
71	3548	IN	710	1064	1419	1774	2129	2484
	3928	OUT	786	1178	1571	1964	2357	2750


* Theoretical output [N] = Pressure [MPa] x Piston area [mm²]

Dimensions

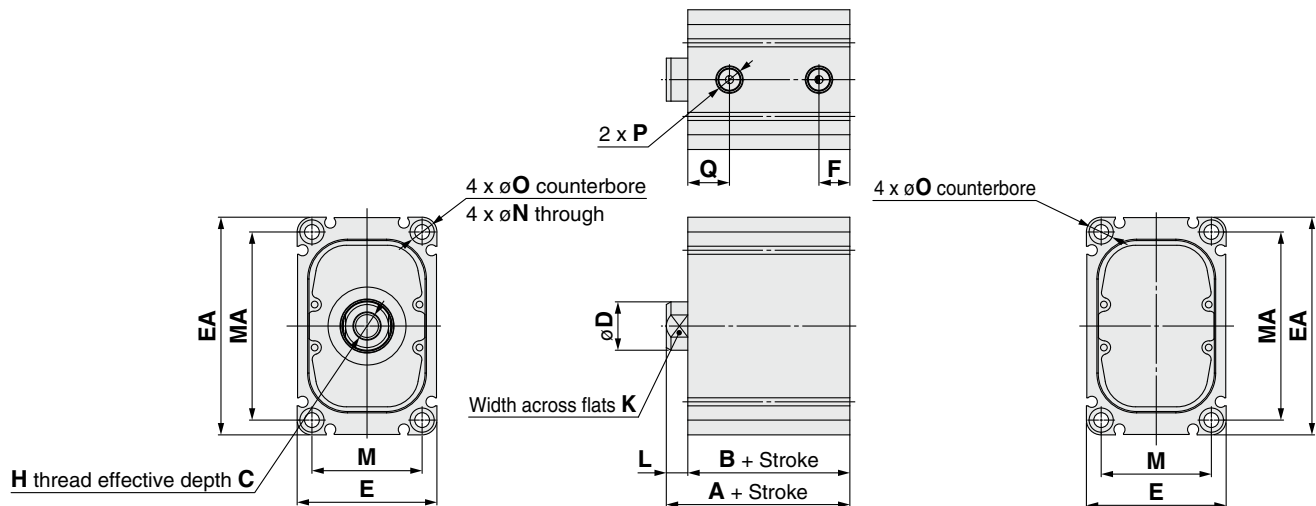

Size	A	B	C	D	E	EA	F	H	K	L	M	MA	N	O	P	Q
45	40.3	34.3	13	14	45	64	10	M8 x 1.25	12	6	35	54	4.5	8 depth 6	Rc1/8	12.5
57	48.3	40.3	15	18	52	81	11.5	M10 x 1.5	16	8	41	70	5.5	9 depth 7	Rc1/8	15.5
71	53.6	44.6	21	22	64	97	14.5	M14 x 2.0	19	9	51	84	6.6	11 depth 8	Rc1/8	17

Square Shape Compact Cylinder

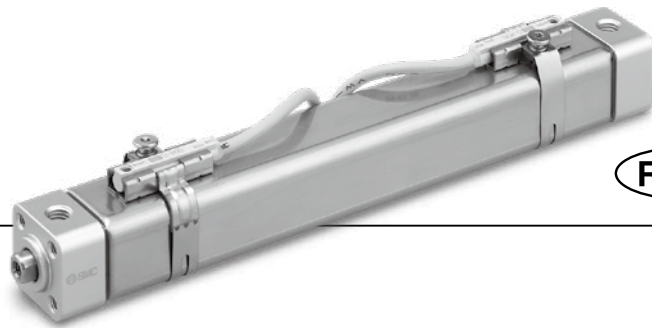

RoHS

Size 20



Now, more compact and lightweight due to the adoption of a square shape piston!

Weight **59% reduction**
170 g → 70 g


Overall length **25% reduction**
132 mm → 99.5 mm

Width Height **23% reduction**
24 mm → 18.4 mm

* Compared with the existing CM2 series model, ø20, 50 mm stroke, Boss-cut, Female rod end

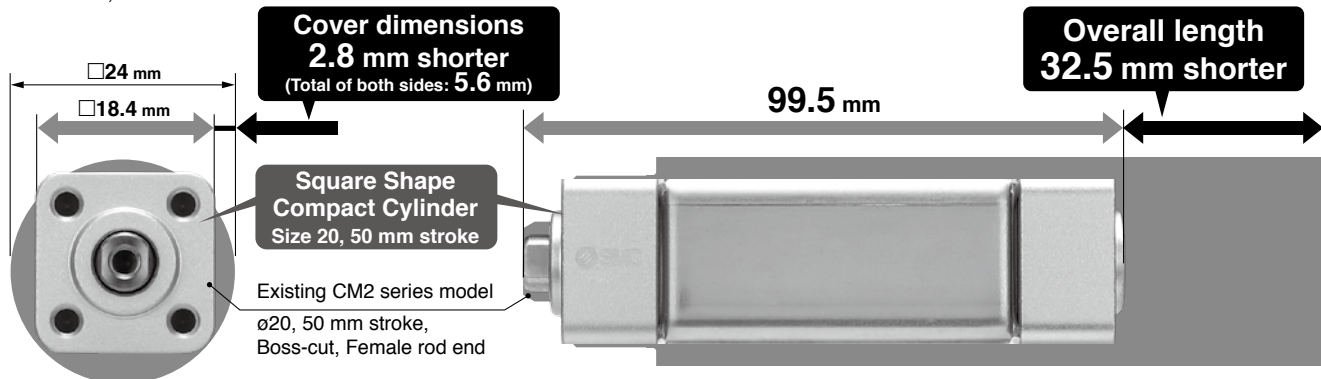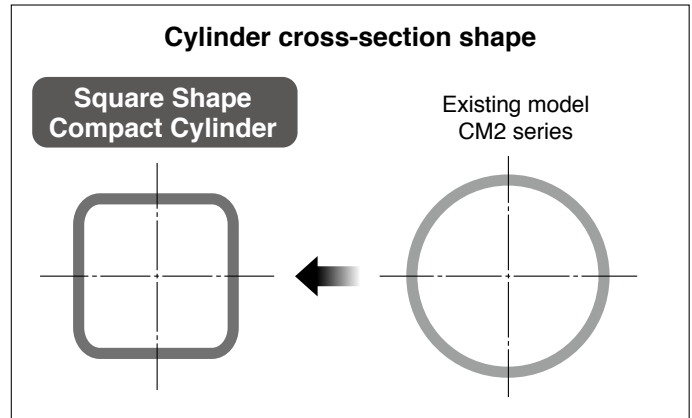


■ **Reduced cover dimensions (1 size smaller than the existing model) but with increased output**

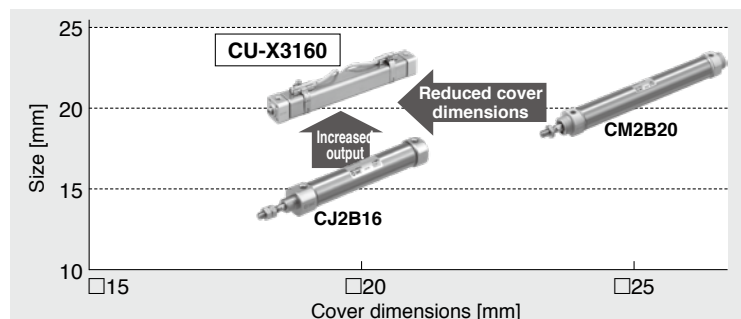

■ **Small auto switches can be mounted on 4 surfaces.**

Applicable auto switch: D-M9□

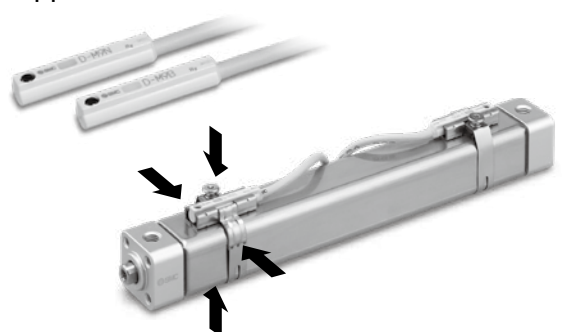

CU-X3160

Specifications

Size	20 (Equiv. ø20 piston area)
Action	Double acting, Single rod
Fluid	Air
Proof pressure	1.0 MPa
Max. operating pressure	0.7 MPa
Min. operating pressure	0.05 MPa
Ambient and fluid temperatures	Without auto switch: 5 to 70°C With auto switch : 5 to 60°C (No freezing)
Lubrication	Not required (Non-lube)
Piston speed	50 to 500 mm/s
Stroke length tolerance	+2.0 *1 0
Cushion	Rubber bumper
Allowable kinetic energy	0.11 J
Port size	M5
Mounting	Basic (Female threads on both covers)

*1 Stroke length tolerance does not include the amount of bumper change.

Depending on the system configuration selected, the specified speed may not be satisfied.

Standard Strokes


Size	Standard stroke [mm]
20	25, 50, 75, 100, 125, 150

Theoretical Output


Size	Rod operating direction	Piston area [mm ²]	Operating air pressure [MPa]						
			0.2	0.3	0.4	0.5	0.6	0.7	
20	IN	257	51	77	103	128	154	179	
	OUT	285	57	85	114	142	171	199	

* Theoretical output [N] = Pressure [MPa] x Piston area [mm²]

Dimensions

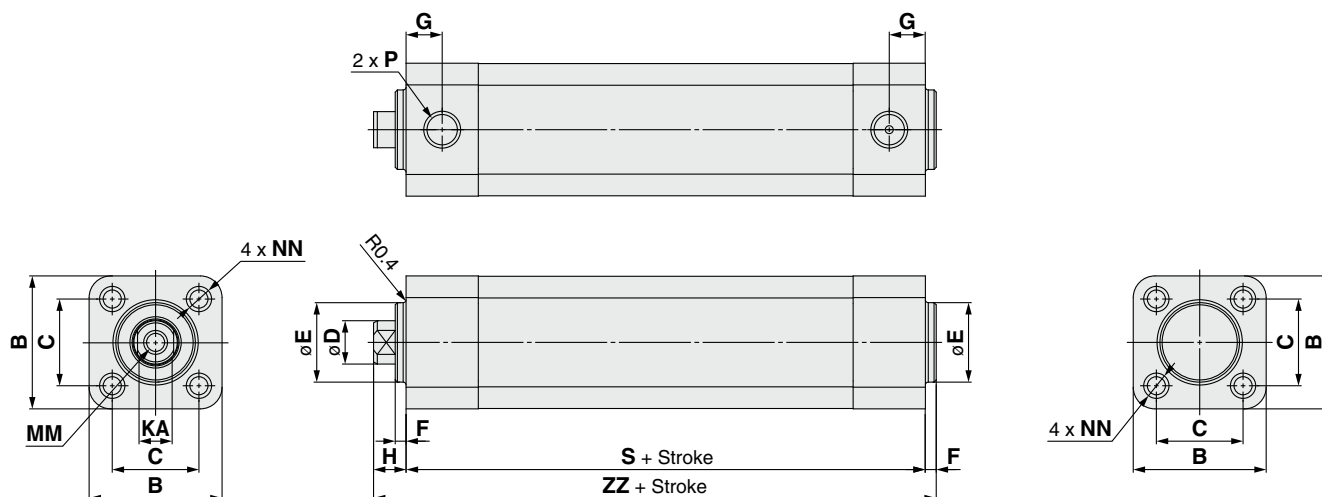

Auto switch bracket dimensions

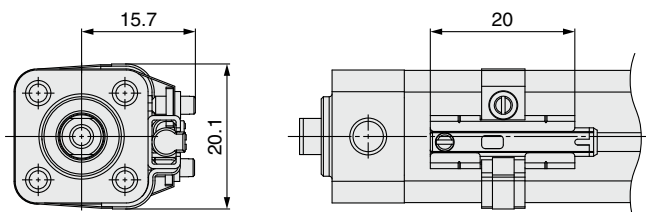

Size	B	C	D	E	F	G	H	KA	NN	MM	P	S	ZZ
20	18.4	12	6	11	1.5	5	4.5	5	M3 x 0.5 depth 5	M3 x 0.5 depth 6	M5 x 0.8	43.5	49.5


Air Cylinder CJ2 Compact Type

RoHS

ø10, ø16

Compact

Lightweight

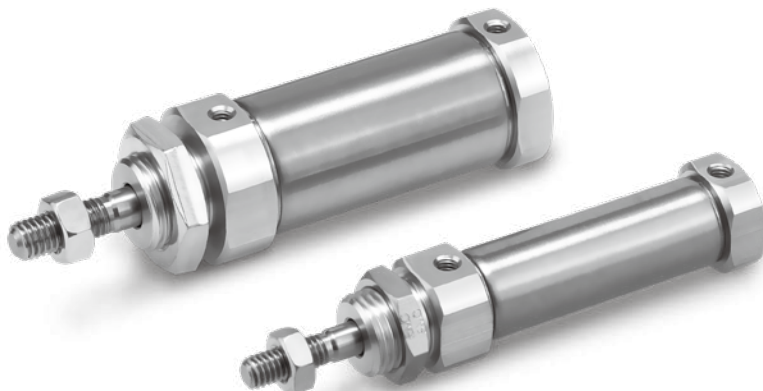


Overall length

Max. **25%** reduction

Overall length comparison (15 mm stroke, Without auto switch magnet) [mm]

Bore size	New CJ2	Existing model CJ2	Reduction	Reduction rate [%]
10	67	89	22	25
16	69.5	90	20.5	23

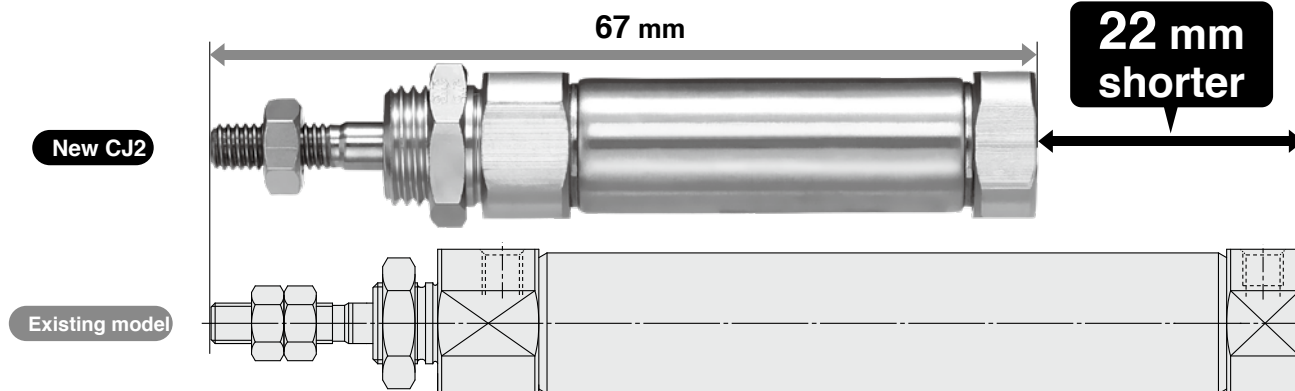

Weight

Max. **27%** reduction


Weight comparison (15 mm stroke, Without auto switch magnet) [g]

Bore size	New CJ2	Existing model CJ2	Reduction	Reduction rate [%]
10	19	26	7	27
16	41	54	13	24

■ New rail type auto switch mounting bracket

Applicable to the D-M9□ (Direct mounting possible)

* An auto switch with a reduced overall length is available upon request.
(Produced upon receipt of order)
Please contact your local sales representative for more details.

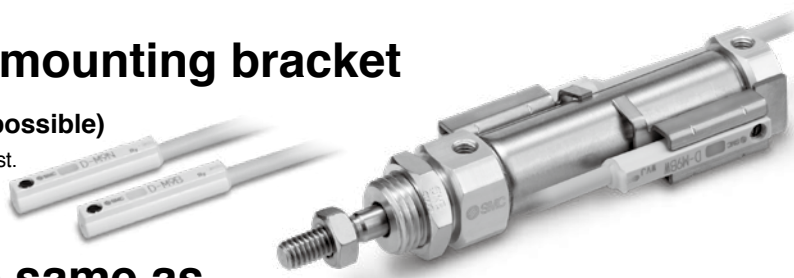

■ The specifications are the same as those of the existing CJ2 series.

CJ2-X3175


Specifications

Bore size [mm]	10	16
Action	Double acting, Single rod	
Fluid	Air	
Proof pressure	1 MPa	
Max. operating pressure	0.7 MPa	
Min. operating pressure	0.06 MPa	
Ambient and fluid temperatures	Without auto switch: -10°C to 70°C With auto switch : -10°C to 60°C (No freezing)	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J
Stroke length tolerance	+1.0 0	

Standard Strokes

Bore size	Standard stroke [mm]
10, 16	15, 30, 45, 60, 75, 100

Dimensions

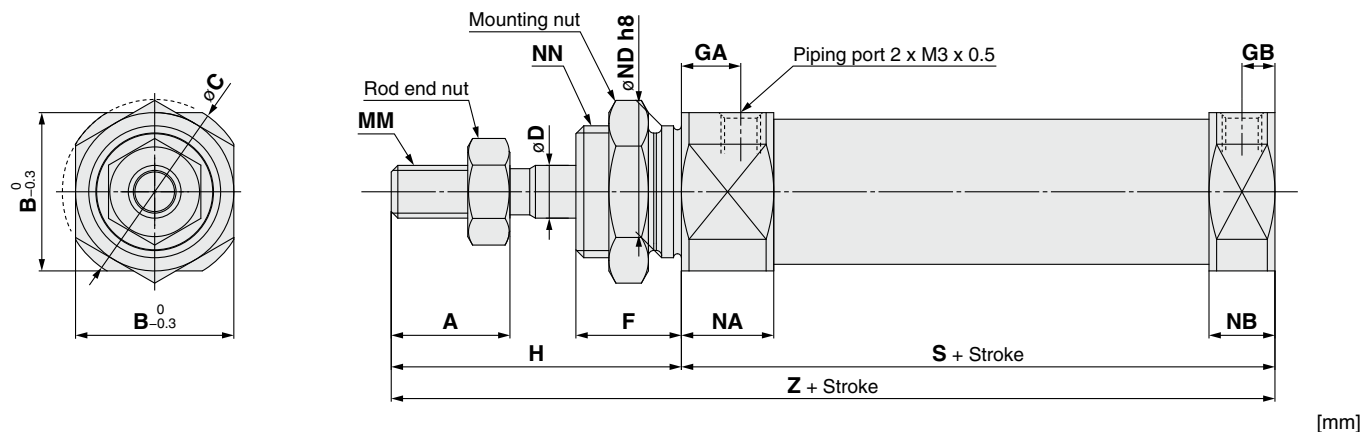

Bore size	A	B	C	D	F	GA	GB	H	MM	NA	NB	ND h8	NN	Without auto switch		With auto switch	
														S	Z	S	Z
10	9	12	14	4	8	4.5	2.5	22	M4 x 0.7	7	5	10 ⁰ _{-0.022}	M10 x 1.0	30	52	34	56
16	11	18.3	20	5	8	4.5	2.5	24	M5 x 0.8	7	5	12 ⁰ _{-0.027}	M12 x 1.0	30.5	54.5	35.5	59.5

* The rod end nut and mounting nut come with the product.
If they are required separately, order according to the details below.
Rod end nut: ø10: **NTJ-010C**, ø16: **NTJ-015C**
Mounting nut: ø10: **SNPS-006**, ø16: **SNKJ-016C**

⚠ Specific Product Precautions

⚠ Caution

1. Do not apply external force to the auto switch mounting rail.


Doing so may cause the rail to become deformed, resulting in auto switch malfunction. In addition, repeatedly bending or stretching the lead wires may also result in malfunction.

Air Cylinder/Compact Type

RoHS



Size: 40, 63

Now, more compact and lightweight due to the adoption of a octagonal piston!

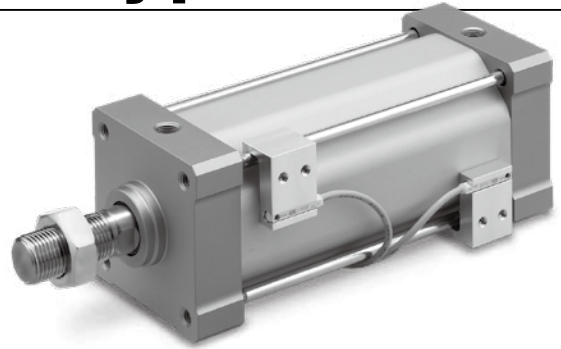


Weight	35% reduction 750 g → 487 g
Overall length	16% reduction 189 mm → 158 mm
Height Width	10% reduction 52 mm → 47 mm

* Compared with the MB series, ø40, 50 mm stroke

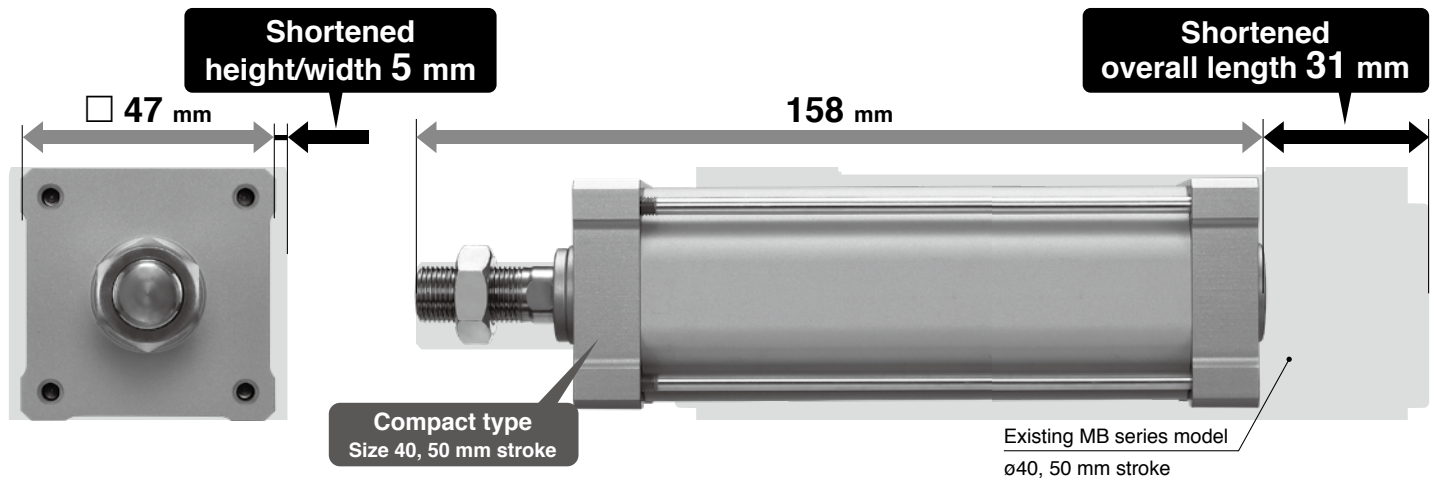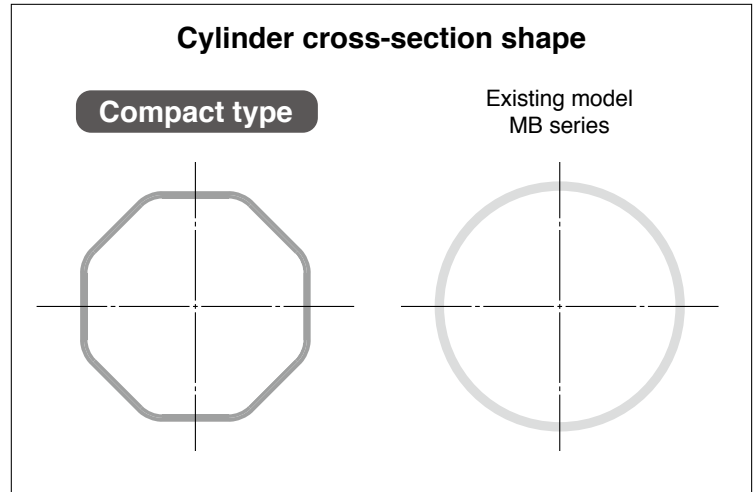

- Small auto switches can be mounted on 4 surfaces.
(Tie-rod mounting)

Applicable auto switch: D-M9□

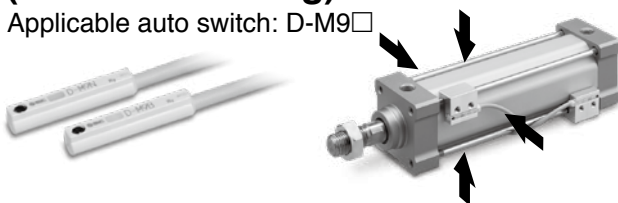

- Air cushion adjustment is not required due to the non-adjustable air cushion.

The built-in rubber bumper reduces the metal noise that occurs when the piston stops.

- Cover shape that prevents foreign matter accumulation

MB-X3155

Specifications

Size	40 (Equiv. ø40 piston area)	63 (Equiv. ø63 piston area)
Action	Double acting, Single rod	
Proof pressure	1.0 MPa	
Max. operating pressure	0.7 MPa* ¹	
Min. operating pressure	0.05 MPa	
Ambient and fluid temperatures	5 to 60°C	
Lubrication	Not required (Non-lube)	
Piston speed	50 to 500 mm/s* ¹	
Stroke length tolerance	$^{+2.0}_{0}$ mm	
Cushion	Non-adjustable air cushion + rubber bumper	
Port size	Rc1/8	
Stroke	50 to 250 mm (25 mm increments)	
Mounting	None (Basic type only)	
Allowable kinetic energy	1.2 J	3.4 J

Depending on the system configuration selected, the specified speed may not be satisfied.

*¹ Maximum operating pressure and piston speed are different from the existing product (MB series).

Standard Strokes

Size	Standard stroke [mm]
40	50, 75, 100, 125, 150,
63	175, 200, 225, 250


Theoretical Output





								[N]
Size	Rod operating direction	Piston area [mm²]	Operating pressure [MPa]					
			0.2	0.3	0.4	0.5	0.6	0.7
40	IN	1108	222	332	443	554	665	776
	OUT	1262	252	379	505	631	757	884
63	IN	2858	572	857	1143	1429	1715	2000
	OUT	3112	622	934	1245	1556	1867	2178

* Theoretical output [N] = Pressure [MPa] x Piston area [mm²]

Dimensions

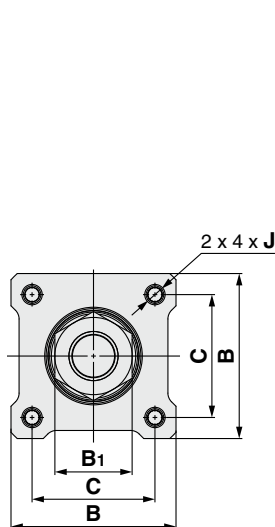

Auto switch bracket dimensions

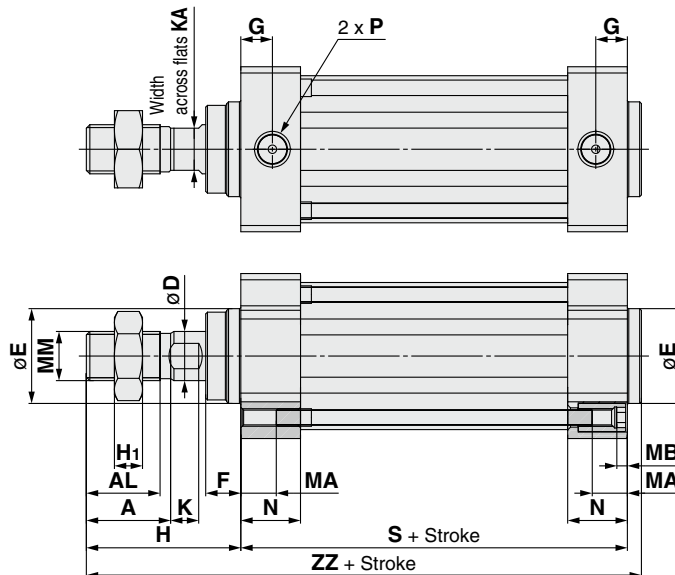

Size	A	AL	B	B1	C	D	E	F	G	H	H1	J	K	KA	MA	MB	MM	N	P	S	ZZ	Hs	Ht
40	24	21	47	22	35	14	27	10	9	44	8	M5 x 0.8	8	12	9	3	M14 x 1.5	17	Rc1/8	60	108	26.5	23.8
63	35	32	69	27	53	18	31	8	11	51	11	M6 x 1.0	7	16	10	3.5	M18 x 1.5	20	Rc1/8	67	122	40.4	32.5

Air Cylinder/Double Force Type





RoHS

Size: 57

This product is capable of providing double the force of the MB series, without changing the width, due to the adoption of a rectangular piston.

* Comparison with tandem cylinders satisfying the following conditions: a cylinder of the same width with double the theoretical output.

* The width of the MB standard model and the MB tandem cylinder are the same.

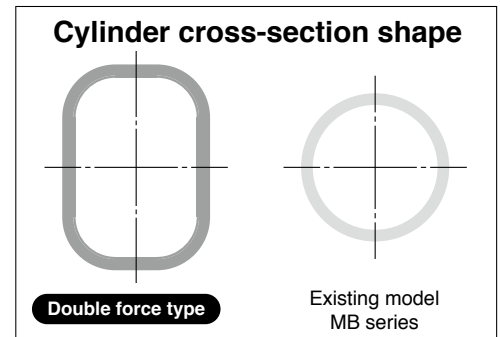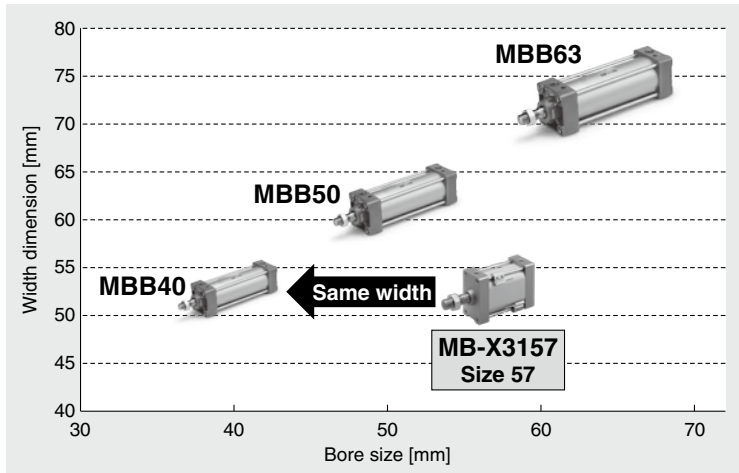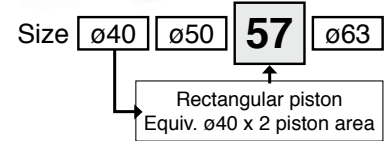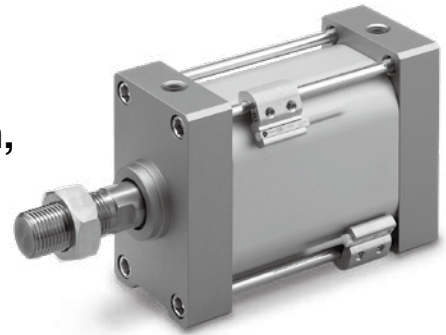




Overall length **47%^{*1} reduction**
335 mm → 179 mm

Weight **20%^{*1} reduction**
1500 g → 1200 g

*1 Compared with the existing tandem type cylinder -XC12 (double force), ø40, 50 mm stroke


Tandem cylinder (-XC12)/Double force

When air pressure is supplied to the A and C ports at the same time, double the force can be obtained for the extending operation.

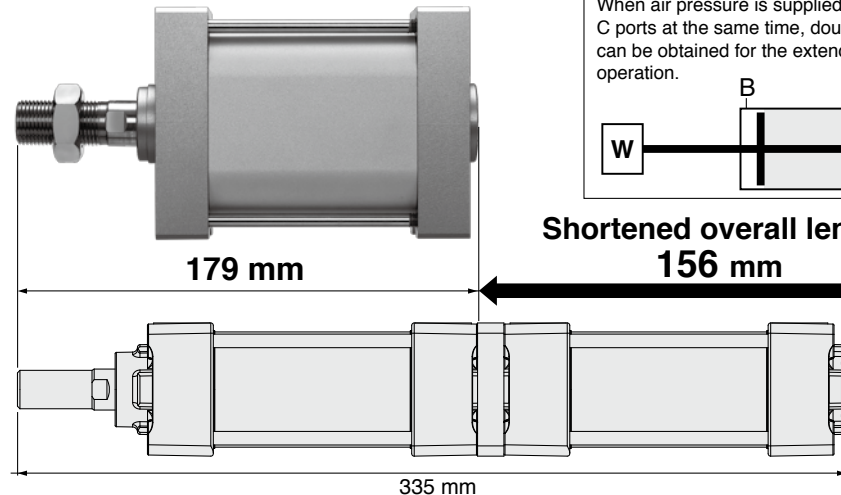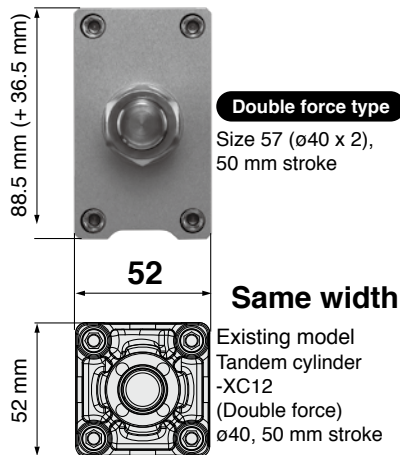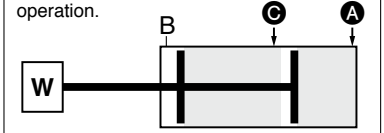

■ **Small auto switches can be mounted on 4 surfaces.**
(Tie-rod mounting)

Applicable auto switch: D-M9□



■ **Air cushion adjustment is not required due to the non-adjustable air cushion.**

The built-in rubber bumper reduces the metal noise that occurs when the piston stops.

■ **Cover shape that prevents foreign matter accumulation**

MB-X3157

Specifications

Size	57 (Equiv. $\phi 40 \times 2$ piston area)
Action	Double acting, Single rod
Proof pressure	1.0 MPa
Max. operating pressure	0.7 MPa*1
Min. operating pressure	0.05 MPa
Ambient and fluid temperatures	5 to 60°C
Lubrication	Not required (Non-lube)
Piston speed	50 to 500 mm/s*1
Stroke length tolerance	$^{+2.0}_0$ mm
Cushion	Non-adjustable air cushion + rubber bumper
Port size	Rc1/8
Stroke	50 to 250 mm (25 mm increments)
Mounting	None (Basic type only)
Allowable kinetic energy	2.0 J

Depending on the system configuration selected, the specified speed may not be satisfied.

*1 Maximum operating pressure and piston speed are different from the existing product (MB series).

Standard Strokes

Size	Standard stroke [mm]
57	50, 75, 100, 125, 150, 175, 200, 225, 250

Theoretical Output




								[N]	
Size	Rod operating direction	Piston area [mm²]	Operating air pressure [MPa]						
			0.2	0.3	0.4	0.5	0.6	0.7	
57	IN	2262	452	678	905	1131	1357	1583	
	OUT	2516	503	755	1006	1258	1510	1761	

* Theoretical output [N] = Pressure [MPa] x Piston area [mm²]

Dimensions


Auto switch bracket dimensions

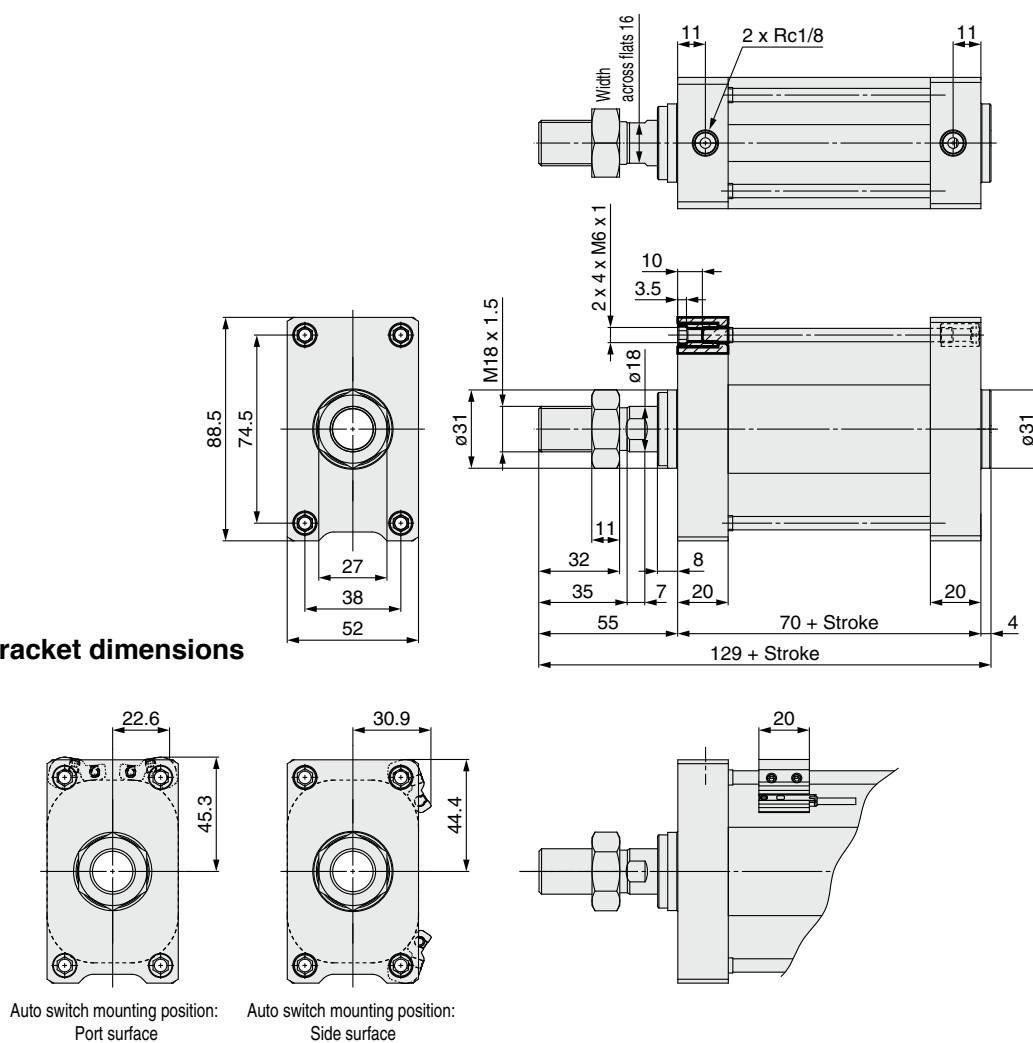

Free Mount Cylinder

Compact Type

RoHS

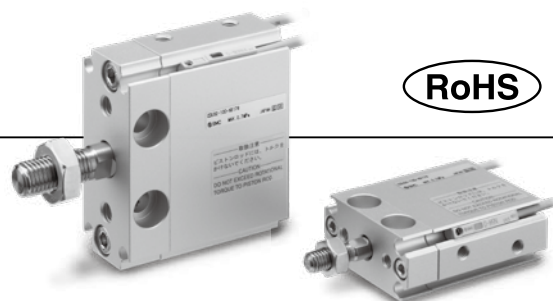

Size: 20, 32




Now, more compact and lightweight due to the adoption of a rectangular shape piston!

Weight **49% reduction**
389 g → 197 g


Width **35% reduction**
40 mm → 26 mm

Overall length **10% reduction**
89 mm → 80 mm

* Compared with the existing CU series model, ø32, 10 mm stroke

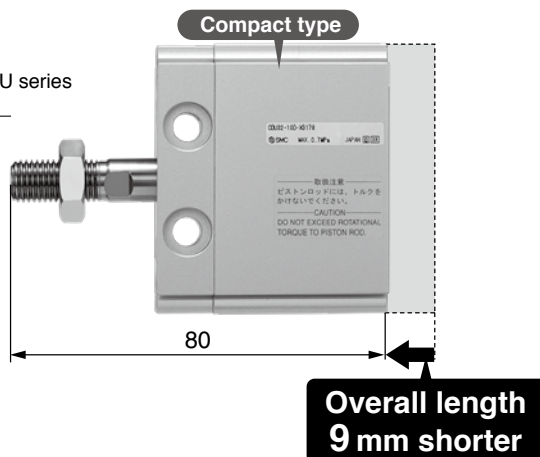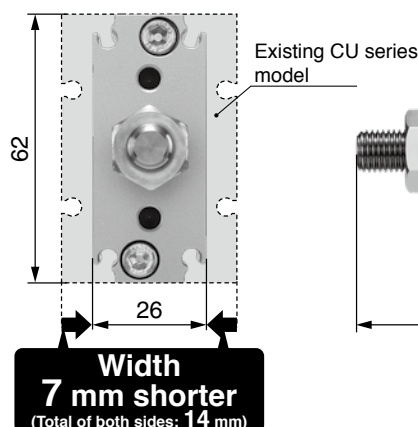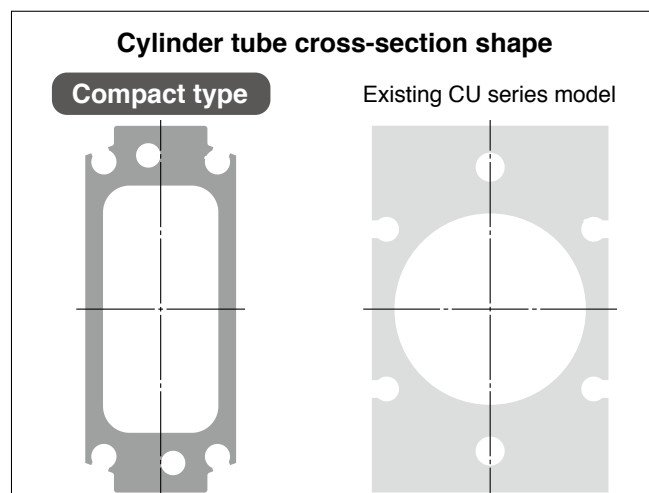


- **Mounting is possible from 5 directions.**
(The same as the existing CU series model)
The pitch and diameter of the mounting holes for lateral mounting are the same as those of the existing CU series model.

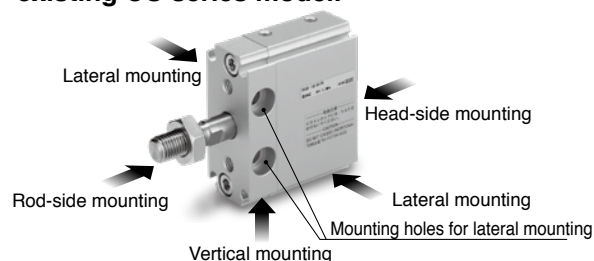

- **The dedicated spacer allows for interchangeable height when laterally mounted.**

When the dedicated spacer is used, the distance to the rod axis is the same as that on the existing model.

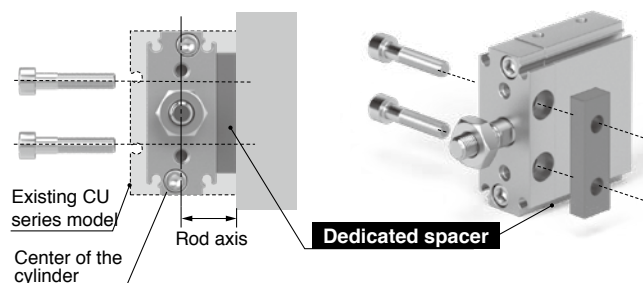


CDU-X3178

Specifications

Size	20 (Equiv. ø20 piston area)	32 (Equiv. ø32 piston area)
Fluid	Air	
Proof pressure	1.05 MPa	
Max. operating pressure	0.7 MPa	
Min. operating pressure	0.05 MPa	
Ambient and fluid temperatures	-10 to 60°C (No freezing)	
Lubrication	Non-lube	
Piston speed	50 to 500 mm/s	
Cushion	Rubber bumper	
Rod end thread	Male thread	
Stroke length tolerance	$\begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$ mm	
Rod non-rotating accuracy	$\pm 1^\circ$	$\pm 0.8^\circ$

* This is a non-rotating rod type cylinder.




Allowable Lateral Load at Rod End


Size	Stroke [mm]							
	5	10	15	20	25	30	40	50
20	3.0	2.7	2.5	2.3	2.1	2.0	1.8	1.6
32	7.1	6.6	6.1	5.7	5.4	5.1	4.6	4.1

Dimensions

Operating Speed

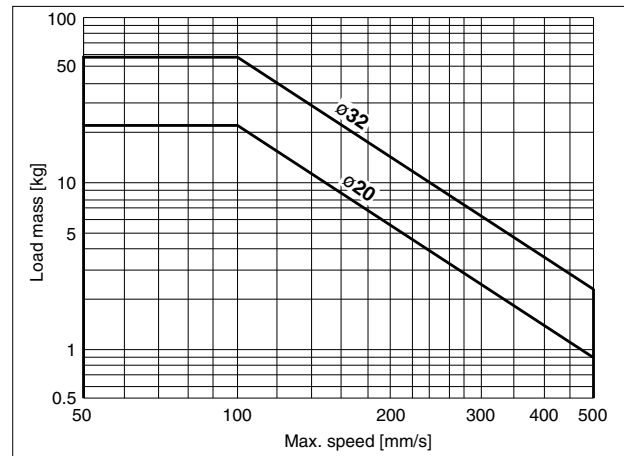

Be sure to connect a speed controller to the cylinder and adjust its speed to 500 mm/s or less. If a load is to be attached to the end of the rod, adjust the speed to the max. speed shown in the graph above or less, in accordance with the load mass.

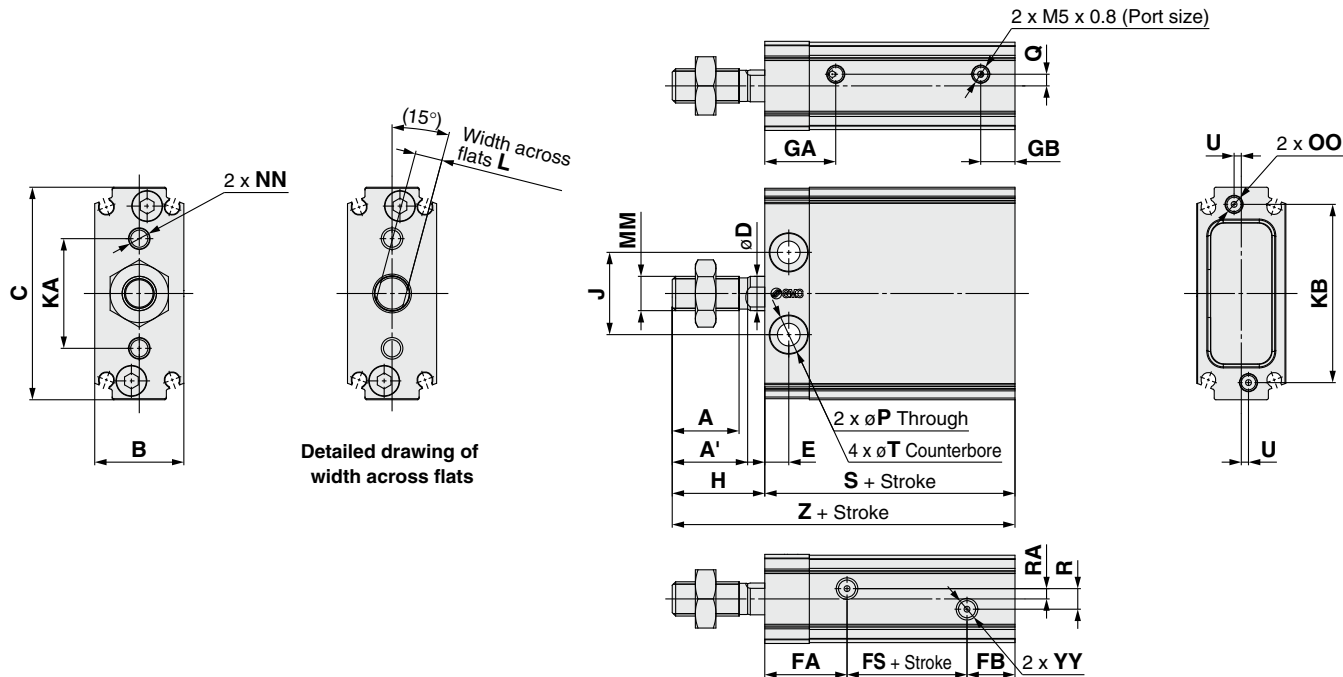


Size	A	A'	B	C	D	E	FA	FB	FS	GA	GB	H	J	KA	KB	L	MM
20	12	14	19	40	6	5.3	18.6	10.5	9	18	9.8	19	16	20.2	32.5	5	M6 x 1.0
32	19.5	22	26	62	10	7	24	14	5	20.7	10	27	24	32	52	8	M10 x 1.25

Size	NN			OO			P	Q	R	RA	T			U	YY			S	Z
20	M4 x 0.7 Depth 8			M4 x 0.7 Depth 5			5.5	1	3	1.5	9.3 Depth 5.4			1.3	M4 x 0.7 Depth 5			38	57
32	M6 x 1.0 Depth 12.5			M5 x 0.8 Depth 8			6.6	3.4	6	3	11 Depth 6.5			2.1	M6 x 1 Depth 6			43	70

⚠ Caution

When securing a workpiece to the end of the piston rod, ensure that the piston rod is fully retracted, and place a wrench on the portion of the rod that protrudes. Then, tighten without applying tightening torque to the piston rod.

Compact Guide Cylinder/ Rectangular Piston Type

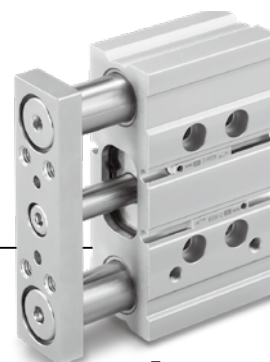

RoHS

Size: 25, 32

Now more lightweight and compact due to the adoption of a rectangular piston

Width **21%^{*1} reduction**
48 mm → 38 mm


Weight **37%^{*2} reduction**
3.29 kg → 2.07 kg

Overall length **7%^{*1} reduction**
100 mm → 93 mm


*1 Compared with the existing MGPM series model, ø32, 25 mm stroke

*2 Compared with the existing MGPM series model, ø32, 150 mm stroke


■ The allowable lateral load and the allowable kinetic energy are the same as those of the existing MGP series model.

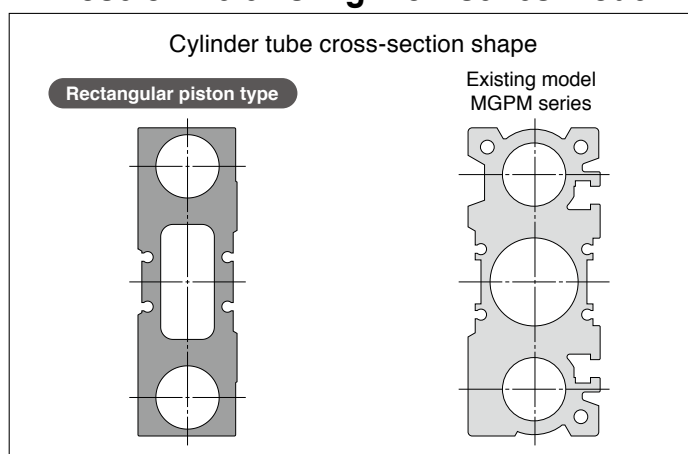

■ Shortened width

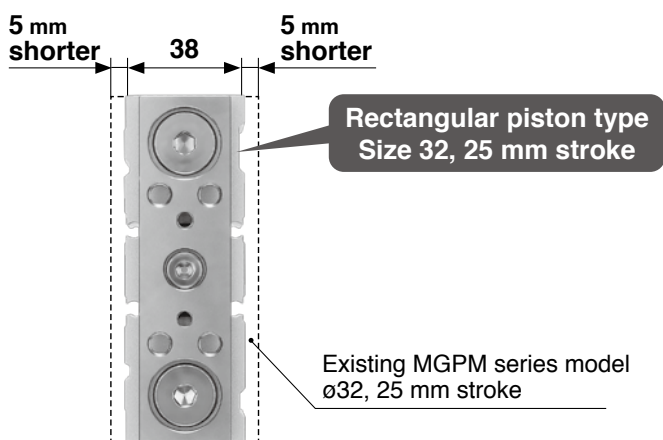


■ Shortened overall length

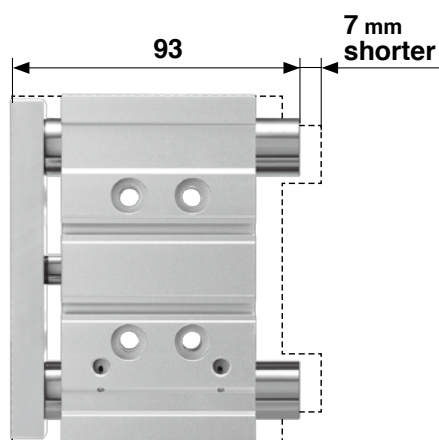

■ The allowable rotational torque of the plate and the non-rotating accuracy are the same as those of the existing MGP series model.

■ Mounting is possible from 3 directions.

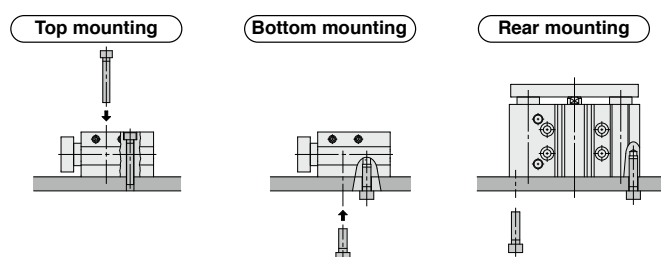

MGPM-X3159

MGPM-X3159




Specifications

Size	25 (Equiv. $\phi 25$ piston area)	32 (Equiv. $\phi 32$ piston area)
Action	Double acting	
Fluid	Air	
Proof pressure	1.05 MPa	
Max. operating pressure	0.7 MPa	
Min. operating pressure	0.1 MPa	
Ambient and fluid temperatures	5 to 60°C	
Piston speed	50 to 500 mm/s	
Cushion	Rubber bumper on both ends	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	$^{+1.5}_0$ mm	
Allowable kinetic energy	0.18 J	0.29 J
Allowable lateral load (at 50 stroke)	5.0 kg	16.7 kg

Standard Strokes

Size	Standard stroke [mm]
25	20, 30, 50, 100, 150
32	25, 50, 75, 100, 150


Theoretical Output



Size	Rod size [mm]	Operating direction	Piston area [mm ²]	Operating pressure [MPa]								
				0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
25	10	OUT	491	98	147	196	245	295	344	393	442	491
		IN	412	82	124	165	206	247	289	330	371	412
32	14	OUT	804	161	241	322	402	483	563	643	724	804
		IN	650	130	195	260	325	390	455	520	585	650


* Theoretical output [N] = Pressure [MPa] x Piston area [mm²]

Allowable Rotational Torque of Plate



Size	Stroke [mm]						
	20	25	30	50	75	100	150
25	1.76	—	1.55	1.25	—	2.57	2.02
32	—	6.35	—	5.13	5.69	4.97	3.98

Non-rotating Accuracy of Plate

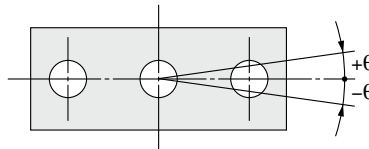


Non-rotating accuracy θ when retracted and when no load is applied should be not more than the values shown in the table.

Size	Non-rotating accuracy θ
25	$\pm 0.06^\circ$
32	$\pm 0.05^\circ$

Compact Guide Cylinder/Rectangular Piston Type **MGPM-X3159**

Dimensions

MGPM□-□-X3159

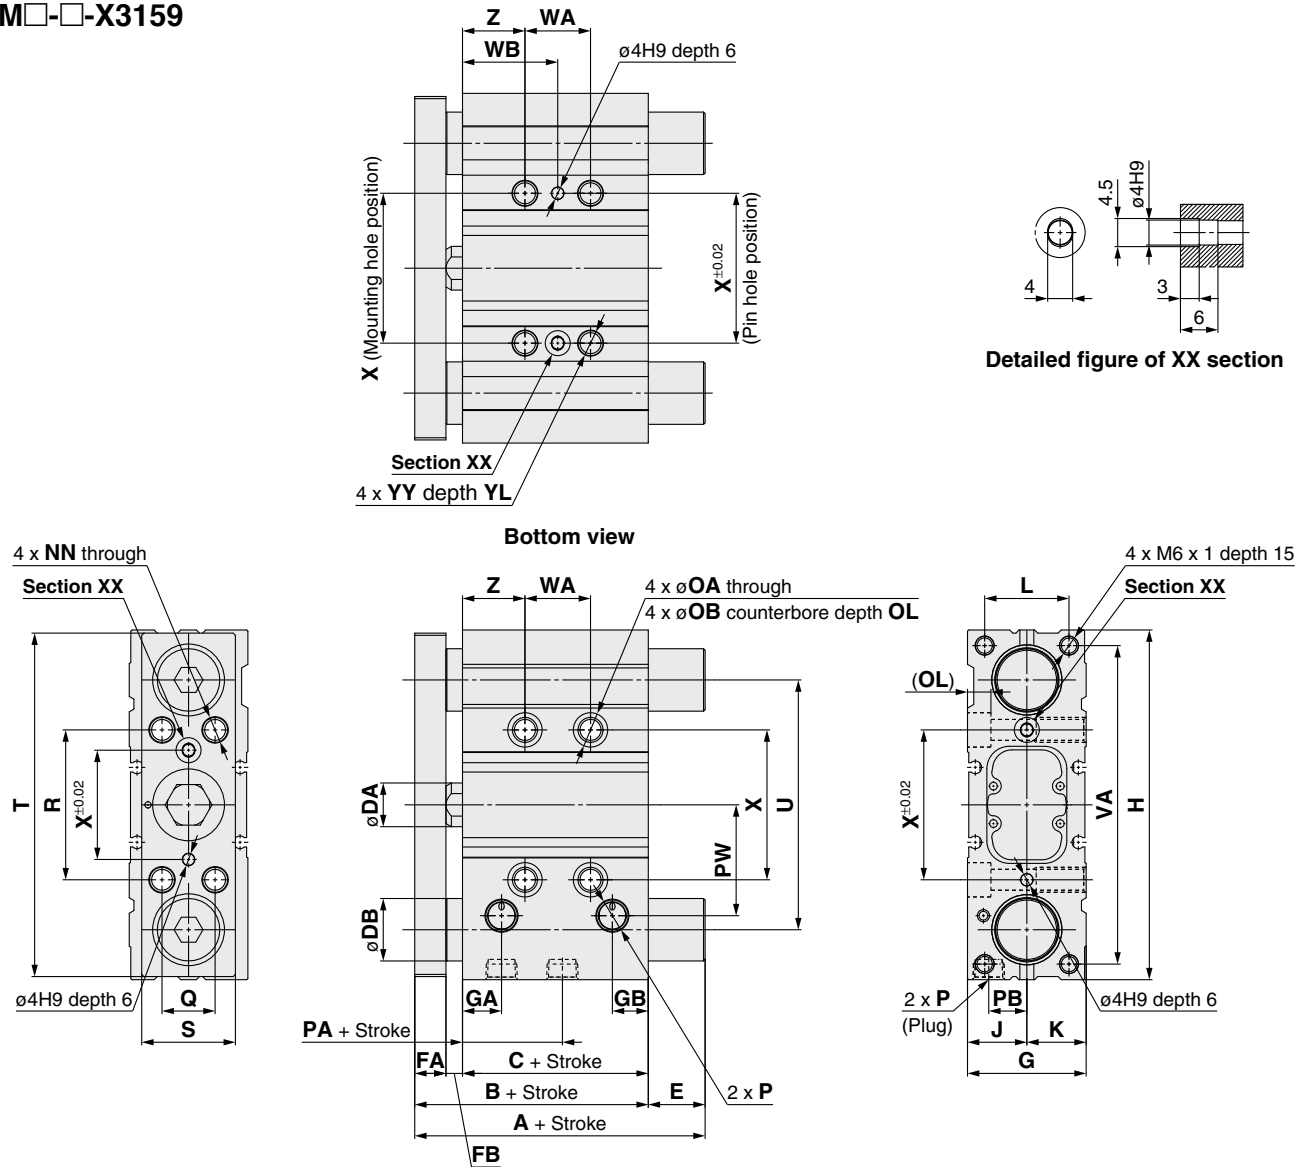

Size	Standard stroke	A		B	C	DA	DB	E		FA	FB	G	GA	GB	H	J	K
		50 st or less	Over 50 st 150 st or less					50 st or less	Over 50 st 150 st or less								
25	20, 30, 50, 100, 150	46	75.5	46	31.7	10	16	0	29.5	9	5.3	32	10.5	9.2	93	16	16
32	25, 50, 75, 100, 150	68	86.5	49.8	34.5	14	20	18.2	36.7	10	5.3	38	12.5	11.5	112	19	19

Size	L	NN	OA	OB	OL	P	PA	PB	PW	Q	R	S	T	U	VA	X	YY	YL	Z
25	22	M6 x 1	5.4	9.5	5.5	M5 x 0.8	9	11	26	13	39	25	91	66	84	39	M6 x 1	12	18
32	27	M8 x 1.25	6.7	11	7.5	Rc1/8	7	12	35.5	17	48	30	110	80	102	48	M8 x 1.25	16	20

Size	WA			WB		
	30 st or less	Over 30 st 100 st or less	Over 100 st 150 st or less	30 st or less	Over 30 st 100 st or less	Over 100 st 150 st or less
25	17	37	113	26.5	36.5	74.5

Size	WA				WB			
	25 st or less	Over 25 st 50 st or less	Over 50 st 100 st or less	Over 100 st 150 st or less	25 st or less	Over 25 st 50 st or less	Over 50 st 100 st or less	Over 100 st 150 st or less
32	21	45	49	125	30.5	42	44	82

UNIT CONVERSIONS

	unit	conversion	result
length	m	x 3.28	ft
	mm	x 0.04	in
mass	g	x 0.04	oz
volume	cm ³	÷ 16.387	in ³
	L	x 61.024	in ³
speed	mm/s	÷ 25.4	in/s
pressure	MPa	x 145	psi
	kPa	÷ 6.895	psi
temperature	°C	x1.8 then add 32	°F
torque	N·m	x 0.738	ft-lb
force	N	÷ 4.448	lbf
flow	L/min	÷ 28.317	cfm

Compact Cylinder Air-saving Type/ Polygonal Piston Square Type

RoHS

Size: 32, 40, 50




Air saving and more compact!
Improvements due to the adoption of a built-in exhaust return circuit and a polygonal piston

Air saving (Built-in exhaust return circuit)

Air consumption

Max. 46% reduction

- Uses the air exhausted from the extension side to supply the retraction side, thus reusing the air (Built-in exhaust return circuit)
- Reduce air consumption just by piping to the product

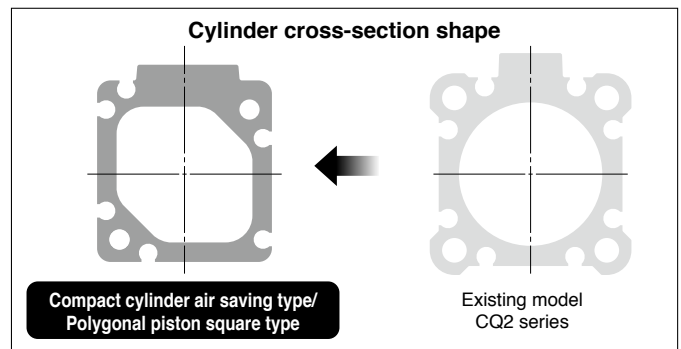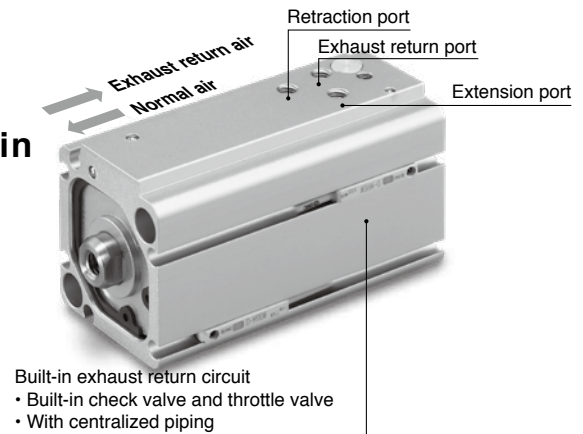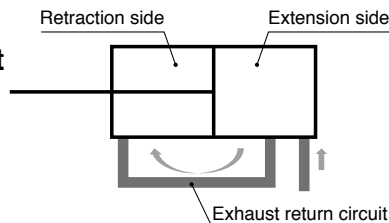

Compact (Now with a polygonal piston)

Width

13%^{*1} reduction
45 mm → 39 mm

Height

11%^{*1} reduction
49.5 mm → 44 mm

Overall length

11%^{*1} reduction
50 mm → 44.5 mm


*1 Compared with the CDQ2 series, ø32, 10 mm stroke
The overall length of size 50 is 1 mm longer than that of the existing CQ2 model.

■ With rubber bumper


■ Small auto switches can be mounted on 4 surfaces.

Applicable auto switch: D-M9□

Height reduced by
5.5 mm

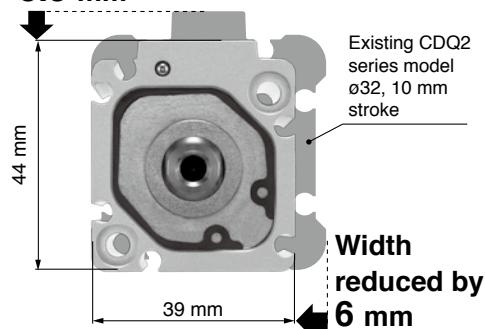

Compact cylinder air saving type/
Polygonal piston square type
Size 32, 10 mm stroke

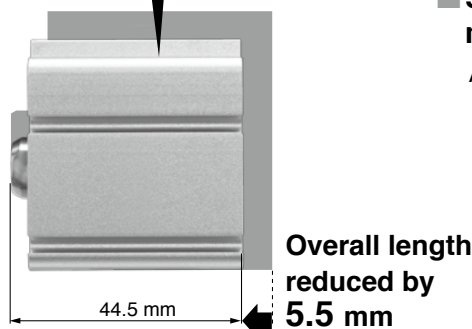

CDQ2B-X3205

CDQ2B-X3205

Specifications

Size		32 (Equiv. ø32 piston area)	40 (Equiv. ø40 piston area)	50 (Equiv. ø50 piston area)
Action		Double acting, Single rod		
Fluid		Air		
Proof pressure		1.0 MPa		
Max. operating pressure		0.7 MPa* ³		
Min. operating pressure		0.4 MPa		
Ambient and fluid temperatures		5 to 60°C (No freezing)		
Lubrication		Not required (Non-lube)		
Piston speed	Extending operation	50 to 500 mm/s	50 to 300 mm/s* ³	
	Retracting operation	50 to 300 mm/s	50 to 200 mm/s* ³	
Cushion		Rubber bumper		
Stroke length tolerance		0 to +1.3 mm* ¹		
Port size	Extension port	M5 x 0.8		Rc1/8
	Retraction port	M5 x 0.8		Rc1/8
	Exhaust return port	M5 x 0.8		
Mounting orientation		Horizontal lateral, Vertical upward		
Min. theoretical output* ²	Retracting operation	35 N	55 N	85 N
Allowable kinetic energy		0.15 J	0.26 J	0.46 J
Allowable lateral load at rod end (At 30 st)		5.1 N	10.2 N	17.3 N
Mounting		Basic type (Through-hole)		

*1 Stroke length tolerance does not include the amount of bumper change.

*2 Be aware that the cylinder output is reduced during the retraction operation.


The cylinder output values in the table above are the min. values. Therefore, depending on the operating conditions, the output may be greater.

Please contact your local sales representative for more details.

Standard Strokes

Size	Standard stroke [mm]
32	10, 20, 30, 40, 50
40	
50	

Circuit Diagram

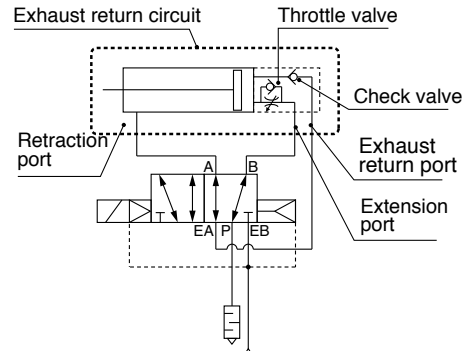


Depending on the system configuration selected, the specified speed may not be satisfied.

*3 Maximum operating pressure and piston speed are different from the existing product (CQ2 series).

For sizes 32 and 40, the positions of the switch mounting grooves vary slightly from those of the polygonal piston standard type.

Dimensions

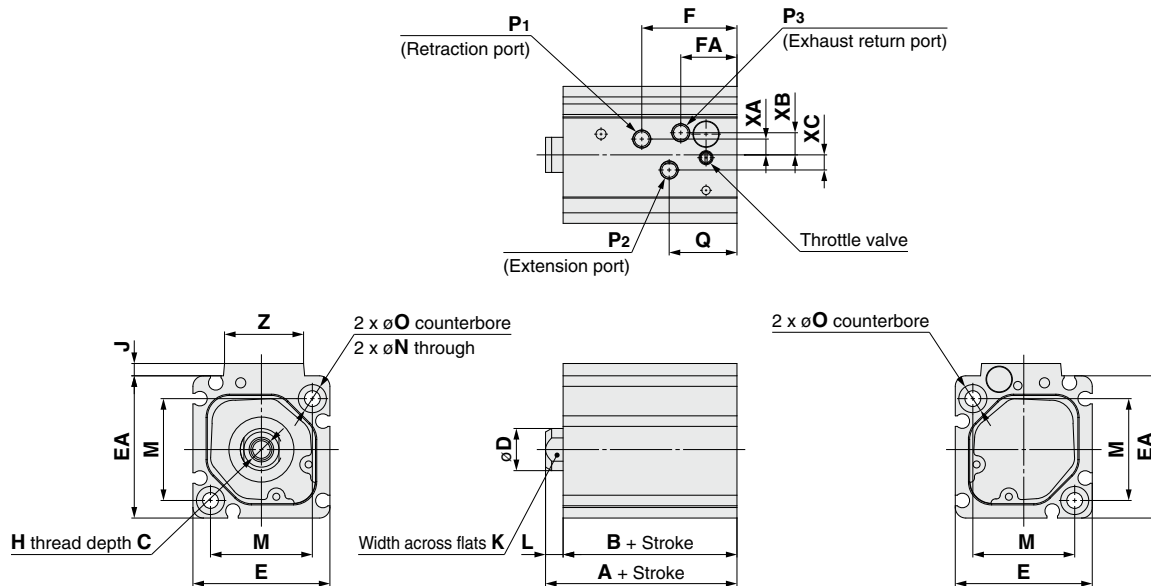

Size	A	B	C	D	E	EA	F		FA	H	J	K	L	M	N	O
							10 mm stroke	20 to 50 mm stroke								
32	34.5	29.5	12	12	39	40.5	28.7	27.1	16	M6 x 1.0	3.5	10	5	29	4.5	8 depth 6
40	42	36	13	14	46	48.2	30.8	27.9	16.9	M8 x 1.25	2.8	12	6	35	5.5	9 depth 7
50	49.5	41.5	15	18	55	58.2	33.6	33.2	18.7	M10 x 1.5	2.3	16	8	42	6.6	11 depth 8

Size	P1	P2	P3	Q	XA		XB	XC	Z
					10 mm stroke	20 to 50 mm stroke			
32	M5 x 0.8	M5 x 0.8	M5 x 0.8	19.3	5.9	4.5	6.3	4.3	22.5
40	M5 x 0.8	M5 x 0.8	M5 x 0.8	20.2	5.2	4.6	5.6	5.4	23.5
50	Rc1/8	Rc1/8	M5 x 0.8	21.2	1.2	3	5	10.5	28

Handling

⚠ Warning

1. Residual pressure will remain in the exhaust return piping of this circuit.

To completely exhaust all of the residual pressure, install a 3 -port valve for residual pressure exhaust in the exhaust return piping.

2. The adjustment range for the throttle valve for retraction operation speed adjustment is, starting from the fully closed position, within the number of rotations shown in the table below.

Bore size [mm]	Number of rotations
32, 40	4.5 rotations or less
50	3 rotations or less

To adjust the throttle valve, use a 3 mm flat head watchmaker's screwdriver.


The adjustment range for the throttle valve is, between the fully closed position and the open position, within the range indicated in the table above.

A retaining mechanism prevents the throttle valve from slipping out; however, it may spring out during operation if it is rotated beyond the range shown above.

⚠ Caution

1. Pipe according to the circuit diagram shown below when using this cylinder.

Circuit diagram

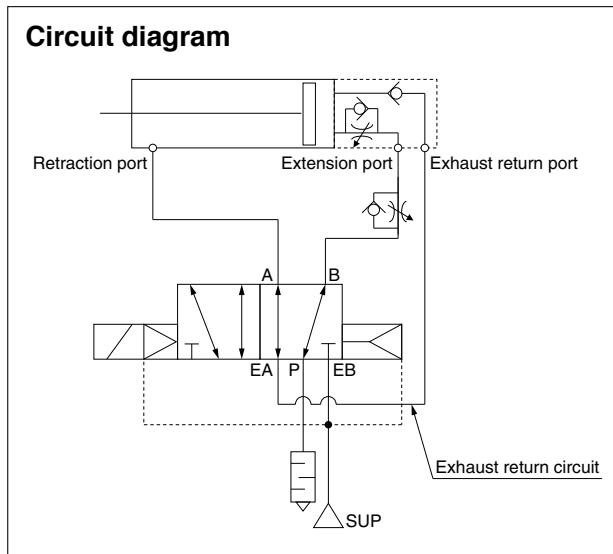

2. For exhaust return, the selection and installation of suitable fittings, tubes, and devices is required. Please contact your local sales representative for more details.
3. For the solenoid valve, select a single unit (body ported or base ported) external pilot type.
4. Follow the instructions below to adjust the speed of this cylinder.
 Extending operation: Use the speed controller (meter-in) installed between the extension port and the solenoid valve.
 Retracting operation: Use the built-in throttle valve on the cylinder.
5. As the retracting operation of this cylinder is performed with low pressure and low thrust, refrain from applying more external force than necessary.
6. Pivot brackets cannot be used.

Compact Cylinder Air-saving Type/ Polygonal Piston Rectangle Type

RoHS

Size: 32, 40, 50



Air saving and more compact!
Improvements due to the adoption of a
built-in exhaust return circuit and a
polygonal piston

Air saving (Built-in exhaust return circuit)


Air consumption

Max. 46% reduction

- Uses the air exhausted from the extension side to supply the retraction side, thus reusing the air (Built-in exhaust return circuit)
- Reduce air consumption just by piping to the product

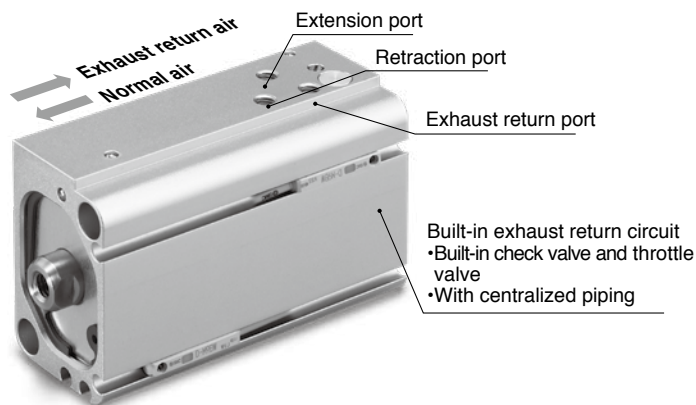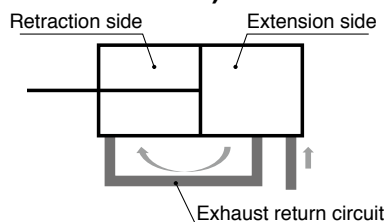


Cylinder cross-section shape

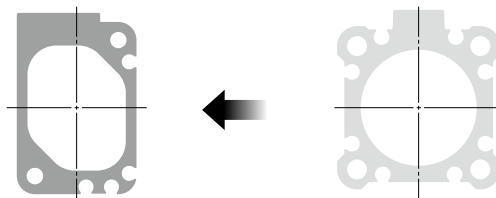

Compact cylinder air saving type/
Polygonal piston rectangle type

Existing model
CQ2 series

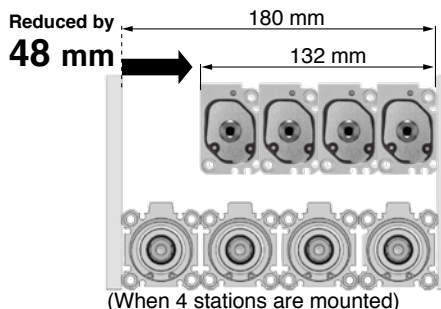

Compact cylinder air saving type/
Polygonal piston rectangle type
(Size 32)

Existing model
(ø32)

(When 4 stations are mounted)

Compact (Now with a polygonal piston)


Width

27%^{*1} reduction
45 mm → 33 mm


Overall length

7%^{*1} reduction
50 mm → 46.5 mm

^{*1} Compared with the CDQ2 series, ø32, 10 mm stroke
The overall length of size 50 is 3 mm longer than that of
the existing CQ2 model.

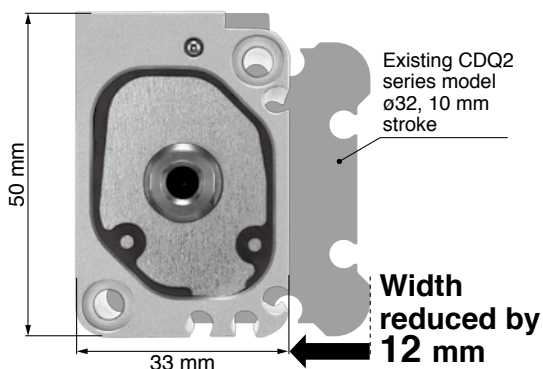

Compact cylinder air saving type/
Polygonal piston rectangle type
Size 32, 10 mm stroke

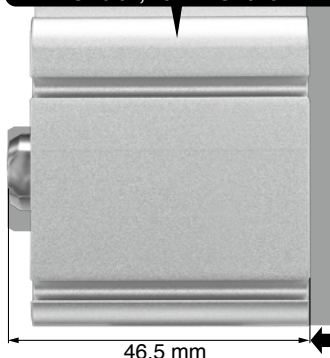

■ **With rubber bumper**

■ **Small auto switches can be mounted.**

Applicable auto switch: **D-M9**□

Sizes 32, 40: Mounting on 2 surfaces

Size 50: Mounting on 3 surfaces
(For details, refer to the dimensions.)

CDQ2B-X3206

CDQ2B-X3206

Specifications

Size		32 (Equiv. ø32 piston area)	40 (Equiv. ø40 piston area)	50 (Equiv. ø50 piston area)
Action		Double acting, Single rod		
Fluid		Air		
Proof pressure		1.0 MPa		
Max. operating pressure		0.7 MPa*3		
Min. operating pressure		0.4 MPa		
Ambient and fluid temperatures		5 to 60°C (No freezing)		
Lubrication		Not required (Non-lube)		
Piston speed	Extending operation	50 to 500 mm/s	50 to 300 mm/s*3	
	Retracting operation	50 to 300 mm/s	50 to 200 mm/s*3	
Cushion		Rubber bumper		
Stroke length tolerance		0 to +1.3 mm*1		
Port size	Extension port	M5 x 0.8		Rc1/8
	Retraction port	M5 x 0.8		Rc1/8
	Exhaust return port	M5 x 0.8		
Mounting orientation		Horizontal lateral, Vertical upward		
Min. theoretical output*2	Retracting operation	35 N	55 N	85 N
Allowable kinetic energy		0.15 J	0.26 J	0.46 J
Allowable lateral load at rod end (At 30 st)		4.9 N	9.9 N	16.7 N
Mounting		Basic type (Through-hole)		

*1 Stroke length tolerance does not include the amount of bumper change.

*2 Be aware that the cylinder output is reduced during the retraction operation.

The cylinder output values in the table above are the min. values. Therefore, depending on the operating conditions, the output may be greater.

Please contact your local sales representative for more details.

Depending on the system configuration selected, the specified speed may not be satisfied.


*3 Maximum operating pressure and piston speed are different from the existing product (CQ2 series).

For all bore sizes, the positions of the switch mounting grooves vary slightly from those of the polygonal piston standard type.


Standard Strokes

Size	Standard stroke [mm]
32	10, 20, 30, 40, 50
40	
50	

Circuit Diagram

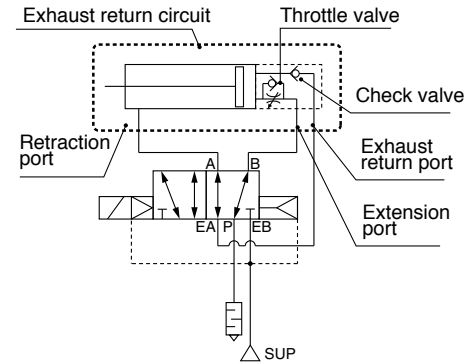

Dimensions

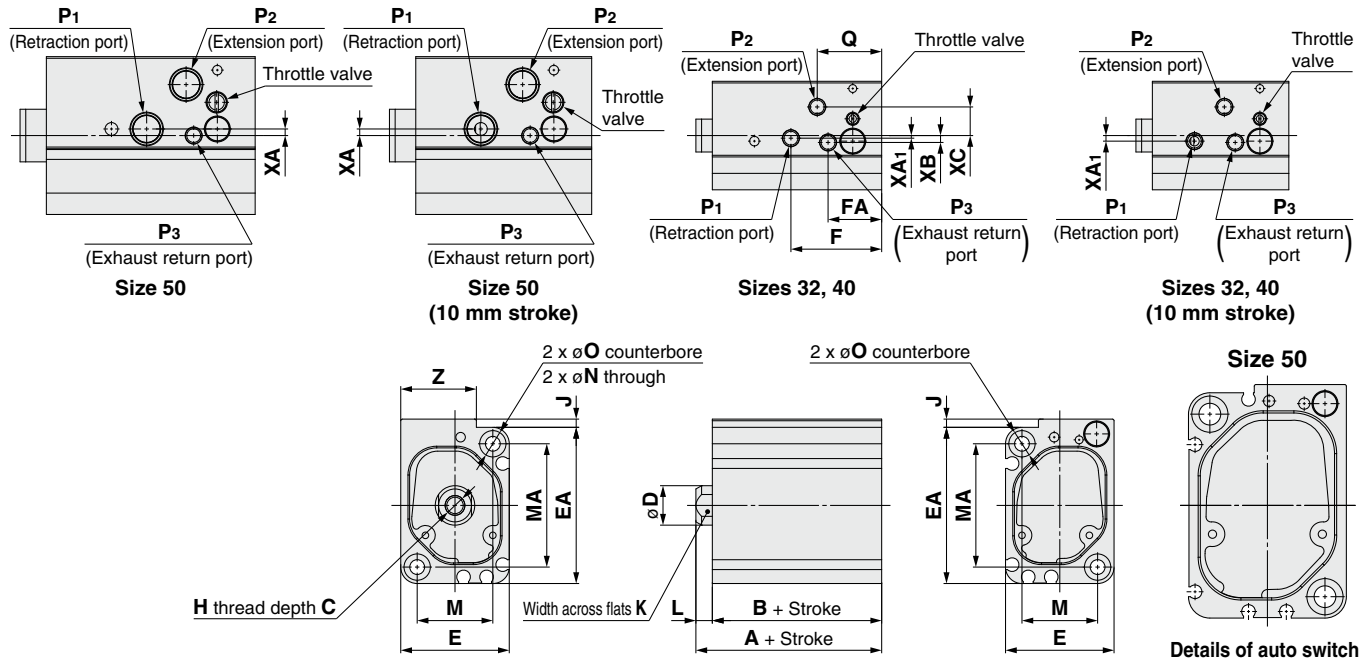

Size	A	B	C	D	E	EA	F		FA	H	J	K	L	M	MA	N
							10 mm stroke	20 to 50 mm stroke								
32	36.5	31.5	12	12	33	47.5	28.7	27.6	16.3	M6 x 1.0	2.5	10	5	23	37.5	4.5
40	44	38	13	14	39	56.5	31	27.9	16.9	M8 x 1.25	3	12	6	28	45.5	5.5
50	51.5	43.5	15	18	48	68.5	33.7	33	18.7	M10 x 1.5	2.5	16	8	35	55.5	6.6

Size	O	P1	P2	P3	Q	XA		XA1		XB	XC	Z
						10 mm stroke	20 to 50 mm stroke	10 mm stroke	20 to 50 mm stroke			
32	8 depth 6	M5 x 0.8	M5 x 0.8	M5 x 0.8	19.6	—	—	1.7	0.8	2.1	8.7	23
40	9 depth 7	M5 x 0.8	M5 x 0.8	M5 x 0.8	20.2	—	—	0.5	0	0.9	10.3	25
50	11 depth 8	Rc1/8	Rc1/8	M5 x 0.8	21	2	2	—	—	0	15.5	28

Handling

⚠ Warning

1. Residual pressure will remain in the exhaust return piping of this circuit.

To completely exhaust all of the residual pressure, install a 3 -port valve for residual pressure exhaust in the exhaust return piping.

2. The adjustment range for the throttle valve for retraction operation speed adjustment is, starting from the fully closed position, within the number of rotations shown in the table below.

Bore size [mm]	Number of rotations
32, 40	4.5 rotations or less
50	3 rotations or less

To adjust the throttle valve, use a 3 mm flat head watchmaker's screwdriver.


The adjustment range for the throttle valve is, between the fully closed position and the open position, within the range indicated in the table above.

A retaining mechanism prevents the throttle valve from slipping out; however, it may spring out during operation if it is rotated beyond the range shown above.

⚠ Caution

1. Pipe according to the circuit diagram shown below when using this cylinder.

Circuit diagram

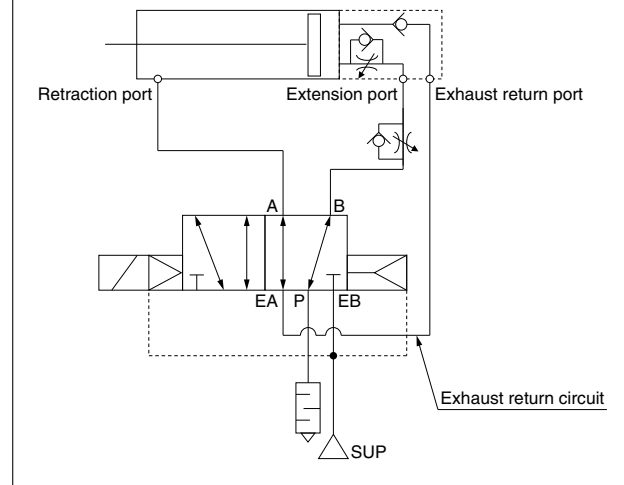

2. For exhaust return, the selection and installation of suitable fittings, tubes, and devices is required. Please contact your local sales representative for more details.
3. For the solenoid valve, select a single unit (body ported or base ported) external pilot type.
4. Follow the instructions below to adjust the speed of this cylinder.
 Extending operation: Use the speed controller (meter-in) installed between the extension port and the solenoid valve.
 Retracting operation: Use the built-in throttle valve on the cylinder.
5. As the retracting operation of this cylinder is performed with low pressure and low thrust, refrain from applying more external force than necessary.
6. Pivot brackets cannot be used.

UNIT CONVERSIONS


	unit	conversion	result
length	m	x 3.28	ft
	mm	x 0.04	in
mass	g	x 0.04	oz
volume	cm ³	÷ 16.387	in ³
	L	x 61.024	in ³
speed	mm/s	÷ 25.4	in/s
pressure	MPa	x 145	psi
	kPa	÷ 6.895	psi
temperature	°C	x1.8 then add 32	°F
torque	N·m	x 0.738	ft-lb
force	N	÷ 4.448	lbf
flow	L/min	÷ 28.317	cfm

Compact Cylinder Air-saving Type/ Double Force Type

RoHS

Size: 45, 57, 71

Air saving and more compact!
Improvements due to the adoption of a
built-in exhaust return circuit and a
polygonal piston (new size)

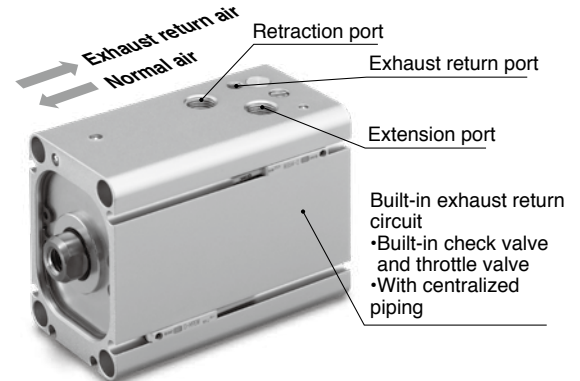


Air saving (Built-in exhaust return circuit)

Air consumption


Max. 46% reduction

- Uses the air exhausted from the extension side to supply the retraction side, thus reusing the air (Built-in exhaust return circuit)

- Reduce air consumption just by piping to the product

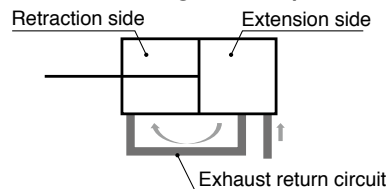


Cylinder cross-section shape

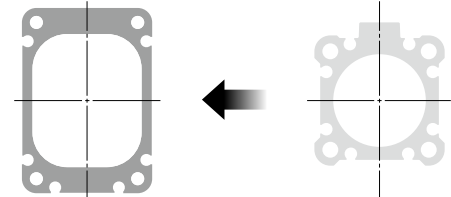

Compact cylinder air saving type/
Double force type

Existing model
CQ2 series

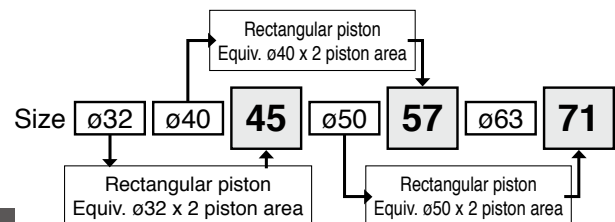

Compact (Now with a polygonal piston)

This product is capable of providing double the force of the CQ2 series without changing the width.


Overall length

50%^{*1} reduction
130.5 mm → 65.3 mm


*1 Compared with the existing model
(CDQ2B32-25+0DCZ-XC11 Dual stroke cylinder)

Dual stroke cylinder/ Double force

When air pressure is supplied to the A and C ports at the same time, double the force can be obtained.



Width comparison

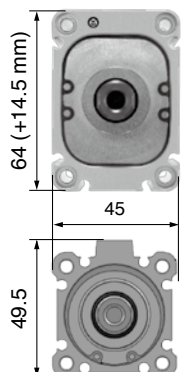


Compact cylinder
air saving type/
Double force type

Size 45 ($\phi 32 \times 2$),
25 mm stroke

Same width

Existing model
Dual stroke cylinder
(Double force)
 $\phi 32$, 25 mm stroke

Overall length comparison

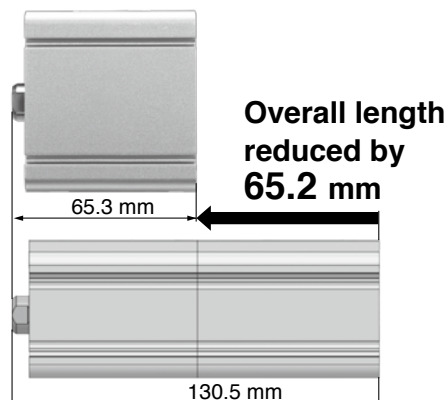

- With rubber bumper

- Small auto switches can be mounted.

Applicable auto switch: **D-M9**□

Size 45: Mounting on 3 surfaces

Sizes 57, 71: Mounting on 4 surfaces
(For details, refer to the dimensions.)

CDQ2B-X3207

CDQ2B-X3207

Specifications

Size		45 (Equiv. ø32 x 2 piston area)	57 (Equiv. ø40 x 2 piston area)	71 (Equiv. ø50 x 2 piston area)
Action		Double acting, Single rod		
Fluid		Air		
Proof pressure		1.0 MPa		
Max. operating pressure		0.7 MPa		
Min. operating pressure		0.4 MPa		
Ambient and fluid temperatures		5 to 60°C (No freezing)		
Lubrication		Not required (Non-lube)		
Piston speed	Extending operation	50 to 300 mm/s*3		
	Retracting operation	50 to 200 mm/s*3		
Cushion		Rubber bumper		
Stroke length tolerance		0 to +1.3 mm*1		
Port size	Extension port	Rc1/8		
	Retraction port	Rc1/8		
	Exhaust return port	M5 x 0.8	Rc1/8	
Mounting orientation		Horizontal lateral, Vertical upward		
Min. theoretical output*2	Retracting operation	73 N	113 N	177 N
Allowable kinetic energy		0.26 J	0.46 J	0.77 J
Allowable lateral load at rod end (At 25 st)		12.6 N	22.3 N	35.8 N
Mounting		Basic type (Through-hole)		

- *1 Stroke length tolerance does not include the amount of bumper change.
 *2 Be aware that the cylinder output is reduced during the retraction operation.
 The cylinder output values in the table above are the min. values. Therefore, depending on the operating conditions, the output may be greater.
 Please contact your local sales representative for more details.

Depending on the system configuration selected, the specified speed may not be satisfied.


*3 Maximum operating pressure and piston speed are different from the existing product (CQ2 series).

For sizes 45 and 57, the positions of the switch mounting grooves vary slightly from those of the polygonal piston standard type.


Standard Strokes

Size	Standard stroke [mm]
45	25, 50
57	
71	

Circuit Diagram

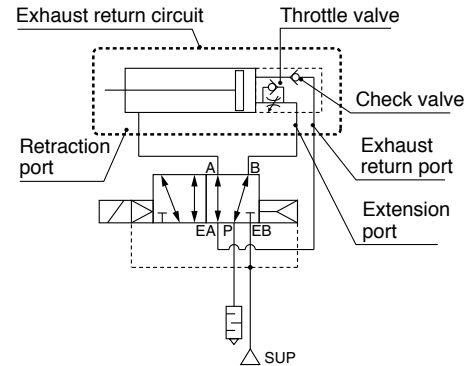

Dimensions

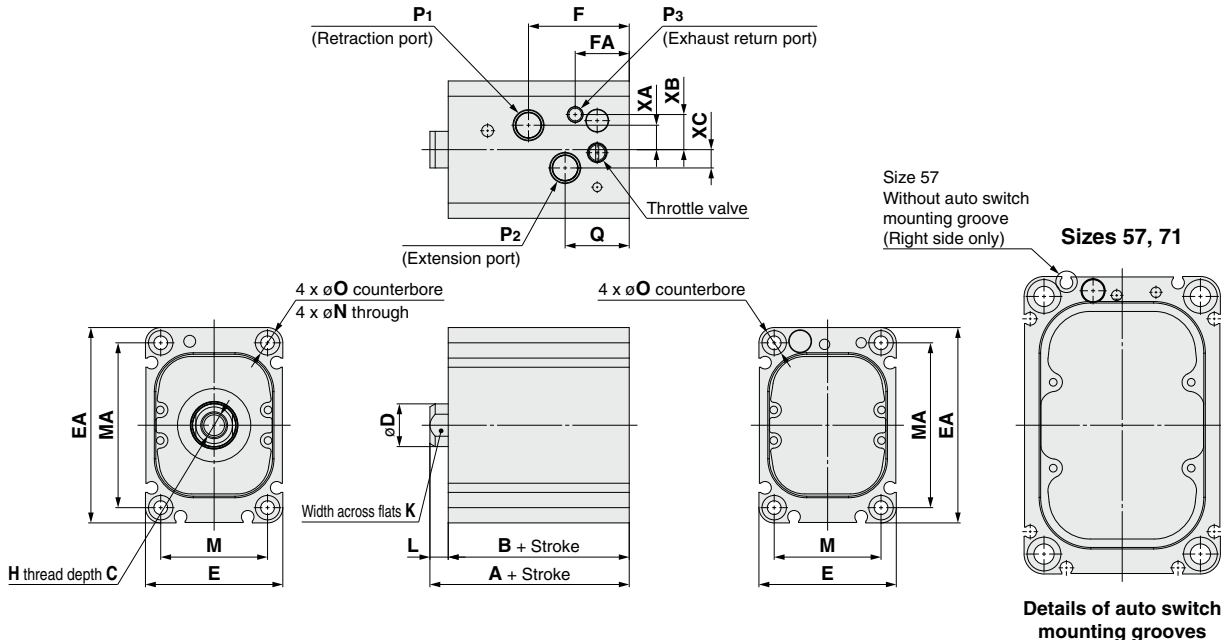

Size	A	B	C	D	E	EA	F		FA	H	K	L	M	MA	N	O
							25 mm stroke	50 mm stroke								
45	40.3	34.3	13	14	45	64	—	33	17.7	M8 x 1.25	12	6	35	54	4.5	8 depth 6
57	48.3	40.3	15	18	52	81	49.7	46.1	22.6	M10 x 1.5	16	8	41	70	5.5	9 depth 7
71	53.6	44.6	21	22	64	97	52.7	45.3	24.8	M14 x 2.0	19	9	51	84	6.6	11 depth 8

Size	P1	P2	P3	Q	XA		XB	XC
					25 mm stroke	50 mm stroke		
45	Rc1/8	Rc1/8	M5 x 0.8	21	—	8	11.5	6
57	Rc1/8	Rc1/8	Rc1/8	34.1	5	5	5.5	9.3
71	Rc1/8	Rc1/8	Rc1/8	34.3	9	9	10	6

Handling

⚠ Warning

1. Residual pressure will remain in the exhaust return piping of this circuit.

To completely exhaust all of the residual pressure, install a 3 -port valve for residual pressure exhaust in the exhaust return piping.

2. The adjustment range for the throttle valve for retraction operation speed adjustment is, starting from the fully closed position, within the number of rotations shown in the table below.

Bore size [mm]	Number of rotations
45, 57, 71	3 rotations

To adjust the throttle valve, use a 3 mm flat head watchmaker's screwdriver.


The adjustment range for the throttle valve is, between the fully closed position and the open position, within the range indicated in the table above.

A retaining mechanism prevents the throttle valve from slipping out; however, it may spring out during operation if it is rotated beyond the range shown above.

⚠ Caution

1. Pipe according to the circuit diagram shown below when using this cylinder.

Circuit diagram

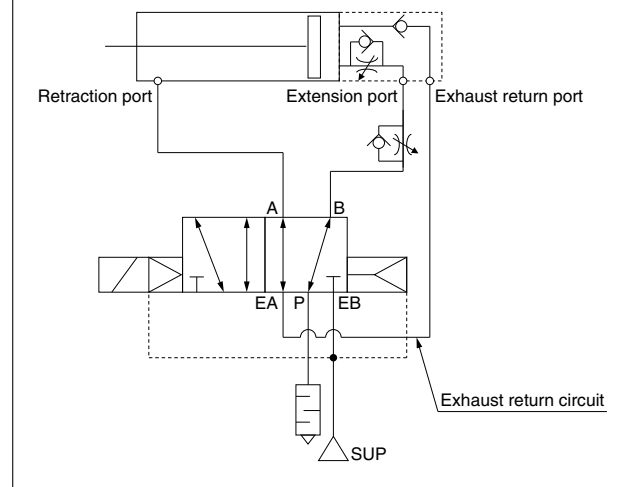

2. For exhaust return, the selection and installation of suitable fittings, tubes, and devices is required. Please contact your local sales representative for more details.
3. For the solenoid valve, select a single unit (body ported or base ported) external pilot type.
4. Follow the instructions below to adjust the speed of this cylinder.
 Extending operation: Use the speed controller (meter-in) installed between the extension port and the solenoid valve.
 Retracting operation: Use the built-in throttle valve on the cylinder.
5. As the retracting operation of this cylinder is performed with low pressure and low thrust, refrain from applying more external force than necessary.
6. Pivot brackets cannot be used.


Air Cylinder

ø32, ø40, **ø45**, ø50, **ø56**, ø63, **ø67**, ø80, **ø85**, ø100 **RoHS**

New Port thread types NPT, G added.

Intermediary Bore Sizes

- Air saving
- Space saving

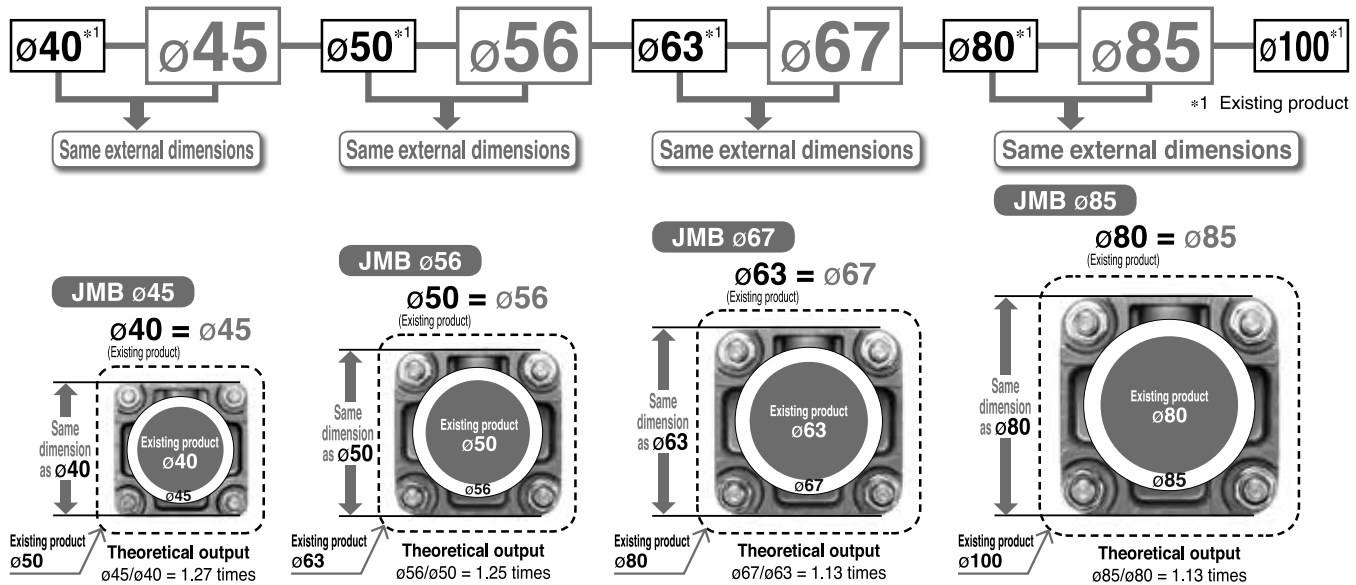

Overall length shortened



Max. **Weight 36% lighter** 1.56 kg → 1.00 kg
(Compared with the existing MB series, ø50, 100 mm stroke)

JMB Series

Global Manufacturing, Distribution and Service Network

Worldwide Subsidiaries

EUROPE

AUSTRIA
SMC Pneumatik GmbH (Austria)

BELGIUM
SMC Pneumatics N.V./S.A.

BULGARIA
SMC Industrial Automation Bulgaria EOOD

CROATIA
SMC Industrijska Automatika d.o.o.

CZECH REPUBLIC
SMC Industrial Automation CZ s.r.o.

DENMARK
SMC Pneumatik A/S

ESTONIA
SMC Pneumatics Estonia

FINLAND
SMC Pneumatics Finland OY

FRANCE
SMC Pneumatique S.A.

GERMANY
SMC Pneumatik GmbH

GREECE
SMC Hellas EPE

HUNGARY
SMC Hungary Ipari Automatizálási Kft.

IRELAND
SMC Pneumatics (Ireland) Ltd.

ITALY
SMC Italia S.p.A.

KAZAKHSTAN
LLP "SMC Kazakhstan"

LATVIA
SMC Pneumatics Latvia SIA

LITHUANIA
UAB "SMC Pneumatics"

NETHERLANDS
SMC Pneumatics B.V.

NORWAY
SMC Pneumatics Norway AS

POLAND
SMC Industrial Automation Polska Sp. z o.o.

ROMANIA
SMC Romania S.r.l.

RUSSIA
SMC Pneumatik LLC.

SLOVAKIA
SMC Priemysel'na Automatizacia, Spol s.r.o.

SLOVENIA
SMC Industrijska Avtomatika d.o.o.

SPAIN / PORTUGAL
SMC España, S.A.

SWEDEN
SMC Pneumatics Sweden AB

SWITZERLAND
SMC Pneumatik AG

TURKEY
SMC Pnömatik Sanayi Ticaret ve Servis A.Ş.

UK
SMC Pneumatics (U.K.) Ltd.

ASIA / OCEANIA

AUSTRALIA
SMC Pneumatics (Australia) Pty. Ltd.

CHINA
SMC (China) Co., Ltd.
SMC Pneumatics (Guangzhou) Ltd.

HONG KONG
SMC Pneumatics (Hong kong) Ltd.

INDIA
SMC Pneumatics (India) Pvt. Ltd.

INDONESIA
PT. SMC Pneumatics Indonesia

JAPAN
SMC Corporation

MALAYSIA
SMC Pneumatics (S.E.A.) Sdn. Bhd.

NEW ZEALAND
SMC Pneumatics (N.Z.) Ltd.

PHILIPPINES
Shoketsu SMC Corporation

SINGAPORE
SMC Pneumatics (S.E.A.) Pte. Ltd.

SOUTH KOREA
SMC Pneumatics Korea Co., Ltd.

TAIWAN
SMC Pneumatics (Taiwan) Co., Ltd.

THAILAND
SMC (Thailand) Ltd.

UNITED ARAB EMIRATES
SMC Pneumatics Middle East FZE

VIETNAM
SMC Pneumatics (VN) Co., Ltd

AFRICA

SOUTH AFRICA
SMC Pneumatics (South Africa) Pty Ltd

NORTH, CENTRAL & SOUTH AMERICA

ARGENTINA
SMC Argentina S.A.

BOLIVIA
SMC Pneumatics Bolivia S.R.L.

BRAZIL
SMC Pneumáticos do Brasil Ltda.

CANADA
SMC Pneumatics (Canada) Ltd.

CHILE
SMC Pneumatics (Chile) S.A.

COLOMBIA
SMC Colombia Sucursal de SMC Chile, S.A.

MEXICO
SMC Corporation (Mexico) S.A. de C.V.

PERU
SMC Corporation Peru S.A.C.

USA
SMC Corporation of America

VENEZUELA
SMC Neumatica Venezuela S.A.

U.S. & Canadian Sales Offices

WEST

Austin
Dallas
Denver
El Paso
Los Angeles
Phoenix
Portland
San Jose

CENTRAL


Chicago
Cincinnati
Cleveland
Detroit
Des Moines
Grand Rapids
Indianapolis
Kansas City
Milwaukee
Minneapolis
St. Louis

EAST

Albany
Atlanta
Birmingham
Boston
Charlotte
Knoxville
Nashville
New Jersey
Rochester
Tampa

CANADA

Vancouver
Toronto
Windsor
Montreal
Quebec City

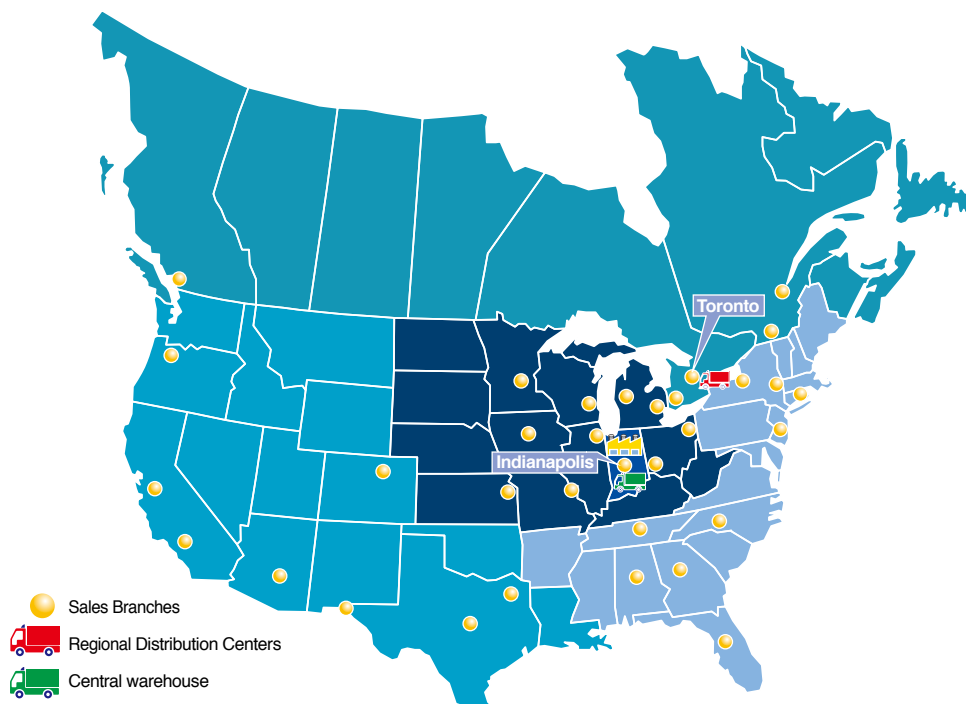

SMC Corporation of America
10100 SMC Blvd., Noblesville, IN 46060
www.smcusa.com

SMC Automation (Canada) Ltd.
www.smcautomation.ca

(800) SMC.SMC1 (762-7621)
e-mail: sales@smcusa.com
International inquiries: www.smcworld.com

