





Proposal for Air-saving System

— Contributes to CO₂ emissions reduction —



Air Blow

Nozzles for Blowing

Through the use of a smaller diameter nozzle, air consumption can be reduced by **62%**



Pulse Valve

High peak pressure and low air consumption
35% reduction



Impact Blow Gun

Air consumption
85% reduction



Vacuum Equipment

Vacuum Ejector

Due to the energy-saving function, air consumption can be reduced by **93%**



Actuators

Air Saving Speed Controller

By simply mounting on your current air cylinder, air consumption can be reduced by **25%**




Air Cylinder

By selecting an optimal size air cylinder, air consumption can be reduced by **29%**



Booster Regulator

Power consumption
40% reduction



Successful cases of companies that implemented measures for energy saving

Company A performance


Electricity	3000 kW → 1400 kW
CO ₂	0.9 t reduction/year
Cost	¥80 million reduction/year

Company B performance


Electricity	10000 kW → 7000 kW
CO ₂	1.7 t reduction/year
Cost	¥150 million reduction/year

We will help you save energy.

- We will help you to improve and standardize your equipment and adopt new equipment.
- We also proactively promote activities through official organizations, such as holding seminars at the Energy Conservation Center.

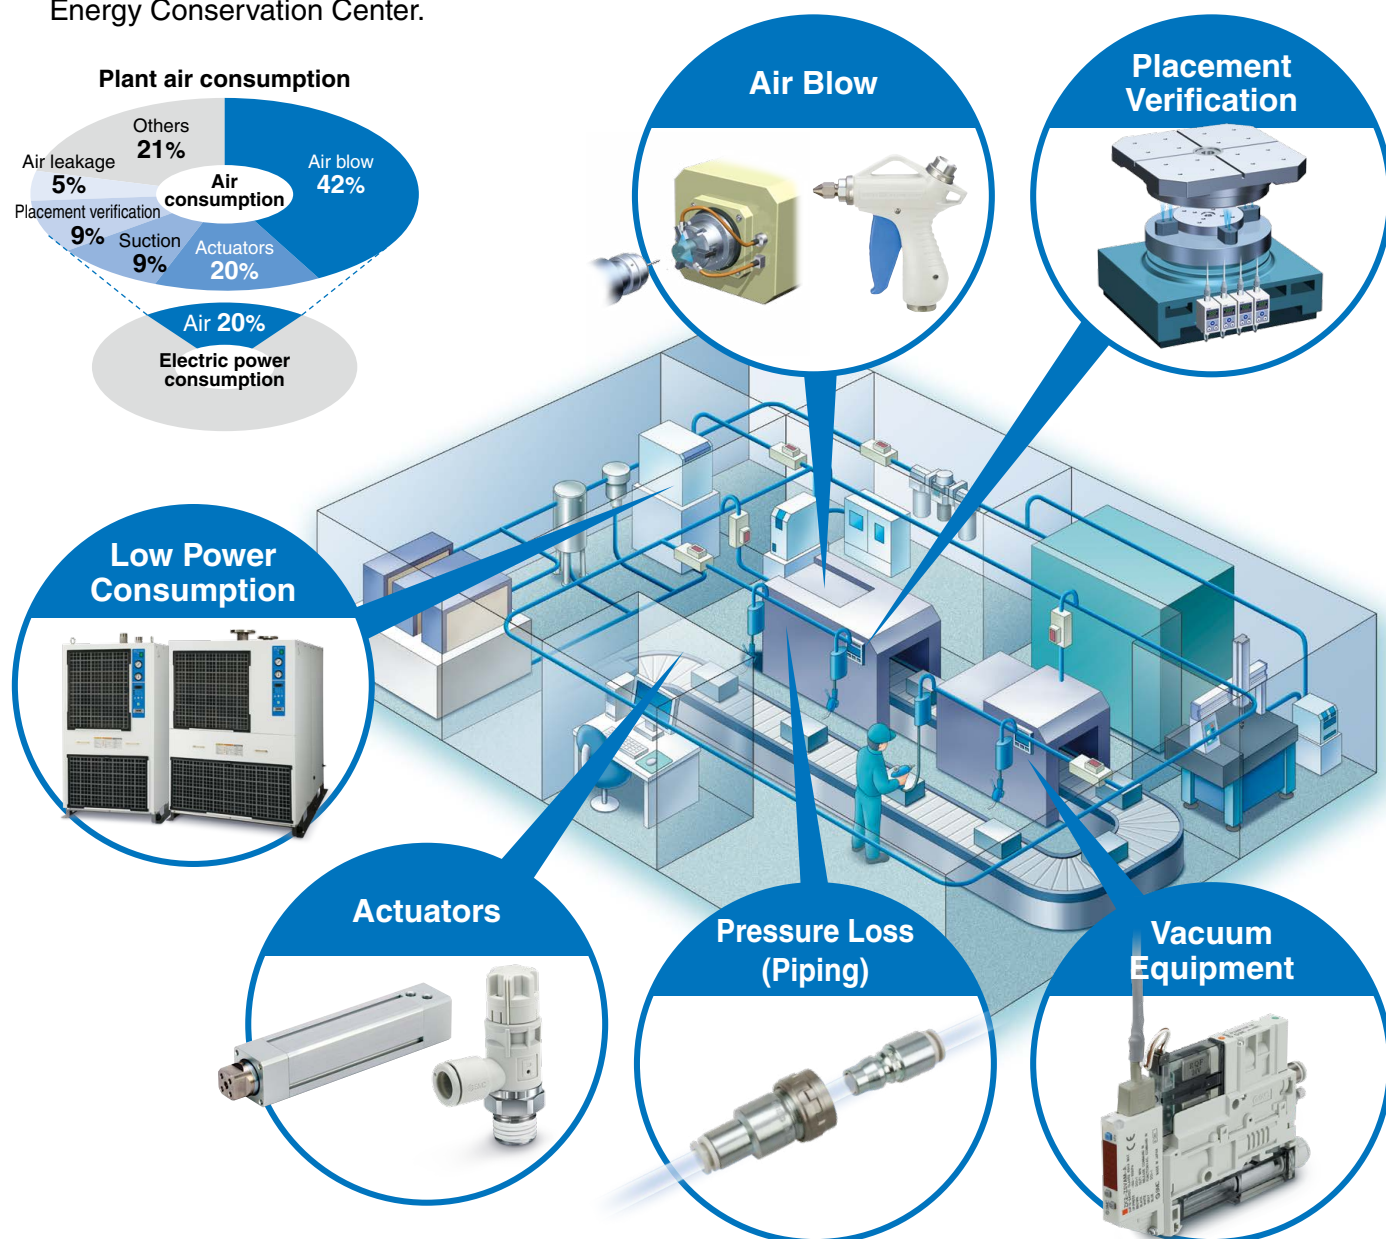

Energy-saving Themes

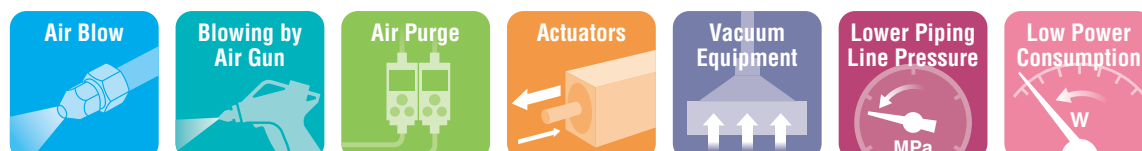

CONTENTS



Air Blow



Nozzles for Blowing KN Series	p. 3
Intermittent Blow Circuit IZE110-X238	p. 4
Pulse Valve Valve for Dust Collector JSXFA Series	p. 5



Blowing by Air Gun



Blow Gun VMG Series	p. 6
----------------------------------	------



Air Purge



Digital Gap Checker ISA3 Series	p. 7
--	------



Actuators



Air Cylinder JMB Series	p. 8
Double Power Cylinder MGZ Series	p. 9
Compact Cylinder with Solenoid Valve CVQ Series	p. 10
Booster Regulator VBA Series	p. 11
Air Saving Speed Controller AS-R/AS-Q Series	p. 12



Vacuum Equipment



Vacuum Ejector ZK2 Series	p. 13
Multistage Ejector ZL112A Series	p. 14



Lower Piping Line Pressure



S Couplers KK130 Series	p. 15
--------------------------------------	-------



Low Power Consumption



3/4/5-Port Solenoid Valve	p. 16
Refrigerated Air Dryer IDF□FS Series	p. 17



Information



Booster Regulator (Size: 10A) VBA-X3145	p. 18
Air Saving Impact Blow Gun IBG1 Series	p. 18

Nozzles for Blowing *KN Series*

Air Blow





Air consumption

**62%
reduction**

Air consumption can be reduced through the use of a smaller diameter nozzle.


Blow circuit that facilitates effective pressure use

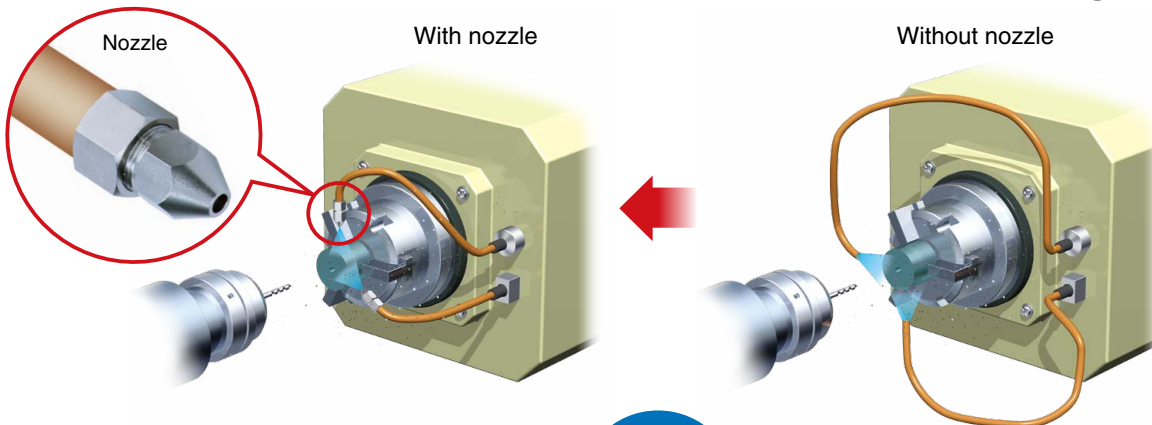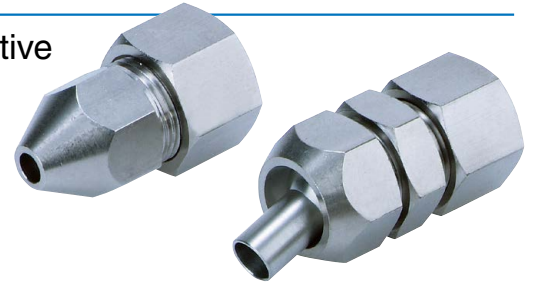

Energy-saving Model

Effects of
Energy
Saving

Existing Model

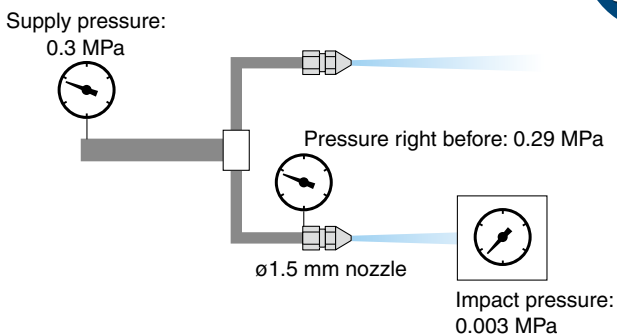

Collective piping: TU0805, 2 m
Intermediate and end piping:
TU0604, 0.5 m each
Distance: 100 mm

Air consumption per nozzle:
74 L/min (ANR)


Blow time: 2 sec.
Annual operating cycles:
900000

4464 m³/year (ANR)
(¥6696/year)

(¥10584/year reduction)

**62%
reduction**

Energy-saving Model

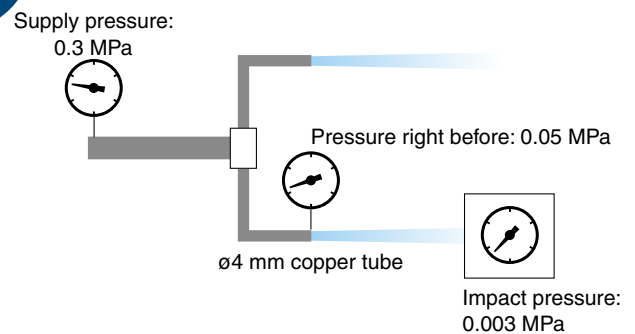

Collective piping: TU0805, 2 m
Intermediate and end piping:
TU0604, 0.5 m each
Distance: 100 mm

Air consumption per nozzle:
192 L/min (ANR)

Blow time: 2 sec.
Annual operating cycles:
900000

11520 m³/year (ANR)
(¥17280/year)

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)

Intermittent Blow Circuit IZE110-X238

Air Blow



Air consumption


**50%
reduction**

By using intermittent blow based on an intermittent control timer, air consumption can be reduced by **50%**.




Intermittent Blow Circuit

[Output under timer control]

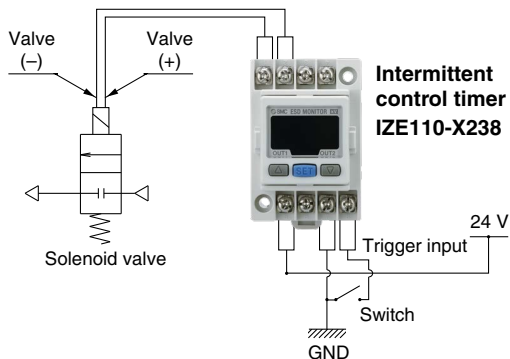


Continuous Blow Circuit



Energy-saving Circuit


The duty ratio can be freely adjusted.
By setting the duty ratio to one that has the same blow effectiveness, air consumption can be reduced.

Example:

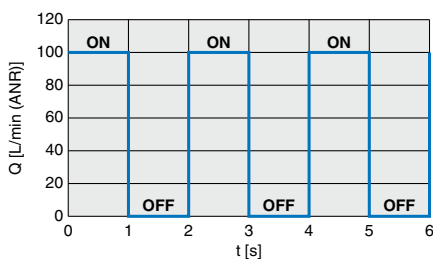

Existing Circuit

The duty ratio is equivalent to 100%.

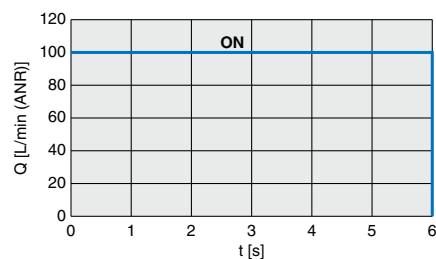

Intermittent Blow Circuit

Pressure right before: 0.2 MPa
Blow time: 10 s
(Frequency: 12 times/h)
One blow operation:
ON for 1 s, OFF for 1 s;
Repeated a total of 5 times
Working hours: 10 h/day
(250 days/year)
Nozzle diameter: 1 mm

318.2 m³/year (ANR)
(¥477/year)
(¥477/year reduction)

Energy-saving Circuit

Effects of
Energy
Saving

**50%
reduction**

Existing Circuit

Pressure right before: 0.2 MPa
Blow time: 10 s
(Frequency: 12 times/h)
Working hours:
10 h/day (250 days/year)
Nozzle diameter: 1 mm

636.3 m³/year (ANR)
(¥954/year)

Existing Circuit

Corresponding value: Air unit ¥1.5/m³ (ANR)

Pulse Valve Valve for Dust Collector **JSXFA Series**

Air Blow




Peak pressure

15%^{*1}
increase

Air consumption

35%^{*1}
reduction

**High peak pressure and
low air consumption**

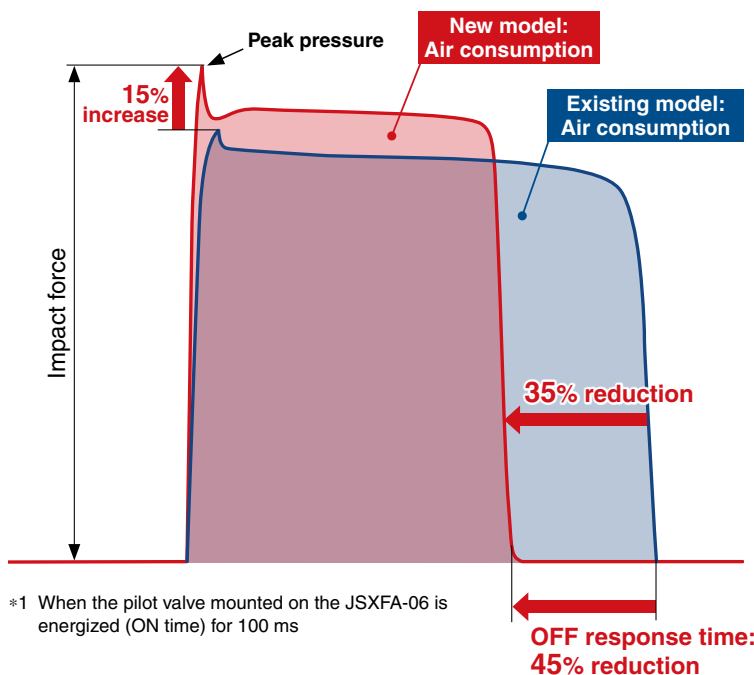

Energy-saving Model

- Optimized internal geometry
- Improved response

Injection quantity per cycle:
57 L/cycle (ANR)

Pressure: 0.9 MPa
Energizing time: 100 ms
Annual operating cycles: 240000

13680 m³/year (ANR)
(¥20520/year)
(¥11160/year reduction)

Energy-saving Model

**Effects of
Energy
Saving**

Existing Model

- Flow path construction with a large pressure loss
- Long response time

Injection quantity per cycle:
88 L/cycle (ANR)

Pressure: 0.9 MPa
Energizing time: 100 ms
Annual operating cycles: 240000

21120 m³/year (ANR)
(¥31680/year)

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)

Blow Gun VMG Series



Power consumption

20%
reduction

Power consumption can be reduced by 20% with the SMC blow gun + S coupler + coil tube combination.

* 10% reduction with only the blow gun (VMG)


Pressure loss of **1% or less**




Example of Improvement

Review the blow work and change to the SMC blow gun, S coupler, and coil tube combination to create a larger effective area.

After improvement

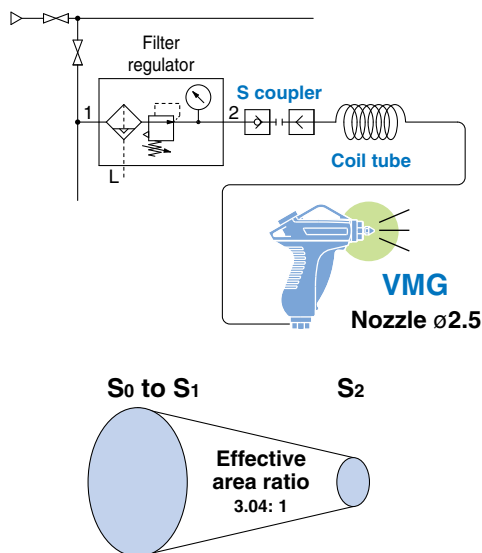


Before improvement

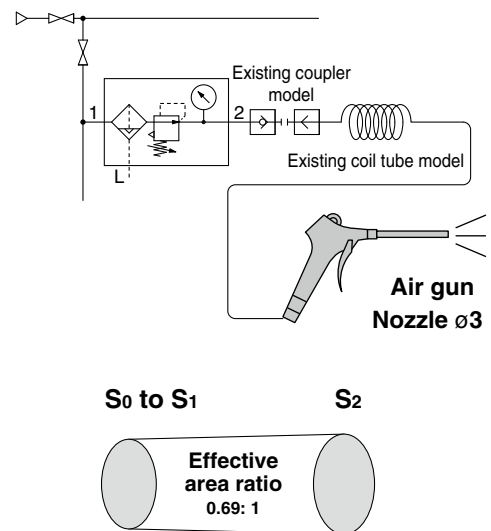

Energy-saving Model

Impact pressure: 0.011 MPa (Distance: 100 mm)
 Blow time: 10 s (Frequency: 12 times/h)
 Working hours: 10 h/day (250 days/year)
 Total working hours: 8300 h
 Compressor pressure: **0.5 MPa**
 Air consumption: **257 L/min (ANR)**

Power consumption by compressor: **1.25 kW**
 (¥155625/year)
 (¥38595/year reduction)

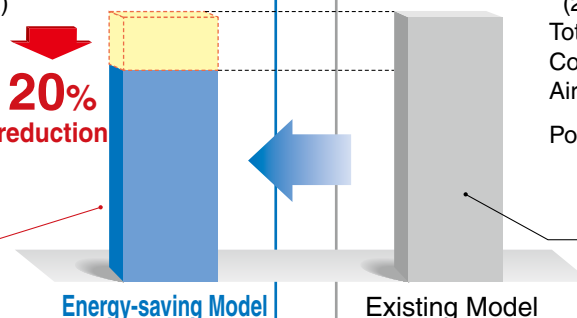

Effects of
Energy
Saving

Existing Model

Impact pressure: 0.011 MPa (Distance: 100 mm)
 Blow time: 10 s (Frequency: 12 times/h)
 Working hours: 10 h/day (250 days/year)
 Total working hours: 8300 h
 Compressor pressure: 0.6 MPa
 Air consumption: 287 L/min (ANR)

Power consumption by compressor: **1.56 kW**
 (¥194220/year)

Corresponding value: Electricity unit ¥15/kWh

Digital Gap Checker *ISA3 Series*

Air Purge




Air consumption

60%
reduction

Air consumption when a workpiece is seated is now **0 L/min** due to the new detection principle.



Comparison of detection circuit

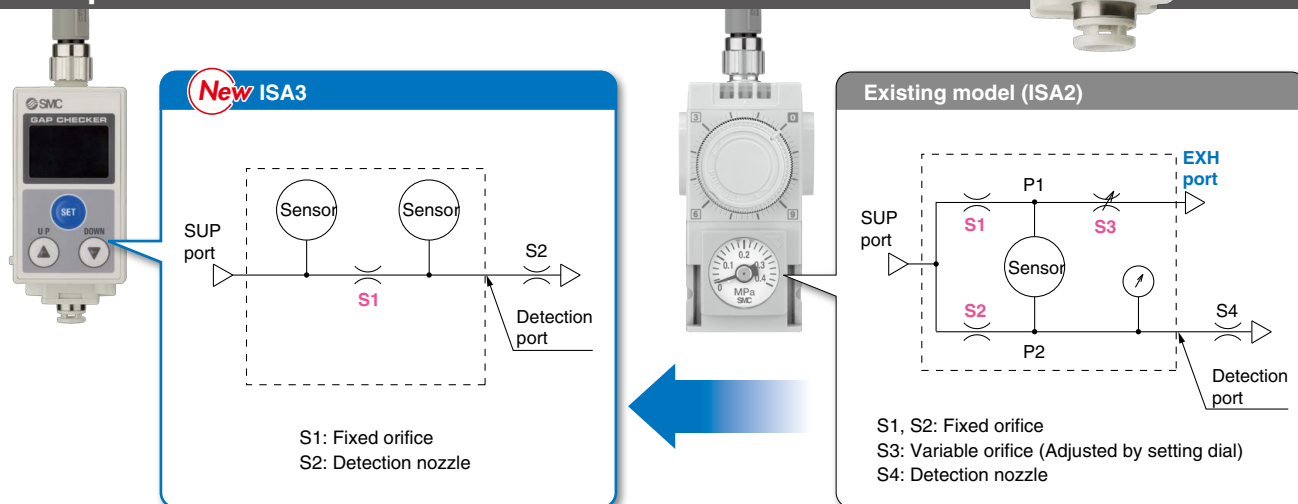

Due to the new detection principle, the need for air to be exhausted from the product has been eliminated. This makes the flow consumption 0 L/min when a workpiece is seated.

The result is a great reduction in air consumption compared with the existing model.

* Conditions: Unseated for 5 seconds and seated for 20 seconds (For the G type)

Energy-saving Model

**Effects of
Energy
Saving**

Existing Model

- Air consumption
When placed: 0 L/min (ANR)
When not placed: 10 L/min (ANR)
- Air consumption per cycle:
0.83 L/cycle (ANR)
- Annual operating cycles: 860000

Air consumption (When placed):
0 L/min (ANR)

717 m³/year (ANR)
(¥1076/year)

(¥1608/year reduction)

60%
reduction

Energy-saving Model

- Air consumption
When placed: 4 L/min (ANR)
When not placed: 10 L/min (ANR)
- Air consumption per cycle:
208 L/cycle (ANR)
- Annual operating cycles: 860000


Air consumption (When placed):
4 L/min (ANR)

1789 m³/year (ANR)
(¥2684/year)

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)

Air Cylinder JMB Series



Air consumption

29%
reduction

Air consumption can be reduced by selecting an optimal size air cylinder.



Intermediary Bore Sizes

Air consumption can be reduced by up to **29%**

Bore size (mm)	ø40	ø45	ø50	ø56	ø63	ø67	ø80	ø85	ø100
Air consumption L/min (ANR)	1.4	1.8	2.2	2.8	3.6	4.1	5.8	6.6	9.1

Conditions/Supply pressure: 0.5 MPa
Load factor: 50%, At 100 mm stroke

18% reduction (ø45 vs ø50)
22% reduction (ø56 vs ø63)
29% reduction (ø67 vs ø80)
27% reduction (ø85 vs ø100)

Example Bore size for 85 kg workpieces

Conditions/Supply pressure: 0.5 MPa, Load factor: 50%

Bore size (mm)	Theoretical output (N)	Output for load factor of 50% (kg)	Judgment
ø63	1559	79.5	Not acceptable (Insufficient)
ø80	2513	128.2	Acceptable (Excessive)

When intermediary bore size ø67 is used

ø67	1763	89.9	OK
-----	------	------	----

Existing size: ø80



Could be switched to intermediary bore size **ø67**

Energy-saving Model

Bore size: ø67
Stroke: 100 mm
Pressure: 0.5 MPa
Load factor: 50%

Per single reciprocation:
4.1 L/min (ANR)

When it is operated
1000000 times/year

4100 m³/year (ANR)
(¥6150/year)

(¥2550/year reduction)

29%
reduction

Energy-saving Model

Effects of
Energy
Saving

Existing Model

Bore size: ø80
Stroke: 100 mm
Pressure: 0.5 MPa
Load factor: 50%

Per single reciprocation:
5.8 L/min (ANR)

When it is operated
1000000 times/year

5800 m³/year (ANR)
(¥8700/year)

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)

Double Power Cylinder *MGZ Series*

Actuators

Air consumption

**14%
reduction**

**Air consumption can be reduced by 14%
due to the reduced cylinder size.**


It is possible to reduce air consumption in the retracting direction, compared with a standard cylinder with equivalent output in the extending direction, due to the doubled piston area in the extending direction.




Double extension output power!

SMC's unique cylinder construction doubles the piston area in the extending direction. This is an ideal air cylinder for lifting and press applications.

Air pressure supplied from A operates on both surfaces ① and ②. (Extension)

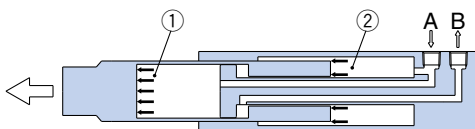

Air pressure supplied from B operates on surface ③. (Retraction)

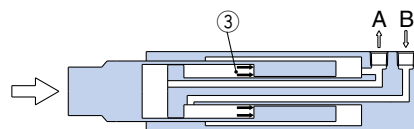


ø63

Piston area
Extension: 5945 mm²
Retraction: 2313 mm²

Increased energy saving and space saving
Reduced cylinder size

Size reduction

ø63 ← ø80



ø80

Piston area
Extension: 5030 mm²
Retraction: 4540 mm²

Energy-saving Model

Bore size: ø63

Stroke: 200 mm

Pressure on the extension side: 0.5 MPa

Theoretical output (Extension side): 2973 N

Per single reciprocation:

9.9 L (ANR)

When it is operated
900000 times/year

8910 m³/year (ANR)

(¥13370/year)

(¥2160/year reduction)

**14%
reduction**

Energy-saving Model

Effects of
Energy
Saving

Existing Model

Bore size: ø80

Stroke: 200 mm

Pressure: 0.5 MPa

Theoretical output (Extension side): 2520 N

Per single reciprocation:

11.5 L (ANR)

When it is operated
900000 times/year

10350 m³/year (ANR)

(¥15530/year)

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)

Compact Cylinder with Solenoid Valve *CVQ Series*

Actuators





Air consumption

37%
reduction

Energy Saving

Air consumption between the valve and cylinder can be reduced by approximately **37%**.

Valve and compact cylinder integrated for compactness

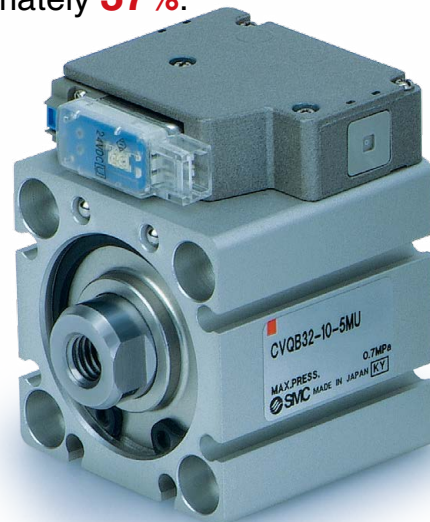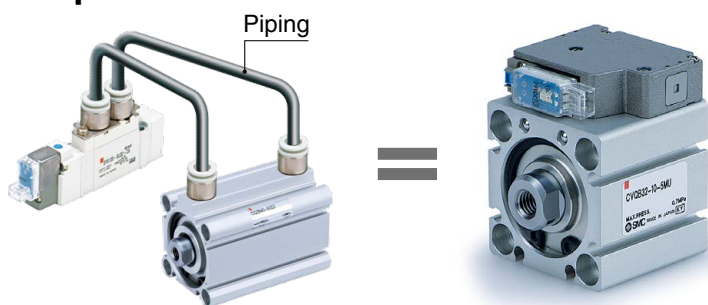

Energy-saving Model

CVQ

Bore size: $\phi 32$
Stroke: 50 mm
No piping between the valve and the cylinder
Supply pressure: 0.5 MPa

Per single reciprocation:
0.42 L (ANR)

When it is operated
900000 times/year

380 m³/year (ANR)
(¥570/year)

(¥340/year reduction)



Effects of Energy Saving

Existing Model




CQ2

Bore size: $\phi 32$
Stroke: 50 mm
Piping bore: 4 mm
Piping length: 2 m (Between the valve and the cylinder)
Supply pressure: 0.5 MPa

Per single reciprocation:
0.67 L (ANR)

When it is operated
900000 times/year

606 m³/year (ANR)
(¥910/year)

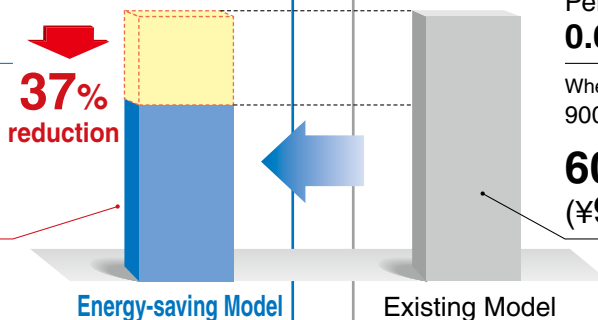

Energy-saving Model

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)

Booster Regulator VBA Series

Actuators



Air consumption

33%
reduction


Air consumption can be reduced by **33%** due to the optimization of the booster circuit.




Boost an insufficiently powered portion with a booster regulator

- Optimized booster circuit: Now with a space-saving booster circuit

Example of a one-side booster circuit
(Boosting pressure on the operating stroke only)

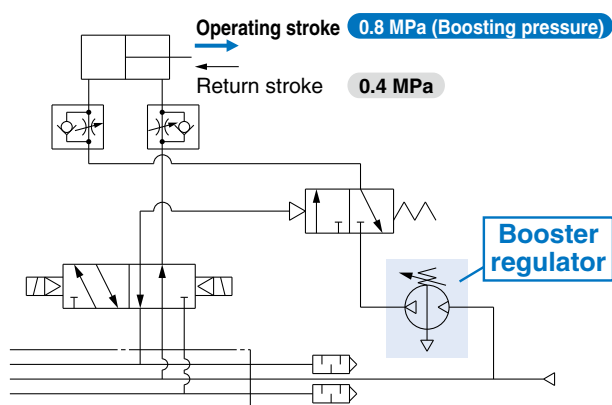

Example of a two-side booster circuit

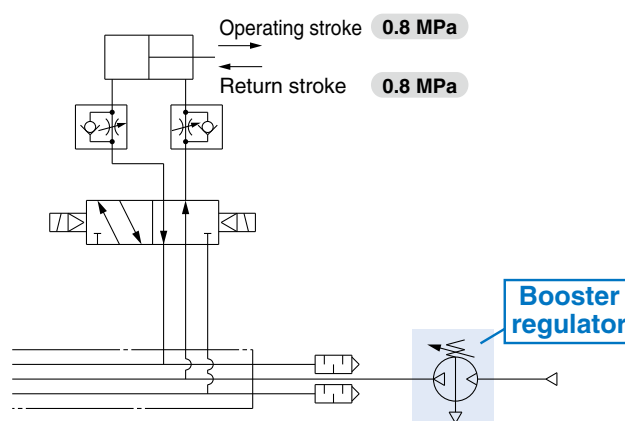

Energy-saving Circuit

When boosting pressure is on the extension side only
Retraction: 0.4 MPa
Extension: 0.8 MPa (Boosting pressure)

Per single reciprocation:
8.7 L (ANR)

When it is operated
900000 times/year

7830 m³/year (ANR)
(¥11750/year)

(¥5800/year reduction)

33%
reduction

Energy-saving Model

Effects of
Energy
Saving

Existing Circuit

Bore size: ø50
Stroke: 200 mm
Pressure: 0.4 MPa
Boosting pressure: 0.8 MPa

Per single reciprocation:
13 L (ANR)

When it is operated
900000 times/year

11700 m³/year (ANR)
(¥17550/year)

Existing Circuit

Corresponding value: Air unit ¥1.5/m³ (ANR)

Air Saving Speed Controller AS-R/AS-Q Series

Actuators

Air consumption

**25%
reduction**


Reduce air consumption just by mounting to your current air cylinder!

Mounting and operation are the same as a regular speed controller.




With pressure-reduction function
AS-R Series


By reducing the pressure on the return stroke to 0.2 MPa, air consumption can be reduced.

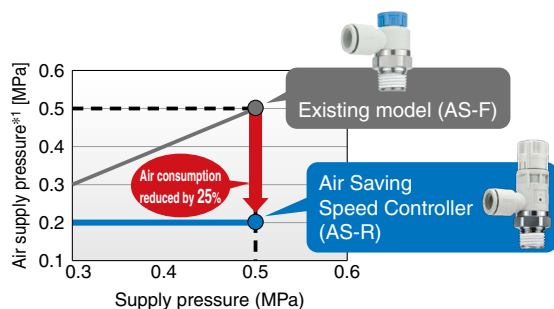

*1 Cylinder pressure on the return stroke side
* The air consumption reduction rate indicates the rate for one cycle of the cylinder.

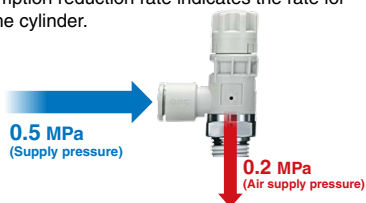

When it is not necessary to apply force at the end of the working stroke, by using a lifter, pusher, etc.

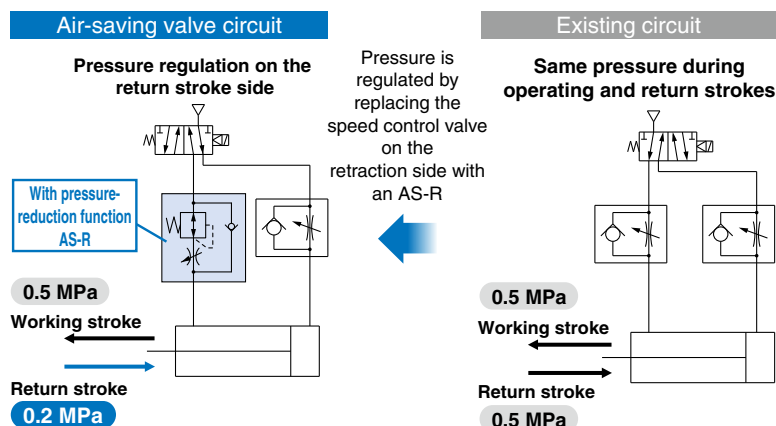

Energy-saving Model

Bore size: $\phi 50$
Stroke: 200 mm
Pressure on the extension side: 0.5 MPa
Pressure on the retraction side: 0.2 MPa

Per single reciprocation:
3.3 L/min (ANR)

When it is operated
900000 times/year

3011 m³/year (ANR)
(¥4520/year)

(¥1330/year reduction)

**25%
reduction**

Energy-saving Model

Effects of
Energy
Saving

Existing Model

Bore size: $\phi 50$
Stroke: 200 mm
Pressure: 0.5 MPa

Per single reciprocation:
4.3 L/min (ANR)

When it is operated
900000 times/year

3902 m³/year (ANR)
(¥5850/year)

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)

Vacuum Ejector ZK2 Series

Vacuum Equipment



Air consumption


93% reduction*1

*1 Based on SMC's measuring conditions

Energy-saving Ejector

The digital pressure switch for vacuum with energy-saving function cuts supply air when the pressure reaches the desired vacuum.

Digital pressure switch for vacuum with energy-saving function


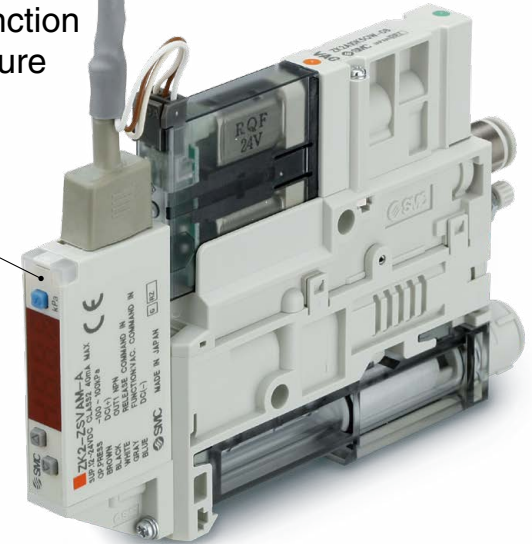


The digital pressure switch

with energy-saving function can reduce

air consumption by 90%*2. *2 Based on SMC's measuring conditions

While the suction signal is ON, the ON/OFF operation of the supply valve is also performed automatically within the set value.

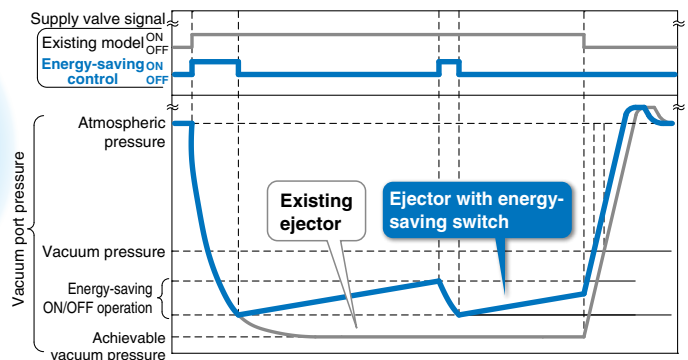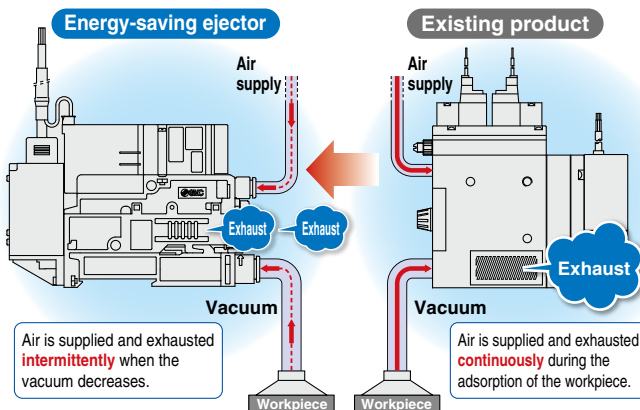

Energy-saving Model

- Air consumption: 58 L/min (ANR)
- Vacuum suction flow rate: 61 L/min (ANR)
- Vacuum generation time: 0.6 s/cycle
(Vacuum is continuously generated and air is consumed for 6 s (1 cycle))
- Annual operating cycles: 1100000
(450 cycles/h, 10 h/day, 250 days/year)

Air consumption (When placed):

58 L/min (ANR)

638 m³/year (ANR)

(¥957/year)

(¥13070/year reduction)

93% reduction

Energy-saving Model

Effects of Energy Saving

Existing Model

- Air consumption: 85 L/min (ANR)
- Vacuum suction flow rate: 44 L/min (ANR)
- Vacuum generation time: 6 s/cycle
(Vacuum is continuously generated and air is consumed for 6 s (1 cycle))
- Annual operating cycles: 1100000
(450 cycles/h, 10 h/day, 250 days/year)

Air consumption (When placed):

85 L/min (ANR)

9350 m³/year (ANR)

(¥14025/year)

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)

Multistage Ejector ZL112A Series

Vacuum Equipment



Air consumption

10% reduction



Air consumption can be reduced by **10%** due to the optimization of the diffuser flow path.



3-stage diffuser construction

Suction flow rate increased by **250%**

(Versus $\phi 1.3$, 1-stage model)

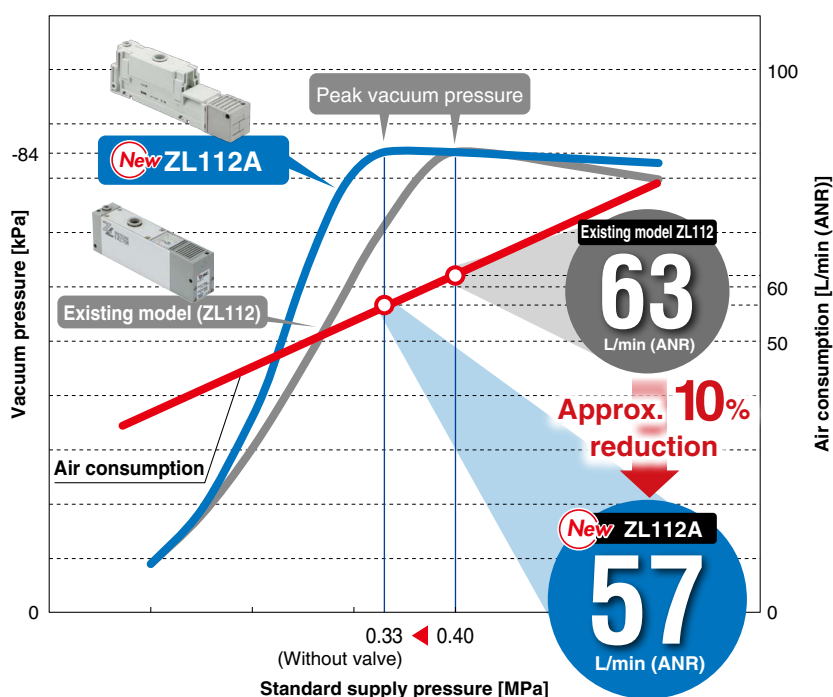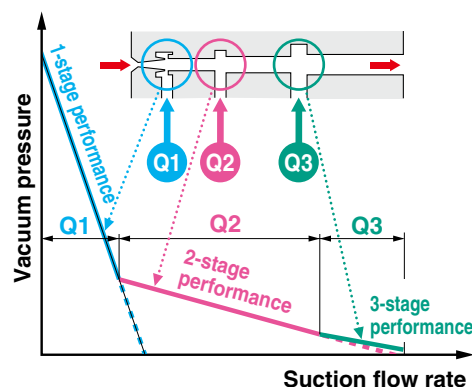

Energy-saving Model

Standard supply pressure: 0.33 MPa (Without valve)
Maximum vacuum pressure: -84 kPa
Maximum suction flow rate: 100 L/min (ANR)
Air consumption: 57 L/min (ANR)

When work is carried out for 2500 hours per year, and 30 minutes per hour

4275 m³/year (ANR)

(¥6413/year)

(¥675/year reduction)

10% reduction

Energy-saving Model

Effects of Energy Saving

Existing Model

Standard supply pressure: 0.4 MPa
Maximum vacuum pressure: -84 kPa
Maximum suction flow rate: 100 L/min (ANR)
Air consumption: 63 L/min (ANR)

When work is carried out for 2500 hours per year, and 30 minutes per hour

4725 m³/year (ANR)

(¥7088/year)

Existing Model

Corresponding value: Air unit ¥1.5/m³ (ANR)


S Couplers *KK130 Series*



Pressure loss

7%
reduction

The built-in valve is of a special shape, resulting in reduced pressure loss.

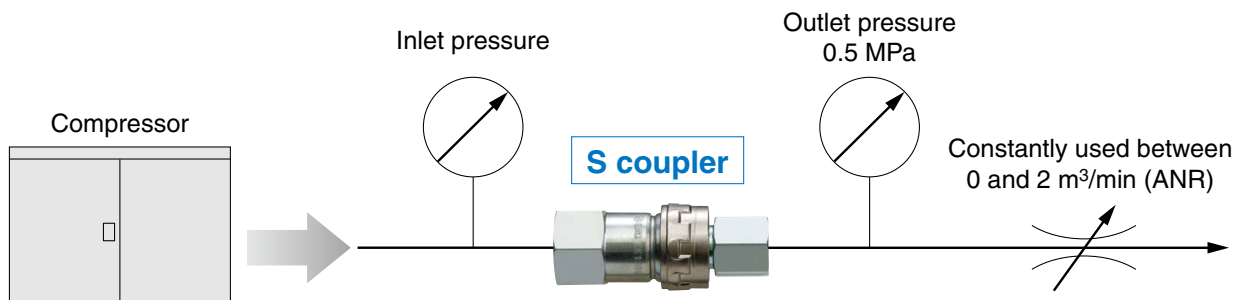

Energy-saving Model

Operating pressure at the outlet: 0.5 MPa
Compressor efficiency: 0.7
Annual operating time: 2500 hours
Flow rate: 1.2 m³/min (ANR)

Inlet pressure:
0.54 MPa

Power consumption by compressor:

¥262000/year

(¥11000/year reduction)



**Effects of
Energy
Saving**

Energy-saving Model

Existing Model

Operating pressure at the outlet: 0.5 MPa
Compressor efficiency: 0.7
Annual operating time: 2500 hours
Flow rate: 1.2 m³/min (ANR)

Inlet pressure:
0.58 MPa

Power consumption by compressor:

¥273000/year

Existing Model

Corresponding value: Electricity unit ¥15/kWh

3/4/5-Port Solenoid Valve



Power consumption


**75%
reduction**

The power-saving circuit can reduce the consumption of electric power when the device is energized.


SY Series




VF Series



SY Series
(Plug-in type)




VP Series



- Reduces power consumption when energized

Power consumption can be reduced by approx. 1/4 by reducing the wattage required to hold the valve in an energized state. (Effective energizing time is over 62 ms*1 at 24 VDC.) Refer to the electrical power waveform as shown below.

Electrical power waveform with power-saving circuit

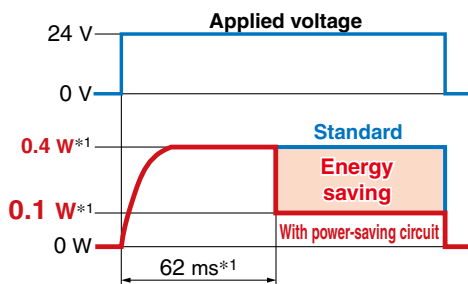

*1 SY/SYJ series

Low Power Consumption Valve

Energy-saving Product

Type	Model	Power consumption W*2	
		Standard	With power-saving circuit
4/5-port	SJ2000	0.55	0.23
	SJ3000	0.4	0.15
	New SY3000/5000/7000	0.4	0.15
	SY3000/5000/7000/9000	0.4	0.1
	SYJ3000/5000/7000	0.4	0.1
	VF1000/3000/5000	1.55	0.55
3-port	SYJ300/500/700	0.4	0.1
	VP300/500/700	1.55	0.55
	V100	0.4	0.1

*2 With DC light

Energy-saving Model

SY: **0.1 W**

(With power-saving circuit)

292 Wh/year
(¥4.3/year)

Power consumption per valve:
(¥13.2/year reduction)

**75%
reduction**

Energy-saving Model

Effects of
Energy
Saving

When the energizing
time is 8 hours/day,
356 days/year

Existing Model


SY: 0.4 W

1168 Wh/year (ANR)
(¥17.5/year)

Existing Model

Corresponding value: Electricity unit ¥15/kWh

Refrigerated Air Dryer *IDF□FS Series*




Double energy-saving function series



Power consumption

76%
reduction

The addition of a second re-heater + digital scroll results in high energy savings.

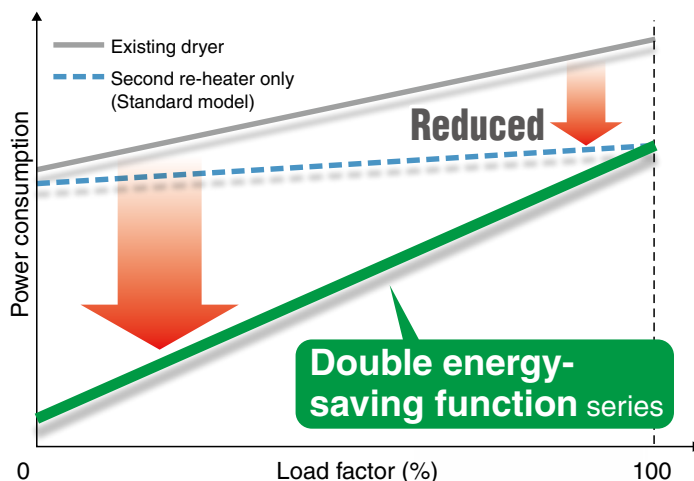

Energy-saving design

Up to a **76%** (1 kW)^{*1} reduction

^{*1} Operating conditions: The IDF125FS in energy-saving operation mode

- Ambient temperature 32°C ● Inlet air temperature 40°C
- Inlet air pressure 0.7 MPa ● Air flow rate = Rated flow x 0.4
- Power supply frequency 60 Hz ● Power supply voltage 200 V ● Set dew point = 30°C



Example 1 year (Spring to Winter) Power consumption

Reduced



Compared with the standard model (constant compressor operation), the

Double energy-saving function series

^{*1} The IDF125FS was used for this example.

can reduce power consumption by 43%!

Double energy-saving function series (IDF125FS)

Standard model (IDF125F)

^{*} [Trial calculation conditions] Days of operation per year = 240 days (60 days each in spring, summer, autumn, and winter),
Operating hours per day = 12 hours
For details about the dryer operating conditions for each season, refer to the **Web Catalog** (IDF□FS series.).


Booster Regulator (Size: 10A) *VBA-X3145*

Air consumption

40% reduction^{*1}

^{*1} Based on SMC's measuring conditions

- 3 piston construction
- The drive chamber on one side can be operated by the exhaust return circuit.

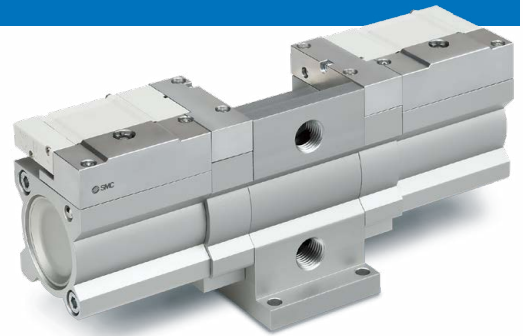


Operation noise: **65 dB (A)**^{*2}

^{*2} Based on SMC's measuring conditions

15 dB (A) reduction compared with the existing model (VBA series)

- Exhaust noise: Reduced noise due to exhaust of reused low-pressure air
- Metal noise: Reduced noise due to the adoption of a construction in which the internal switching part doesn't come into contact with any metal parts

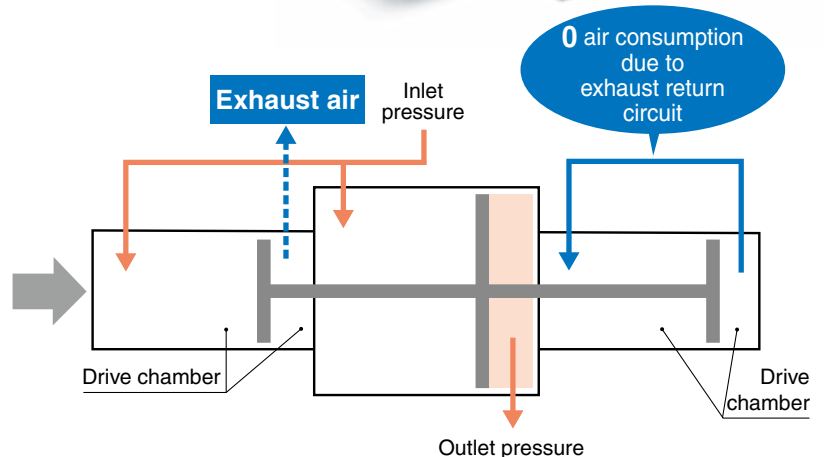

* Please contact your local sales representative for more details.

Air Saving Impact Blow Gun *IBG1 Series*


Increased impact force due to higher peak pressure
Drastic reduction in air consumption and labor time

High peak pressure

3 times or more^{*1}
(Compared with the existing model)

Air consumption

85% reduction^{*2}

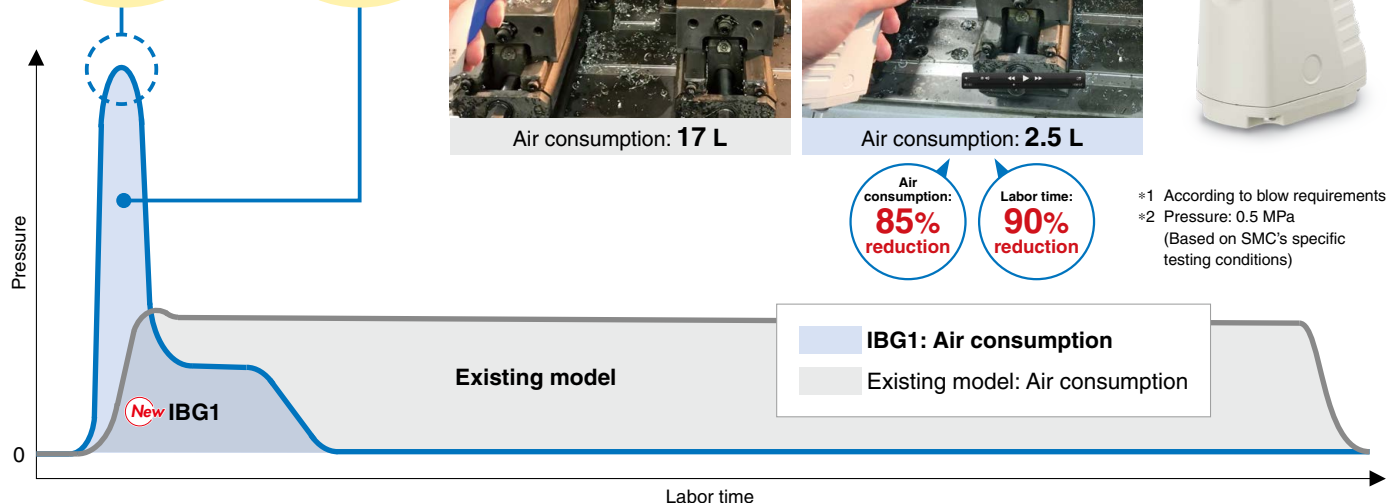


^{*1} According to blow requirements

^{*2} Pressure: 0.5 MPa
(Based on SMC's specific testing conditions)

* Please contact your local sales representative for more details.

Proposal for Air-saving System

— Contributes to CO₂ emissions reduction —



SMC Corporation

Akihabara UDX 15F,
4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN
Phone: 03-5207-8249 Fax: 03-5298-5362
<https://www.smcworld.com>
© 2019 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice
and any obligation on the part of the manufacturer.

D-G

1st printing XU printing XU 9270KY Printed in Japan.