

# Introduction to SMC's CFC-free (CO2 Refrigerant) Thermo-chillers for the Semiconductor Industry

307 mm

THERMO CHILLER

849

			1
<b>GWP: 1</b> (Natural refriger	ant)	EU refrigerant regulations: GWP150 or less <sup>*1</sup> US refrigerant regulations: GWP700 or less <sup>*1</sup> California, US refrigerant regulations: GWP750 or less *1 As of December 2023	
Air transpo possible	ort	No air transport restrictions for non-toxic and non- flammable <sup>*2</sup> refrigerants *2 A1 (ASHRAE34 standard)	
Footprint reduced by 21% <sup>*3</sup>	Slim design allows for efficient chiller layout. *3 SMC comparison		
Improved workability	The circulating fluid can be refilled from the front.		
No CFC management	Eliminates the need for periodic		

Footprint reduced by 21% <sup>∗3</sup>	Slim design allows for efficient chiller layout. *3 SMC comparison
Improved workability	The circulating fluid can be refilled from the front.
No CFC management required	Eliminates the need for periodic inspections based on the Fluorocarbon Emissions Control Act (Japan)
No CFC recovery & disposal costs	Eliminates the need to pay for CFC recovery & disposal


INR-495-042/043

**1640** 

## Refrigerant in use: CO<sub>2</sub> (R744) • GWP: 1 Standards: SEMI/CE/UL

Specifications Series	INR-495-042	INR-495-043	New HRZ	
Set temperature range [°C]	-20	-20 to 70		
Temperature stability [°C]	±1	±1.0		
Cooling capacity (@20°C) [kW]	8.5 (@	8.5 (@20°C)		
Breaker capacity [A]	20	30		
Dimensions [mm]	307 (W) x 849	307 (W) x 849 (D) x 1640 (H)		
Release date	Currently	Scheduled for September 2024		



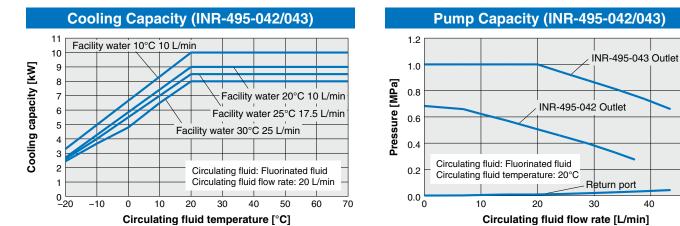

#### **GWP Comparison**

Environmental burden	Smaller	← →			Larger
GWP*1	1	150 or less	151 to 1000	1001 to 2999	3000 or more
Air transport	Yes	No	No	Yes	Yes
Refrigerant (Example)	R744 (CO2)	R454C	R32	R410A	R404A

\*1 Global Warming Potential

40

50

### **SMC's Global Maintenance Network**

Thanks to a solid inventory of maintenance parts and an experienced	Americas	E	Europe		Asia and Oceania	
chiller support team capable of conducting repairs and replacements, SMC is able to respond to customers' issues quickly and precisely. As SMC's high-quality services are available to customers all over the world, you can rest assured that you'll have our continued support long after purchase.	Brazil U.S.A. Mexico	Austria Czech Republic Denmark Finland France Germany Hungary Ireland Italy Latvia Netherlands * The nam	Norway Poland Russia Slovakia Slovenia Spain/Portugal Sweden Switzerland Turkey U.K. es of countries and regi	Australia China Hong Kong India Indonesia Japan Korea Malaysia	New Zealand Philippines Singapore Taiwan Thailand Vietnam	

A Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.

## **SMC** Corporation

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.