

## ***Benefit from the eight “zeros” with clamp mounting!***

## Zero piping work

## Zero leakage

## Zero clogging

## Zero pressure loss

## Zero fluid contact

## Zero fluid contact parts material concerns

## Zero foreign matter entry into piping

Rated flow rate range from **zero** L/min

## “Easy mounting and retrofitting” Reduced installation work

## Applicable fluids

## General liquids

## Beverage

Oil

## Antifreeze

## Chemical

## Water

## High-pressure fluids



## **PFUW Series**

Model	Applicable port size		Flow range [L/min]		
	Nominal A	Nominal B	50	100	200
PFUW760	15A	1/2B	0	60	
PFUW711	20A	3/4B	0	100	
PFUW721	25A	1B	0		200

## Types of compatible piping


Port size		
Flow rate	Nominal A	Nominal B
60 L type	15A	1/2B
100 L type	20A	3/4B
200 L type	25A	1B

## Applications

### For the cooling of processing machines (casting machines)



### For the beverage management of filler machines

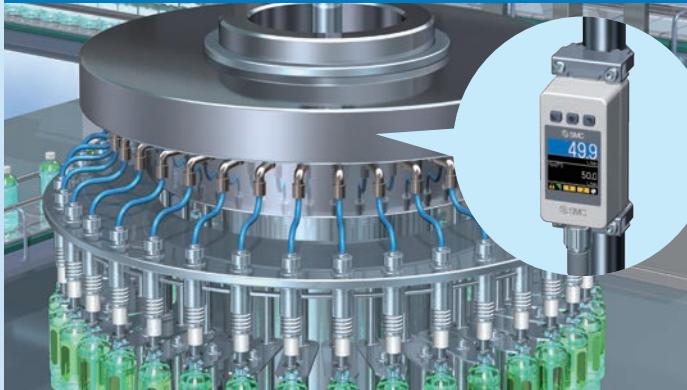

### For drainage management



### For the cooling of welding guns



### For the cooling of PET bottle molding machines



### For coolant management



Applicable fluids General liquids: Beverage, Oil, Antifreeze, Chemical liquids, Water, High-pressure fluids

