

NAAMS Standards Compliant Power Clamp Cylinder

CKZ5N Series

RoHS

ø50, ø63, ø80

A new structure has achieved downsizing.
Overall length reduced by **49 mm** max.

CKZ3N63
392 mm



CKZ5N63
343 mm


Depth reduced by **17.3 mm** max.

CKZ3N63
148.5 mm



CKZ5N63
131.2 mm

* When a proximity switch (by P&F) is attached

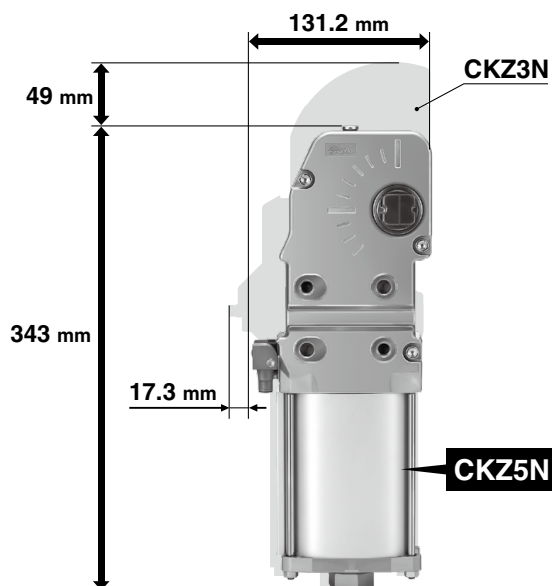

- Interchangeable with existing product CKZ2N and CKZ3N in terms of installation

Weight reduced by up to **25%**

- Aluminum body with greatly reduced weight

CKZ3N63
4.4 kg



CKZ5N63
3.3 kg

* Arm opening angle: 90°


New Bore size ø80 has been added.



High clamping force 4000 N

(ø63, Arm length: 100 mm, 0.5 MPa)

Manual lock release operability has been improved.

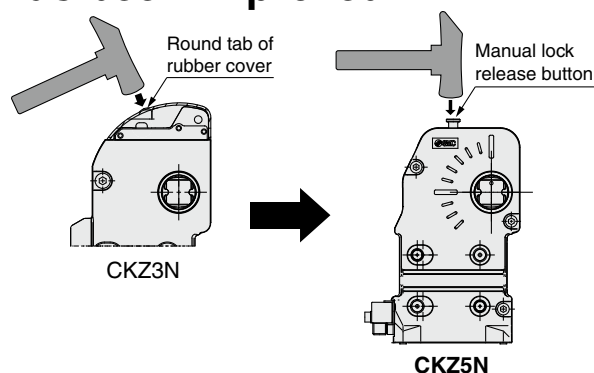

Spatter-proof construction

Fully enclosed structure by means of an aluminum body

Power Clamp Cylinders	CKZM16
	CKZT25/32
	CKZT40
	CKZ5T
	CKZ3T
	CKZT80
	CKZ5N
	CKZ3N
	CKZ2N
Related Products	C(L)KQG□ C(L)KQP□
	C(L)KQ□□ -X3256
	C(L)KQG32 C(L)KU32
	C(L)KQG32 -X3036
Flow Control Equipment	
Piping Equipment	

NAAMS Standards Compliant Power Clamp Cylinder *CKZ5N Series* ø50, ø63, ø80

RoHS

How to Order

Base type



CKZ5N 63 **- 120 R T F**

Bore size

50	ø50 equivalent
63	ø63 equivalent
80	ø80 equivalent



Cylinder port

Nil	NPT
TF	G
TP	Rc

Arm opening angle

Symbol	Arm opening angle
15	15°
30	30°
45	45°
60	60°
75	75°
90	90°
105	105°
120	120°
135	135°




Front mounting hole

Nil (No)	F (Yes)
	

Proximity switch

T	TURCK
P	P&F
W	None

Clamp arm position

R	L	D
Right	Left	Both sides
		

Proximity switch mounting surface

Clamp arm



Mounted arm


CKZ- 63 A002

Bore size

50	ø50 equivalent
63	ø63 equivalent
80	ø80 equivalent

Clamp arm code

(Refer to pages 85 to 88.)

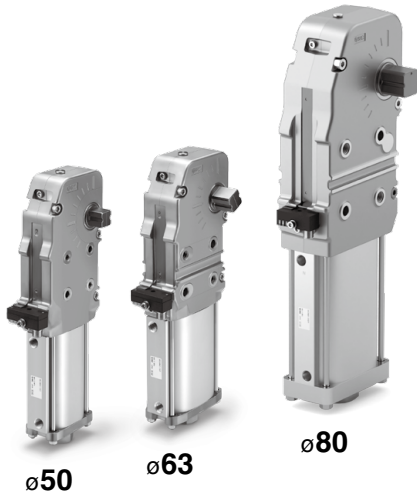

Cylinder Specifications

Bore size	50	63	80
Action	Double acting		
Fluid	Air		
Proof pressure	0.9 MPa		
Max. operating pressure	0.6 MPa		
Min. operating pressure	0.3 MPa		
Ambient and fluid temperatures	-10 to 60°C (No freezing)		
Cushion	Clamping side: None Unclamping side: Rubber bumper		
Operating time	Clamping: 1 s or more, Unclamping: 1 s or more		
Max. allowable holding moment*1	800 N·m	1500 N·m	2500 N·m

*1 Refer to the maximum holding force (torque) while clamped with the operating air exhausted. This is not the possible holding force (torque) for normal use.

Weight (Cylinder Without Clamp Arm)

Bore size	Arm opening angle								
	15°	30°	45°	60°	75°	90°	105°	120°	135°
50D*1	3.0	3.0	2.9	2.9	2.9	2.9	2.9	2.9	2.8
50(R/L)*1	2.9	2.9	2.9	2.9	2.8	2.8	2.8	2.8	2.8
63D*1	3.5	3.5	3.5	3.4	3.4	3.4	3.4	3.4	3.4
63(R/L)*1	3.4	3.4	3.4	3.4	3.3	3.3	3.3	3.3	3.3
80D*1	9.2	9.1	9.1	9.0	9.0	8.9	8.9	8.8	8.8
80(R/L)*1	9.0	8.9	8.9	8.8	8.8	8.7	8.7	8.6	8.6

*1 Clamp arm position D: Both sides, R: Right, L: Left

Cylinder Stroke


Bore size	Arm opening angle								
	15°	30°	45°	60°	75°	90°	105°	120°	135°
50	22.9	32.5	40.6	48.4	56.4	64.5	72.4	79.4	84.4
63	22.9	32.5	40.6	48.4	56.4	64.5	72.4	79.4	84.4
80	35.5	49.8	61.9	73.6	85.7	98.2	110.5	121.6	129.8

Proximity Switch Specifications

Manufacturer	TURCK	P&F
Power supply voltage	10 to 30 VDC	10 to 30 VDC
Output	N.O., PNP	N.O., PNP
Continuous load current	150 mA	100 mA
Response frequency	30 Hz	25 Hz
Housing material	PBT	PA6, PBT
Output indication	Clamping side: Red Unclamping side: Yellow	Clamping side: Red Unclamping side: Yellow
Power supply indication	Green	Green
Connector	M12 connector	M12 connector

* Switch specifications correspond to the manufacturers' technical information.

Wiring Diagram (PNP Connection Circuit)

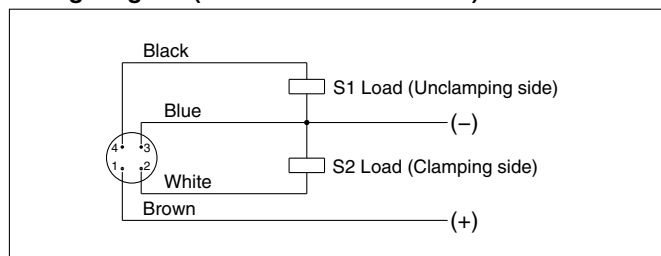

* Applicable to both TURCK and P&F
* NPN specifications are made to order

Power Clamp Cylinders

CKZM16

CKZT25/32

CKZT40

CKZ5T

CKZ3T

CKZT80

CKZ5N

CKZ3N

CKZ2N

Related Products

C(L)KQG□

C(L)KQP□

C(L)KQ□D

-X3256

C(L)KQG32

C(L)KU32

C(L)KQG32

-X3036

Flow Control Equipment

Piping Equipment

CKZ5N Series

Large Port Orifice Specification

The operating time for arm opening angles of 15° to 90° can be set to 0.6 s.

How to Order

CKZ5N **63** **Q** - **120** **R** **T** **F**

Bore size

50	ø50 equivalent
63	ø63 equivalent

Cylinder port


Nil	NPT
TF	G
TP	Rc

Large port orifice specification

Arm opening angle

Symbol	Arm opening angle
15	15°
30	30°
45	45°
60	60°
75	75°
90	90°
105	105°
120	120°
135	135°


Front mounting hole

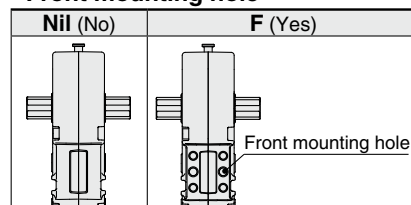

Proximity switch

T	TURCK
P	P&F
W	None

Clamp arm position



Proximity switch

Specifications

Operating time	Clamping: 0.6 s or more, Unclamping: 0.6 s or more*1
Allowable load mass	Refer to the graph below.
Specifications other than the above	Same as those of the standard type

*1 The operating time for arm opening angles of 105°, 120°, and 135° is longer than 0.6 s.

* Proximity switch viewed from the front

Dimensions: Same as those of the standard type


Allowable load mass

The allowable load mass changes depending on the arm opening angle. Be sure to use the product within the allowable values shown in the graphs below.


- * The load indicates the total weight of the clamp arm and clamping block.
- * When the operating time is 0.6 s. When the operating time for arm opening angles of 105° to 135° is longer than 0.6 s.

Calculation procedure for allowable load mass


1. Calculate the distance L from the fulcrum to the load center of gravity.
2. Check the arm opening angle of the product.
3. Read the allowable load mass from the graph.

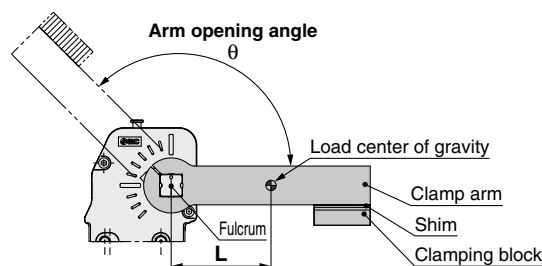


Bore Size: 50

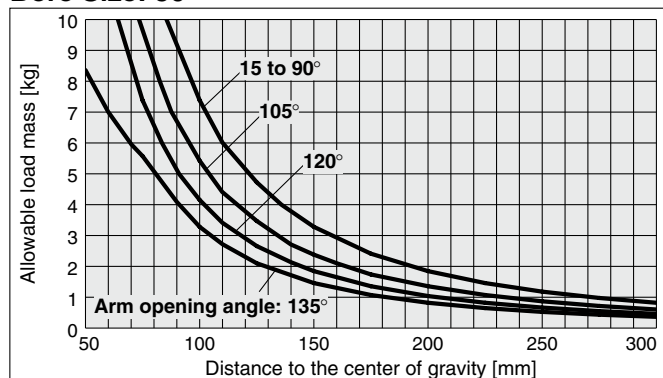

Bore Size: 63

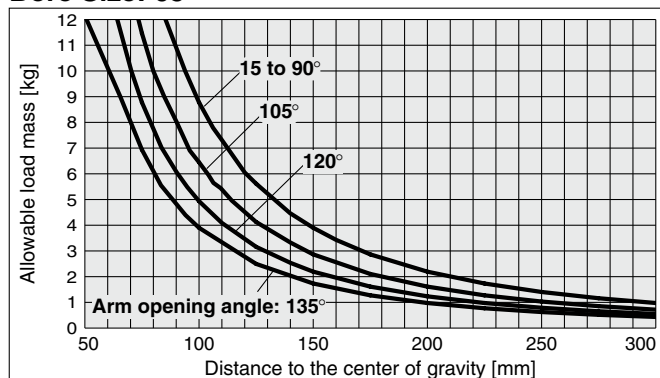

Replacement Parts

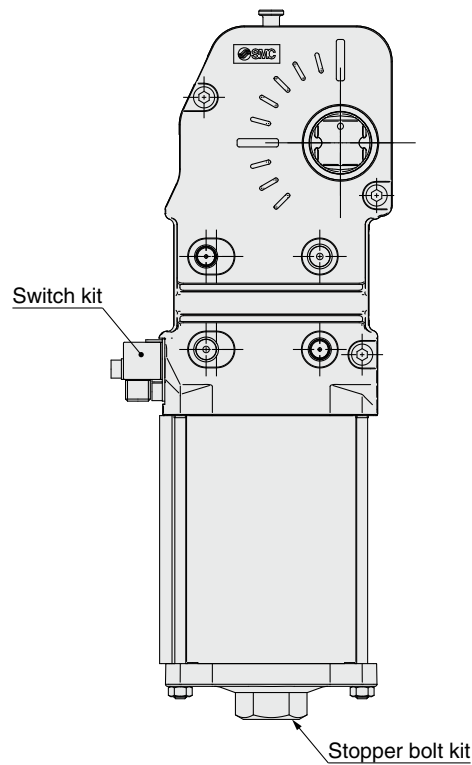

Switch Kit No.

CKZ5 – S0 63 T

Bore size

63	ø50, ø63 equivalent
80	ø80 equivalent

Proximity switch

T	TURCK
P	P&F
W	None

* The switch kit includes mounting brackets.

Stopper Bolt Kit No.

CKZ5 – B0 63 D

Bore size

63	ø50, ø63 equivalent
80	ø80 equivalent


Arm opening angle

J	15°
H	30°
G	45°
F	60°
E	75°
D	90°
C	105°
B	120°
A	135°

* The stopper bolt kit includes a stopper bolt and an O-ring seal.


Dimensions

CKZ5N50/63/80-□

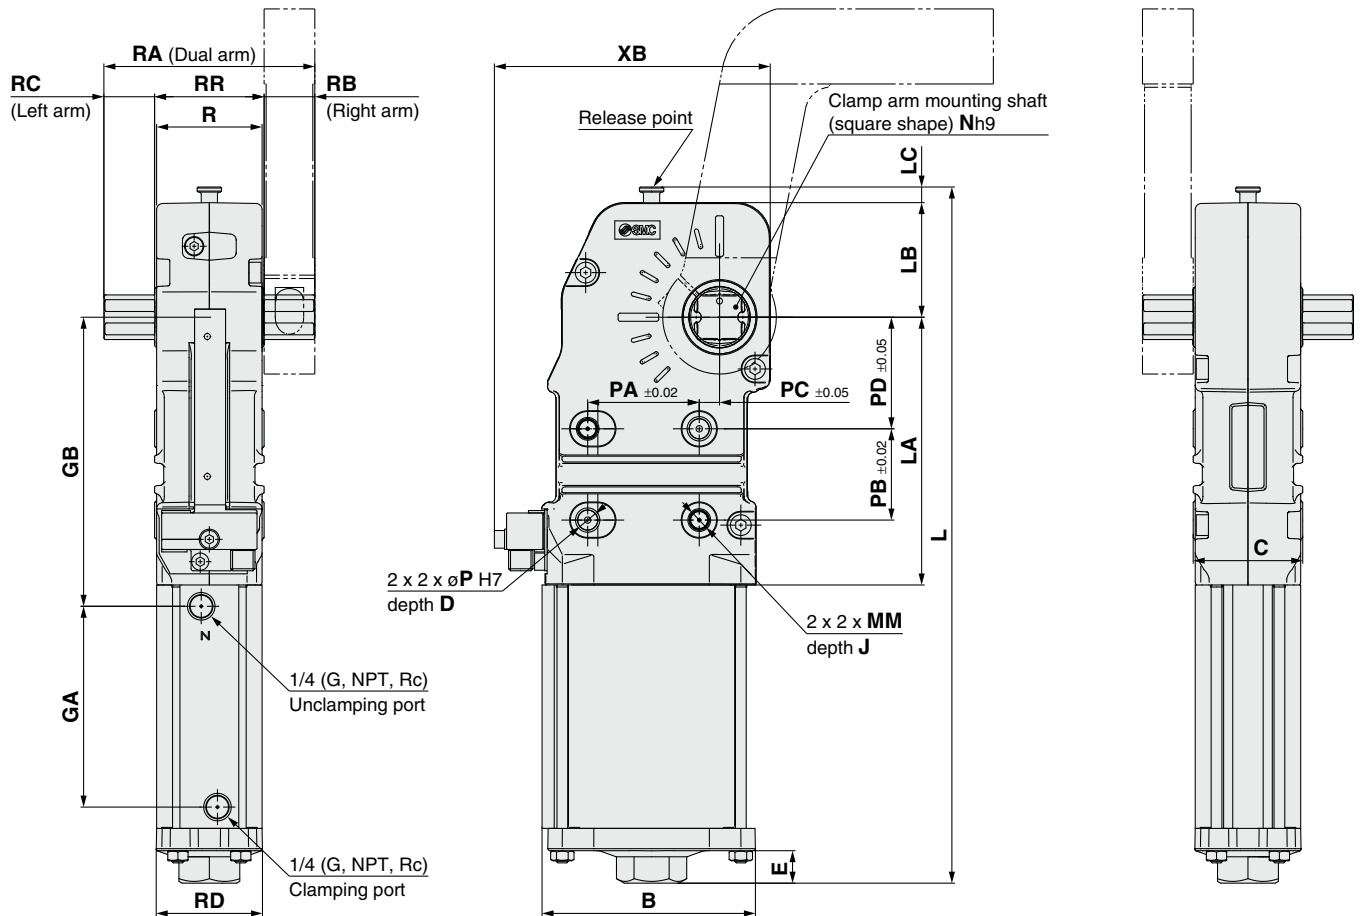

Bore size	B	C	D	E	GA	GB	I	J	L	LA	LB	LC	MM	N	P	PA	PB	PC	PD	R	RA	RB	RC	RD	RR	S	XB	
																											With TURCK switch	With P&F switch
50	86	48	12	16	99	142.5	10	12	343	132	56.5	7.7	M8 x 1.25	19	8	45	45	5	40	46.6	88	20	20	47	48	11	132.7	128.7
63	105	54	15	16	99	142.5	15	12	343	132	56.5	7.7	M10 x 1.5	22	10	55	45	10	55	52	104	25	25	52	54	13	135.2	131.2
80	132.5	76	18	15	141	200.5	12	18	478	190	80	10.7	M12 x 1.75	30	12	70	75	15	65	72	140	32	32	70	76	15	178.6	174.6

With front mounting hole

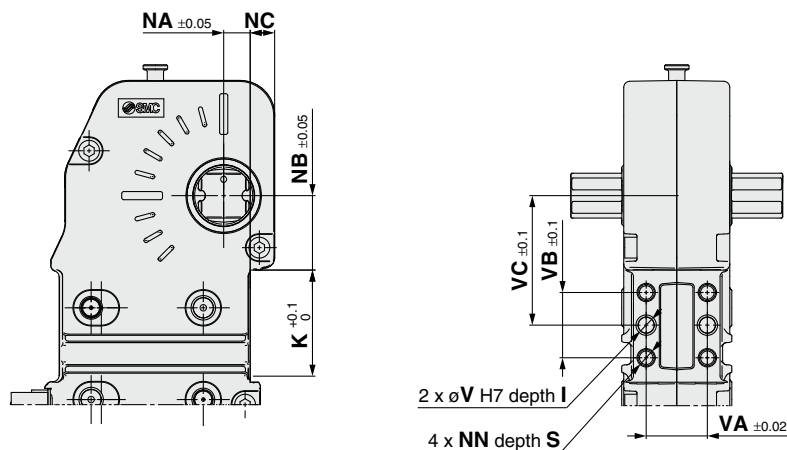

Bore size	K	NA	NB	NC	NN	V	VA	VB	VC
50	55	13	36.5	9.5	M8 x 1.25	8	30	32	63.5
63	55	13	36.5	12	M8 x 1.25	8	30	32	63.5
80	80	21	50	15	M10 x 1.5	8	50	50	90

CKZM16	CKZT25/32	CKZT40	CKZ5T	CKZ3T	CKZT80	CKZ5N	CKZ3N	CKZ2N
C(L)KQG□	C(L)KQ□D	C(L)KQG32	C(L)KQG32	C(L)KQ□D	C(L)KQ□D	C(L)KQG32	C(L)KQG32	C(L)KQ□D
C(L)KQP□	-X3256	-X3036	-X3036	-X3256	-X3256	-X3036	-X3036	-X3256
Flow Control Equipment	Flow Control Equipment	Flow Control Equipment	Flow Control Equipment	Flow Control Equipment	Flow Control Equipment	Flow Control Equipment	Flow Control Equipment	Flow Control Equipment
Piping Equipment	Piping Equipment	Piping Equipment	Piping Equipment	Piping Equipment	Piping Equipment	Piping Equipment	Piping Equipment	Piping Equipment

CKZ5N Series


Clamp Arm Code List

Bore size	SMC part no.	Clamp arm code	NAAMS code	Page
50	CKZ-50A001	A001	ACA201M	86
	CKZ-50A002	A002	ACA202M	
	CKZ-50A003	A003	ACA203M	
	CKZ-50A004	A004	ACA206M	
	CKZ-50A005	A005	ACA207M	
	CKZ-50A006	A006	ACA208M	
	CKZ-50A007	A007	ACA211M	
	CKZ-50A008	A008	ACA212M	
	CKZ-50A009	A009	ACA213M	
	CKZ-50A010	A010	ACA216M	
	CKZ-50A011	A011	ACA217M	
	CKZ-50A012	A012	ACA218M	
	CKZ-50A013	A013	ACA221M	86-1
	CKZ-50A014	A014	ACA222M	
	CKZ-50A015	A015	ACA223M	
	CKZ-50A016	A016	ACA226M	
	CKZ-50A017	A017	ACA227M	
	CKZ-50A018	A018	ACA228M	
	CKZ-50A019	A019	ACA236M	86
	CKZ-50A020	A020	ACA237M	
	CKZ-50A021	A021	ACA238M	
	CKZ-50A022	A022	ACA246M	
	CKZ-50A023	A023	ACA247M	
	CKZ-50A024	A024	ACA248M	
	CKZ-50A025	A025	ACA256M	86-1
	CKZ-50A026	A026	ACA257M	
	CKZ-50A027	A027	ACA258M	
63	CKZ-63A001	A001	ACA001M	87
	CKZ-63A002	A002	ACA002M	
	CKZ-63A003	A003	ACA003M	
	CKZ-63A004	A004	ACA004M	
	CKZ-63A005	A005	ACA005M	
	CKZ-63A006	A006	ACA006M	
	CKZ-63A007	A007	ACA007M	
	CKZ-63A008	A008	ACA008M	
	CKZ-63A009	A009	ACA009M	
	CKZ-63A010	A010	ACA010M	
	CKZ-63A011	A011	ACA011M	
	CKZ-63A012	A012	ACA012M	
	CKZ-63A013	A013	ACA013M	
	CKZ-63A014	A014	ACA014M	
	CKZ-63A015	A015	ACA015M	
	CKZ-63A016	A016	ACA016M	
	CKZ-63A017	A017	ACA017M	
	CKZ-63A018	A018	ACA018M	
	CKZ-63A019	A019	ACA019M	
	CKZ-63A020	A020	ACA020M	
	CKZ-63A021	A021	ACA021M	88
	CKZ-63A022	A022	ACA022M	
	CKZ-63A023	A023	ACA023M	
	CKZ-63A024	A024	ACA024M	
	CKZ-63A025	A025	ACA025M	
	CKZ-63A026	A026	ACA026M	
	CKZ-63A027	A027	ACA027M	
	CKZ-63A028	A028	ACA028M	
	CKZ-63A029	A029	ACA029M	
	CKZ-63A030	A030	ACA030M	
	CKZ-63A031	A031	ACA031M	
	CKZ-63A032	A032	ACA032M	
	CKZ-63A033	A033	ACA033M	
	CKZ-63A034	A034	ACA034M	
	CKZ-63A035	A035	ACA035M	
	CKZ-63A036	A036	ACA036M	
	CKZ-63A037	A037	ACA037M	
	CKZ-63A038	A038	ACA038M	
	CKZ-63A039	A039	ACA039M	
	CKZ-63A040	A040	ACA040M	
	CKZ-63A041	A041	ACA041M	
	CKZ-63A042	A042	ACA042M	
	CKZ-63A043	A043	ACA043M	
	CKZ-63A044	A044	ACA044M	
	CKZ-63A045	A045	ACA045M	
	CKZ-63A046	A046	ACA046M	
	CKZ-63A047	A047	ACA047M	
	CKZ-63A048	A048	ACA048M	

Bore size	SMC part no.	Code	NAAMS Ref. no.	Page
80	CKZ-80A001	A001	ACA100M	88-1
	CKZ-80A002	A002	ACA101M	
	CKZ-80A003	A003	ACA102M	
	CKZ-80A004	A004	ACA103M	
	CKZ-80A005	A005	ACA104M	
	CKZ-80A006	A006	ACA105M	
	CKZ-80A007	A007	ACA106M	
	CKZ-80A008	A008	ACA107M	
	CKZ-80A009	A009	ACA108M	
	CKZ-80A010	A010	ACA110M	88-2
	CKZ-80A011	A011	ACA111M	
	CKZ-80A012	A012	ACA112M	
	CKZ-80A013	A013	ACA113M	
	CKZ-80A014	A014	ACA114M	
	CKZ-80A015	A015	ACA115M	
	CKZ-80A016	A016	ACA116M	88-1
	CKZ-80A017	A017	ACA117M	
	CKZ-80A018	A018	ACA118M	
	CKZ-80A019	A019	ACA120M	
	CKZ-80A020	A020	ACA121M	
	CKZ-80A021	A021	ACA122M	88-2
	CKZ-80A022	A022	ACA123M	
	CKZ-80A023	A023	ACA124M	
	CKZ-80A024	A024	ACA125M	
	CKZ-80A025	A025	ACA126M	
	CKZ-80A026	A026	ACA127M	88-3
	CKZ-80A027	A027	ACA128M	
	CKZ-80A028	A028	ACA130M	
	CKZ-80A029	A029	ACA131M	
	CKZ-80A030	A030	ACA132M	
	CKZ-80A031	A031	ACA133M	88-4
	CKZ-80A032	A032	ACA134M	
	CKZ-80A033	A033	ACA135M	
	CKZ-80A034	A034	ACA136M	
	CKZ-80A035	A035	ACA137M	
	CKZ-80A036	A036	ACA138M	88-3
	CKZ-80A037	A037	ACA140M	
	CKZ-80A038	A038	ACA141M	
	CKZ-80A039	A039	ACA142M	
	CKZ-80A040	A040	ACA143M	
	CKZ-80A041	A041	ACA144M	88-4
	CKZ-80A042	A042	ACA145M	
	CKZ-80A043	A043	ACA146M	
	CKZ-80A044	A044	ACA147M	
	CKZ-80A045	A045	ACA148M	
	CKZ-80A046	A046	ACA150M	88-3
	CKZ-80A047	A047	ACA151M	
	CKZ-80A048	A048	ACA152M	
	CKZ-80A049	A049	ACA153M	
	CKZ-80A050	A050	ACA154M	
	CKZ-80A051	A051	ACA155M	88-4
	CKZ-80A052	A052	ACA156M	
	CKZ-80A053	A053	ACA157M	
	CKZ-80A054	A054	ACA158M	
	CKZ-80A055	A055	ACA160M	
	CKZ-80A056	A056	ACA161M	88-3
	CKZ-80A057	A057	ACA162M	
	CKZ-80A058	A058	ACA163M	
	CKZ-80A059	A059	ACA164M	
	CKZ-80A060	A060	ACA165M	
	CKZ-80A061	A061	ACA166M	88-4
	CKZ-80A062	A062	ACA167M	
	CKZ-80A063	A063	ACA168M	
	CKZ-80A064	A064	ACA170M	
	CKZ-80A065	A065	ACA171M	
	CKZ-80A066	A066	ACA172M	88-4
	CKZ-80A067	A067	ACA173M	
	CKZ-80A068	A068	ACA174M	
	CKZ-80A069	A069	ACA175M	
	CKZ-80A070	A070	ACA176M	
	CKZ-80A071	A071	ACA177M	88-4
	CKZ-80A072	A072	ACA178M	


Dimensions: Clamp Arm **Bore Size** **50**

Straight: Plain

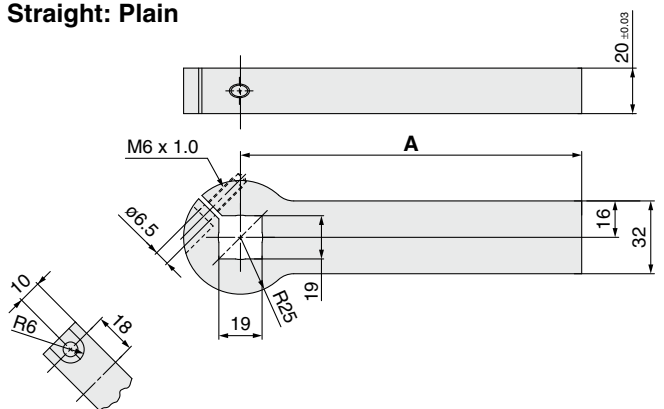


Model	NAAMS code	A	Weight [kg]
CKZ-50A001	ACA201M	90.0	0.6
CKZ-50A002	ACA202M	120.0	0.7
CKZ-50A003	ACA203M	150.0	0.9

Straight: Machined

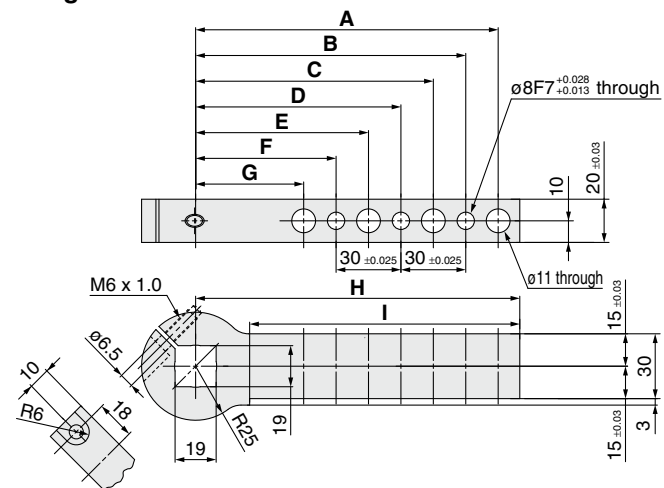


											[mm]
Model	NAAMS code	A	B	C	D	E	F	G	H	I	Weight [kg]
CKZ-50A004	ACA206M	80.0	65.0	50.0	—	—	—	—	90.0	65.0	0.5
CKZ-50A005	ACA207M	110.0	95.0	80.0	65.0	50.0	—	—	120.0	95.0	0.6
CKZ-50A006	ACA208M	140.0	125.0	110.0	95.0	80.0	65.0	50.0	150.0	125.0	0.7

Straight: Machined

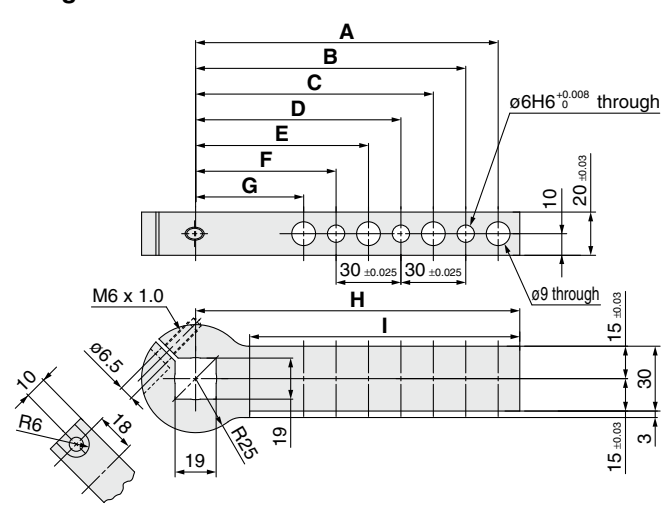


											[mm]
Model	NAAMS code	A	B	C	D	E	F	G	H	I	Weight [kg]
CKZ-50A019	ACA236M	80.0	65.0	50.0	—	—	—	—	90.0	65.0	0.5
CKZ-50A020	ACA237M	110.0	95.0	80.0	65.0	50.0	—	—	120.0	95.0	0.6
CKZ-50A021	ACA238M	140.0	125.0	110.0	95.0	80.0	65.0	50.0	150.0	125.0	0.7

20 mm offset: Plain

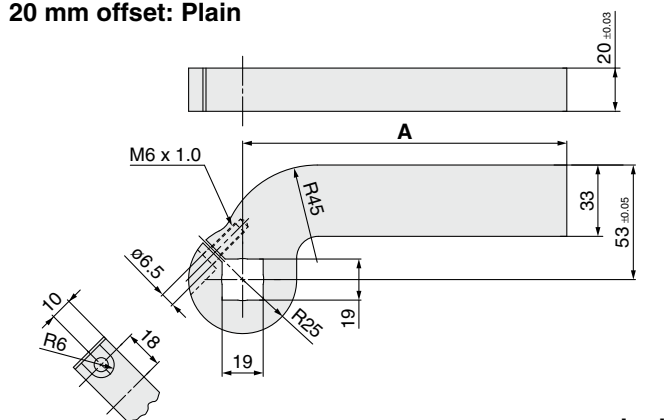


Model	NAAMS code	A	Weight [kg]
CKZ-50A007	ACA211M	90.0	0.7
CKZ-50A008	ACA212M	120.0	0.8
CKZ-50A009	ACA213M	150.0	1.0

25 mm offset: Machined

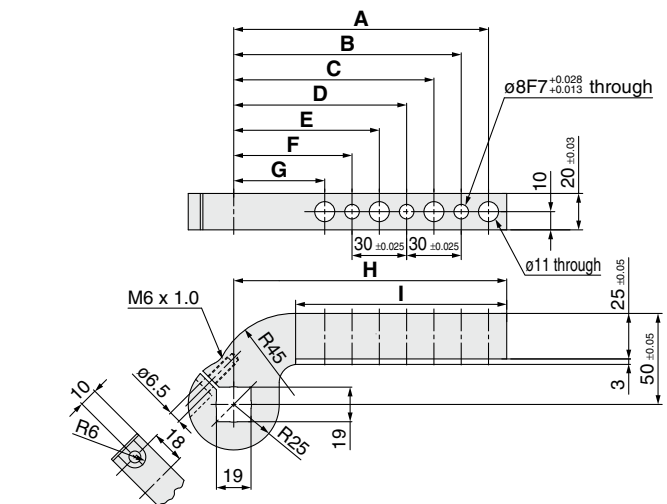

											[mm]
Model	NAAMS code	A	B	C	D	E	F	G	H	I	Weight [kg]
CKZ-50A010	ACA216M	80.0	65.0	50.0	—	—	—	—	90.0	56.0	0.5
CKZ-50A011	ACA217M	110.0	95.0	80.0	65.0	50.0	—	—	120.0	86.0	0.6
CKZ-50A012	ACA218M	140.0	125.0	110.0	95.0	80.0	65.0	50.0	150.0	116.0	0.7

25 mm offset: Machined

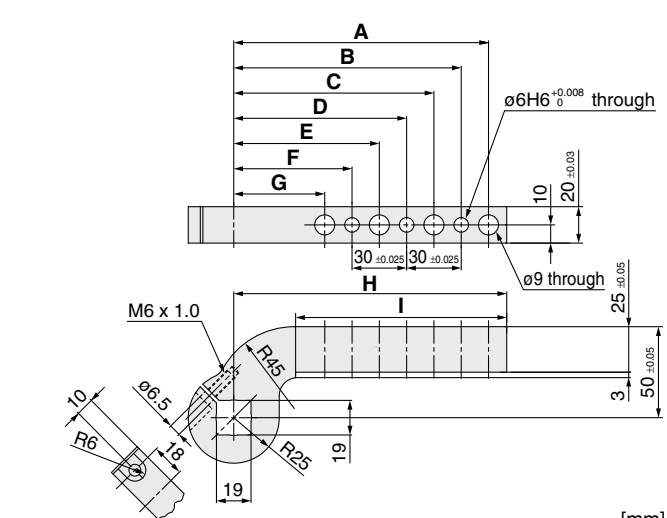


											[mm]
Model	NAAMS code	A	B	C	D	E	F	G	H	I	Weight [kg]
CKZ-50A022	ACA246M	80.0	65.0	50.0	—	—	—	—	90.0	56.0	0.5
CKZ-50A023	ACA247M	110.0	95.0	80.0	65.0	50.0	—	—	120.0	86.0	0.6
CKZ-50A024	ACA248M	140.0	125.0	110.0	95.0	80.0	65.0	50.0	150.0	116.0	0.7

CKZ5N Series


Dimensions: Clamp Arm **Bore Size 50**

45 mm offset: Plain

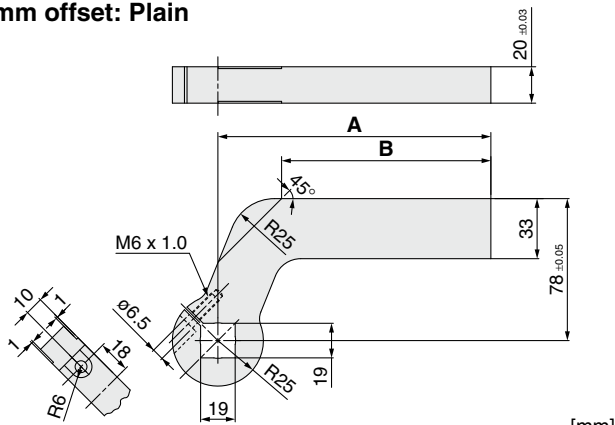


Model	NAAMS code	A	B	Weight [kg]
CKZ-50A013	ACA221M	90.0	55.0	0.8
CKZ-50A014	ACA222M	120.0	85.0	0.9
CKZ-50A015	ACA223M	150.0	115.0	1.1

50 mm offset: Machined

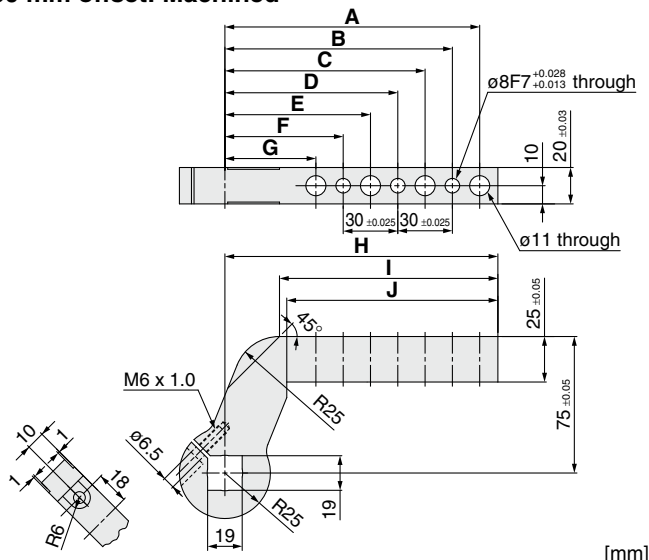

Model	NAAMS code	A	B	C	D	E	F	G	H	I	J	Weight [kg]
CKZ-50A016	ACA226M	80.0	65.0	50.0	—	—	—	—	90.0	60.0	56.0	0.6
CKZ-50A017	ACA227M	110.0	95.0	80.0	65.0	50.0	—	—	120.0	90.0	86.0	0.7
CKZ-50A018	ACA228M	140.0	125.0	110.0	95.0	80.0	65.0	50.0	150.0	120.0	116.0	0.8

50 mm offset: Machined

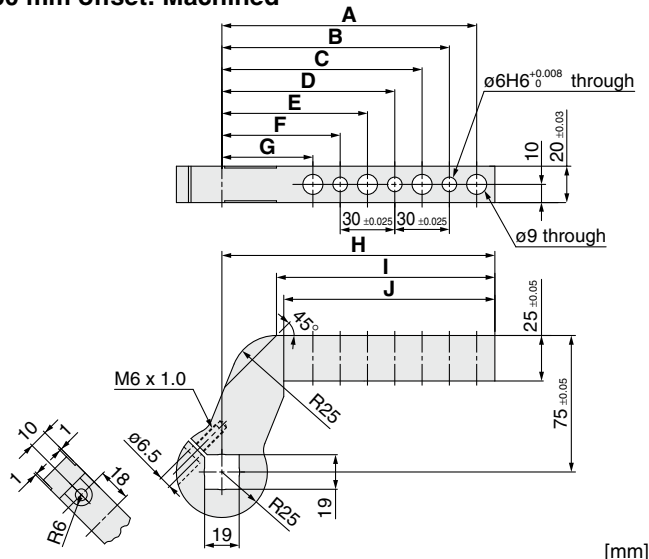


Model	NAAMS code	A	B	C	D	E	F	G	H	I	J	Weight [kg]
CKZ-50A025	ACA256M	80.0	65.0	50.0	—	—	—	—	90.0	60.0	56.0	0.6
CKZ-50A026	ACA257M	110.0	95.0	80.0	65.0	50.0	—	—	120.0	90.0	86.0	0.7
CKZ-50A027	ACA258M	140.0	125.0	110.0	95.0	80.0	65.0	50.0	150.0	120.0	116.0	0.8

CKZ5N Series


Dimensions: Clamp Arm **Bore Size 63**

Straight: Plain

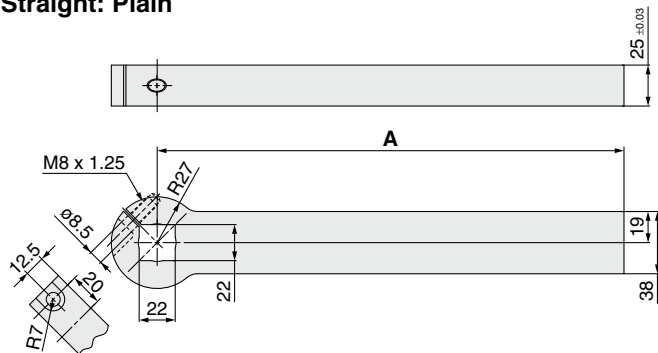


Model	NAAMS code	A	Weight [kg]
CKZ-63A001	ACA001M	135.0	1.2
CKZ-63A002	ACA002M	165.0	1.4
CKZ-63A003	ACA003M	195.0	1.6
CKZ-63A004	ACA004M	225.0	1.8
CKZ-63A005	ACA005M	255.0	2.1
CKZ-63A006	ACA006M	285.0	2.3

20 mm offset: Plain

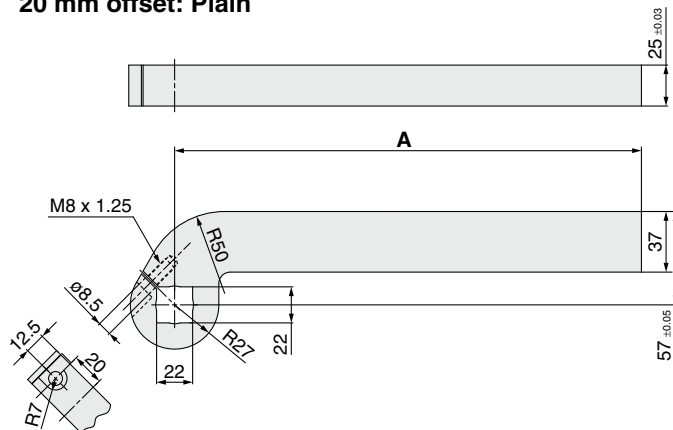

Model	NAAMS code	A	Weight [kg]
CKZ-63A013	ACA013M	135.0	1.4
CKZ-63A014	ACA014M	165.0	1.6
CKZ-63A015	ACA015M	195.0	1.8
CKZ-63A016	ACA016M	225.0	2.0
CKZ-63A017	ACA017M	255.0	2.2
CKZ-63A018	ACA018M	285.0	2.4


Straight: Machined

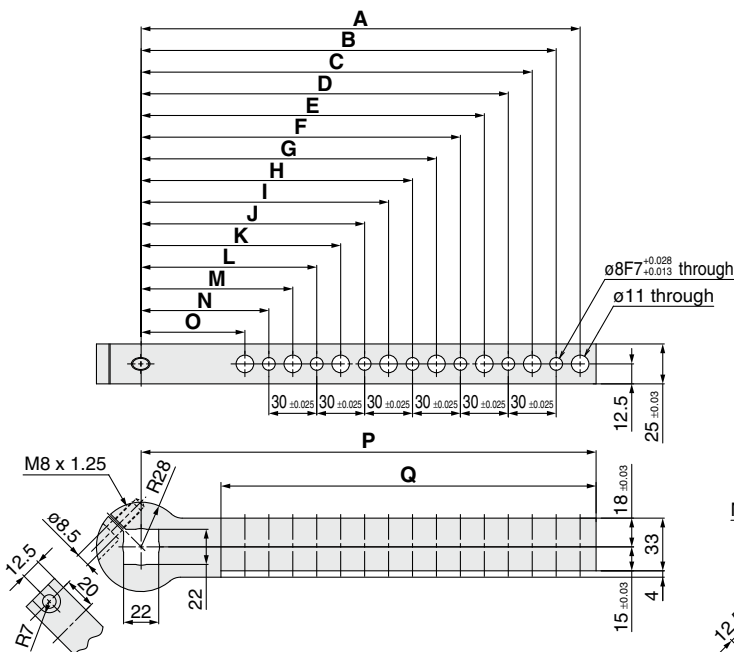

Model	NAAMS code	A	B	C	D	E	F	G	H	I
CKZ-63A007	ACA007M	125.0	110.0	95.0	80.0	65.0	—	—	—	—
CKZ-63A008	ACA008M	155.0	140.0	125.0	110.0	95.0	80.0	65.0	—	—
CKZ-63A009	ACA009M	185.0	170.0	155.0	140.0	125.0	110.0	95.0	80.0	65.0
CKZ-63A010	ACA010M	215.0	200.0	185.0	170.0	155.0	140.0	125.0	110.0	95.0
CKZ-63A011	ACA011M	245.0	230.0	215.0	200.0	185.0	170.0	155.0	140.0	125.0
CKZ-63A012	ACA012M	275.0	260.0	245.0	230.0	215.0	200.0	185.0	170.0	155.0

Model	NAAMS code	J	K	L	M	N	O	P	Q	Weight [kg]
CKZ-63A007	ACA007M	—	—	—	—	—	—	135.0	85.0	1.0
CKZ-63A008	ACA008M	—	—	—	—	—	—	165.0	115.0	1.2
CKZ-63A009	ACA009M	—	—	—	—	—	—	195.0	145.0	1.4
CKZ-63A010	ACA010M	80.0	65.0	—	—	—	—	225.0	175.0	1.5
CKZ-63A011	ACA011M	110.0	95.0	80.0	65.0	—	—	255.0	205.0	1.7
CKZ-63A012	ACA012M	140.0	125.0	110.0	95.0	80.0	65.0	285.0	235.0	1.9

25 mm offset: Machined

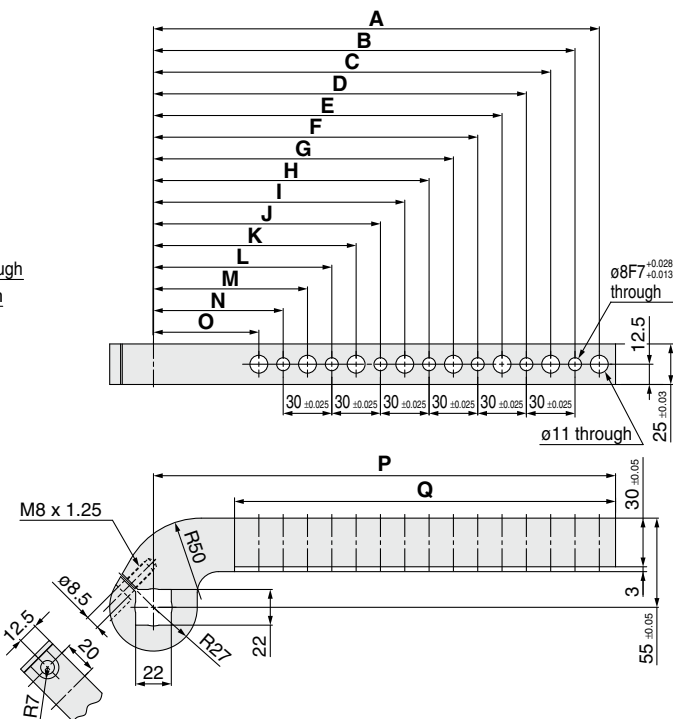


Model	NAAMS code	A	B	C	D	E	F	G	H	I
CKZ-63A019	ACA019M	125.0	110.0	95.0	80.0	65.0	—	—	—	—
CKZ-63A020	ACA020M	155.0	140.0	125.0	110.0	95.0	80.0	65.0	—	—
CKZ-63A021	ACA021M	185.0	170.0	155.0	140.0	125.0	110.0	95.0	80.0	65.0
CKZ-63A022	ACA022M	215.0	200.0	185.0	170.0	155.0	140.0	125.0	110.0	95.0
CKZ-63A023	ACA023M	245.0	230.0	215.0	200.0	185.0	170.0	155.0	140.0	125.0
CKZ-63A024	ACA024M	275.0	260.0	245.0	230.0	215.0	200.0	185.0	170.0	155.0

Model	NAAMS code	J	K	L	M	N	O	P	Q	Weight [kg]
CKZ-63A019	ACA019M	—	—	—	—	—	—	135.0	85.0	1.3
CKZ-63A020	ACA020M	—	—	—	—	—	—	165.0	115.0	1.5
CKZ-63A021	ACA021M	—	—	—	—	—	—	195.0	145.0	1.6
CKZ-63A022	ACA022M	80.0	65.0	—	—	—	—	225.0	175.0	1.7
CKZ-63A023	ACA023M	110.0	95.0	80.0	65.0	—	—	255.0	205.0	1.9
CKZ-63A024	ACA024M	140.0	125.0	110.0	95.0	80.0	65.0	285.0	235.0	2.1


Dimensions: Clamp Arm **Bore Size 63**

65 mm offset: Plain

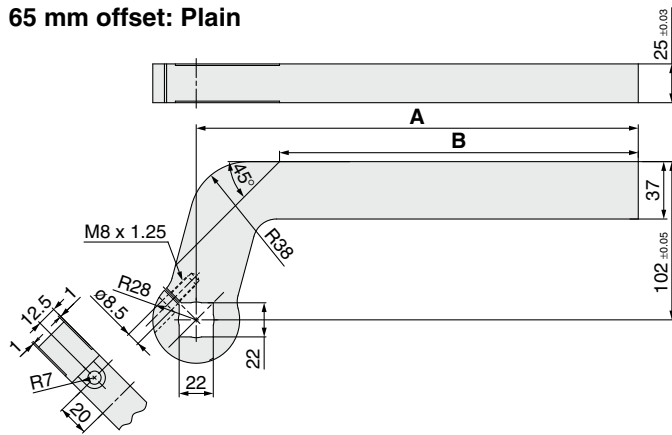


Model	NAAMS code	A	B	Weight [kg]
CKZ-63A025	ACA025M	135.0	81.3	1.7
CKZ-63A026	ACA026M	165.0	111.3	1.9
CKZ-63A027	ACA027M	195.0	141.3	2.1
CKZ-63A028	ACA028M	225.0	171.3	2.3
CKZ-63A029	ACA029M	255.0	201.3	2.5
CKZ-63A030	ACA030M	285.0	231.3	2.7

115 mm offset: Plain

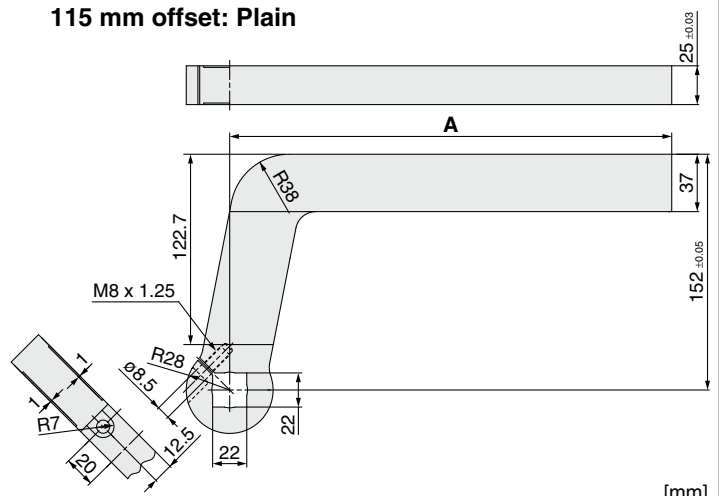

Model	NAAMS code	A	Weight [kg]
CKZ-63A037	ACA037M	135.0	2.1
CKZ-63A038	ACA038M	165.0	2.3
CKZ-63A039	ACA039M	195.0	2.5
CKZ-63A040	ACA040M	225.0	2.7
CKZ-63A041	ACA041M	255.0	2.9
CKZ-63A042	ACA042M	285.0	3.1


70 mm offset: Machined

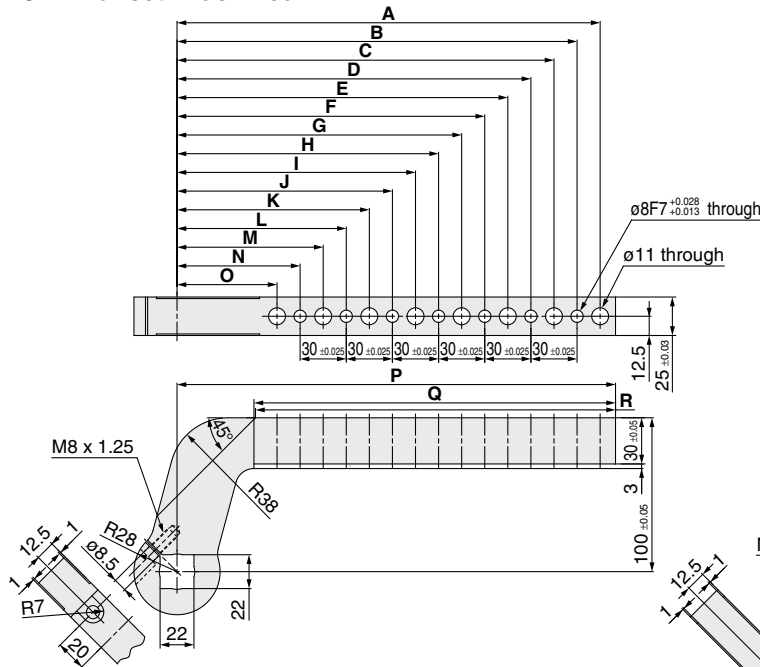

Model	NAAMS code	A	B	C	D	E	F	G	H	I	J
CKZ-63A031	ACA031M	125.0	110.0	95.0	80.0	65.0	—	—	—	—	—
CKZ-63A032	ACA032M	155.0	140.0	125.0	110.0	95.0	80.0	65.0	—	—	—
CKZ-63A033	ACA033M	185.0	170.0	155.0	140.0	125.0	110.0	95.0	80.0	65.0	—
CKZ-63A034	ACA034M	215.0	200.0	185.0	170.0	155.0	140.0	125.0	110.0	95.0	80.0
CKZ-63A035	ACA035M	245.0	230.0	215.0	200.0	185.0	170.0	155.0	140.0	125.0	110.0
CKZ-63A036	ACA036M	275.0	260.0	245.0	230.0	215.0	200.0	185.0	170.0	155.0	140.0

Model	NAAMS code	K	L	M	N	O	P	Q	R	Weight [kg]
CKZ-63A031	ACA031M	—	—	—	—	—	135.0	85.0	84.0	1.4
CKZ-63A032	ACA032M	—	—	—	—	—	165.0	115.0	114.0	1.6
CKZ-63A033	ACA033M	—	—	—	—	—	195.0	145.0	144.0	1.8
CKZ-63A034	ACA034M	65.0	—	—	—	—	225.0	175.0	174.0	1.9
CKZ-63A035	ACA035M	95.0	80.0	65.0	—	—	255.0	205.0	204.0	2.1
CKZ-63A036	ACA036M	125.0	110.0	95.0	80.0	65.0	285.0	235.0	234.0	2.3

120 mm offset: Machined

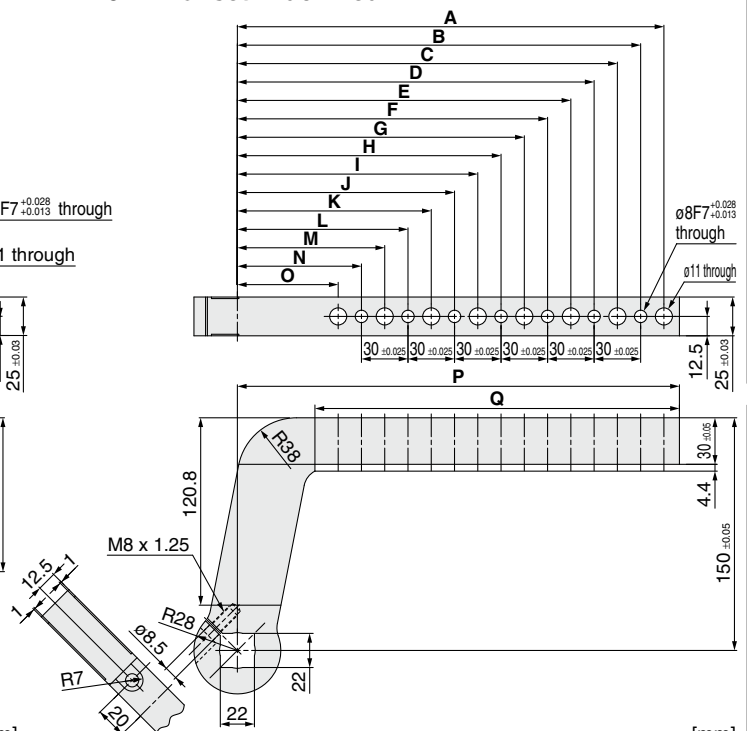

Model	NAAMS code	A	B	C	D	E	F	G	H	I	J
CKZ-63A043	ACA043M	125.0	110.0	95.0	80.0	65.0	—	—	—	—	—
CKZ-63A044	ACA044M	155.0	140.0	125.0	110.0	95.0	80.0	65.0	—	—	—
CKZ-63A045	ACA045M	185.0	170.0	155.0	140.0	125.0	110.0	95.0	80.0	65.0	—
CKZ-63A046	ACA046M	215.0	200.0	185.0	170.0	155.0	140.0	125.0	110.0	95.0	80.0
CKZ-63A047	ACA047M	245.0	230.0	215.0	200.0	185.0	170.0	155.0	140.0	125.0	110.0
CKZ-63A048	ACA048M	275.0	260.0	245.0	230.0	215.0	200.0	185.0	170.0	155.0	140.0


Model	NAAMS code	K	L	M	N	O	P	Q	Weight [kg]
CKZ-63A043	ACA043M	—	—	—	—	—	135.0	85.0	1.8
CKZ-63A044	ACA044M	—	—	—	—	—	165.0	115.0	2.0
CKZ-63A045	ACA045M	—	—	—	—	—	195.0	145.0	2.1
CKZ-63A046	ACA046M	65.0	—	—	—	—	225.0	175.0	2.3
CKZ-63A047	ACA047M	95.0	80.0	65.0	—	—	255.0	205.0	2.5
CKZ-63A048	ACA048M	125.0	110.0	95.0	80.0	65.0	285.0	235.0	2.6

- Power Clamp Cylinders
- CKZM16
 - CKZT25/32
 - CKZT40
 - CKZ5T
 - CKZ3T
 - CKZT80
 - CKZ5N
 - CKZ3N
 - CKZ2N
- Related Products
- CLJ/KQG□
 - CLJ/KQ□ID
 - CLJ/KQ□-X3256
 - CLJ/KQG32
 - CLJ/KU32
 - CLJ/KQG32
 - CLJ/KQ□-X3036
- Flow Control Equipment
- Piping Equipment

CKZ5N Series


Dimensions: Clamp Arm **Bore Size 80**

Straight: Plain

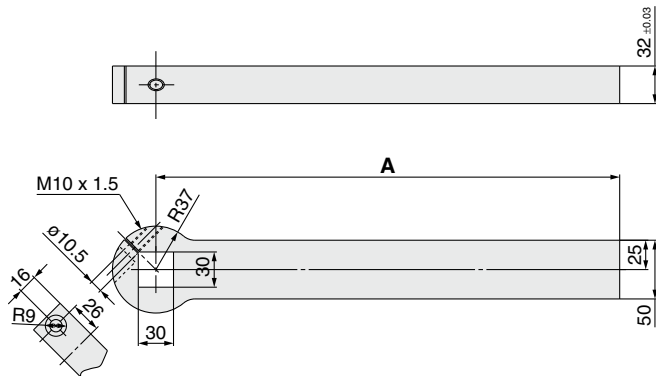


Part no.	NAAMS code	A	Weight [kg]
CKZ-80A001	ACA100M	155.0	2.3
CKZ-80A002	ACA101M	185.0	2.7
CKZ-80A003	ACA102M	215.0	3.0
CKZ-80A004	ACA103M	245.0	3.4
CKZ-80A005	ACA104M	275.0	3.8
CKZ-80A006	ACA105M	305.0	4.2
CKZ-80A007	ACA106M	335.0	4.5
CKZ-80A008	ACA107M	365.0	4.9
CKZ-80A009	ACA108M	395.0	5.3

20 mm offset: Plain

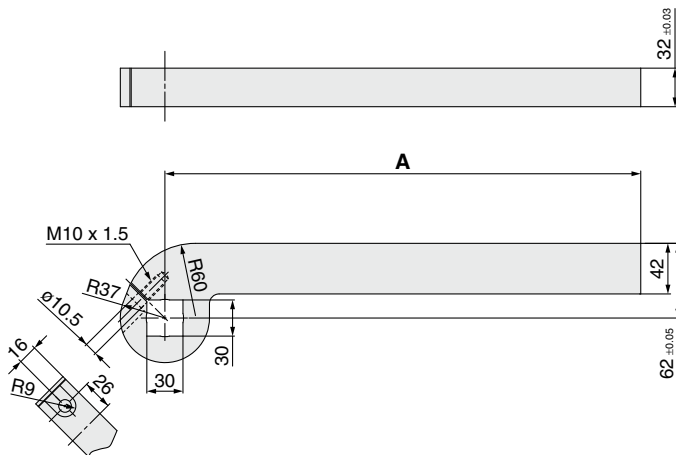


Part no.	NAAMS code	A	Weight [kg]
CKZ-80A019	ACA120M	155.0	2.4
CKZ-80A020	ACA121M	185.0	2.7
CKZ-80A021	ACA122M	215.0	3.0
CKZ-80A022	ACA123M	245.0	3.3
CKZ-80A023	ACA124M	275.0	3.6
CKZ-80A024	ACA125M	305.0	3.9
CKZ-80A025	ACA126M	335.0	4.2
CKZ-80A026	ACA127M	365.0	4.6
CKZ-80A027	ACA128M	395.0	4.9

Straight: Machined

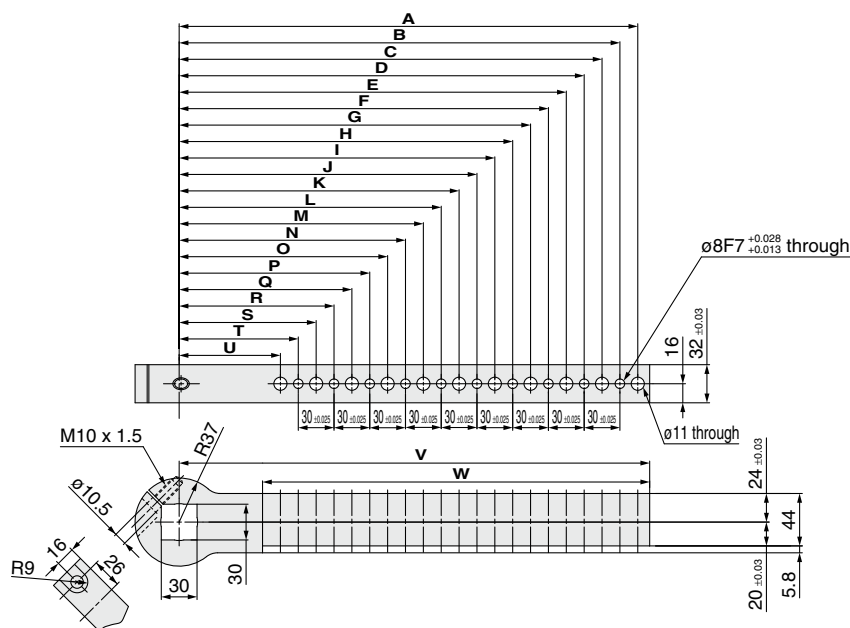

Part no.	NAAMS code	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Weight [kg]
CKZ-80A010	ACA110M	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	155.0	85.0	2.1
CKZ-80A011	ACA111M	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	185.0	115.0	2.4
CKZ-80A012	ACA112M	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	215.0	145.0	2.7
CKZ-80A013	ACA113M	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	245.0	175.0	3.0
CKZ-80A014	ACA114M	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	275.0	205.0	3.3
CKZ-80A015	ACA115M	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	305.0	235.0	3.6
CKZ-80A016	ACA116M	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	335.0	265.0	3.9
CKZ-80A017	ACA117M	355.0	340.0	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	365.0	295.0	4.2
CKZ-80A018	ACA118M	385.0	370.0	355.0	340.0	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	395.0	325.0	4.5

25 mm offset: Machined

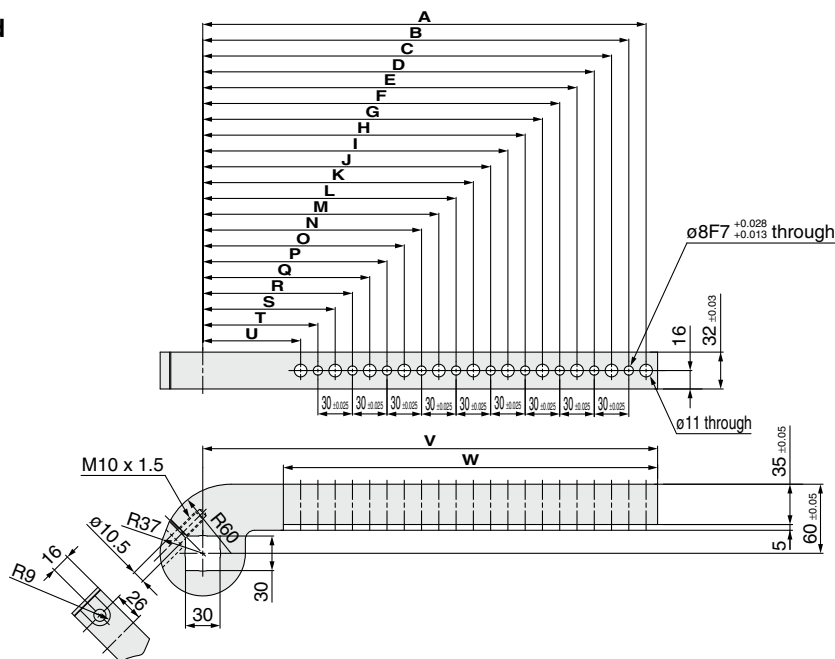

Part no.	NAAMS code	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Weight [kg]
CKZ-80A028	ACA130M	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	155.0	85.0	2.1
CKZ-80A029	ACA131M	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	185.0	115.0	2.3
CKZ-80A030	ACA132M	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	215.0	145.0	2.6
CKZ-80A031	ACA133M	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	245.0	175.0	2.8
CKZ-80A032	ACA134M	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	275.0	205.0	3.0
CKZ-80A033	ACA135M	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	305.0	235.0	3.2
CKZ-80A034	ACA136M	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	335.0	265.0	3.5
CKZ-80A035	ACA137M	355.0	340.0	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	365.0	295.0	3.8
CKZ-80A036	ACA138M	385.0	370.0	355.0	340.0	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	395.0	325.0	4.0

Power Clamp Cylinders

CKZM16

CKZT25/32

CKZT40

CKZ5T

CKZ3T

CKZT80

CKZ5N

CKZ3N

CKZ2N

C(L)KQG ☐

Related Products

C(L)KQG ☐

C(L)KQ□D

C(L)KQG32

C(L)KQG32


Flow Control Equipment

Piping

CKZ5N Series


Dimensions: Clamp Arm **Bore Size 80**

65 mm offset: Plain

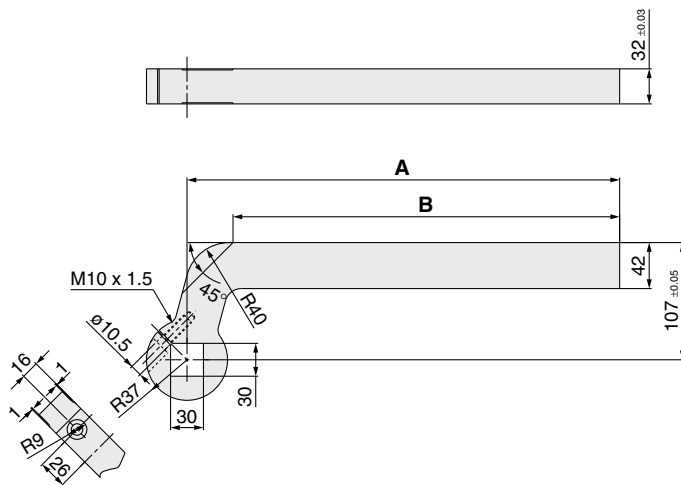


Part no.	NAAMS code	A	B	Weight [kg]
CKZ-80A037	ACA140M	155.0	113.0	2.7
CKZ-80A038	ACA141M	185.0	143.0	3.0
CKZ-80A039	ACA142M	215.0	173.0	3.3
CKZ-80A040	ACA143M	245.0	203.0	3.6
CKZ-80A041	ACA144M	275.0	233.0	3.9
CKZ-80A042	ACA145M	305.0	263.0	4.2
CKZ-80A043	ACA146M	335.0	293.0	4.5
CKZ-80A044	ACA147M	365.0	323.0	4.8
CKZ-80A045	ACA148M	395.0	353.0	5.1

115 mm offset: Plain

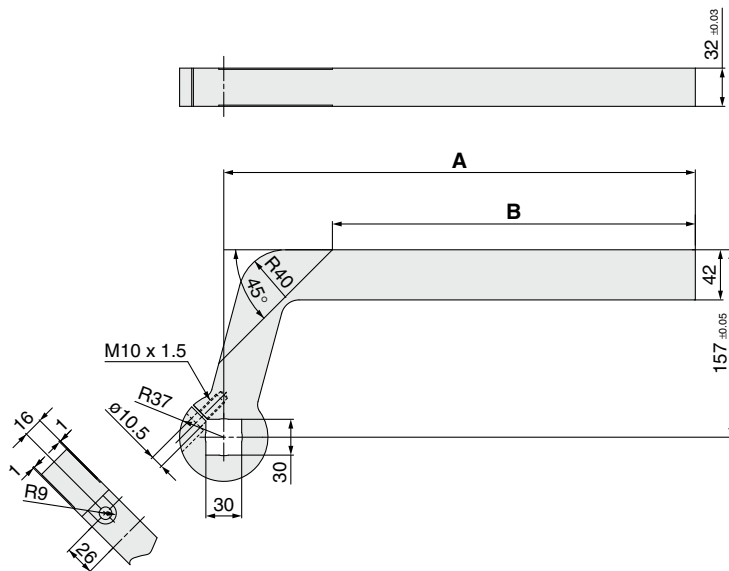


Part no.	NAAMS code	A	B	Weight [kg]
CKZ-80A055	ACA160M	155.0	64.0	3.0
CKZ-80A056	ACA161M	185.0	94.0	3.3
CKZ-80A057	ACA162M	215.0	124.0	3.6
CKZ-80A058	ACA163M	245.0	154.0	3.9
CKZ-80A059	ACA164M	275.0	184.0	4.2
CKZ-80A060	ACA165M	305.0	214.0	4.5
CKZ-80A061	ACA166M	335.0	244.0	4.8
CKZ-80A062	ACA167M	365.0	274.0	5.2
CKZ-80A063	ACA168M	395.0	304.0	5.5

70 mm offset: Machined

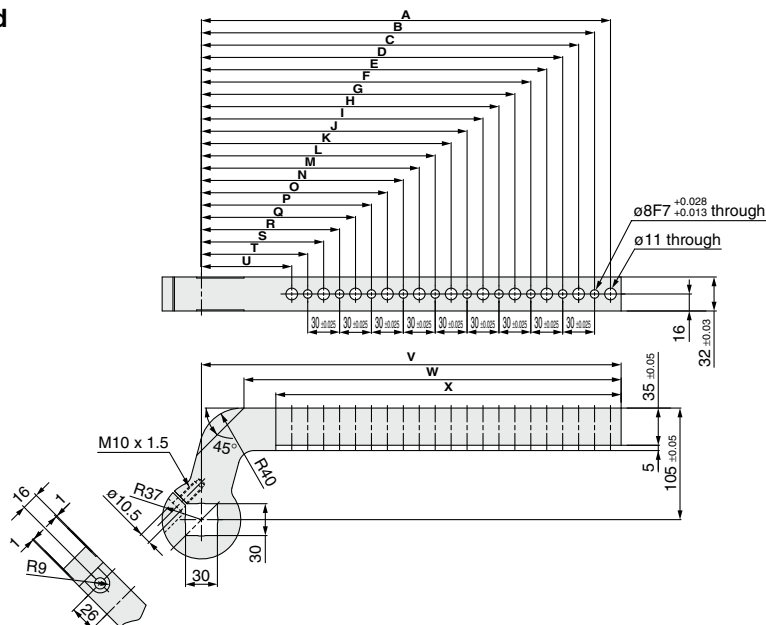

Part no.	NAAMS code	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Weight [kg]
CKZ-80A046	ACA150M	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	155.0	115.0	85.0	2.4	
CKZ-80A047	ACA151M	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	—	185.0	145.0	115.0	2.6	
CKZ-80A048	ACA152M	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	215.0	175.0	145.0	2.8	
CKZ-80A049	ACA153M	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	245.0	205.0	175.0	3.1	
CKZ-80A050	ACA154M	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	275.0	235.0	205.0	3.3	
CKZ-80A051	ACA155M	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	305.0	265.0	235.0	3.5	
CKZ-80A052	ACA156M	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	335.0	295.0	265.0	3.8	
CKZ-80A053	ACA157M	355.0	340.0	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	365.0	325.0	295.0	4.0	
CKZ-80A054	ACA158M	385.0	370.0	355.0	340.0	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	395.0	355.0	325.0	4.3

120 mm offset: Machined

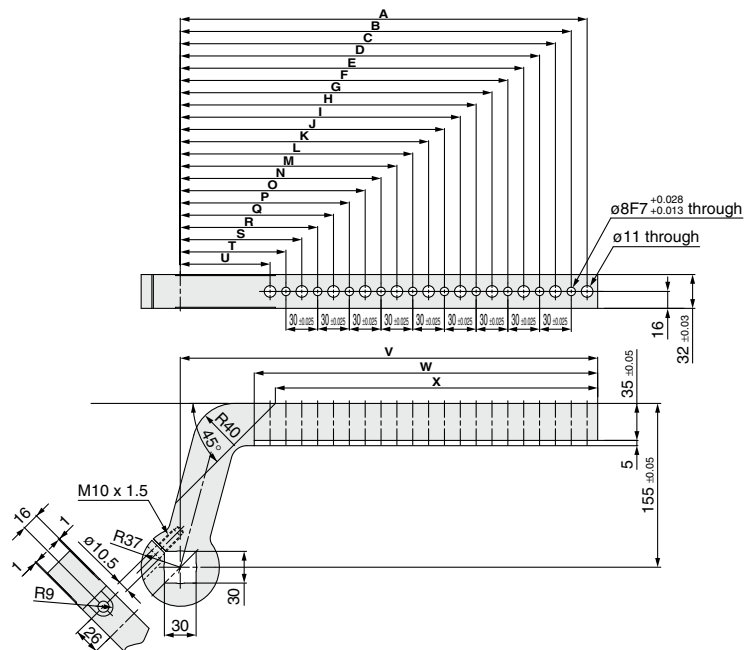

Part no.	NAAMS code	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Weight [kg]
CKZ-80A064	ACA170M	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	155.0	85.0	65.0	2.7
CKZ-80A065	ACA171M	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	185.0	115.0	95.0	2.9
CKZ-80A066	ACA172M	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	—	—	215.0	145.0	125.0	3.2
CKZ-80A067	ACA173M	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	—	—	245.0	175.0	155.0	3.4
CKZ-80A068	ACA174M	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	—	—	275.0	205.0	185.0	3.6
CKZ-80A069	ACA175M	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	—	—	305.0	235.0	215.0	3.9
CKZ-80A070	ACA176M	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	—	—	335.0	265.0	245.0	4.1
CKZ-80A071	ACA177M	355.0	340.0	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	—	—	365.0	295.0	275.0	4.4
CKZ-80A072	ACA178M	385.0	370.0	355.0	340.0	325.0	310.0	295.0	280.0	265.0	250.0	235.0	220.0	205.0	190.0	175.0	160.0	145.0	130.0	115.0	100.0	85.0	395.0	325.0	305.0	4.6

Power Clamp Cylinders

CKZM16

CKZT25/32

CKZT40

CKZ5T

CKZ3T

CKZT80

CKZ5N

CKZ3N

CKZ2N

C(L)KQG ☐

C(L)KQ□D


C(L)KQG32

Flow Control Equipment


Piping

CKZ5N Series Model Selection


Relation between arm length and clamping force

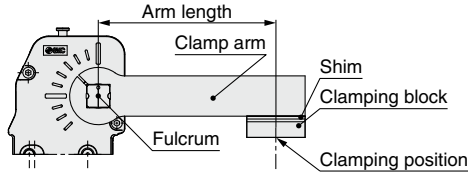


Bore Size: 50

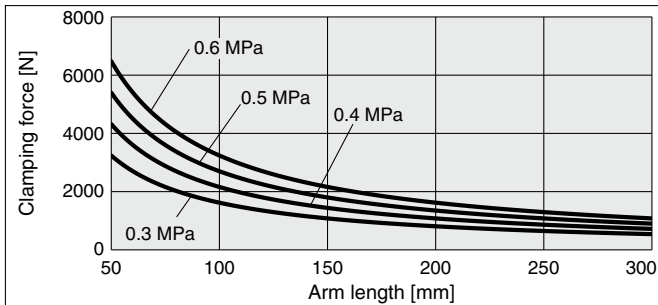

Bore Size: 80

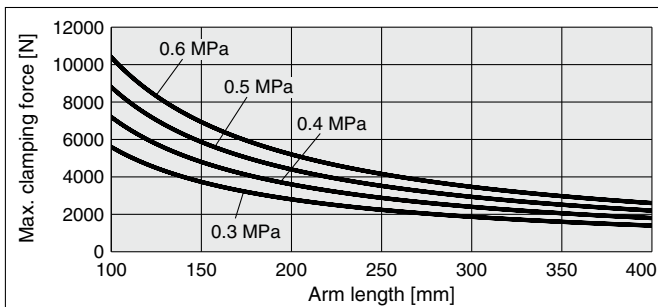

Bore Size: 63

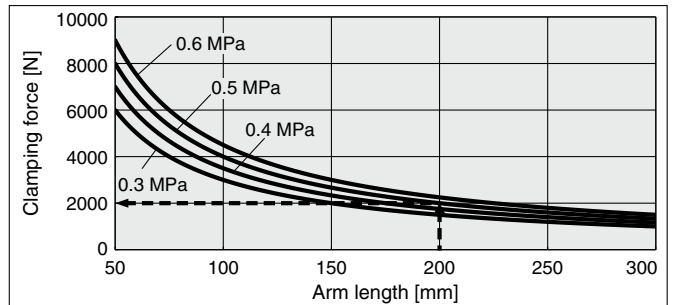


Calculation example

Bore size: 63, Arm length: 200 mm, Operating pressure: 0.5 MPa

With an arm length of 200 mm and an operating pressure of 0.5 MPa, according to the graph, the maximum clamping force is 2000 N.

Allowable arm length

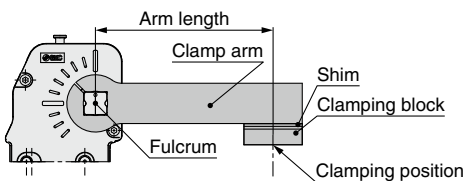

[mm]	
Bore size	Allowable arm length
50	300
63	300
80	400


Allowable load mass

The allowable load mass changes depending on the arm opening angle.
Be sure to use the product within the allowable values shown in the graph below.


- * The load indicates the total weight of the clamp arm and clamping block.
- * When the operating time is 1 second

Calculation procedure for allowable load mass


- ① Calculate the distance **L** from the fulcrum to the load center of gravity.
- ② Check the arm opening angle of the product.
- ③ Read the allowable load mass from the graph.

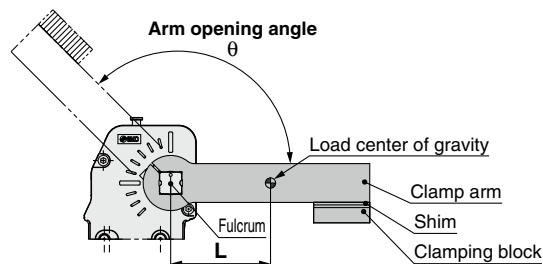


Bore Size: 50

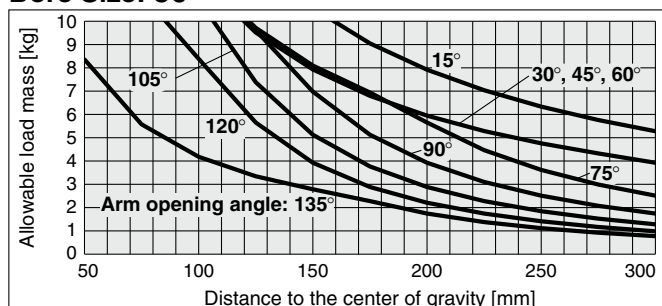

Bore Size: 80

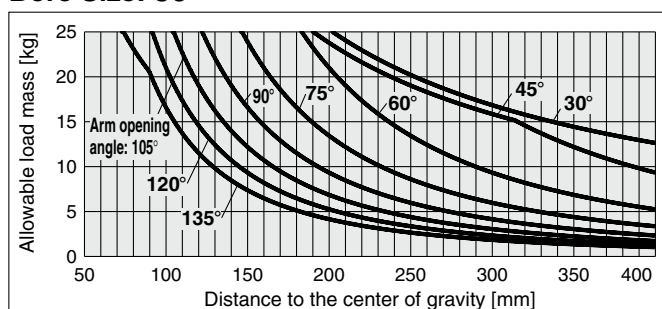

Bore Size: 63

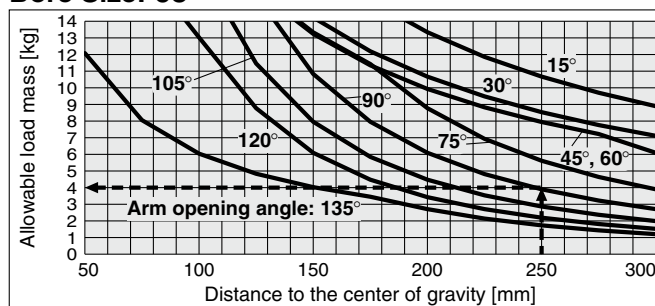

Calculation example

Bore size: 63, Arm opening angle: 90°, Distance to the center of gravity L: 250 mm

With an arm opening angle of 90° and a 250 mm distance to the center of gravity, according to the graph, the maximum allowable load mass is 4.0 kg.

CKZM16
CKZT25/32
CKZT40
CKZ5T
CKZ3T
CKZT80
CKZ5N
CKZ3N
CKZ2N

Related Products
C(L)KQG□ C(L)KQP□
C(L)KQ□ID -X3256
C(L)KQG32 C(L)KU32
C(L)KQG32 -X3036
Flow Control Equipment
Piping Equipment

CKZ5N Series Setup Procedure

Precautions

- 1) The tightening torque of the clamp arm is 12 to 15 N·m for $\phi 50$, 15 to 20 N·m for $\phi 63$, and 18 to 24 N·m for $\phi 80$. Refer to pages 85 to 88 for details on the clamp arm.
- 2) This product is designed to be used after being externally adjusted using a shim, and there is a mechanical difference of -0.25° to $+0.25^\circ$ at the clamping end as shown in Figure 1.
- 3) Be sure to use a speed controller, and make adjustments according to the following conditions.

Unclamping to clamping: 1 second or more

Clamping to unclamping: 1 second or more

If excessive kinetic energy is applied, there is a possibility of damage.

- 4) When using a side guide (Figure 2):

Attach the side guide so that lateral loads, such as galling, etc., are not applied to the clamp arm.

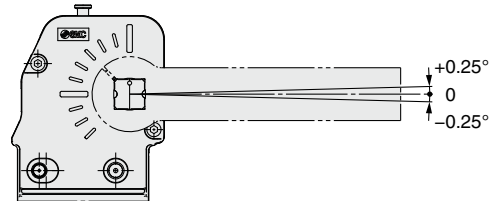


Figure 1






Figure 2

Power clamp cylinder mounting and setup procedure

<Ex. 1 When using clamping force only: When equipped with a workpiece receptacle>

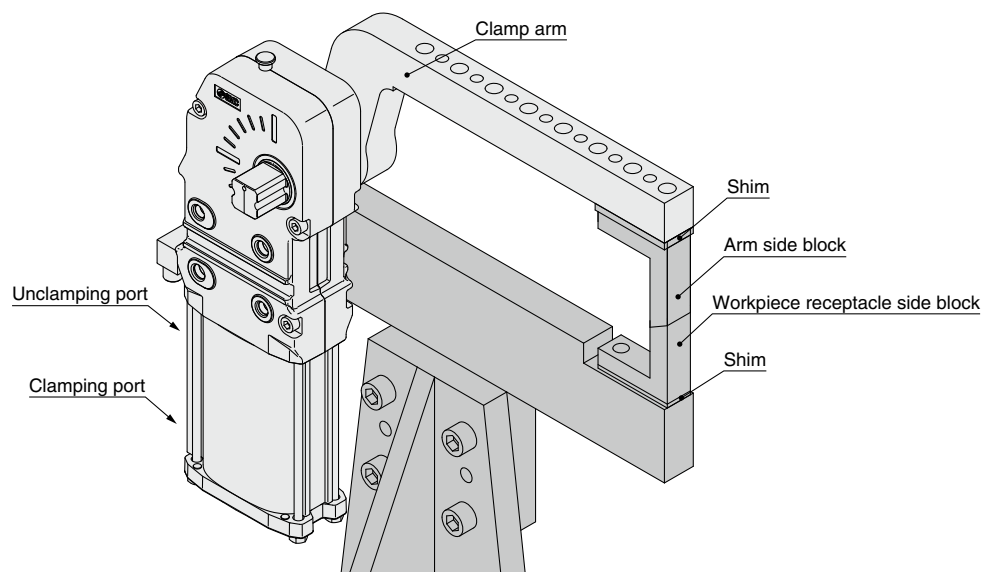


Procedure

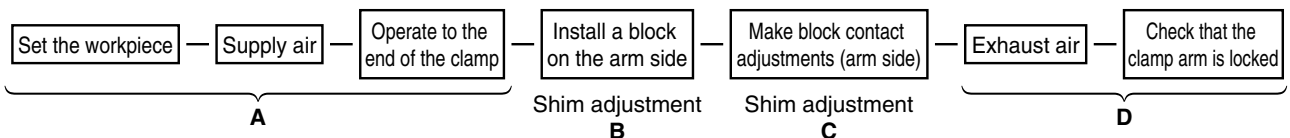

- A) Place the workpiece, supply air to the clamping port without attaching the block on the arm side, and operate the clamp arm to the end of the clamp.
- B) In the state of A), attach the workpiece and the arm side block, and adjust the shim so that there is a space of about 0 mm. During this step, theoretically, there is no clamping force pressing down on the workpiece.
- C) In order to generate a clamping force from the state described in step B), insert an additional shim. The thickness of the shim changes depending on the arm length and the operating pressure. Refer to page 92. Please note that the graph should only be used as a guide as there is a tolerance of about 10% in the clamp cylinder body.
- D) Exhaust the air while in the clamped state, and confirm that the clamp arm does not open.


Power clamp cylinder mounting and setup procedure

<Ex. 2 When using a hard stop: When not equipped with a workpiece receptacle>

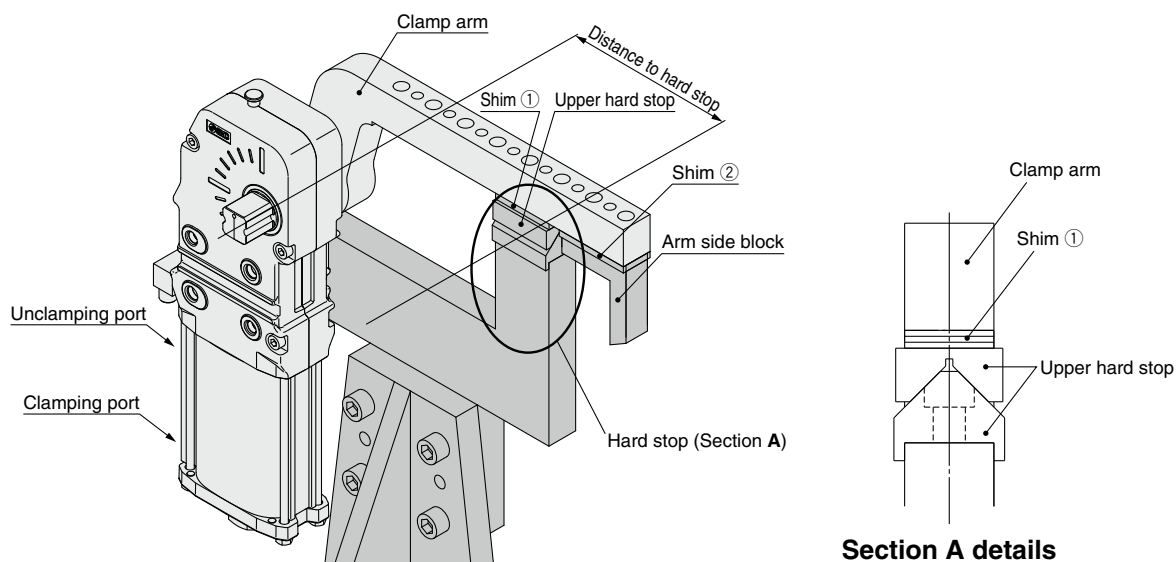

Section A details

Procedure

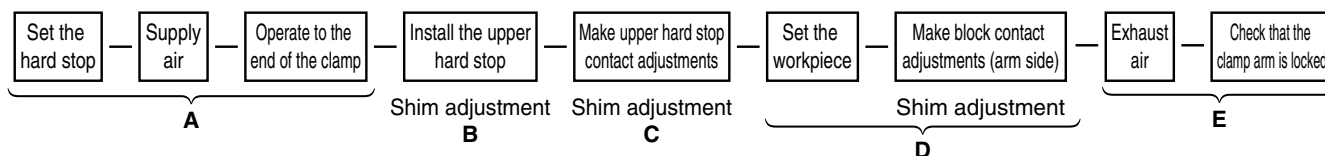

A) Supply air to the clamping port without installing the upper hard stop, and operate the clamp arm to the end of the clamp.

B) In the state of A), attach the upper hard stop and adjust shim ① so that there is a space of about 0 mm between the upper hard stop and the hard stop.

During this step, theoretically, there is no clamping force applied to the hard stop.

C) In order to generate a clamping force from the state described in step B), insert an additional shim ①.


The thickness of the shim changes depending on the distance to the hard stop and the operating pressure. Refer to page 92, and consider the distance to the hard stop as the arm length.

Please note that the graph should only be used as a guide as there is a tolerance of about 10% in the clamp cylinder body.

D) In the state of C), adjust shim ② so that the arm side block contacts the workpiece.

E) Exhaust the air while in the clamped state, and confirm that the clamp arm does not open.


Relation between shim thickness and clamping force

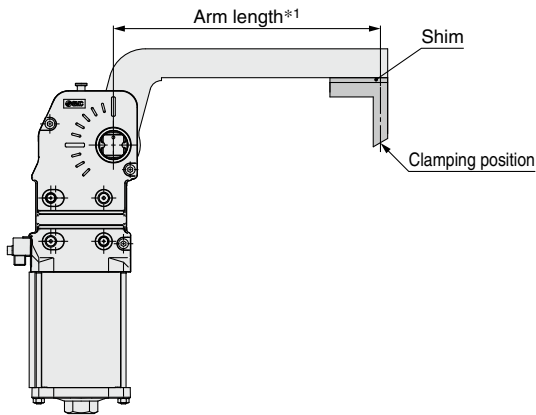


- * Use this figure as a guide as there is a tolerance of about 10% in the clamp cylinder body.
- * When a shim exceeding the peak clamping force position on the graph is inserted, the lock will not be activated when clamped. Insert a shim of the appropriate thickness.

*1 The arm length indicates the distance between the clamp arm shaft and the clamping position.


Bore Size: 50

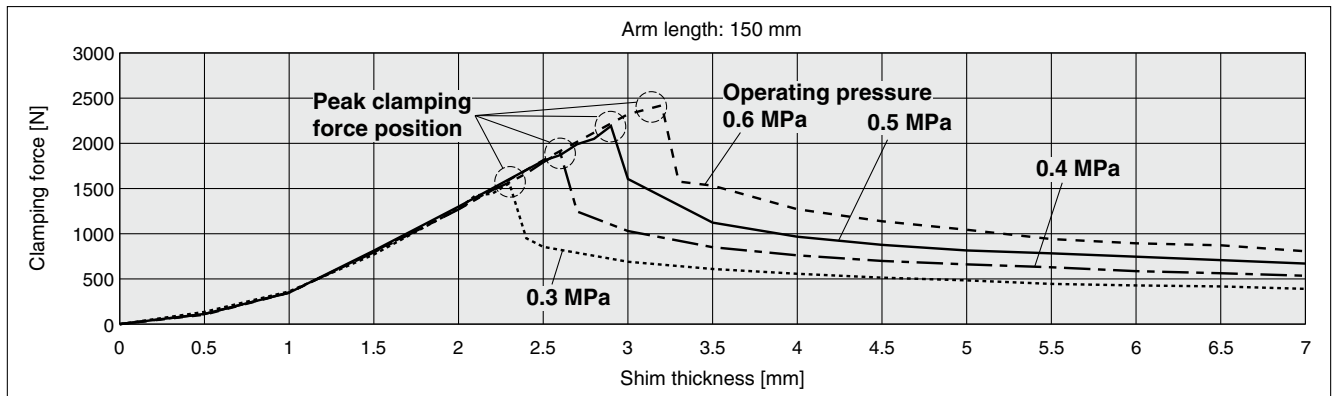

Bore Size: 63

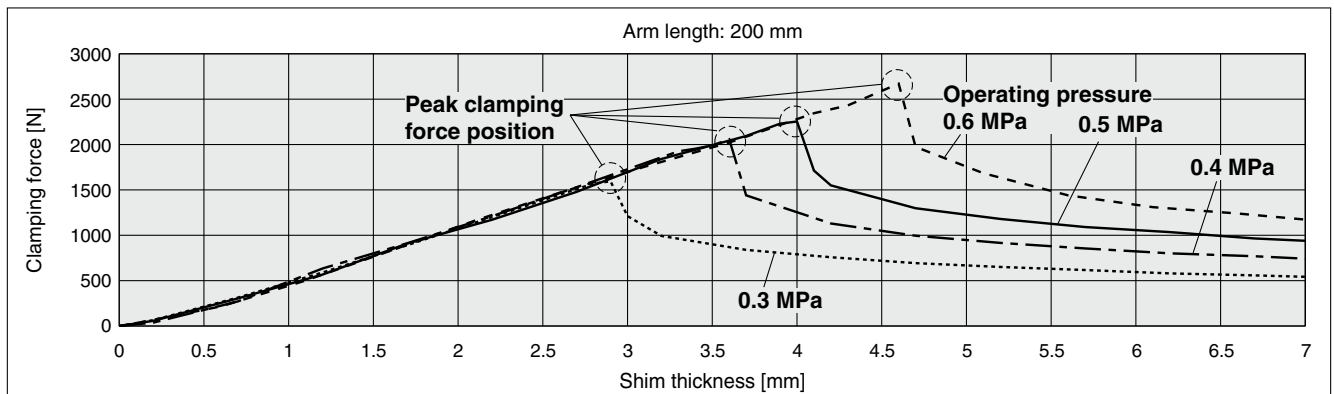

Bore Size: 80

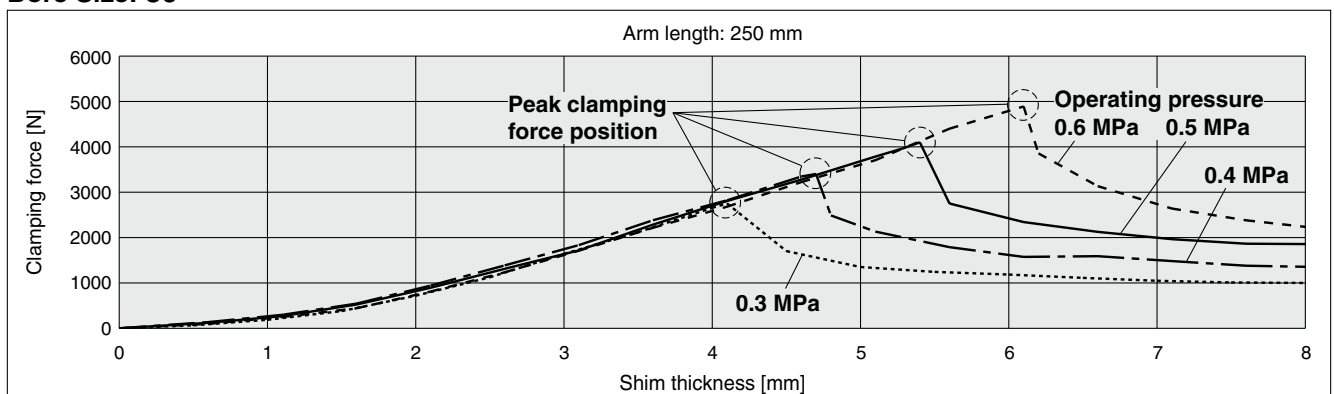

Power Clamp Cylinders

CKZM16

CKZT25/32

CKZT40

CKZ5T

CKZ3T

CKZT80

CKZ5N

CKZ3N

CKZ2N

C(L)KQG□
C(L)KQP□

C(L)KQ□ID
-X3256

C(L)KQG32
C(L)KU32

C(L)KQG32
-X3036

Flow Control
Equipment

Piping
Equipment


Related Products

To change the arm opening angle

⚠ Caution Be sure to confirm safety, and perform the work while the air is exhausted.

1 Procedure for changing the stopper bolt

- 1) Remove the stopper bolt of the head cover, and replace with a stopper bolt for the desired angle using the tightening torque below. When tightening the stopper bolt, hold the head cover.
Refer to "Replacement Parts" (page 83) for the part numbers of the applicable stopper bolts.

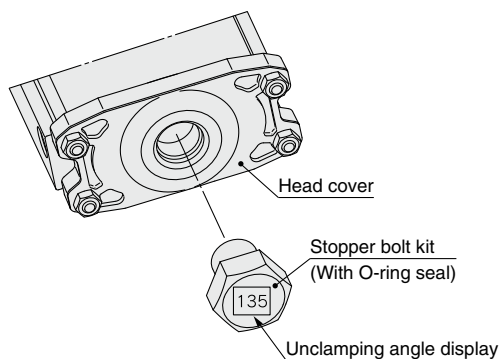


Stopper Bolt Tightening Torque

Bore size	Tightening torque [N·m]
50	45 to 65
63	45 to 65
80	130 to 190

2 Procedure for changing the switch position

- 1) Set the arm opening to 15° or above.
- 2) Loosen the switch cassette mounting bolt, and remove the switch cassette.
- 3) Remove the switch on the unclamping side, and attach it in the position of the desired angle. Store the lead wire in the storage space.
- 4) Mount the switch cassette to the body, and tighten the switch cassette mounting bolt to the tightening torque shown below.
Refer to "Replacement Parts Switch Kit No." (page 83) for the part numbers of the switch cassette replacement parts.

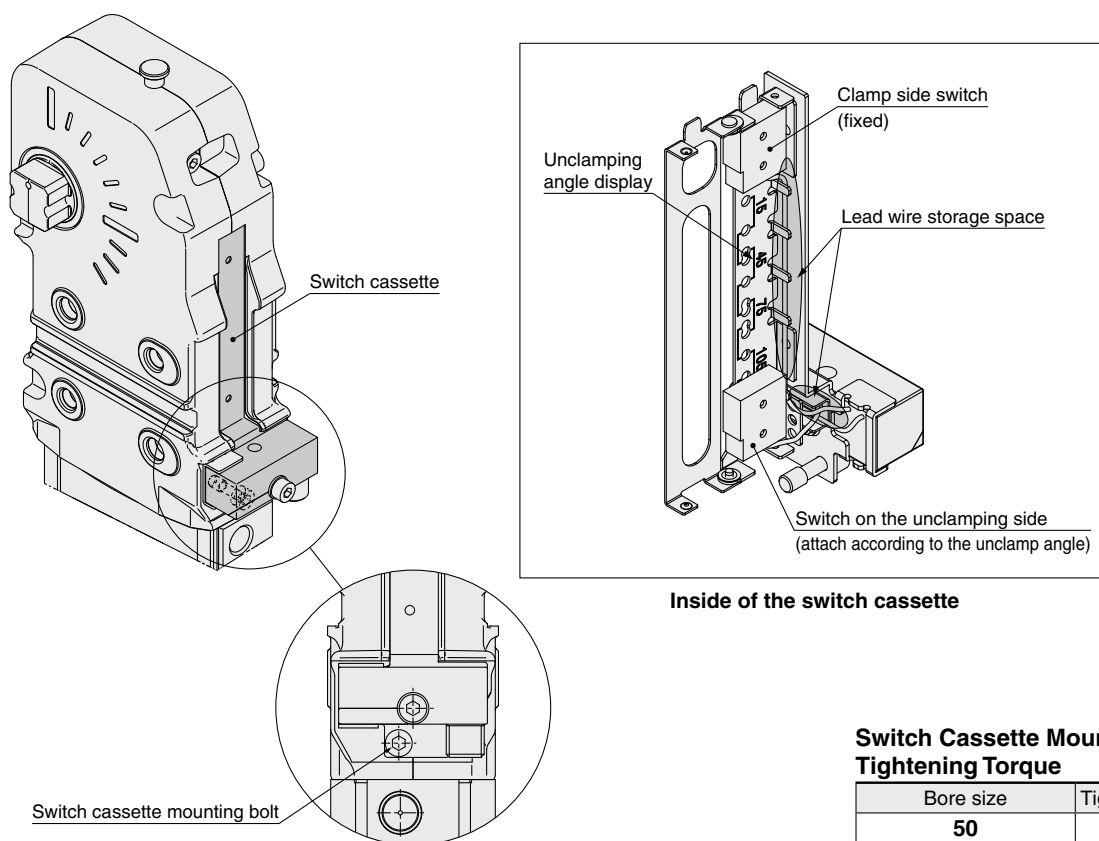

Switch Cassette Mounting Bolt Tightening Torque

Bore size	Tightening torque [N·m]
50	3.0 to 4.0
63	3.0 to 4.0
80	3.0 to 4.0

Large Port Orifice Specification

The operating time for arm opening angles of 15° to 90° can be set to 0.6 s.

How to Order

CKZ5N **63** **Q** - **120** **R** **T** **F**

Bore size

50	ø50 equivalent
63	ø63 equivalent

Cylinder port


Nil	NPT
TF	G
TP	Rc

Large port orifice specification

Arm opening angle

Symbol	Arm opening angle
15	15°
30	30°
45	45°
60	60°
75	75°
90	90°
105	105°
120	120°
135	135°


Front mounting hole

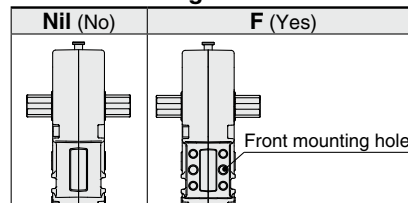

Proximity switch

T	TURCK
P	P&F
W	None

Clamp arm position



* Proximity switch viewed from the front

Specifications

Operating time	Clamping: 0.6 s or more, Unclamping: 0.6 s or more*1
Allowable load mass	Refer to the graph below.
Specifications other than the above	Same as those of the standard type

*1 The operating time for arm opening angles of 105°, 120°, and 135° is longer than 0.6 s.

Dimensions: Same as those of the standard type


Allowable load mass

The allowable load mass changes depending on the arm opening angle.
Be sure to use the product within the allowable values shown in the graphs below.


- * The load indicates the total weight of the clamp arm and clamping block.
- * When the operating time is 0.6 s. When the operating time for arm opening angles of 105° to 135° is longer than 0.6 s.

Calculation procedure for allowable load mass


1. Calculate the distance L from the fulcrum to the load center of gravity.
2. Check the arm opening angle of the product.
3. Read the allowable load mass from the graph.

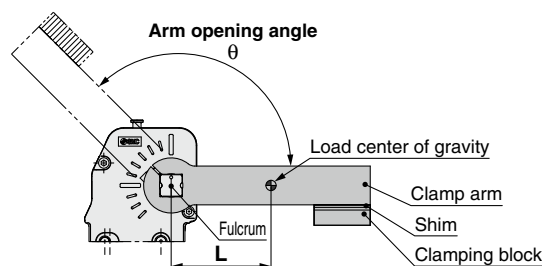

Bore Size: 50

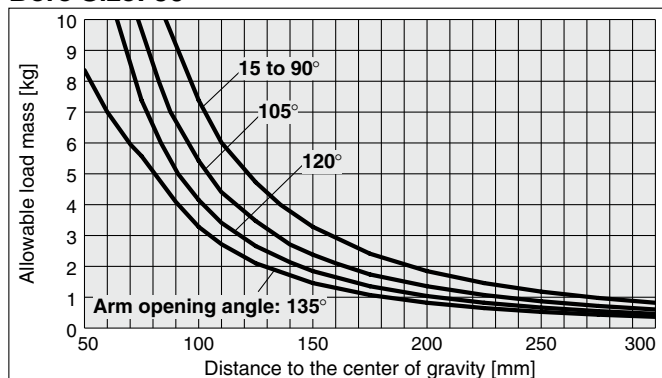

Bore Size: 63

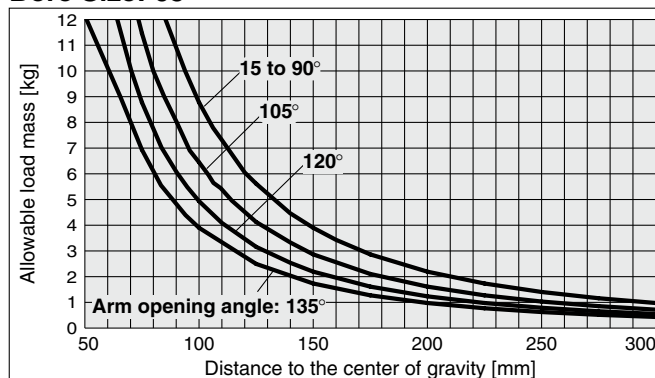



Be sure to read this before handling the products. Refer to page 179 for safety instructions. For actuator precautions, refer to the “Handling Precautions for SMC Products” and the “Operation Manual” on the SMC website.

The switch output signal is output near the clamping end and the unclamping end respectively. The switch output signal on the clamping side does not output the status where the power clamp cylinder is locked by the toggle mechanism.

If the operating time is short or a load exceeding the allowable load mass is applied, a failure of the product, such as breakage and deformation, may occur. If load mass or operating speed exceed the specifications, install external buffers, such as shock absorbers.

Piping Equipment