
Mechanically Jointed Rodless Cylinder/Cam Follower Guide Type

Series **MY1C** Ø16, Ø20, Ø25, Ø32 Ø40, Ø50, Ø63



Construction

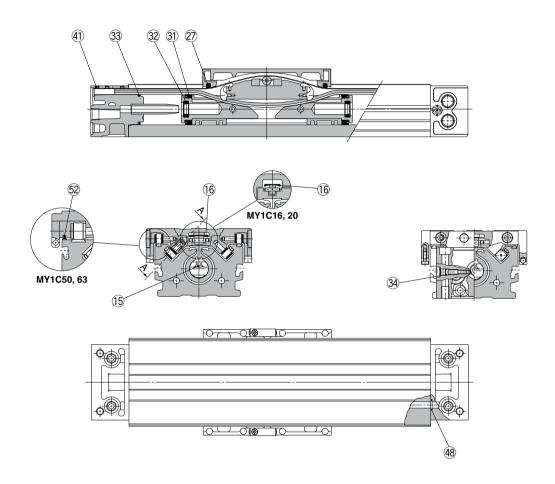

* The numbers are the same as the "Construction" of the Best Pneumatics No.2 Series MY1C.

*BLUE links will lead to purchase pages. Call or email us at sales@smcpneumatics.com for request.

Seal Kit List (15, 16, 34 and 52 are not included in the seal kit. Order them as required with by individual part numbers.)

No.	Description	Qty.	MY1C16	MY1C20	MY1C25	MY1C32	MY1C40	MY1C50	MY1C63
15	Seal belt	1	MY16-16A-Stroke	MY20-16A-Stroke	MY25-16A-Stroke	MY32-16A-Stroke	MY40-16A-Stroke	MY50-16A-Stroke	MY63-16A-Stroke
16	Dust seal band	1	MY16-16B-Stroke	MY20-16B-Stroke	MY25-16B-Stroke	MY32-16B-Stroke	MY40-16B-Stroke	MY50-16B-Stroke	MY63-16B-Stroke
34	O-ring	2	KA00309	KA00311	KA00311	KA00320	KA00402	KA00777	KA00777
			(ø4 x ø1.8 x ø1.1)	(ø5.1 x ø3 x ø1.05)	(ø5.1 x ø3 x ø1.05)	(ø7.15 x ø3.75 x ø1.7)	(ø8.3 x ø4.5 x ø1.9)	_	_
52	Side scraper	2	_	_	_	_	_	MYM50-15CK0502B	MYM63-15CK0503B
27)	Scraper	2	MY1M16-PS	MY1M20-PS	MY1M25-PS	<u>MY1M32-PS</u>	MY1M40-PS	MY1M50-PS	MY1M63-PS
31)	Piston seal	2							
32	Cushion seal	2							
33	Tube gasket	2							
48	O-ring	4							

^{*} Seal kit includes $\ensuremath{\mathfrak{D}}$, $\ensuremath{\mathfrak{Y}}$, $\ensuremath{\mathfrak{Y}}$, $\ensuremath{\mathfrak{Y}}$, and $\ensuremath{\mathfrak{Y}}$. Order the seal kit based on each bore size.

Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

A: Black zinc chromated \rightarrow MY \square -16B-stroke, B: Nickel plated \rightarrow MY \square -16BW-stroke



^{*} Seal kit includes a grease pack (10 g).

When (5) and (6) are shipped independently, a grease pack is included. (10 g per 1000 strokes)

Note) Two kinds of dust seal bands are available. Verify the type to use, since the part number varies depending on the treatment of the hexagon socket head set screw 41.