

Compact Cylinder

Series CQS

ø12, ø16, ø20, ø25

Ideal for machine designs with small space requirements

The “D-M9” auto switch will not protrude from switch mounting groove.

Square body shape gives you flexibility for designing machine.

Cross-section of a cylinder tube is the same configuration regardless of w/ switch or w/o switch.

Auto switch mounting allows for flexible designing requirements

3 faces on ø12, ø16, and all 4 faces including port side on ø20, ø25.


2 way basic mounting: Through-hole or both ends tapped

Basic mounting is 2 way. You can choose either through-hole or both ends tapped mounting.

**Non-rotating accuracy
Non-rotating rod**

Hexagonal cross sectional shape piston rod for high non-rotation accuracy.

ø12, ø16 — ±1°
ø20, ø25 — ±0.7°

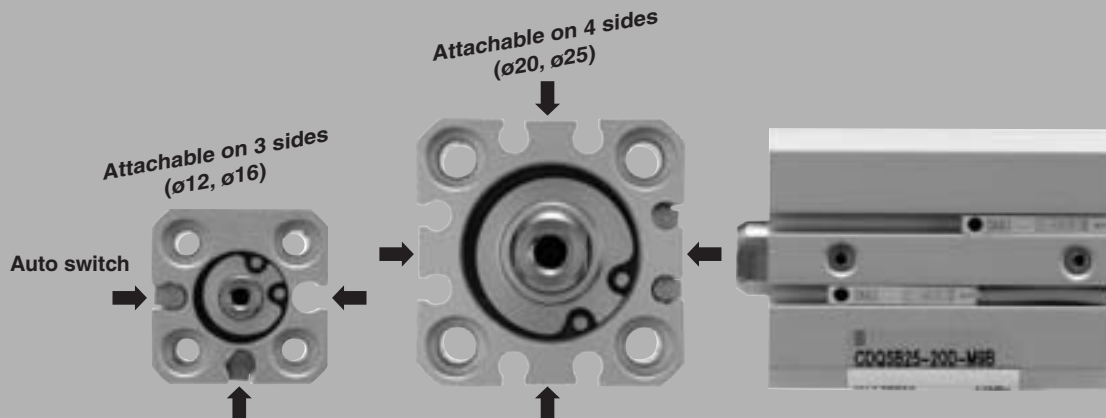

			Bore size (mm)	Stroke (mm)	Page
Standard 	Double acting	Single rod CQS	12, 16 20, 25	ø12 } 5, 10, 15, 20 ø16 } 25, 30 ø20 } 5, 10, 15, 20, 25 ø25 } 30, 35, 40, 45, 50	551
		Double rod CQSW		ø12 } 35, 40, 45, 50, 75, 100 ø16 } 125, 150, 175, 200 ø20 } 75, 100, 125, 150, 175, 200 ø25 } 75, 100, 125, 150, 175, 200, 250, 300	
	Single acting	Return/Extend CQS		ø12 } 5, 10, 15, 20 ø16 } 25, 30 ø20 } 5, 10, 15, 20, 25 ø25 } 30, 35, 40, 45, 50	560
				ø12 } 5, 10 ø16 } ø20 } ø25 }	567
Non-rotating Rod 	Double acting	Single rod CQSK		ø12 } 5, 10, 15, 20 ø16 } 25, 30 ø20 } 5, 10, 15, 20, 25 ø25 } 30, 35, 40, 45, 50	575
		Double rod CQSKW			582
Anti-lateral Load 	Double acting	Single rod CQS□S		ø12 } 5, 10, 15, 20 ø16 } 25, 30 ø20 } 5, 10, 15, 20, 25 ø25 } 30, 35, 40, 45, 50	589



Refer to Best Pneumatics No. 3.



Refer to Best Pneumatics No. 3.

Combinations of Standard Products and Made to Order Specifications

Series CQS

Series CQS

- : Standard
- ◎ : Made to Order specifications
- : Special product (Contact SMC for details.)
- : Not available

● : Standard ◎ : Made to Order specifications ○ : Special product (Contact SMC for details.) — : Not available		Series	CQS (Standard)						CQSK (Non-rotating rod)		CQS (Long stroke)	CQS□S (Anti-lateral load)	CQSY Smooth cylinder (Low friction) ⁽³⁾	CQSX Low-speed cylinder ⁽³⁾
		Action/ Type	Double acting		Single acting				Double acting		Double acting	Double acting	Double acting	Double acting
			Single rod	Double rod	Single rod/ Extension	Single rod/ Retraction			Single rod	Double rod	Single rod	Single rod	Single rod	Single rod
Symbol	Specification	Applicable bore size	ø12 to ø25					ø12 to ø25						
Standard	Standard	ø12 to ø25	●	●	●	●			●	●	●	●	●	●
D	Built-in magnet		●	●	●	●			●	●	●	●	●	●
CQS□-□M	Rod end male thread		●	●	●	●			●	●	●	●	●	●
CQS□-□C	With rubber bumper		●	●	○	○			○	○	● ⁽¹⁾	● ⁽¹⁾	● ⁽¹⁾	●
CQS□-□F	With boss on head end		●	—	●	●			●	—	○	●	○	○
CQS ^{LF} _G	Foot, Flange		●	●	●	●			●	●	●	●	●	●
CQSD	Double clevis style		●	—	●	●			●	—	●	●	●	●
10-, 11-	Clean series		●	○	○	○			○	○	○	○	—	●
20-	Copper and Fluorine-free		●	●	●	●			○	○	●	●	—	—
XB6	Heat-resistant cylinder (−10 to 150 °C)	ø12 to ø25	◎	◎	○	○			○	○	○	○	—	—
XB7	Cold-resistant cylinder (−40 to 70 °C)		◎	◎	○	○			○	○	○	○	—	—
XB9	Low-speed cylinder (5 to 50 mm/s)		◎	◎	○	○			○	○	○	○	—	—
XB10	Intermediate stroke (Using exclusive body)		◎	◎	◎	○			○	○	◎	◎	○	○
XB13	Low-speed cylinder (5 to 50 mm/s)		◎	◎	○	○			○	○	○	○	—	—
XC6	Piston rod, retaining ring, rod end nut made of stainless steel		◎	◎	◎	◎			◎	◎	◎	◎	○	○
XC8	Adjustable stroke cylinder/Adjustable extension type		◎	—	○	○			◎	—	○	○	○	○
XC9	Adjustable stroke cylinder/Adjustable retraction type		◎	—	○	○			◎	—	○	○	○	○
XC10	Dual stroke cylinder/Double rod type		◎	—	◎	◎			◎	—	○	○	○	○
XC11	Dual stroke cylinder/Single rod type		◎	—	○	○			◎	—	○	○	○	○
XC36	With boss on rod side		◎	◎	◎	◎			○	○	◎ ⁽²⁾	◎ ⁽²⁾	◎ ⁽²⁾	◎ ⁽²⁾
XC92	Dust resistant cylinder		◎	○	○	○			—	—	○	○	—	—
X235	Change of piston rod end of double rod cylinder		—	◎	—	—			—	○	—	—	—	—
X271	Fluororubber seal		◎	◎	◎	◎			○	○	◎	◎	—	—
X525	Long stroke of adjustable extension stroke cylinder (-XC8)		◎	—	○	○			○	—	○	○	○	○
X526	Long stroke of adjustable retraction stroke cylinder (-XC9)		◎	—	○	○			○	—	○	○	○	○
X633	Intermediate stroke of double rod type		—	◎	—	—			—	◎	—	—	—	—
X636	Long stroke of dual stroke single rod		◎	—	○	—			○	—	○	○	○	○
X1876	With concave shape end boss on the cylinder tube head side	ø20, ø25	◎	—	◎	◎			◎	—	—	◎	○	—

Note 1) A rubber bumper comes as standard.
Note 2) For ø12 and ø16 only. (○) for ø20 and ø25.
Note 3) Refer to Best Pneumatics No. 3 for low-speed cylinders.





Series CQS Specific Product Precautions

Be sure to read before handling. Refer to front matters 54 and 55 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Operating Precautions

Caution


- All loads to piston rod must be applied in axial direction only.
 - When a lateral load is applied unavoidably, ensure that it should not exceed the allowable lateral load to the rod end as specified in graph (1) to (5).
 - When installing a cylinder, centering should be required accurately.
 - Adoption of guide mechanism is strongly recommended for the case when CQS is used as stopper to prevent non-rotating piston rod from side loads.
- When a workpiece is secured to the end of the piston rod, ensure that the piston rod is retracted entirely, and place a wrench on the portion of the rod that protrudes beyond the section. Also, tighten by giving consideration to prevent the tightening torque from being applied to the non-rotating guide.

Retaining Ring Installation/Removal


Caution

- For installation and removal, use an appropriate pair of pliers (tool for installing a type C retaining ring).
- Even if a proper plier (tool for installing type C retaining ring) is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier (tool for installing a type C retaining ring). Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installment.


Allowable Lateral Load at Rod End




Graph (1) Standard:
Non-rotating Rod Type/Without Auto Switch

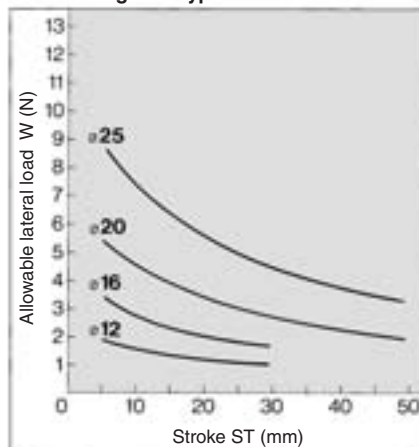


Graph (2) Standard:
Non-rotating Rod Type/With Auto Switch

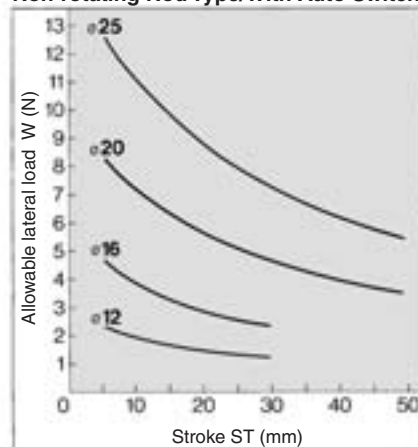


Graph (3)
Anti-lateral Load Type/Without Auto Switch

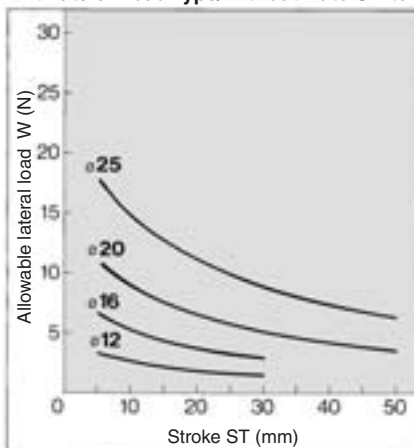

Graph (4)
Anti-lateral Load Type/With Auto Switch

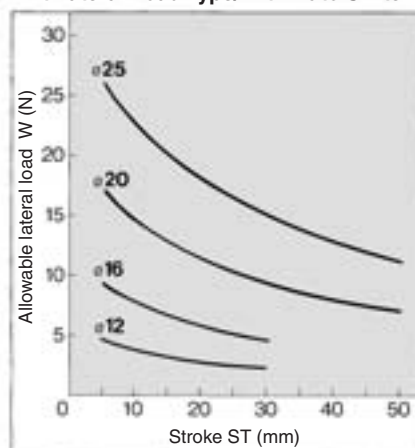

Graph (5)
Long Stroke/With & Without Auto Switch

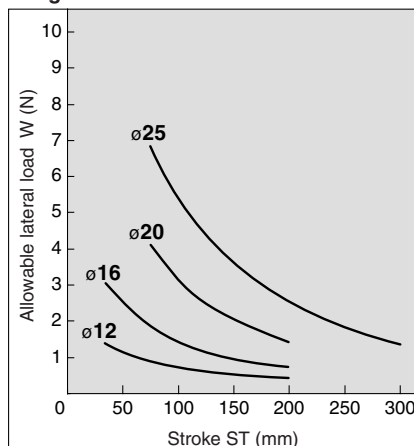

Note 1) Graph (1) to (5): Rod end female thread

Note 2) Lateral load allowance varies depending upon rod end shape dimensions or load value (distance to the center of the gravity of load). Please consult with SMC.

Compact Cylinder: Standard Type Double Acting, Single Rod

Series CQS

ø12, ø16, ø20, ø25

How to Order

CQS B 20 - 30 D - **M9BW**

With auto switch **CDQS B 20 - 30 D** - **M9BW**

With auto switch
(Built-in magnet)

Mounting style

B	Through-hole/Both ends tapped common (Standard)
L	Foot style
F	Rod side flange style
G	Head side flange style
D	Double clevis style

Bore size

12	12 mm
16	16 mm
20	20 mm
25	25 mm

Cylinder stroke (mm)

Bore size	Standard stroke	Long stroke
12, 16	5, 10, 15, 20, 25, 30	35, 40, 45, 50, 75, 100, 125, 150, 175, 200
20	5, 10, 15, 20, 25, 30, 35, 40, 45, 50	75, 100, 125, 150, 175, 200
25		75, 100, 125, 150, 175, 200, 250, 300

Auto switch

Nil	Without auto switch
-----	---------------------

Body option

<Standard stroke>

Nil	Standard
C	With rubber bumper
M	Rod end male thread
F	Boss on head side

<Long stroke>

C	With rubber bumper Rod end female thread (Standard)
CM	With rubber bumper Rod end male thread

Action

D	Double acting
---	---------------

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDQSL25-30D

Made to Order
Refer to page 552 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

For "Manufacture of Intermediate Strokes", refer to page 552.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
	3-wire (PNP)			M9PV				M9P	●	●	●	○	○			
	2-wire			M9BV				M9B	●	●	●	○	○			
	3-wire (NPN)			M9NWV				M9NW	●	●	●	○	○			
	3-wire (PNP)			M9PWV				M9PW	●	●	●	○	○			
	2-wire			M9BWV				M9BW	●	●	●	○	○			
	3-wire (NPN)			M9NAV ***				M9NA ***	○	○	●	○	○			
	3-wire (PNP)			M9PAV ***				M9PA ***	○	○	●	○	○			
	2-wire			M9BAV ***				M9BA ***	○	○	●	○	○			
Magnetic field resistant (2-color indication)	2-wire (Non-polar)	—	—	P3DW**	●	—	●	●	○	—						
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96V	A96	●	—	●	—	—	IC circuit	—
				2-wire	24 V	12 V	100 V	A93V	A93	●	—	●	—	—	—	—
			100 V or less				A90V	A90	●	—	●	—	—	—	—	IC circuit

** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NV
1 m..... M (Example) M9NM
3 m..... L (Example) M9NL
5 m..... Z (Example) M9NZ

* Solid state auto switches marked with "○" are produced upon receipt of order.
** Available only for ø25.
It is mounted away from the port side to avoid interference with fittings.

* Since there are other applicable auto switches than listed, refer to page 597 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329. Refer to pages 1317-1 and 1317-2 for D-P3DW.


* Auto switches are shipped together (not assembled).

Note) There is the case D-A9V/M9V/M9WV/M9AVL type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.

Series CQS



JIS Symbol



Made to Order Specifications

(For details, refer to pages 1373 to 1565.)

Symbol	Specifications
—XA□	Change of rod end shape
—XB6	Heat-resistant cylinder (–10 to 150 °C) (without an auto switch)
—XB7	Cold-resistant cylinder (–40 to 70 °C) (without an auto switch)
—XB9	Low speed cylinder (10 to 50 mm/s)
—XB10	Intermediate stroke (Using exclusive body)
—XB13	Low speed cylinder (5 to 50 mm/s)
—XC6	Piston rod, retaining ring, rod end nut made of stainless steel
—XC8	Adjustable stroke cylinder/Adjustable extension type
—XC9	Adjustable stroke cylinder/Adjustable retraction type
—XC10	Dual stroke cylinder/Double rod type
—XC11	Dual stroke cylinder/Single rod type
—XC36	With boss in rod side
—XC92	Dust resistant cylinder
—X271	Fluororubber seals
—X525	Long stroke of adjustable extension stroke cylinder (—XC8)
—X526	Long stroke of adjustable retraction stroke cylinder (—XC9)
—X636	Long stroke of dual stroke single rod
—X1876	With concave shape end boss on the cylinder tube head side

Body Option

Description	Application
Rod end male thread	Available for all standard models of double acting, single rod.
Rubber bumper	

* Rubber bumper is standard equipment for long stroke type.


Specifications

Bore size (mm)		12	16	20	25
Action		Double acting, Single rod			
Fluid		Air			
Lubrication		Not required (Non-lube)			
Proof pressure		1.5 MPa			
Maximum operating pressure		1.0 MPa			
Minimum operating pressure		0.07 MPa		0.05 MPa	
Ambient and fluid temperature		Without auto switch: -10 to 70°C (No freezing)			
		With auto switch: -10 to 60°C (No freezing)			
Cushion		None, Rubber bumper *			
Rod end thread		Female thread			
Stroke length tolerance		Standard stroke: $+1.0_0$ Long stroke: $+1.4_0^*$			
Mounting		Through-hole/Both ends tapped common			
Piston speed		50 to 500 mm/s			
Allowable kinetic energy (J)	Standard type	0.022	0.038	0.055	0.09
	With rubber bumper	0.043	0.075	0.11	0.18

* Stroke length tolerance does not include the deflection of the bumper.

* Only rubber bumper is available for the long stroke type.

Theoretical Output



Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)		
				0.3	0.5	0.7
12	6	IN	84.8	25	42	59
		OUT	113	34	57	79
16	8	IN	151	45	75	106
		OUT	201	60	101	141
20	10	IN	236	71	118	165
		OUT	314	94	157	220
25	12	IN	378	113	189	264
		OUT	491	147	245	344

Manufacture of Intermediate Stroke

Description		Spacer is installed in the standard stroke body.		Exclusive body (-XB10)	
Part no.		Refer to "How to Order" for the standard model no. (page 551).		Suffix "-XB10" to the end of standard model no. (page 551).	
Standard stroke	Description	Intermediate strokes by the 1 mm interval are available by using spacers with standard stroke cylinders.		Dealing with the stroke by the 1 mm interval by using an exclusive body with the specified stroke.	
	Stroke range	Bore size	Stroke range	Bore size	Stroke range
		12, 16	1 to 29	12, 16	6 to 29
		20, 25	1 to 49	20, 25	6 to 49
Long stroke	Description	Intermediate strokes by the 1 mm interval are available by using spacers with standard stroke cylinders.		Dealing with the stroke by the 1 mm interval by using an exclusive body with the specified stroke.	
	Stroke range	Bore size	Stroke range	Bore size	Stroke range
		12, 16	31 to 199	12, 16	31 to 199
		20	51 to 199	20	51 to 199
		25	51 to 299	25	51 to 299
Example		Part no.: CQSB25-47D CQSB25-50D with 3 mm width spacer inside. B dimension is 72.5 mm.		Part no.: CQSB25-47D-XB10 Makes 47 stroke tube. B dimension is 69.5 mm.	

Refer to pages 595 to 597 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Auto switch mounting bracket/Part no.

Compact Cylinder: Standard Type Double Acting, Single Rod **Series CQS**

Mass/Without Auto Switch

(g)

Bore size (mm)	Cylinder stroke (mm)																	
	5	10	15	20	25	30	35	40	45	50	75	100	125	150	175	200	250	300
12	29	36	42	49	56	63	93	100	107	113	147	180	213	246	279	312	—	—
16	38	47	56	64	73	82	119	128	136	145	187	229	271	313	355	397	—	—
20	63	75	88	101	114	127	140	153	166	178	306	370	434	498	562	627	—	—
25	91	107	123	139	155	171	186	202	218	234	399	478	557	636	715	794	952	1110

For standard stroke

Calculation: (Example) **CQSD20-20DCM**

- Cylinder mass: CQSB20-20D..... 101 g
- Option mass: Rod end male thread..... 10 g
- Option mass: Rubber bumper..... -2 g
- Option mass: Double clevis style..... 92 g

201 g

Mass/With Auto Switch (Built-in magnet)

(g)

Bore size (mm)	Cylinder stroke (mm)																	
	5	10	15	20	25	30	35	40	45	50	75	100	125	150	175	200	250	300
12	37	43	50	57	63	70	94	101	108	114	148	181	214	247	280	313	—	—
16	48	57	66	74	83	92	121	129	137	146	188	231	273	315	357	399	—	—
20	93	106	119	132	144	157	170	182	195	208	311	375	439	503	567	632	—	—
25	134	150	166	182	197	213	229	245	261	277	406	485	564	643	721	800	958	1116

Additional Mass

(g)

Bore size (mm)		12	16	20	25
Rod end male thread	Male thread	1.5	3	6	12
	Nut	1	2	4	8
Rubber bumper * (No need to add for long stroke)		0	1	-2	-3
Foot style (Including mounting bolt)		55 (53)	65 (61)	159 (153)	181 (172)
Rod side flange style (Including mounting bolt)		58 (56)	70 (66)	143 (137)	180 (171)
Head side flange style (Including mounting bolt)		56	66	137	171
Double clevis style (Including pin, snap ring, bolt)		34	40	92	127

(): denotes the values of long stroke model.

Mounting Bracket Part No.

Bore size (mm)	Foot (1)	Flange	Double clevis
12	CQS-L012	CQS-F012	CQS-D012
16	CQS-L016	CQS-F016	CQS-D016
20	CQS-L020	CQS-F020	CQS-D020
25	CQS-L025	CQS-F025	CQS-D025



Note1) When ordering foot bracket, order 2 pieces per cylinder.

Note2) Parts belonging to each bracket are as follows.

Foot or Flange style: Body mounting bolt

Double clevis style: Clevis pin, Type C snap ring for axis, Body mounting bolt.

Copper and Fluorine-free Series (For CRT manufacturing process)

20 — C(D)QS **Mounting** **Bore size** — **Stroke** D(C)(M)

• Copper and Fluorine-free Series — • $\varnothing$ 12, $\varnothing$ 16, $\varnothing$ 20, $\varnothing$ 25

To prevent the influence of copper ions or halogen ions during CRT manufacturing processes, copper and fluorine materials are not used in the component parts.

Specifications

Action	Double acting, Single rod
Bore size (mm)	12, 16, 20, 25
Proof pressure	1.5 MPa
Maximum operating pressure	1.0 MPa
Cushion	None, Rubber bumper
Mounting	Through-hole/Both ends tapped common
Piston speed	50 to 500 mm/s

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual
-X□

Technical
data

Series CQS

Clean Series (Standard stroke is only available.)

10 — C(D)QSB Bore size — Stroke D(M)

Clean Series


10	Relief type
11	Vacuum type

The type which is applicable for using inside the clean room graded Class 100 by making an actuator's rod section a double seal construction and discharging by relief port directly to the outside of clean room.

Specifications

Action	Double acting, Single rod
Bore size (mm)	ø12, ø16, ø20, ø25
Proof pressure	1.5 MPa
Maximum operating pressure	1.0 MPa
Rubber bumper	None
Piping	Screw-in piping
Piston speed	30 to 400 mm/s
Mounting	Through-hole/Both ends tapped common
Auto switch	Mountable

Note) For details, please contact SMC.

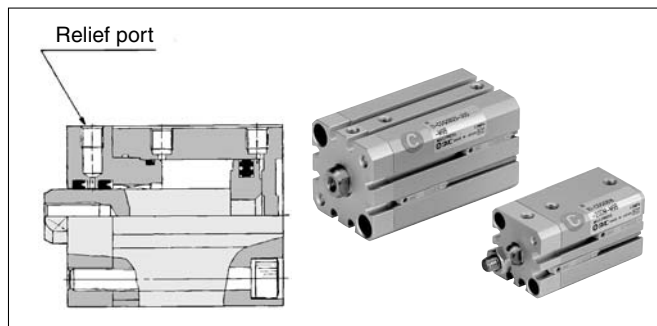

For details, refer to the separate catalog "Pneumatic Clean Series".

Smooth Cylinder

CQS Y Mounting Bore size — Stroke DC(M)

Smooth Cylinder

Smooth operation with a little sticking and slipping at low speed.
Dual-side low friction operation is possible.



Some of the parts are different from the dimensions of the double acting, single rod type.
Refer to Best Pneumatics No. 3.

Low-speed Cylinder

CQS X Mounting Bore size — Stroke D(C)(M)

Low-speed Cylinder

Smooth operation with a little sticking and slipping at low speed.
Can start smoothly with a little ejection even after being rendered for hours.



The dimensions are the same as the double acting, single rod type.
Refer to Best Pneumatics No. 3.

Specifications

Bore size (mm)	12	16	20	25
Type	Pneumatic (Non-lube)			
Action	Double acting, Single rod			
Fluid	Air			
Proof pressure	1.05 MPa			
Maximum operating pressure	0.7 MPa			
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C (No freezing)			
Cushion	None, Rubber bumper*			
Rod end thread	Female thread			
Stroke length tolerance	+1.0* 0			
Mounting	Through-hole/Both ends tapped common			
Piston speed	50 to 500 mm/s			
Allowable leakage	0.5ℓ/min (ANR) or less			

* Stroke length tolerance does not include the deflection of the bumper.

Minimum operating pressure (MPa)

Bore size (mm)	12	16	20	25
Minimum operating pressure	0.03		0.02	

Specifications

Bore size (mm)	12	16	20	25
Type	Pneumatic (Non-lube)			
Action	Double acting, Single rod			
Fluid	Air			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Ambient and fluid temperature	Without auto switch: -10 to 70°C With auto switch: -10 to 60°C (No freezing)			
Rubber bumper	None, Rubber bumper*			
Rod end thread	Female thread			
Stroke length tolerance	Standard stroke +1.0 0			
Mounting	Through-hole/Both ends tapped common			
Piston speed	ø12, ø16: 1 to 300 mm/s ø20, ø25: 0.5 to 300 mm/s			


* Stroke length tolerance does not include the deflection of the bumper.

Minimum operating pressure (MPa)


	12	16	20	25
Minimum operating pressure	0.03	0.03	0.025	0.025

Construction

Basic style




With rubber bumper




With auto switch (Built-in magnet)


ø12, ø16




Rod end male thread




Long stroke

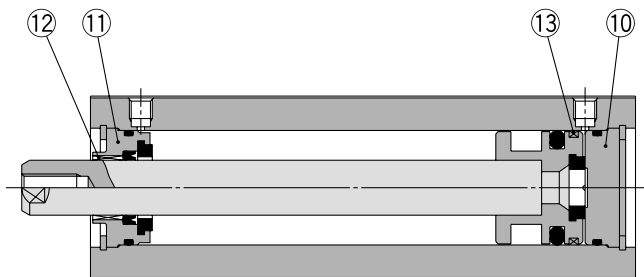

ø20, ø25



With rear slip fit



Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Collar	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	Chromated
4	Piston rod	Stainless steel	
5	Retaining ring	Carbon tool steel	Phosphate coated
6	Rod end nut	Carbon steel	Nickel plated
7	Spacer for switch type	Aluminum alloy	Chromated
8	Bumper A	Urethane	
9	Bumper B	Urethane	
10	Bottom plate	Aluminum alloy	Anodized

Component Parts

No.	Description	Material	Note
11	Collar	Aluminum alloy	Anodized
12	Bushing	Oil-impregnated sintered alloy	
13	Wear ring	Resin	
14	Magnet	—	
15 *	Rod seal	NBR	
16 *	Piston seal	NBR	
17 *	Tube gasket	NBR	
18	Centering location ring	Aluminum alloy	Anodized

Replacement Parts: Seal Kit (Basic style)

Bore size (mm)	Kit no.	Contents
12	CQSB12-PS	Set of nos. above 15, 16, 17
16	CQSB16-PS	
20	CQSB20-PS	
25	CQSB25-PS	

Replacement Parts: Seal Kit (Long stroke)

Bore size (mm)	Kit no.	Contents
12	CQSB12-L-PS	Set of nos. above 15, 16, 17
16	CQSB16-L-PS	
20	CQSB20-L-PS	
25	CQSB25-L-PS	

* Seal kit includes 15, 16, 17. Order the seal kit, based on each bore size.
(The long stroke type includes 2 tube gaskets.)

* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual

-X□

Technical
data


Series CQS

Mounting Bolt for CQS without Auto Switch

Mounting method: Mounting bolt for through-hole mounting style of CQSB is available as an option.


Refer to the following for ordering procedures.
Order the actual number of bolts that will be used.

Example) CQ-M3x25L 4 pcs.

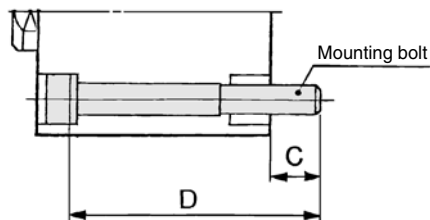

Note 1) The appropriate plain washer must be used for through-hole mounting.

Note 2) Please contact SMC for details concerning the mounting bolts to be used with $\phi 12$ and $\phi 16$ that exceed 30 mm strokes, or $\phi 20$ and $\phi 25$ that exceed 50 mm strokes.

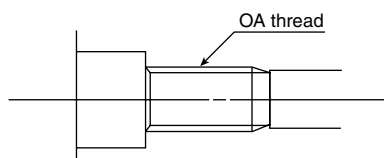

Cylinder model	C	D	Mounting bolt part no.
CQSB12-5D		25	CQ-M3 x 25L
-10D	6.5	30	x 30L
-15D		35	x 35L
-20D		40	x 40L
-25D		45	x 45L
-30D		50	x 50L
-35DC	6.5		
-40DC			
-45DC			
-50DC			
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
CQSB16-5D		25	CQ-M3 x 25L
-10D	6.5	30	x 30L
-15D		35	x 35L
-20D		40	x 40L
-25D		45	x 45L
-30D		50	x 50L
-35DC	6.5		
-40DC			
-45DC			
-50DC			
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			

Secure the cylinder by using the OA screws that are provided with the cylinder tube.

Secure the cylinder by using the OA screws that are provided with the cylinder tube.

Cylinder model	C	D	Mounting bolt part no.
CQSB20-5D		25	CQ-M5 x 25L
-10D	6.5	30	x 30L
-15D		35	x 35L
-20D		40	x 40L
-25D		45	x 45L
-30D		50	x 50L
-35DC	6.5	55	x 55L
-40DC		60	x 60L
-45DC		65	x 65L
-50DC		70	x 70L
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
CQSB25-5D		30	CQ-M5 x 30L
-10D	8.5	35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
-35DC	8.5	60	x 60L
-40DC		65	x 65L
-45DC		70	x 70L
-50DC		75	x 75L
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
-250DC			
-300DC			

Secure the cylinder by using the OA screws that are provided with the cylinder tube.

Secure the cylinder by using the OA screws that are provided with the cylinder tube.


Material: Chromium molybdenum steel
Surface treatment: Nickel plated

Mounting Bolt for CDQS with Auto Switch

Mounting method: Mounting bolt for through-hole mounting style of CDQSB is available as an option.


Refer to the following for ordering procedures.
Order the actual number of bolts that will be used.

Example) CQ-M3x30L 4 pcs.

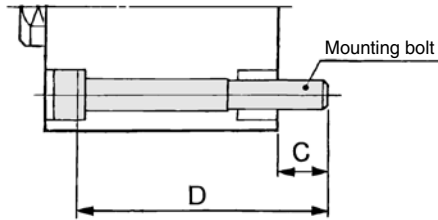

Note 1) The appropriate plain washer must be used for through-hole mounting.

Note 2) Please contact SMC for details concerning the mounting bolts to be used with $\phi 12$ and $\phi 16$ that exceed 30 mm strokes, or $\phi 20$ and $\phi 25$ that exceed 50 mm strokes.

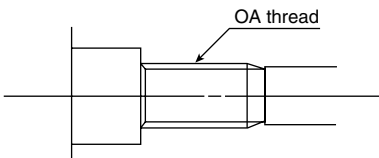

Accessory

For accessory bracket for **Series CQS**, refer to page 620, since it is commonly used with **Series CQ2**.

- Single knuckle joint
- Double knuckle joint
- Pin for knuckle
- Rod end nut

Cylinder model	C	D	Mounting bolt part no.
CDQSB12-5D		30	CQ-M3 x 30L
-10D	6.5	35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
-35DC	6.5	Secure the cylinder by using the OA screws that are provided with the cylinder tube.	
-40DC			
-45DC			
-50DC			
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
CDQSB16-5D		30	CQ-M3 x 30L
-10D	6.5	35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
-35DC	6.5	Secure the cylinder by using the OA screws that are provided with the cylinder tube.	
-40DC			
-45DC			
-50DC			
-75DC			
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			

Cylinder model	C	D	Mounting bolt part no.
CDQSB20-5D		35	CQ-M5 x 35L
-10D	6.5	40	x 40L
-15D		45	x 45L
-20D		50	x 50L
-25D		55	x 55L
-30D		60	x 60L
-35D		65	x 65L
-40D		70	x 70L
-45D		75	x 75L
-50D		80	x 80L
-75DC	6.5	Secure the cylinder by using the OA screws that are provided with the cylinder tube.	
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
CDQSB25-5D		40	CQ-M5 x 40L
-10D	8.5	45	x 45L
-15D		50	x 50L
-20D		55	x 55L
-25D		60	x 60L
-30D		65	x 65L
-35D		70	x 70L
-40D		75	x 75L
-45D		80	x 80L
-50D		85	x 85L
-75DC	8.5	Secure the cylinder by using the OA screws that are provided with the cylinder tube.	
-100DC			
-125DC			
-150DC			
-175DC			
-200DC			
-250DC	8.5		
-300DC			

Material: Chromium molybdenum steel
Surface treatment: Zinc chromated

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual

-X□

Technical data


Series CQS

Dimensions: $\phi 12$ to $\phi 25$


Basic style (Through-hole/Both ends tapped common): CQSB/CDQSB

* For the auto switch mounting position and its mounting height, refer to page 595.



$\phi 12$




$\phi 16$

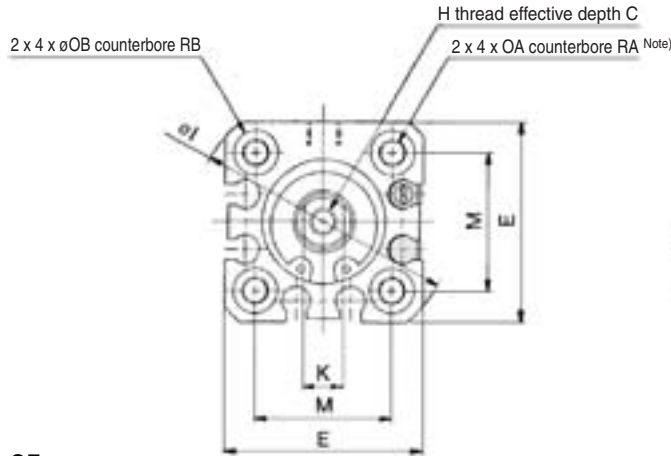

$\phi 20, \phi 25$

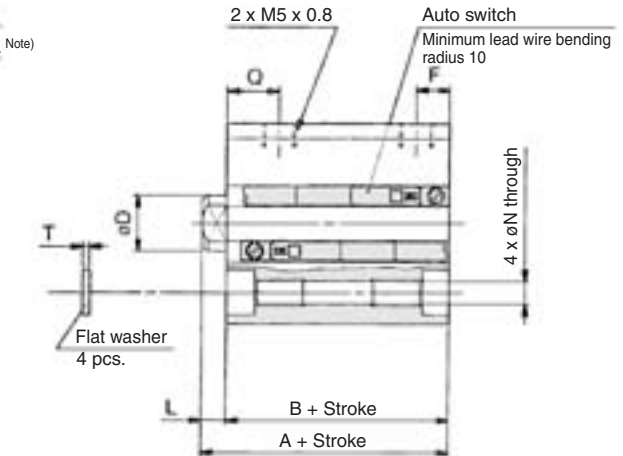

Rod end male thread



- Length with intermediate stroke
- (1) Spacer ... The dimensions will be identical to those of the nearest long stroke. Those that exceed the standard stroke will have the long stroke dimensions.
- (2) Exclusive body (-XB10) ... Add stroke. Also, the stroke length that exceeds the standard stroke would be the long stroke dimension.

Rod End Male Thread

Bore size (mm)	B ₁	C ₁	H ₁	Standard stroke	Long stroke	MM	X
				L ₁	L ₁		
12	8	9	4	14	24	M5 x 0.8	10.5
16	10	10	5	15.5	25.5	M6 x 1.0	12
20	13	12	5	18.5	28.5	M8 x 1.25	14
25	17	15	6	22.5	32.5	M10 x 1.25	17.5

Basic Style


Bore size (mm)	Standard stroke range (mm)	Standard stroke								Long stroke range (mm)	Long stroke				C	D	E	H	I	K	M	N	OA	OB	Q	RA	RB	T
		Without auto switch				With auto switch					With/Without auto switch																	
		A	B	F	L	A	B	F	L		A	B	F	L														
12	5 to 30	20.5	17	5	3.5	25.5	22	5	3.5	35 to 200	45.5	32	7.5	13.5	6	6	25	M3 x 0.5	32	5	15.5	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
16	5 to 30	20.5	17	5	3.5	25.5	22	5	3.5	35 to 200	45.5	32	7.5	13.5	8	8	29	M4 x 0.7	38	6	20	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
20	5 to 50	24	19.5	5.5	4.5	34	29.5	5.5	4.5	75 to 200	55.5	41	9	14.5	7	10	36	M5 x 0.8	47	8	25.5	5.4	M6 x 1.0	9	9	10	7	1
25	5 to 50	27.5	22.5	5.5	5	37.5	32.5	5.5	5	75 to 300	59	44	11	15	12	12	40	M6 x 1.0	52	10	28	5.4	M6 x 1.0	9	11	10	7	1

Note 1) For the following bore/stroke sizes through-hole is threaded over the entire length: Basic style $\phi 12$ and $\phi 16$; 5 stroke, $\phi 20$; 5 to 15 stroke, $\phi 25$; 5 to 10 stroke, $\phi 20$ with auto switch built-in magnet; 5 stroke.


Note 2) Rubber bumper type has the same dimensions as those indicated above.

* For details about the rod end nut and accessory brackets, refer to page 620.

Foot style: CQSL/CDQSL

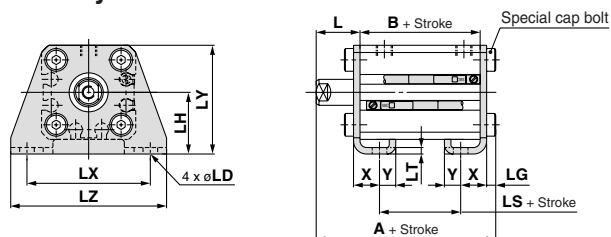

Rod end male thread




Foot Style

Bore size (mm)	Standard stroke range (mm)	Standard stroke						Long stroke range (mm)	Long stroke		
		Without auto switch			With auto switch				Without/With auto switch		
		A	B	LS	A	B	LS		A	B	LS
12	5 to 30	35.3	17	5	40.3	22	10	35 to 200	50.3	32	20
16	5 to 30	35.3	17	5	40.3	22	10	35 to 200	50.3	32	20
20	5 to 50	41.2	19.5	7.5	51.2	29.5	17.5	75 to 200	62.7	41	29
25	5 to 50	44.7	22.5	7.5	54.7	32.5	17.5	75 to 300	66.2	44	29

Bore size (mm)	L	L1	LD	LG	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel
Surface treatment: Nickel plated

Rod side flange style: CQSF/CDQSF

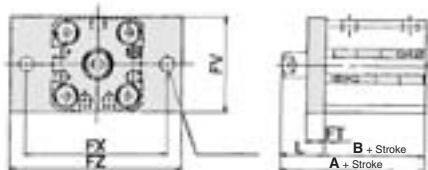

Rod end male thread




Rod Side Flange Style

Bore size (mm)	Standard stroke range (mm)	Standard stroke				Long stroke range (mm)	Long stroke	
		Without auto switch		With auto switch			Without/With auto switch	
		A	B	A	B		A	B
12	5 to 30	30.5	17	35.5	22	35 to 200	45.5	32
16	5 to 30	30.5	17	35.5	22	35 to 200	45.5	32
20	5 to 50	34	19.5	44	29.5	75 to 200	55.5	41
25	5 to 50	37.5	22.5	47.5	32.5	75 to 300	59	44


Bore size (mm)	FD	FT	FV	FX	FZ	L	L1
12	4.5	5.5	25	45	55	13.5	24
16	4.5	5.5	30	45	55	13.5	25.5
20	6.6	8	39	48	60	14.5	28.5
25	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Head side flange style: CQSG/CDQSG

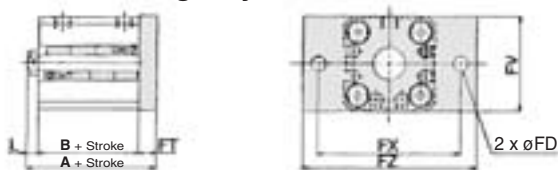

Rod end male thread




Head Side Flange Style

Bore size (mm)	Standard stroke range (mm)	Standard stroke								Long stroke range (mm)	Long stroke			
		Without auto switch				With auto switch					Without/With auto switch			
		A	B	L	L ₁	A	B	L	L ₁		A	B	L	L ₁
12	5 to 30	26	17	3.5	14	31	22	3.5	14	35 to 200	51	32	13.5	24
16	5 to 30	26	17	3.5	15.5	31	22	3.5	15.5	35 to 200	51	32	13.5	25.5
20	5 to 50	32	19.5	4.5	18.5	42	29.5	4.5	18.5	75 to 200	63.5	41	14.5	28.5
25	5 to 50	35.5	22.5	5	22.5	45.5	32.5	5	22.5	75 to 300	67	44	15	32.5


Bore size (mm)	FD	FT	FV	FX	FZ
12	4.5	5.5	25	45	55
16	4.5	5.5	30	45	55
20	6.6	8	39	48	60
25	6.6	8	42	52	64

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Double clevis style: CQSD/CDQSD

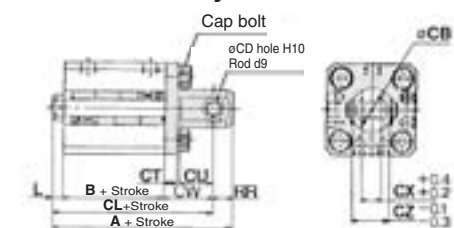

Rod end male thread



Double Cevis Style

Bore size (mm)	Standard stroke range (mm)	Standard stroke										Long stroke range (mm)	Long stroke				
		Without auto switch					With auto switch						Without/With auto switch				
		A	B	CL	L	L ₁	A	B	CL	L	L ₁	A	B	CL	L	L ₁	
12	5 to 30	40.5	17	34.5	3.5	14	45.5	22	39.5	3.5	14	35 to 200	65.5	32	59.5	13.5	24
16	5 to 30	41.5	17	35.5	3.5	15.5	46.5	22	40.5	3.5	15.5	35 to 200	66.5	32	60.5	13.5	25.5
20	5 to 50	51	19.5	42	4.5	18.5	61	29.5	52	4.5	18.5	75 to 200	82.5	41	73.5	14.5	28.5
25	5 to 50	57.5	22.5	47.5	5	22.5	67.5	32.5	57.5	5	22.5	75 to 300	89	44	79	15	32.5

Bore size (mm)	CB	CD	CT	CU	CW	CX	CZ	RR
12	12	5	4	7	14	5	10	6
16	14	5	4	10	15	6.5	12	6
20	20	8	5	12	18	8	16	9
25	24	10	5	14	20	10	20	10

Double clevis bracket material: Carbon steel
Surface treatment: Nickel plated

* For details about the rod end nut and accessory brackets, refer to page 620.

Compact Cylinder: Standard Type Double Acting, Double Rod

Series CQSW

ø12, ø16, ø20, ø25

How to Order

CQSW B 20 - 30 D C -

With auto switch **CDQSW B 20 - 30 D C - M9BW**

• **With auto switch**
(Built-in magnet)

• **Mounting style**

B	Through-hole/Both ends tapped common (Standard)
L	Foot style
F	Flange style

* Mounting brackets are shipped together, (but not assembled).
* Cylinder mounting bolts are not included. Order them separately referring to "Mounting Bolt for CQSW" on page 564.

• **Bore size**

12	12 mm
16	16 mm
20	20 mm
25	25 mm

• **Cylinder stroke (mm)**

Standard Stroke

Bore size (mm)	Standard stroke (mm)
12, 16	5, 10, 15, 20, 25, 30
20, 25	5, 10, 15, 20, 25, 30, 35, 40, 45, 50

For "Manufacture of Intermediate Strokes", refer to page 561.

• **Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

• **Auto switch**

Nil	Without auto switch
------------	---------------------

* Refer to the table below for the applicable auto switch model.

• **Body option**

Nil	Standard
C	With rubber bumper
M	Rod end male thread

* Combination of body options is available. CM

• **Action**

D	Double acting
----------	---------------

• **Made to Order**
Refer to page 561 for details.

• **Built-in Magnet Cylinder Model**

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDQSWL25-30D

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
	3-wire (PNP)			M9PV				M9P	●	●	●	○	○			
	2-wire			M9BV				M9B	●	●	●	○	○			
	3-wire (NPN)			M9NWV				M9NW	●	●	●	○	○			
	3-wire (PNP)			M9PWV				M9PW	●	●	●	○	○			
	2-wire			M9BWV				M9BW	●	●	●	○	○			
	3-wire (NPN)			M9NAV ***				M9NA ***	○	○	●	○	○			
	3-wire (PNP)			M9PAV ***				M9PA ***	○	○	●	○	○			
	2-wire			M9BAV ***				M9BA ***	○	○	●	○	○			
	Magnetic field resistant (2-color indication)			2-wire (Non-polar)				—	—	P3DW**	●	—	●	●		
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96V	A96	●	—	●	—	—	IC circuit	—
				2-wire	24 V	12 V	100 V	A93V	A93	●	—	●	—	—	—	
			100 V or less				A90V	A90	●	—	●	—	—	—	IC circuit	

*** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.
Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ

* Solid state auto switches marked with "○" are produced upon receipt of order.
** Available only for ø25.
It is mounted away from the port side to avoid interference with fittings.

* Since there are other applicable auto switches than listed, refer to page 597 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329. Refer to pages 1317-1 and 1317-2 for D-P3DW□.


* Auto switches are shipped together (not assembled).

Note) There is the case D-A9□V/M9□V/M9□VW/M9□AVL type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.

Compact Cylinder: Standard Type Double Acting, Double Rod *Series CQSW*



JIS Symbol



Made to Order Specifications
(For details, refer to pages 1373 to 1565.)

Symbol	Specifications
-XA□	Change of rod end shape
-XB6	Heat-resistant cylinder (-10 to 150 °C) (without an auto switch)
-XB7	Cold-resistant cylinder (-40 to 70 °C) (without an auto switch)
-XB9	Low speed cylinder (10 to 50 mm/s)
-XB10	Intermediate stroke (Using exclusive body)
-XB13	Low speed cylinder (5 to 50 mm/s)
-XC6	Piston rod, retaining ring, rod end nut made of stainless steel
-XC36	With boss in rod side
-X235	Change of piston rod end of double rod cylinder
-X271	Fluororubber seals
-X633	Intermediate stroke of double rod cylinder

Body Option

Description	Application
Rod end male thread	Available for all standard models of double acting, double rod.
Rubber bumper	

Mounting Bracket Part No.

Bore size (mm)	Foot ⁽¹⁾	Flange
12	CQS-L012	CQS-F012
16	CQS-L016	CQS-F016
20	CQS-L020	CQS-F020
25	CQS-L025	CQS-F025



Note 1) When ordering foot bracket, order 2 pieces per cylinder.

Note 2) Parts belonging to each bracket are as follows.

Foot or Flange style: Body mounting bolt

Specifications

Bore size (mm)		12	16	20	25
Action		Double acting, Double rod			
Fluid		Air			
Lubrication		Not required (Non-lube)			
Proof pressure		1.5 MPa			
Maximum operating pressure		1.0 MPa			
Minimum operating pressure		0.07 MPa		0.05 MPa	
Ambient and fluid temperature		Without auto switch: -10 to 70°C (No freezing)			
		With auto switch: -10 to 60°C (No freezing)			
Cushion		None, Rubber bumper			
Rod end thread		Female thread			
Stroke length tolerance		+1.0 mm * 0			
Mounting		Through-hole/Both ends tapped common			
Piston speed		50 to 500 mm/s			
Allowable kinetic energy (J)	Standard type	0.022	0.038	0.055	0.09
	With rubber bumper	0.043	0.075	0.11	0.18

* Stroke length tolerance does not include the deflection of the bumper.

Theoretical Output

(N)

Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)		
				0.3	0.5	0.7
12	6	IN	84.8	25	42	59
		OUT				
16	8	IN	151	45	75	106
		OUT				
20	10	IN	236	71	118	165
		OUT				
25	12	IN	378	113	189	264
		OUT				

Manufacture of Intermediate Stroke

Description	Spacer is installed in the standard stroke body.	Exclusive body (-XB10)
Part no.	Suffix "-X633" to the end of standard model no. (page 560).	Suffix "-XB10" to the end of standard model no. (page 560).
Description	Intermediate strokes by the 1 mm interval are available by using spacers with standard stroke cylinders.	Dealing with the stroke by the 1 mm interval by using an exclusive body with the specified stroke.
Stroke range	Bore size	Bore size
	Stroke range	Stroke range
	12, 16 20, 25	1 to 29 1 to 49
Example	Part no.: CQSWB25-47D-X633 CQSWB25-50D with 3 mm width spacer inside. B dimension is 79 mm.	Part no.: CQSWB25-47D-XB10 Makes 47 stroke tube. B dimension is 76 mm.

Refer to pages 595 to 597 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Auto switch mounting bracket/Part no.

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual
-X□

Technical
data

Series CQSW

Mass/Without Auto Switch

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	38	46	54	62	69	77	—	—	—	—
16	50	61	71	81	92	102	—	—	—	—
20	89	104	120	136	152	167	183	199	215	231
25	127	146	166	186	206	227	247	267	287	308

Mass/With Auto Switch (Built-in magnet)

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	46	54	62	70	77	85	—	—	—	—
16	60	71	81	91	102	112	—	—	—	—
20	119	134	150	166	182	198	214	230	245	261
25	154	174	195	215	235	255	276	296	316	336

Additional Mass

(g)

Bore size (mm)		12	16	20	25
Rod end male thread	Male thread	3	6	12	24
	Nut	2	4	8	16
With rubber bumper		0	—1	—2	—2
Foot style (Including mounting bolt)		55	65	159	181
Rod side flange style (Including mounting bolt)		58	70	143	180

Calculation: (Example) CQSWF12-10DM

- Cylinder mass: CQSWB12-10D..... 46 g
 - Option mass: Rod end male thread..... 5 g
 - : Rod side flange style..... 58 g
- 109 g

⚠ Caution

Retaining Ring Installation/Removal



1. For installation and removal, use an appropriate pair of pliers (tool for installing a type C retaining ring).
2. Even if a proper plier (tool for installing type C retaining ring) is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier (tool for installing a type C retaining ring). Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installment.

⚠ Warning

Mounting


Do not apply the reverse torque to the piston rods sticking out from both sides of this cylinder at the same time. The torque makes connection threads inside loosen, which may cause an accident or malfunction.

Install or remove a load while the piston rod width across flats are secured. Do not fix the other side of piston rod width across flat and apply the reverse torque.




Construction

Basic style

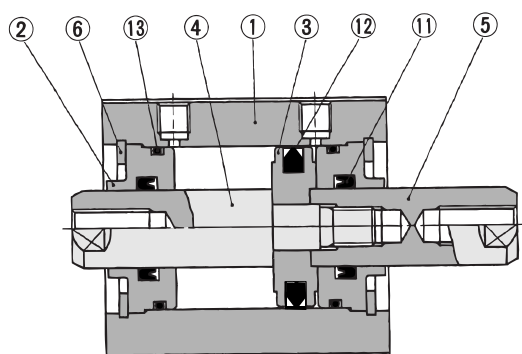


With rubber bumper

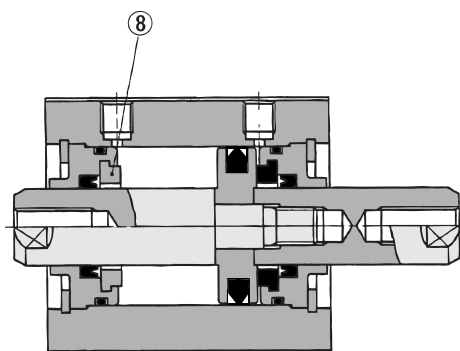


With auto switch (Built-in magnet)

ø12, ø16

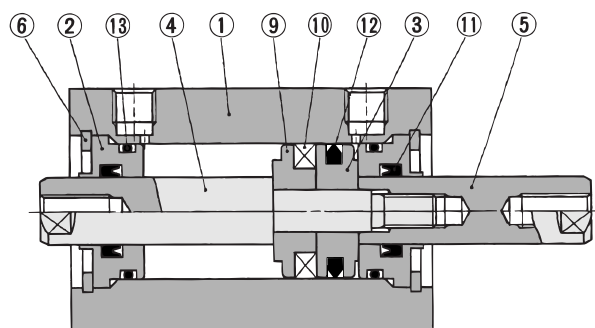


ø20, ø25

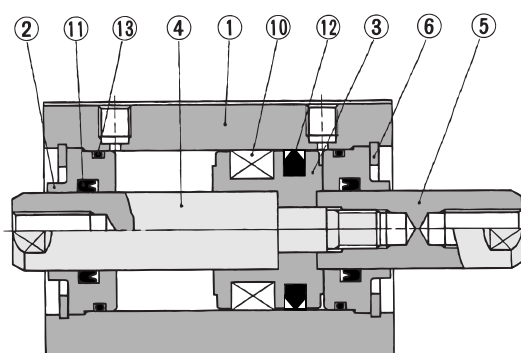

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Collar	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	Chromated
4	Piston rod A	Stainless steel	
5	Piston rod B	Stainless steel	
6	Retaining ring	Carbon tool steel	Phosphate coated
7	Rod end nut	Carbon steel	Nickel plated
8	Bumper	Urethane	
9	Spacer for switch	Aluminum alloy	Chromated
10	Magnet	—	
11	Rod seal	NBR	
12	Piston seal	NBR	
13	Tube gasket	NBR	

Rod end male thread

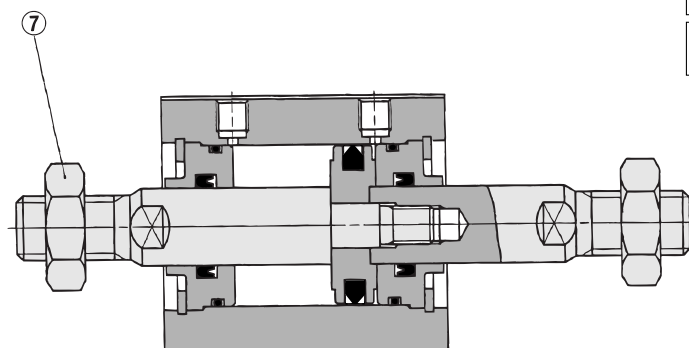

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
12	CQSWB12-PS	Set of nos. above ⑪, ⑫, ⑬
16	CQSWB16-PS	
20	CQSWB20-PS	
25	CQSWB25-PS	

* Seal kit includes ⑪, ⑫, ⑬. Order the seal kit, based on each bore size.
* Since the seal kit does not include a grease pack, order it separately.
Grease pack part no.: GR-S-010 (10 g)

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual
-X□

Technical
data


Series CQSW

Mounting Bolt for CQSW

Mounting method: Mounting bolt for through-hole mounting style of CQSW is available as an option.

Refer to the following for ordering procedures.
Order the actual number of bolts that will be used.

Example) CQ-M3x30L 4 pcs.

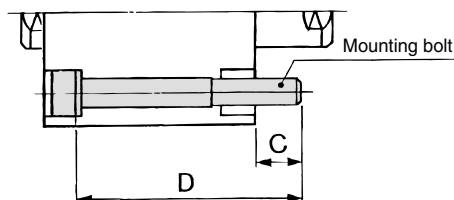

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.
CQSWB12-5D	6.5	30	CQ-M3 x 30L
-10D		35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
CQSWB16-5D	6.5	30	CQ-M3 x 30L
-10D		35	x 35L
-15D		40	x 40L
-20D		45	x 45L
-25D		50	x 50L
-30D		55	x 55L
CQSWB20-5D	10	35	CQ-M5 x 35L
-10D		40	x 40L
-15D		45	x 45L
-20D		50	x 50L

Cylinder model	C	D	Mounting bolt part no.
CQSWB20-25D	10	55	CQ-M5 x 55L
-30D		60	x 60L
-35D		65	x 65L
-40D		70	x 70L
-45D		75	x 75L
-50D		80	x 80L
CQSWB25-5D	7	35	CQ-M5 x 35L
-10D		40	x 40L
-15D		45	x 45L
-20D		50	x 50L
-25D		55	x 55L
-30D		60	x 60L
-35D		65	x 65L
-40D		70	x 70L
-45D		75	x 75L
-50D		80	x 80L


Material: Chromium molybdenum steel
Surface treatment: Zinc chromated

Mounting Bolt for CDQSW with Auto Switch

Mounting method: Mounting bolt for through-hole mounting style of CDQSW is available as an option.

Refer to the following for ordering procedures.
Order the actual number of bolts that will be used.

Example) CQ-M3x35L 4 pcs.

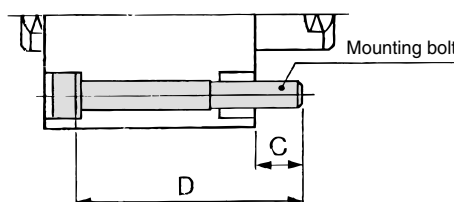

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.
CDQSWB12-5D	6.5	35	CQ-M3 x 35L
-10D		40	x 40L
-15D		45	x 45L
-20D		50	x 50L
-25D		55	x 55L
-30D		60	x 60L
CDQSWB16-5D	6.5	35	CQ-M3 x 35L
-10D		40	x 40L
-15D		45	x 45L
-20D		50	x 50L
-25D		55	x 55L
-30D		60	x 60L
CDQSWB20-5D	10	45	CQ-M5 x 45L
-10D		50	x 50L
-15D		55	x 55L
-20D		60	x 60L


Cylinder model	C	D	Mounting bolt part no.
CDQSWB20-25D	10	65	CQ-M5 x 65L
-30D		70	x 70L
-35D		75	x 75L
-40D		80	x 80L
-45D		85	x 85L
-50D		90	x 90L
CDQSWB25-5D	7	45	CQ-M5 x 45L
-10D		50	x 50L
-15D		55	x 55L
-20D		60	x 60L
-25D		65	x 65L
-30D		70	x 70L
-35D		75	x 75L
-40D		80	x 80L
-45D		85	x 85L
-50D		90	x 90L

Material: Chromium molybdenum steel
Surface treatment: Zinc chromated


Dimensions: $\phi 12$ to $\phi 25$

Basic style (Through-hole/Both ends tapped common): CQSWB/CDQSWB

$\phi 12$

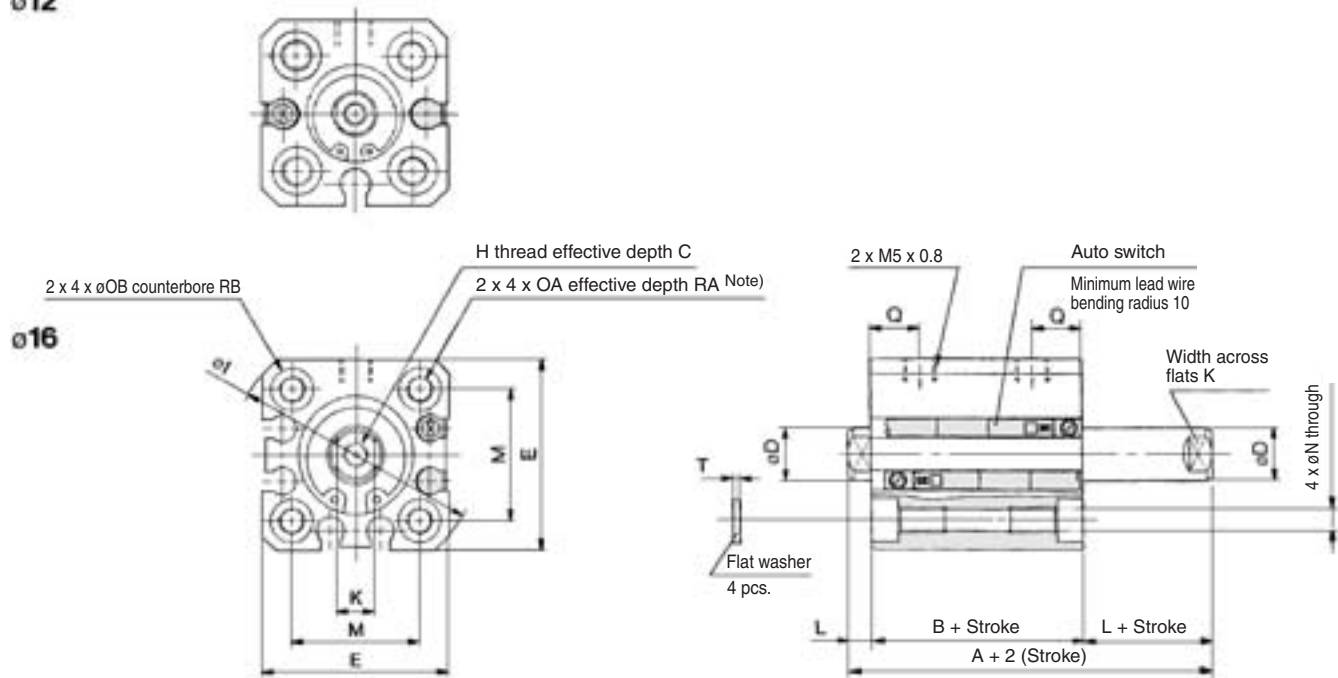

$\phi 20, \phi 25$

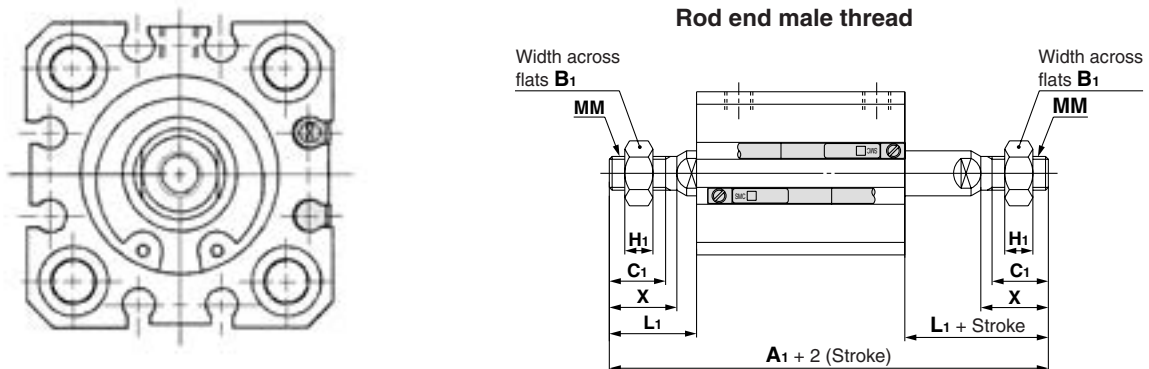

Rod End Male Thread

Bore size (mm)	Without auto switch	With auto switch	B ₁	C ₁	H ₁	L ₁	MM	X
	A ₁	A ₁						
12	50	55	8	9	4	14	M5 x 0.8	10.5
16	53	58	10	10	5	15.5	M6 x 1.0	12
20	63	73	13	12	5	18.5	M8 x 1.25	14
25	74	84	17	15	6	22.5	M10 x 1.25	17.5

Basic Style

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		C	D	E	H	I	K	L	M	N	OA	OB	Q	RA	RB	T
		A	B	A	B															
12	5 to 30	29	22	34	27	6	6	25	M3 x 0.5	32	5	3.5	15.5	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
16	5 to 30	29	22	34	27	8	8	29	M4 x 0.7	38	6	3.5	20	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
20	5 to 50	35	26	45	36	7	10	36	M5 x 0.8	47	8	4.5	25.5	5.4	M6 x 1.0	9	9	10	7	1
25	5 to 50	39	29	49	39	12	12	40	M6 x 1.0	52	10	5	28	5.4	M6 x 1.0	9	11	10	7	1

Note 1) For basic style $\phi 20$ and $\phi 25$ with 5 stroke, through-hole is threaded over the entire length.

Note 2) Rubber bumper type has the same dimensions as those indicated above


Note 3) The positions of width across flats on both sides are not the same.

* For details about the rod end nut and accessory brackets, refer to page 620.


Series CQSW

Dimensions: $\varnothing 12$ to $\varnothing 25$

Foot style: CQSWL/CDQSWL

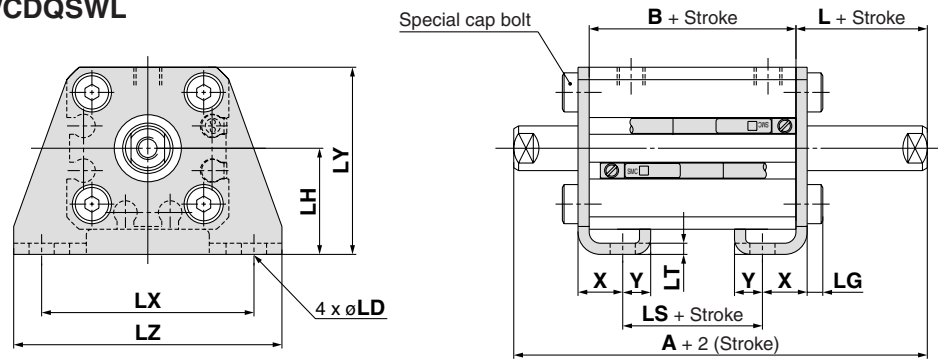

Rod end male thread

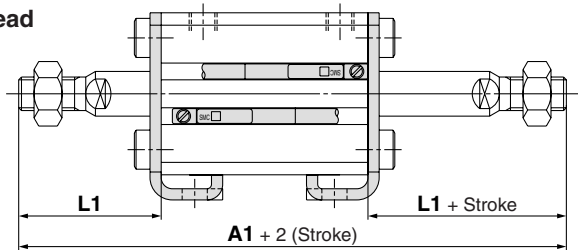


Foot Style

Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				L	L1	LD	LG	LH	LT	LX	LY	LZ	X	Y
		A	A1	B	LS	A	A1	B	LS											
12	5 to 30	49	70	22	10	54	75	27	15	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	5 to 30	49	73	22	10	54	78	27	15	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	5 to 50	55	83	26	14	65	93	36	24	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	5 to 50	59	94	29	14	69	104	39	24	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel
Surface treatment: Nickel plated

Flange style: CQSWF/CDQSWF

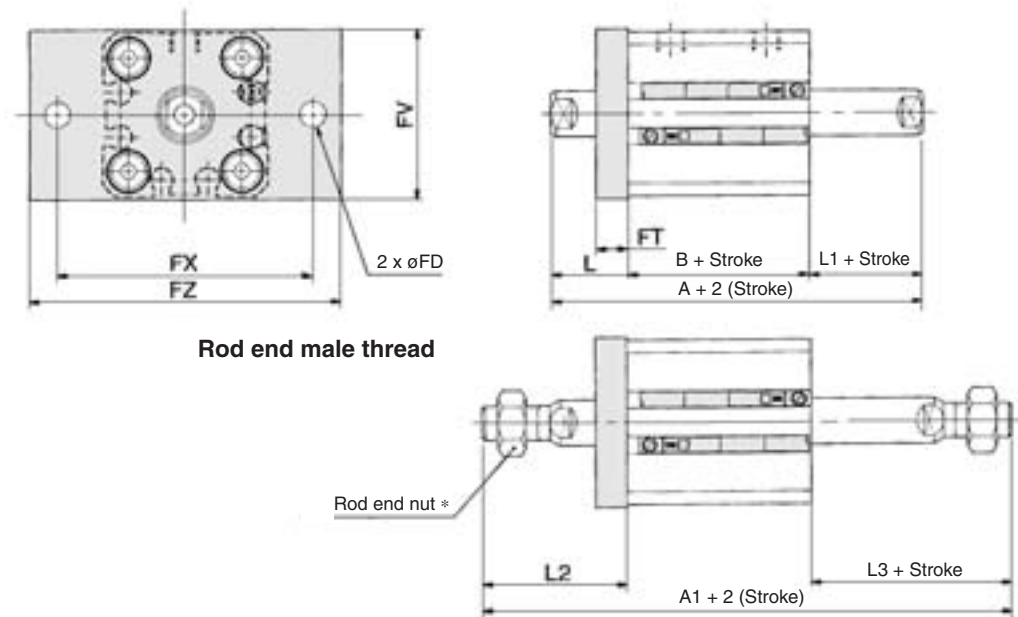

Flange Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			FD	FT	FV	FX	FZ	L	L1	L2	L3
		A	A1	B	A	A1	B									
12	5 to 30	39	60	22	44	65	27	4.5	5.5	25	45	55	13.5	3.5	24	14
16	5 to 30	39	63	22	44	68	27	4.5	5.5	30	45	55	13.5	3.5	25.5	15.5
20	5 to 50	45	73	26	55	83	36	6.6	8	39	48	60	14.5	4.5	28.5	18.5
25	5 to 50	49	84	29	59	94	39	6.6	8	42	52	64	15	5	32.5	22.5

* For details about the rod end nut and accessory brackets, refer to page 620.
Note 1) The positions of width across flats on both sides are not the same.

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Compact Cylinder: Standard Type Single Acting, Single Rod

Series CQS

ø12, ø16, ø20, ø25

How to Order

With auto switch CQS B 20 - 10 S - []

With auto switch CDQS B 20 - 10 S - M9BW [] - []

Mounting style

B	Through-hole/Both ends tapped common (Standard)
L	Foot style
F	Rod side flange style
G	Head side flange style
D	Double clevis style

* Mounting brackets are shipped together, (but not assembled).
* Cylinder mounting bolts are not included. Order them separately referring to "Mounting Bolt for CQS" on page 569.

Bore size

12	12 mm
16	16 mm
20	20 mm
25	25 mm

Cylinder stroke (mm)

Standard Stroke

Bore size (mm)	Standard stroke (mm)
12, 16, 20, 25	5, 10

For "Manufacture of Intermediate Strokes", refer to page 568.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the table below for the applicable auto switch model.

Body option

Nil	Standard (Rod end female thread)
M	Rod end male thread
F	Boss on head side

* Combination of body options is available. FM

Action

S	Single acting, Spring return
T	Single acting, Spring extend

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch. (Example) CDQSL25-10T

Made to Order
Refer to page 568 for details.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC		AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)		5 (Z)		
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
	3-wire (PNP)			M9PV				M9P	●	●	●	○	○			
	2-wire			M9BV				M9B	●	●	●	○	○			
	3-wire (NPN)			M9NWV				M9NW	●	●	●	○	○			
	3-wire (PNP)			M9PWV				M9PW	●	●	●	○	○			
	2-wire			M9BWV				M9BW	●	●	●	○	○			
	3-wire (NPN)			M9NAV **				M9NA **	○	○	●	○	○			
	3-wire (PNP)			M9PAV **				M9PA **	○	○	●	○	○			
	2-wire			M9BAV **				M9BA **	○	○	●	○	○			
	Reed switch			—				Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96V		
No		2-wire	24 V		12 V	100 V	A93V		A93	●	—	●	—	—	—	Relay, PLC
						100 V or less	A90V		A90	●	—	●	—	—	IC circuit	

** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NV
1 m..... M (Example) M9NVW
3 m..... L (Example) M9NVWL
5 m..... Z (Example) M9NVWZ

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed, refer to page 597 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Auto switches are shipped together (not assembled).

Note) There is the case D-A9□V/M9□V/M9□VW/M9□AVL type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.


Series CQS



JIS Symbol

Single acting,
Spring return

Single acting,
Spring extend



Made to Order Specifications

(For details, refer to pages 1373 to 1498 and 1508.)

Symbol	Specifications
–XA□	Change of rod end shape
–XB10	Intermediate stroke (Using exclusive body), Extension type only
–XC6	Piston rod, retaining ring, rod end nut made of stainless steel
–XC36	With boss on rod side, ø12 and ø16 only
–X271	Fluororubber seals
–X1876	With concave shape end boss on the cylinder tube head side

Body Option

Description	Application
Rod end male thread	Available for all standard models of single acting, single rod.

Mounting Bracket Part No.

Bore size (mm)	Foot ⁽¹⁾	Flange	Double clevis
12	CQS-L012	CQS-F012	CQS-D012
16	CQS-L016	CQS-F016	CQS-D016
20	CQS-L020	CQS-F020	CQS-D020
25	CQS-L025	CQS-F025	CQS-D025



Note 1) When ordering foot bracket, order 2 pieces per cylinder.

Note 2) Parts belonging to each bracket are as follows.

Foot or Flange style: Body mounting bolt
Double clevis style: Clevis pin, Type C retaining ring for axis, Body mounting bolt.

Standard Specifications

Bore size (mm)	12	16	20	25
Action	Single acting, Single rod			
Fluid	Air			
Lubrication	Not required (Non-lube)			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Minimum operating pressure	0.25 MPa		0.18 MPa	
Ambient and fluid temperature	Without auto switch: −10 to 70°C (No freezing)			
	With auto switch: −10 to 60°C (No freezing)			
Cushion	None			
Rod end thread	Female thread			
Stroke length tolerance	+1.0 mm 0			
Mounting	Through-hole/Both ends tapped common			
Piston speed	50 to 500 mm/s			
Allowable kinetic energy (J)	0.022	0.038	0.055	0.09

Theoretical Output

(N)

Action	Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)			Retracted side	Extended side
					0.3	0.5	0.7		
Spring return	12	6	IN	–	20	43	65	14	4
			OUT	113					
	16	8	IN	–	45	86	126	15	6
			OUT	201					
	20	10	IN	–	78	141	204	15	6
			OUT	314					
	25	12	IN	–	126	224	323	21	11
			OUT	491					
Spring extend	12	6	IN	84.8	14	31	48	10	3
			OUT	–					
	16	8	IN	151	24	54	85	19	4
			OUT	–					
	20	10	IN	236	44	91	138	27	5
			OUT	–					
	25	12	IN	378	84	160	235	29	10
			OUT	–					

Manufacture of Intermediate Stroke (Single acting, Spring retract type is excluded.)

Description	Spacer is installed in the standard stroke body.	
Part no.	Refer to “How to Order” for the standard model no. (page 567).	
Description	Intermediate strokes by the 1 mm interval are available by using spacers with standard stroke cylinders.	
Stroke range	Bore size	Stroke range
	12 to 25	1 to 9
Example	Part no.: CQSB20-3T CQSB20-5T with 2 mm width spacer inside. B dimension is 24.5 mm.	

Refer to pages 595 to 597 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range

**Mass/Without Auto Switch
Spring return (Spring extend) (g)**

Bore size (mm)	Cylinder stroke (mm)	
	5	10
12	29 (31)	36 (37)
16	39 (39)	48 (47)
20	63 (68)	76 (79)
25	92 (98)	108 (113)

* (): Denotes the values of spring extend.

**Mass/With Auto Switch (Built-in magnet)
Spring return (Spring extend) (g)**

Bore size (mm)	Cylinder stroke (mm)	
	5	10
12	37 (39)	44 (45)
16	49 (51)	58 (59)
20	94 (104)	107 (115)
25	130 (150)	146 (165)

* (): Denotes the values of spring extend.

Additional Mass

Bore size (mm)		12	16	20	25
Rod end male thread	Male thread	1.5	3	6	12
	Nut	1	2	4	8
Foot style (Including mounting bolt)		55	65	159	181
Rod side flange style (Including mounting bolt)		58	70	143	180
Head side flange style (Including mounting bolt)		56	66	137	171
Double clevis style (Including pin, retaining ring, bolt)		34	40	92	127

Calculation: (Example) **CQSG16-10S**

- Cylinder mass: CQSB16-10S..... 48 g
 - Option mass: Head side flange style..... 66 g
- 114 g

Mounting Bolt for CQS without Auto Switch


Mounting method: Mounting bolt for through-hole mounting style
of CQS is available as an option.

Refer to the following for ordering procedures.
Order the actual number of bolts that will be used.

Example) CQ-M3x25L 4 pcs.

Single acting, Spring return

Single acting, Spring extend

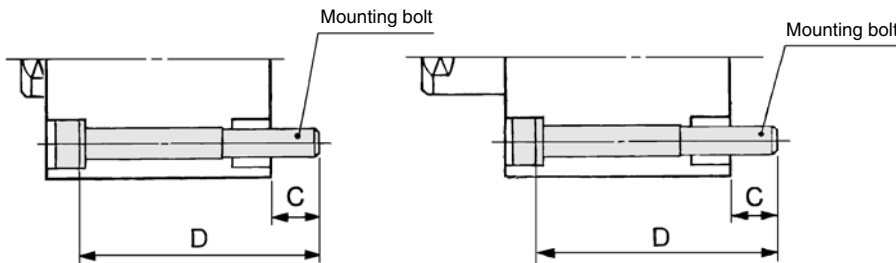

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Mounting Bolt for CDQS with Auto Switch


Mounting method: Mounting bolt for through-hole mounting style
of CDQS is available as an option.

Refer to the following for ordering procedures.
Order the actual number of bolts that will be used.

Example) CQ-M3x30L 4 pcs.

Single acting, Spring return

Single acting, Spring extend

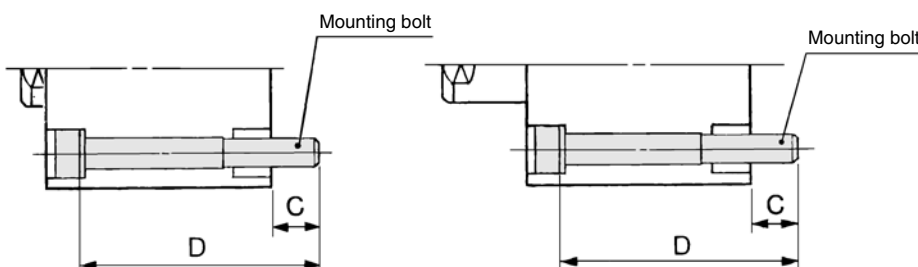

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Caution

Retaining Ring Installation/Removal

1. For installation and removal, use an appropriate pair of pliers (tool for installing a type C retaining ring).
2. Even if a proper plier (tool for installing type C retaining ring) is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier (tool for installing a type C retaining ring). Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installment.

Single Acting, Spring Return

Cylinder model	C	D	Mounting bolt part no.
CQSB12-5S	6.5	25	CQ-M3 x 25L
-10S		30	x 30L
CQSB16-5S	6.5	25	CQ-M3 x 25L
-10S		30	x 30L
CQSB20-5S	6.5	25	CQ-M5 x 25L
-10S		30	x 30L
CQSB25-5S	8.5	30	CQ-M5 x 30L
-10S		35	x 35L

Single Acting, Spring Extend

Cylinder model	C	D	Mounting bolt part no.
CQSB12-5T	6.5	25	CQ-M3 x 25L
-10T		30	x 30L
CQSB16-5T	6.5	25	CQ-M3 x 25L
-10T		30	x 30L
CQSB20-5T	6.5	25	CQ-M5 x 25L
-10T		30	x 30L
CQSB25-5T	8.5	30	CQ-M5 x 30L
-10T		35	x 35L

Material: Chromium molybdenum steel
Surface treatment: Zinc chromated

Single Acting, Spring Return

Cylinder model	C	D	Mounting bolt part no.
CDQSB12-5S	6.5	30	CQ-M3 x 30L
-10S		35	x 35L
CDQSB16-5S	6.5	30	CQ-M3 x 30L
-10S		35	x 35L
CDQSB20-5S	6.5	35	CQ-M5 x 35L
-10S		40	x 40L
CDQSB25-5S	8.5	40	CQ-M5 x 40L
-10S		45	45L

Single Acting, Spring Extend


Cylinder model	C	D	Mounting bolt part no.
CDQSB12-5T	6.5	30	CQ-M3 x 30L
-10T		35	x 35L
CDQSB16-5T	6.5	30	CQ-M3 x 30L
-10T		35	x 35L
CDQSB20-5T	6.5	35	CQ-M5 x 35L
-10T		40	x 40L
CDQSB25-5T	8.5	40	CQ-M5 x 40L
-10T		45	x 45L

Material: Chromium molybdenum steel
Surface treatment: Zinc chromated


Series CQS

Construction


Single acting, Spring return

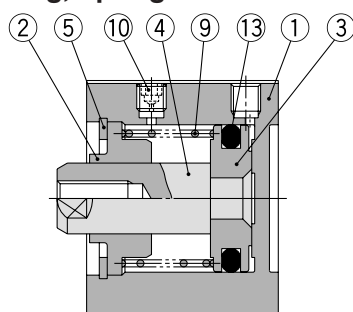


Single acting, Spring return/With auto switch (Built-in magnet) ø12, 16




ø20, 25

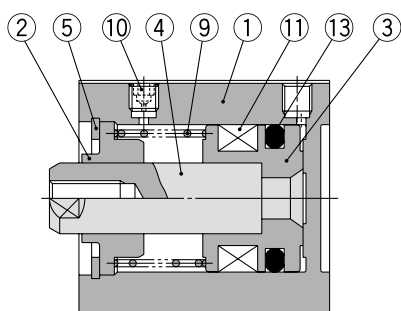


Single acting, Spring extend

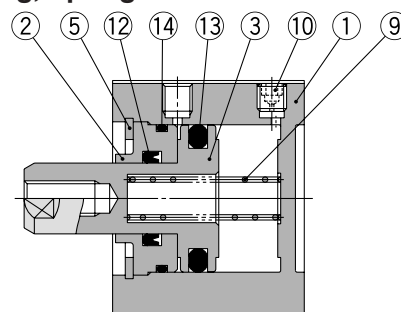

Single acting, Spring extend/With auto switch (Built-in magnet) ø12, 16

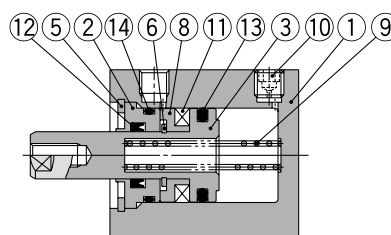

ø20, 25

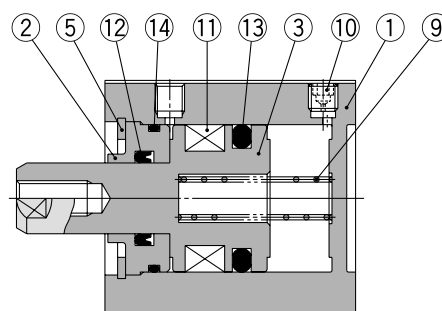

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Collar	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	Single acting, Spring return
		Stainless steel	Single acting, Spring extend
4	Piston rod	Stainless steel	
5	Retaining ring	Carbon tool steel	Phosphate coated
6	Retaining ring	Carbon tool steel	Nickel plated
7	Rod end nut	Carbon steel	Nickel plated
8	Spacer for switch type	Aluminum alloy	Chromated
9	Return spring	Piano wire	Zinc chromated
10	Plug with fixed orifice	Alloy steel	Nickel plated
11	Magnet	—	
12*	Rod seal	NBR	
13*	Piston seal	NBR	
14*	Tube gasket	NBR	
15	Centering location ring	Aluminum alloy	Anodized

Replacement Parts/Seal Kit

Single acting, Spring return

Bore size (mm)	Kit no.	Contents
12	CQSB12-S-PS	Set of nos. above ⑬
16	CQSB16-S-PS	
20	CQSB20-S-PS	
25	CQSB25-S-PS	


* Seal kit includes ⑬. Order the seal kit, based on each bore size.

* Since the seal kit does not include a grease pack, order it separately.


Grease pack part no.: GR-S-010 (10 g)

Rod end male thread

Single acting, Spring return
Single acting, Spring extend



With rear slip fit



Replacement Parts/Seal Kit

Single acting, Spring extend

Bore size (mm)	Kit no.	Contents
12	CQSB12-T-PS	Set of nos. above ⑫, ⑬, ⑭
16	CQSB16-T-PS	
20	CQSB20-T-PS	
25	CQSB25-T-PS	

* Seal kit includes ⑫, ⑬, ⑭. Order the seal kit, based on each bore size.


* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)


Dimensions: $\phi 12$ to $\phi 25$ /Single Acting, Spring Return

Basic style (Through-hole/Both ends tapped common): CQSB/CDQSB


$\phi 12$




$\phi 16$

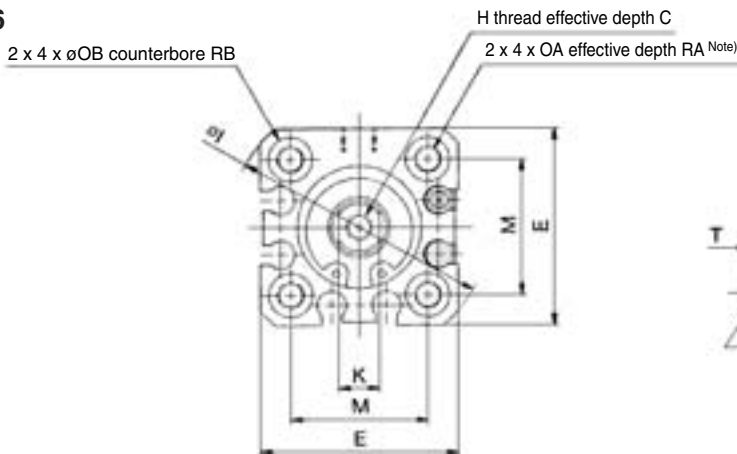

$\phi 20, \phi 25$



Rod end male thread

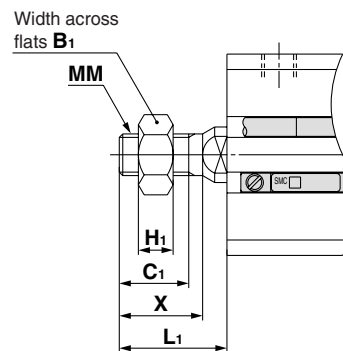

Rod End Male Thread

Bore size (mm)	B ₁	C ₁	H ₁	L ₁	MM	X
12	8	9	4	14	M5 x 0.8	10.5
16	10	10	5	15.5	M6 x 1.0	12
20	13	12	5	18.5	M8 x 1.25	14
25	17	15	6	22.5	M10 x 1.25	17.5

Basic Style

Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				C	D	E	F	H	I	K	L	M	N	OA	OB	RA	RB	T
		A	B	A	B	A	B	A	B															
12	5, 10	25.5	30.5	22	27	30.5	35.5	27	32	6	6	25	5	M3 x 0.5	32	5	3.5	15.5	3.5	M4 x 0.7	6.5	7	4	0.5
16		25.5	30.5	22	27	30.5	35.5	27	32	8	8	29	5	M4 x 0.7	38	6	3.5	20	3.5	M4 x 0.7	6.5	7	4	0.5
20		29	34	24.5	29.5	39	44	34.5	39.5	7	10	36	5.5	M5 x 0.8	47	8	4.5	25.5	5.4	M6 x 1.0	9	10	7	1
25		32.5	37.5	27.5	32.5	42.5	47.5	37.5	42.5	12	12	40	5.5	M6 x 1.0	52	10	5	28	5.4	M6 x 1.0	9	10	7	1



Note) For basic style $\phi 12$ and $\phi 16$ with 5 stroke, through-hole is threaded over the entire length.
For basic style $\phi 20, \phi 25$ with 5 and 10 stroke, through-hole is threaded over the entire length.
With auto switch (Built-in magnet)/ $\phi 20$; 5 stroke.

* For details about the rod end nut and accessory brackets, refer to page 620.

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual

-X□


Technical

data


Series CQS

Dimensions: $\varnothing 12$ to $\varnothing 25$ /Single Acting, Spring Return

Foot style: CQSL/CDQSL

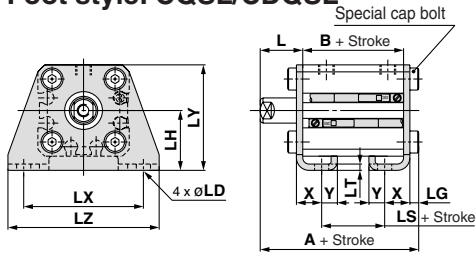

Rod end male thread




Foot Style


Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			L	L ₁	LD	LG	LH	LT	LX	LY	LZ	X	Y
		A	B	LS	A	B	LS											
12	5, 10	35.3	17	5	40.3	22	10	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16		35.3	17	5	40.3	22	10	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20		41.2	19.5	7.5	51.2	29.5	17.5	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25		44.7	22.5	7.5	54.7	32.5	17.5	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel
Surface treatment: Nickel plated

Rod side flange style: CQSF/CDQSF

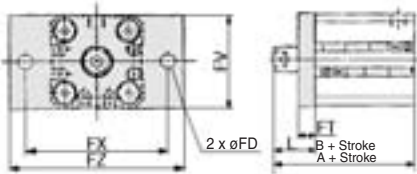

Rod end male thread




Rod Side Flange Style


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L ₁
		A	B	A	B							
12	5, 10	30.5	17	35.5	22	4.5	5.5	25	45	55	13.5	24
16		30.5	17	35.5	22	4.5	5.5	30	45	55	13.5	25.5
20		34	19.5	44	29.5	6.6	8	39	48	60	14.5	28.5
25		37.5	22.5	47.5	32.5	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Head side flange style: CQSG/CDQSG

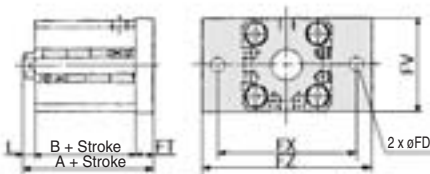

Rod end male thread




Head Side Flange Style


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L ₁
		A	B	A	B							
12	5, 10	26	17	31	22	4.5	5.5	25	45	55	3.5	14
16		26	17	31	22	4.5	5.5	30	45	55	3.5	15.5
20		32	19.5	42	29.5	6.6	8	39	48	60	4.5	18.5
25		35.5	22.5	45.5	32.5	6.6	8	42	52	64	5	22.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Double clevis style: CQSD/CDQSD

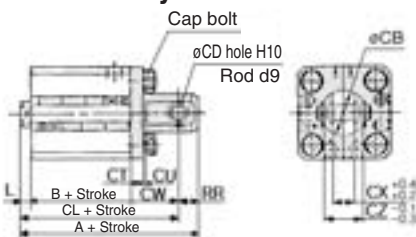

Rod end male thread



Double Clevis Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			CB	CD	CT	CU	CW	CX	CZ	L	L ₁	RR
		A	B	CL	A	B	CL										
12	5, 10	40.5	17	34.5	45.5	22	39.5	12	5	4	7	14	5	10	3.5	14	6
16		41.5	17	35.5	46.5	22	40.5	14	5	4	10	15	6.5	12	3.5	15.5	6
20		51	19.5	42	61	29.5	52	20	8	5	12	18	8	16	4.5	18.5	9
25		57.5	22.5	47.5	67.5	32.5	57.5	24	10	5	14	20	10	20	5	22.5	10


Double clevis bracket material: Carbon steel
Surface treatment: Nickel plated

* For details about the rod end nut and accessory brackets, refer to page 620.



Dimensions: $\phi 12$ to $\phi 25$ /Single Acting, Spring Extend

Basic style (Through-hole/Both ends tapped common): CQSB/CDQSB


$\phi 12$




$\phi 16$

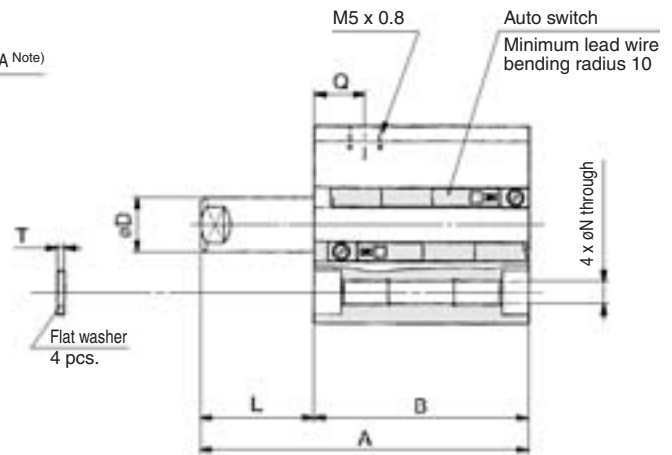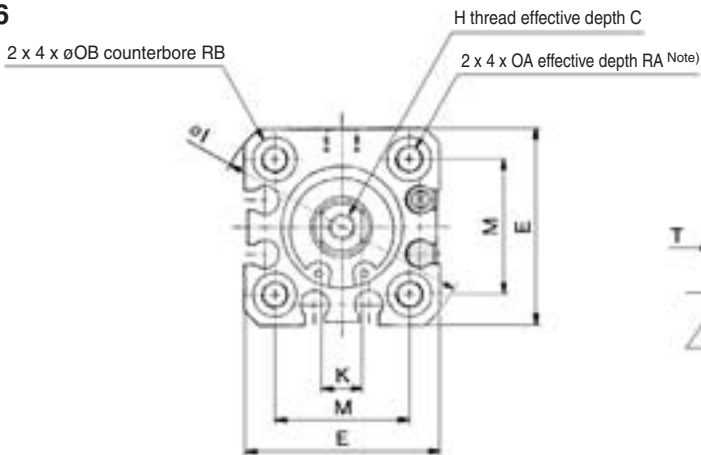

$\phi 20, \phi 25$

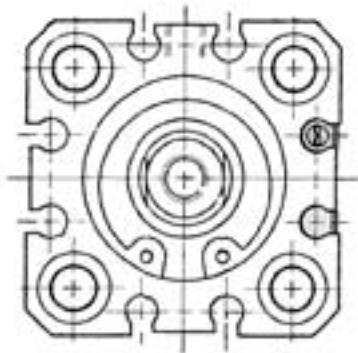

Rod end male thread

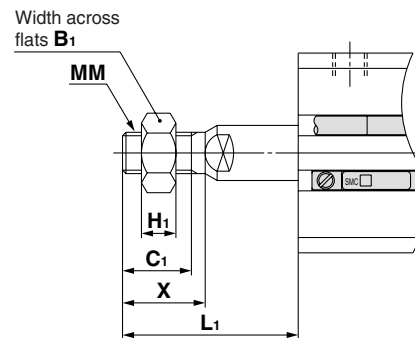

Rod End Male Thread

Bore size (mm)	B ₁	C ₁	H ₁	L ₁		MM	X
				5 ST	10 ST		
12	8	9	4	19	24	M5 x 0.8	10.5
16	10	10	5	20.5	25.5	M6 x 1.0	12
20	13	12	5	23.5	28.5	M8 x 1.25	14
25	17	15	6	27.5	32.5	M10 x 1.25	17.5

Basic Style

Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				C	D	E	H	I	K	L		M	N	OA	OB	Q	RA	RB	T
		A		B		A		B								5 ST	10 ST								
		5 ST	10 ST	5 ST	10 ST	5 ST	10 ST	5 ST	10 ST																
12	5, 10	30.5	40.5	22	27	35.5	45.5	27	32	6	6	25	M3 x 0.5	32	5	8.5	13.5	15.5	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
16		30.5	40.5	22	27	35.5	45.5	27	32	8	8	29	M4 x 0.7	38	6	8.5	13.5	20	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
20		34	44	24.5	29.5	44	54	34.5	39.5	7	10	36	M5 x 0.8	47	8	9.5	14.5	25.5	5.4	M6 x 1.0	9	9	10	7	1
25		37.5	47.5	27.5	32.5	47.5	57.5	37.5	42.5	12	12	40	M6 x 1.0	52	10	10	15	28	5.4	M6 x 1.0	9	11	10	7	1


Note) For basic style $\phi 12$ and $\phi 16$ with 5 stroke, through-hole is threaded over the entire length.
For basic style $\phi 20, \phi 25$ with 5 and 10 stroke, through-hole is threaded over the entire length.
With auto switch (Built-in magnet)/ $\phi 20$; 5 stroke.

* For details about the rod end nut and accessory brackets, refer to page 620.

Series CQS

Dimensions: $\varnothing 12$ to $\varnothing 25$ /Single Acting, Spring Extend

Foot style: CQSL/CDQSL

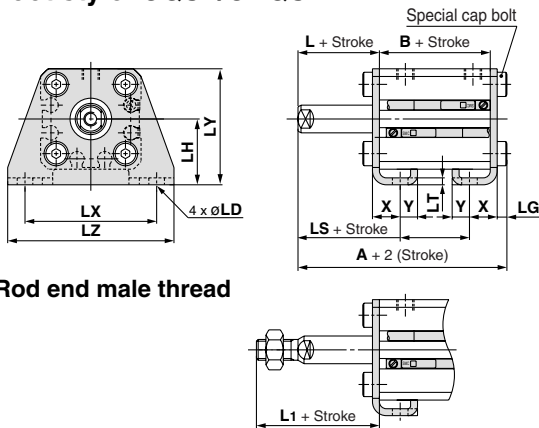

Rod end male thread


Foot Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	LS	A	B	LS
12	5, 10	35.3	17	5	40.3	22	10
16		35.3	17	5	40.3	22	10
20		41.2	19.5	7.5	51.2	29.5	17.5
25		44.7	22.5	7.5	54.7	32.5	17.5


Bore size (mm)	L	L ₁	LD	LG	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel
Surface treatment: Nickel plated

Rod side flange style: CQSF/CDQSF

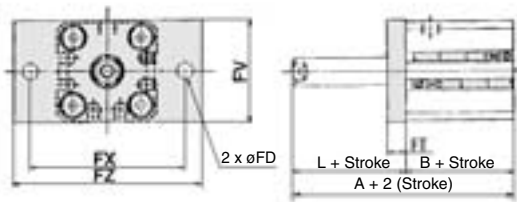

Rod end male thread

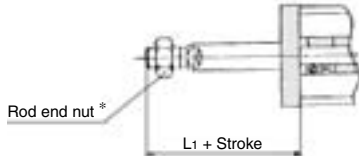


Rod Side Flange Style


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L ₁
		A	B	A	B							
12	5, 10	30.5	17	35.5	22	4.5	5.5	25	45	55	13.5	24
16		30.5	17	35.5	22	4.5	5.5	30	45	55	13.5	25.5
20		34	19.5	44	29.5	6.6	8	39	48	60	14.5	28.5
25		37.5	22.5	47.5	32.5	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Head side flange style: CQSG/CDQSG

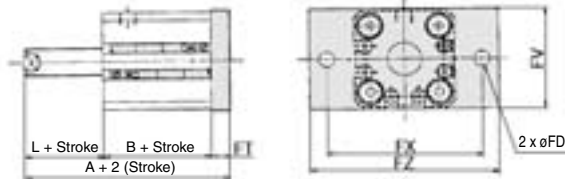

Rod end male thread




Head Side Flange Style


Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L ₁
		A	B	A	B							
12	5, 10	26	17	31	22	4.5	5.5	25	45	55	3.5	14
16		26	17	31	22	4.5	5.5	30	45	55	3.5	15.5
20		32	19.5	42	29.5	6.6	8	39	48	60	4.5	18.5
25		35.5	22.5	45.5	32.5	6.6	8	42	52	64	5	22.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Double clevis style: CQSD/CDQSD

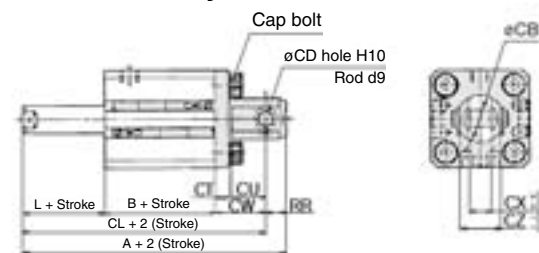

Rod end male thread



Double Clevis Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	CL	A	B	CL
12	5, 10	40.5	17	34.5	45.5	22	39.5
16		41.5	17	35.5	46.5	22	40.5
20		51	19.5	42	61	29.5	52
25		57.5	22.5	47.5	67.5	32.5	57.5

Bore size (mm)	CB	CD	CT	CU	CW	CX	CZ	L	L ₁	RR
12	12	5	4	7	14	5	10	3.5	14	6
16	14	5	4	10	15	6.5	12	3.5	15.5	6
20	20	8	5	12	18	8	16	4.5	18.5	9
25	24	10	5	14	20	10	20	5	22.5	10

Double clevis bracket material: Carbon steel
Surface treatment: Nickel plated

* For details about the rod end nut and accessory brackets, refer to page 620.

Compact Cylinder: Non-rotating Rod Type Double Acting, Single Rod

Series CQSK

ø12, ø16, ø20, ø25

How to Order

CQSK B 20 - 30 D - **□** - **□**

With auto switch **CDQSK B 20 - 30 D** - **□** - **M9BW** - **□** - **□**

With auto switch
(Built-in magnet)

Mounting style

B	Through-hole/Both ends tapped common (Standard)
L	Foot style
F	Rod side flange style
G	Head side flange style
D	Double clevis style

Bore size

12	12 mm
16	16 mm
20	20 mm
25	25 mm

Cylinder stroke (mm)

Standard Stroke

Bore size (mm)	Standard stroke (mm)
12, 16	5, 10, 15, 20, 25, 30
20, 25	5, 10, 15, 20, 25, 30, 35, 40, 45, 50

For "Manufacture of Intermediate Strokes", refer to page 576.

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the table below for the applicable auto switch model.

Body option

Nil	Standard (Rod end female thread)
M	Rod end male thread
F	Boss on head side

* Combination of body options is available. FM

Action

D	Double acting
---	---------------

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Made to Order
Refer to page 576 for details.

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDQSKL25-30D

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
	3-wire (PNP)			M9PV				M9P	●	●	●	○	○			
	2-wire			M9BV				M9B	●	●	●	○	○			
	3-wire (NPN)			M9NWV				M9NW	●	●	●	○	○	IC circuit		
	3-wire (PNP)			M9PWV				M9PW	●	●	●	○	○			
	2-wire			M9BWV				M9BW	●	●	●	○	○			
	3-wire (NPN)			M9NAV **				M9NA **	○	○	●	○	○	IC circuit		
	3-wire (PNP)			M9PAV **				M9PA **	○	○	●	○	○			
	2-wire			M9BAV **				M9BA **	○	○	●	○	○			
	Reed switch			—				Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96V	A96	
No		2-wire	24 V		12 V	100 V	A93V		A93	●	—	●	—	—	—	Relay, PLC
						100 V or less		A90V	A90	●	—	●	—	—	IC circuit	

** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWX

* Solid state auto switches marked with "○" are produced upon receipt of order.


* Since there are other applicable auto switches than listed, refer to page 597 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Auto switches are shipped together (not assembled).

Note) There is the case D-A9□V/M9□V/M9□V/M9□AVL type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.

Series CQSK

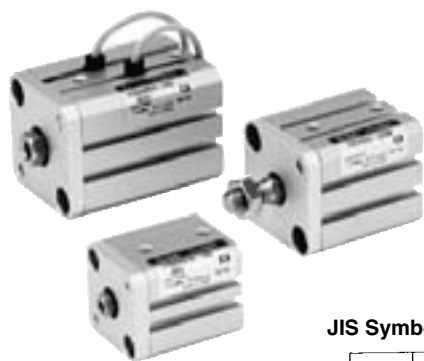

JIS Symbol



Made to Order Specifications
(For details, refer to pages 1426 and 1430 to 1446.)

Symbol	Specifications
-XA□	Change of Rod End Shape
-XC6	Piston rod and rod end nut made of stainless steel
-XC8	Adjustable stroke cylinder/Adjustable extension type
-XC9	Adjustable stroke cylinder/Adjustable retraction type
-XC10	Dual stroke cylinder/Double rod type
-XC11	Dual stroke cylinder/Single rod type
-X1876	With concave shape end boss on the cylinder tube head side

Body Option

Description	Application
Rod end male thread	Available for all non-rotating rod type.

Mounting Bracket Part No.

Bore size (mm)	Foot ⁽¹⁾	Flange	Double clevis
12	CQSK-L012	CQSK-F012	CQSK-D012
16	CQSK-L016	CQSK-F016	CQSK-D016
20	CQSK-L020	CQSK-F020	CQSK-D020
25	CQSK-L025	CQSK-F025	CQSK-D025



Note 1) When ordering foot bracket, order 2 pieces per cylinder.


Note 2) Parts belonging to each bracket are as follows.

Foot or Flange style: Body mounting bolt
Double clevis style: Clevis pin, Type C retaining ring for axis, Body mounting bolt.

Standard Specifications

Bore size (mm)	12	16	20	25
Action	Double acting, Single rod			
Fluid	Air			
Lubrication	Not required (Non-lube)			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Minimum operating pressure	0.07 MPa		0.05 MPa	
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing)			
	With auto switch: -10 to 60°C (No freezing)			
Cushion	None			
Rod end thread	Female thread			
Stroke length tolerance	+1.0 mm 0			
Mounting	Through-hole/Both ends tapped common			
Piston speed	50 to 500 mm/s			
Allowable kinetic energy (J)	0.022	0.038	0.055	0.09
Rod non-rotating accuracy	±1°		±0.7°	

Theoretical Output



Bore size (mm)	Rod width across flats (mm)	Action	Piston area (mm ²)	Operating pressure (MPa)		
				0.3	0.5	0.7
12	5.2	IN	90	27	45	63
		OUT	113	34	57	79
16	6.2	IN	168	50	84	117
		OUT	201	60	101	141
20	8.2	IN	256	77	128	179
		OUT	314	94	157	220
25	10.2	IN	401	120	200	281
		OUT	491	147	245	344

Manufacture of Intermediate Stroke

Description		Spacer is installed in the standard stroke body.	
Part no.		Refer to "How to Order" for the standard model no. (page 575)	
Standard stroke	Description	Intermediate strokes by the 1 mm interval are available by using spacers with standard stroke cylinders.	
	Stroke range	Bore size	Stroke range
		12, 16	1 to 29
		20, 25	1 to 49
Example		Part no.: CQSKB25-47D CQSKB25-50D with 3 mm width spacer inside. B dimension is 77.5 mm.	

Refer to pages 595 to 597 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range

Compact Cylinder: Non-rotating Rod Type

Double Acting, Single Rod *Series CQSK*

Mass/Without Auto Switch

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	39	46	53	60	67	74	—	—	—	—
16	52	61	69	78	86	95	—	—	—	—
20	89	102	116	129	143	156	170	183	197	211
25	124	141	157	174	190	207	224	240	257	273

Calculation: (Example) **CQSKF20-5DM**

• Cylinder mass: CQSKB20-5D..... 89 g
 • Option mass: Rod end male thread..... 10 g
 : Rod side flange style..... 142 g
 241 g

Mass/With Auto Switch (Built-in magnet)

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	47	54	62	69	76	83	—	—	—	—
16	63	71	80	88	97	106	—	—	—	—
20	122	136	149	163	176	190	203	217	230	244
25	168	185	201	218	235	251	268	284	301	317

Additional Mass

(g)

Bore size (mm)		12	16	20	25
Rod end male thread	Male thread	1.5	3	6	12
	Nut	1	2	4	8
Foot style (Including mounting bolt)		55	64	158	179
Rod side flange style (Including mounting bolt)		58	69	142	178
Head side flange style (Including mounting bolt)		56	66	137	171
Double clevis style (Including pin, retaining ring, bolt)		34	40	92	127

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□


Individual
-X□

Technical
data


Series CQSK

Construction


Basic style ø12




ø16, ø20, ø25

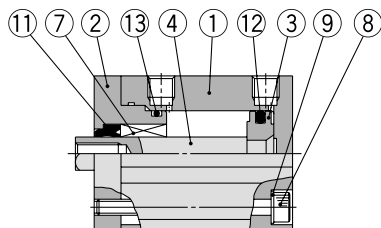


Rod end male thread With rear slip fit

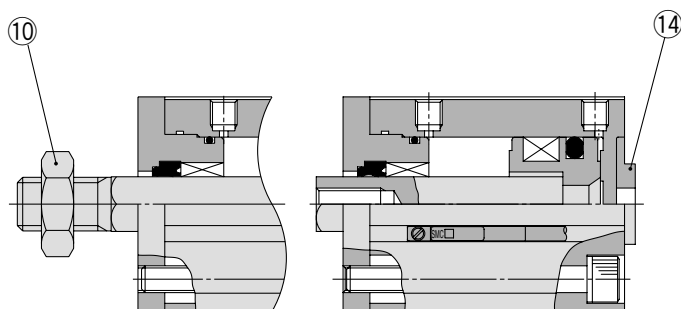


With auto switch (Built-in magnet) ø12

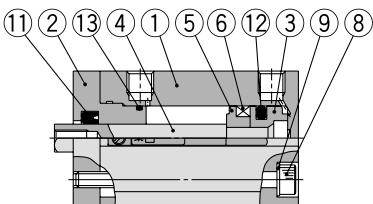

ø16

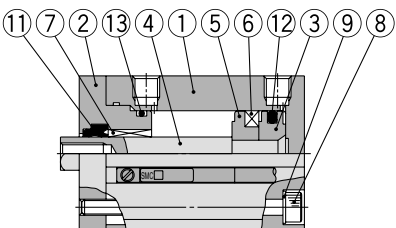

ø20, ø25

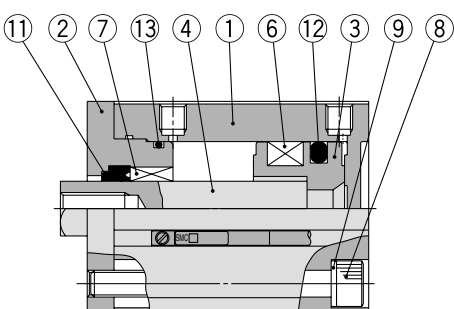

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Rod cover	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	Chromated
4	Piston rod	Stainless steel	
5	Spacer for switch type	Aluminum alloy	Chromated
6	Magnet	—	
7	Non-rotating guide	Oil impregnated sintered alloy	ø16, ø20 and ø25
8	Hexagon socket head cap screw	Alloy steel	Nickel plated
9	Plain washer	Rolled steel	Nickel plated
10	Rod end nut	Carbon steel	Nickel plated
11*	Rod seal	NBR	
12*	Piston seal	NBR	
13*	Tube gasket	NBR	
14	Centering location ring	Aluminum alloy	Anodized

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
12	CQSKB12-PS	Set of nos. above ⑪, ⑫, ⑬.
16	CQSKB16-PS	
20	CQSKB20-PS	
25	CQSKB25-PS	

* Seal kit includes ⑪, ⑫, ⑬. Order the seal kit, based on each bore size.

* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

⚠ Precautions


Operating Precautions

⚠ Caution

- Any kind of operation producing rotational torque to piston rod must be considered. The non-rotating guide would be deformed and the accuracy would be compromised. Refer to the table below for rotation torque allowance.

Allowable rotational torque (N·m) or less	ø12	ø16	ø20	ø25
	0.04	0.04	0.2	0.25

- Load to piston rod must always be in an axial direction.
- When a workpiece is secured to the end of the piston rod, ensure that the piston rod is retracted entirely, and place a wrench on the portion of the rod that protrudes beyond the section. Also, tighten by giving consideration to prevent the tightening torque from being applied to the non-rotating guide.



Mounting Bolt for CQSK


Mounting method: Mounting bolt for through-hole mounting style of CQSK is available as an option.

Refer to the following for ordering procedures.


Order the actual number of bolts that will be used.

Example) CQ-M3x25L 2 pcs.

Head side mounting style

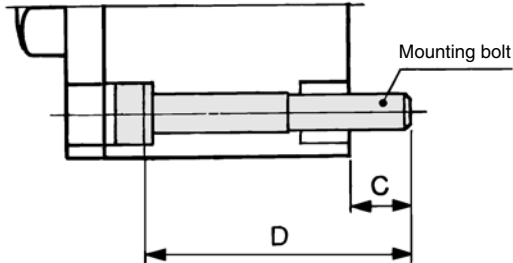

Rod side mounting style

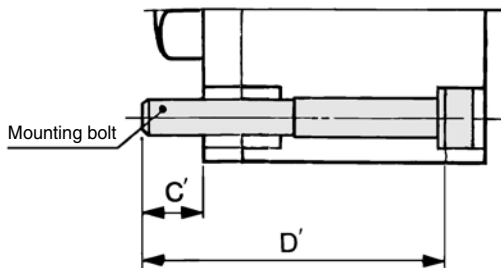

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.	C'	D'	Mounting bolt part no.
CQSKB12-5D		25	CQ-M3 x 25L		30	CQ-M3 x 30L
-10D	6.5	30	x 30L	6.5	35	x 35L
-15D		35	x 35L		40	x 40L
-20D		40	x 40L		45	x 45L
-25D		45	x 45L		50	x 50L
-30D		50	x 50L		55	x 55L
CQSKB16-5D		25	CQ-M3 x 25L		30	CQ-M3 x 30L
-10D	6.5	30	x 30L	6.5	35	x 35L
-15D		35	x 35L		40	x 40L
-20D		40	x 40L		45	x 45L
-25D		45	x 45L		50	x 50L
-30D		50	x 50L		55	x 55L
CQSKB20-5D		25	CQ-M5 x 25L		30	CQ-M5 x 30L
-10D	6.5	30	x 30L	6.5	35	x 35L
-15D		35	x 35L		40	x 40L
-20D		40	x 40L		45	x 45L
-25D		45	x 45L		50	x 50L
-30D		50	x 50L		55	x 55L
-35D		55	x 55L		60	x 60L
-40D		60	x 60L		65	x 65L
-45D		65	x 65L		70	x 70L
-50D		70	x 70L		75	x 75L
CQSKB25-5D		30	CQ-M5 x 30L		35	CQ-M5 x 35L
-10D	8.5	35	x 35L	8.5	40	x 40L
-15D		40	x 40L		45	x 45L
-20D		45	x 45L		50	x 50L
-25D		50	x 50L		55	x 55L
-30D		55	x 55L		60	x 60L
-35D		60	x 60L		65	x 65L
-40D		65	x 65L		70	x 70L
-45D		70	x 70L		75	x 75L
-50D		75	x 75L		80	x 80L

Material: Chromium molybdenum steel
Surface treatment: Zinc chromated

Mounting Bolt for CDQSK


Mounting method: Mounting bolt for through-hole mounting style of CDQSK is available as an option.

Refer to the following for ordering procedures.


Order the actual number of bolts that will be used.

Example) CQ-M3x30L 2 pcs.

Head side mounting style

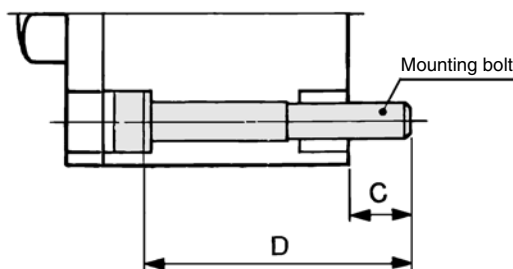

Rod side mounting style

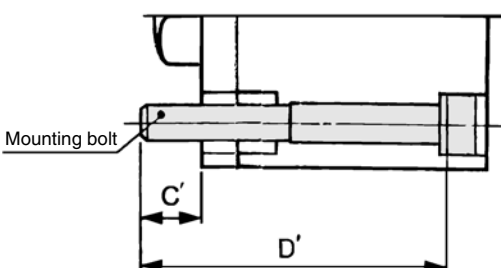

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.	C'	D'	Mounting bolt part no.
CDQSKB12-5D		30	CQ-M3 x 30L		35	CQ-M3 x 35L
-10D	6.5	35	x 35L	6.5	40	x 40L
-15D		40	x 40L		45	x 45L
-20D		45	x 45L		50	x 50L
-25D		50	x 50L		55	x 55L
-30D		55	x 55L		60	x 60L
CDQSKB16-5D		30	CQ-M3 x 30L		35	CQ-M3 x 35L
-10D	6.5	35	x 35L	6.5	40	x 40L
-15D		40	x 40L		45	x 45L
-20D		45	x 45L		50	x 50L
-25D		50	x 50L		55	x 55L
-30D		55	x 55L		60	x 60L
CDQSKB20-5D		35	CQ-M5 x 35L		40	CQ-M5 x 40L
-10D	6.5	40	x 40L	6.5	45	x 45L
-15D		45	x 45L		50	x 50L
-20D		50	x 50L		55	x 55L
-25D		55	x 55L		60	x 60L
-30D		60	x 60L		65	x 65L
-35D		65	x 65L		70	x 70L
-40D		70	x 70L		75	x 75L
-45D		75	x 75L		80	x 80L
-50D		80	x 80L		85	x 85L
CDQSKB25-5D		40	CQ-M5 x 40L		45	CQ-M5 x 45L
-10D	8.5	45	x 45L	8.5	50	x 50L
-15D		50	x 50L		55	x 55L
-20D		55	x 55L		60	x 60L
-25D		60	x 60L		65	x 65L
-30D		65	x 65L		70	x 70L
-35D		70	x 70L		75	x 75L
-40D		75	x 75L		80	x 80L
-45D		80	x 80L		85	x 85L
-50D		85	x 85L		90	x 90L

Material: Chromium molybdenum steel
Surface treatment: Zinc chromated

Series CQSK


Dimensions: $\phi 12$ to $\phi 25$

Basic style (Through-hole/Both ends tapped common): CQSK/CDQSK





* For the auto switch mounting position and its mounting height, refer to page 596.


$\phi 12$




$\phi 16$

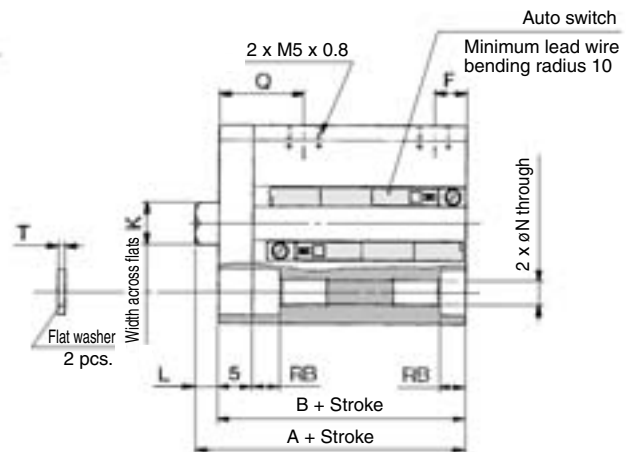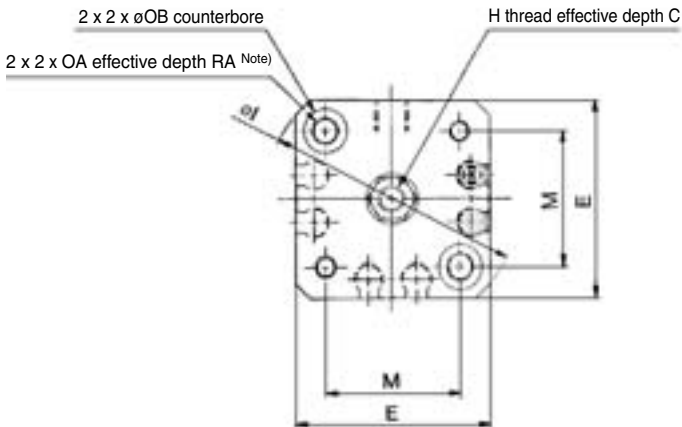

$\phi 20, \phi 25$



Rod end male thread

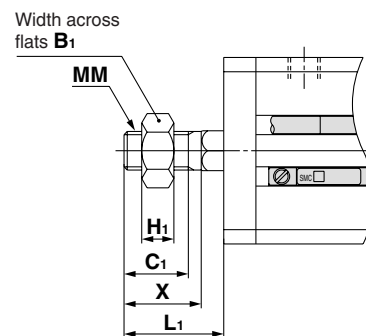

Rod End Male Thread

Bore size (mm)	B ₁	C ₁	H ₁	L ₁	MM	X
12	8	9	4	14	M5 x 0.8	10.5
16	10	10	5	15.5	M6 x 1.0	12
20	13	12	5	18.5	M8 x 1.25	14
25	17	15	6	22.5	M10 x 1.25	17.5

Basic Style

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		C	E	F	H	I	K	L	M	N	OA	OB	Q	RA	RB	T
		A	B	A	B															
12	5 to 30	25.5	22	30.5	27	6	25	5	M3 x 0.5	32	5.2	3.5	15.5	3.5	M4 x 0.7	6.5	12.5	7	4	0.5
16	5 to 30	25.5	22	30.5	27	8	29	5	M4 x 0.7	38	6.2	3.5	20	3.5	M4 x 0.7	6.5	12.5	7	4	0.5
20	5 to 50	29	24.5	39	34.5	7	36	5.5	M5 x 0.8	47	8.2	4.5	25.5	5.4	M6 x 1.0	9	14	10	7	1
25	5 to 50	32.5	27.5	42.5	37.5	12	40	5.5	M6 x 1.0	52	10.2	5	28	5.4	M6 x 1.0	9	16	10	7	1



Note) For basic style $\phi 12$ and $\phi 16$ with 5 stroke, through-hole is threaded over the entire length.


For basic style $\phi 20$ with 5 to 15 stroke, through-hole is threaded over the entire length.

For basic style $\phi 25$ with 5 and 10 stroke, through-hole is threaded over the entire length.


Note) With auto switch (Built-in magnet): $\phi 20$; 5 stroke

* For details about the rod end nut and accessory brackets, refer to page 620.


Foot style: CQSKL/CDQSKL

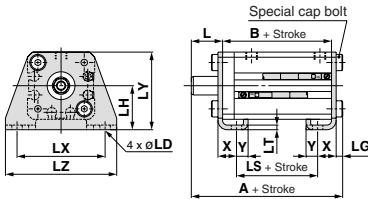


Rod end male thread




Rod side flange style: CQSKF/CDQSKF




Rod end male thread




Head side flange style: CQSKG/CDQSKG

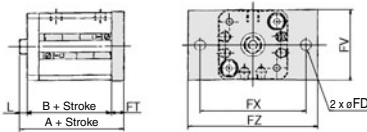


Rod end male thread



Double clevis style: CQSKD/CDQSKD



Rod end male thread



Foot Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			L	L ₁	LD	LG	LH	LT	LX	LY	LZ	X	Y
		A	B	LS	A	B	LS											
12	5 to 30	40.3	22	10	45.3	27	15	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	5 to 30	40.3	22	10	45.3	27	15	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	5 to 50	46.2	24.5	12.5	56.2	34.5	22.5	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	5 to 50	49.7	27.5	12.5	59.7	37.5	22.5	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel
Surface treatment: Nickel plated

Rod Side Flange Style

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L ₁
		A	B	A	B							
12	5 to 30	35.5	22	40.5	27	4.5	5.5	25	45	55	13.5	24
16	5 to 30	35.5	22	40.5	27	4.5	5.5	30	45	55	13.5	25.5
20	5 to 50	39	24.5	49	34.5	6.6	8	39	48	60	14.5	28.5
25	5 to 50	42.5	27.5	52.5	37.5	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Head Side Flange Style

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		FD	FT	FV	FX	FZ	L	L ₁
		A	B	A	B							
12	5 to 30	31	22	36	27	4.5	5.5	25	45	55	3.5	14
16	5 to 30	31	22	36	27	4.5	5.5	30	45	55	3.5	15.5
20	5 to 50	37	24.5	47	34.5	6.6	8	39	48	60	4.5	18.5
25	5 to 50	40.5	27.5	50.5	37.5	6.6	8	42	52	64	5	22.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Double Clevis Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			CB	CD	CT	CU	CW	CX	CZ	L	L ₁	RR
		A	B	CL	A	B	CL										
12	5 to 30	45.5	22	39.5	50.5	27	44.5	12	5	4	7	14	5	10	3.5	14	6
16	5 to 30	46.5	22	40.5	51.5	27	45.5	14	5	4	10	15	6.5	12	3.5	15.5	6
20	5 to 50	56	24.5	47	66	34.5	57	20	8	5	12	18	8	16	4.5	18.5	9
25	5 to 50	62.5	27.5	52.5	72.5	37.5	62.5	24	10	5	14	20	10	20	5	22.5	10

Double clevis bracket material: Carbon steel
Surface treatment: Nickel plated

* For details about the rod end nut and accessory brackets, refer to page 620.

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual

-X□

Technical

data

Compact Cylinder: Non-rotating Rod Type Double Acting, Double Rod

Series CQSKW

ø12, ø16, ø20, ø25

How to Order

CQSKW B 20 - 30 D - []

With auto switch **CDQSKW B 20 - 30 D** - **M9BW** [] - []

With auto switch (Built-in magnet)

Mounting style

B	Through-hole/Both ends tapped common (Standard)
L	Foot style
F	Flange style

* Mounting brackets are shipped together, (but not assembled).
* Cylinder mounting bolts are not included. Order them separately referring to "Mounting Bolt for CQSKW" on page 586.

Bore size

12	12 mm
16	16 mm
20	20 mm
25	25 mm

Cylinder stroke (mm)

Standard Stroke

Bore size (mm)	Standard stroke (mm)
12, 16	5, 10, 15, 20, 25, 30
20, 25	5, 10, 15, 20, 25, 30, 35, 40, 45, 50

Auto switch

Nil	Without auto switch
------------	---------------------

* Refer to the table below for the applicable auto switch model.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Body option

Nil	Standard (Rod end female thread)
M	Rod end male thread

Action

D	Double acting
----------	---------------

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDQSKWL25-30D

Made to Order
Refer to page 583 for details.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator/light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
	3-wire (PNP)			M9PV				M9P	●	●	●	○	○			
	2-wire			M9BV				M9B	●	●	●	○	○			
	3-wire (NPN)			M9NWV				M9NW	●	●	●	○	○			
	3-wire (PNP)			M9PWV				M9PW	●	●	●	○	○			
	2-wire			M9BWV				M9BW	●	●	●	○	○			
	3-wire (NPN)			M9NAV **				M9NA **	○	○	○	○	○			
	3-wire (PNP)			M9PAV **				M9PA **	○	○	●	○	○			
	Water resistant (2-color indication)		2-wire		12 V		M9BAV **	M9BA **	○	○	●	○	○	○	—	
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96V	A96	●	—	●	—	—	IC circuit	—
				No	2-wire	24 V	12 V	100 V	A93V	A93	●	—	●	—	—	—
100 V or less	A90V	A90	●					—	●	—	—	—	IC circuit			

** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed, refer to page 597 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.


* Auto switches are shipped together (not assembled).

Note) There is the case D-A9□V/M9□V/M9□WV/M9□AVL type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.

Compact Cylinder: Non-rotating Rod Type Double Acting, Double Rod *Series CQSKW*



JIS Symbol



Made to Order Specifications
(For details, refer to pages 1426 to 1511.)

Symbol	Specifications
-XA□	Change of Rod End Shape
-XC6	Piston rod, retaining ring, rod end nut made of stainless steel
-X633	Intermediate stroke of double rod cylinder

Body Option

Description	Application
Rod end male thread	Available for all non-rotating rod type.

Mounting Bracket Part No.

Bore size (mm)	Foot ⁽¹⁾	Flange
12	CQSK-L012	CQSK-F012
16	CQSK-L016	CQSK-F016
20	CQSK-L020	CQSK-F020
25	CQSK-L025	CQSK-F025



Note 1) When ordering foot bracket, order 2 pieces per cylinder.

Note 2) Parts belonging to each bracket are as follows.

Foot or Flange style: Body mounting bolt

Specifications

Bore size (mm)	12	16	20	25
Action	Double acting, Single rod			
Fluid	Air			
Lubrication	Not required (Non-lube)			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Minimum operating pressure	0.07 MPa		0.05 MPa	
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing)			
	With auto switch: -10 to 60°C (No freezing)			
Cushion	None			
Rod end thread	Female thread			
Stroke length tolerance	+1.0 mm 0			
Mounting	Through-hole/Both ends tapped common			
Piston speed	50 to 500 mm/s			
Allowable kinetic energy (J)	0.022	0.038	0.055	0.09
Rod non-rotating accuracy	±1°		±0.7°	

Theoretical Output

(N)

Bore size (mm)	Rod width across flats (mm)	Piston area (mm ²)	Operating pressure (MPa)		
			0.3	0.5	0.7
12	5.2	90	27	45	63
16	6.2	168	50	84	117
20	8.2	256	77	128	179
25	10.2	401	120	200	281

Refer to pages 595 to 597 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual
-X□

Technical
data

Series CQSKW

Mass/Without Auto Switch

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	48	56	65	73	80	88	—	—	—	—
16	64	75	84	95	105	115	—	—	—	—
20	115	131	148	164	191	196	213	229	246	264
25	160	180	200	221	241	263	285	305	320	347

Mass/With Auto Switch (Built-in magnet)

(g)

Bore size (mm)										
	5	10	15	20	25	30	35	40	45	50
12	56	65	74	82	90	98	—	—	—	—
16	75	85	95	105	116	126	—	—	—	—
20	148	164	180	197	214	231	247	265	280	297
25	188	209	230	251	273	293	315	335	356	376

Additional Mass

(g)

Bore size (mm)		12	16	20	25
Rod end male thread	Male thread	1.5	3	6	12
	Nut	1	2	4	8
Foot style (Including mounting bolt)		55	64	158	179
Rod side flange style (Including mounting bolt)		58	69	142	178

Calculation: (Example) CQSKWF20-5DM

- Cylinder mass: CQSKWB20-5D..... 115 g
- Option mass: Rod end male thread..... 10 g
- : Rod side flange style..... 142 g


267 g

⚠ Precautions

Operating Precautions

⚠ Warning

1. Do not apply the reverse torque to the piston rods sticking out from both sides of this cylinder at the same time. The torque makes connection threads inside loosen, which may cause an accident or malfunction.
Install or remove a load while the piston rod width across flats are secured. Do not fix the other side of piston rod width across flat and apply the reverse torque.

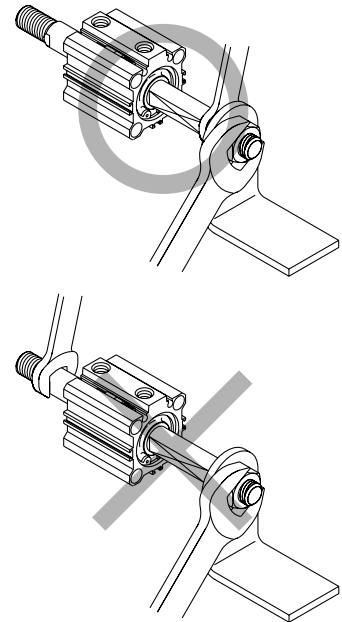

⚠ Caution

1. Any kind of operation producing rotational torque to piston rod must be considered. The non-rotating guide would be deformed and the accuracy would be compromised. Refer to the table below for rotation torque allowance.

Allowable rotational torque (N·m) or less	ø12	ø16	ø20	ø25
	0.04	0.04	0.2	0.25

2. Load to piston rod must always be in an axial direction.

Retaining Ring Installation/Removal


⚠ Caution

1. For installation and removal, use an appropriate pair of pliers (tool for installing a type C retaining ring).
2. Even if a proper plier (tool for installing type C retaining ring) is used, it is likely to inflict damage to a human body or peripheral equipment, as a retaining ring may be flown out of the tip of a plier (tool for installing a type C retaining ring). Be much careful with the popping of a retaining ring. Besides, be certain that a retaining ring is placed firmly into the groove of rod cover before supplying air at the time of installment.


Construction

Basic style


ø12

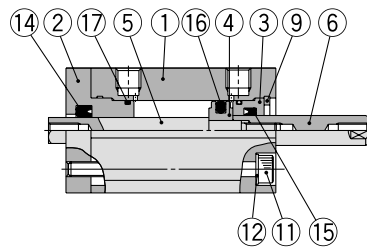

ø16, ø20, ø25

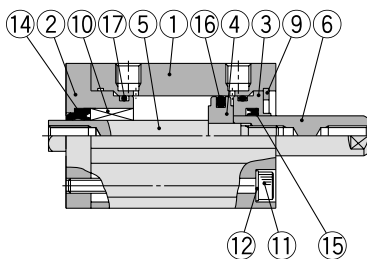


Rod end male thread

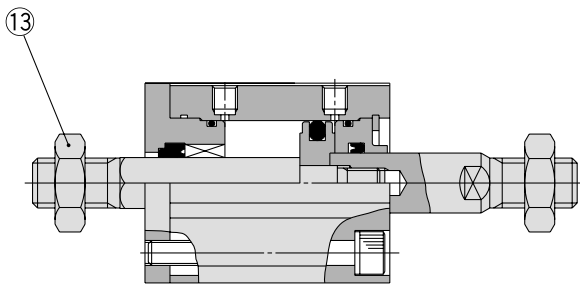


With auto switch (Built-in magnet)


ø12

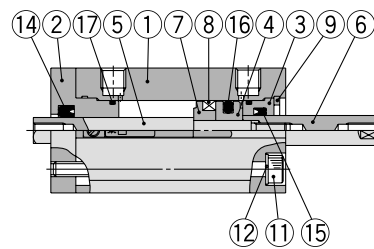

ø16

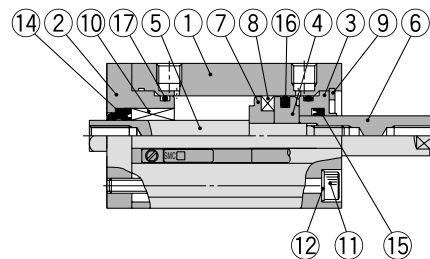

ø20, ø25

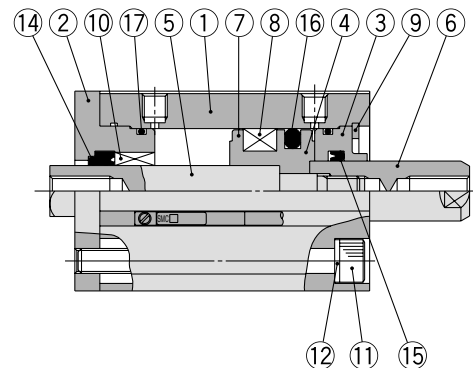

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Rod cover	Aluminum alloy	Anodized
3	Collar	Aluminum alloy	Anodized
4	Piston	Aluminum alloy	Chromated
5	Piston rod A	Stainless steel	
6	Piston rod B	Stainless steel	
7	Spacer for switch type	Aluminum alloy	Chromated
8	Magnet	—	
9	Retaining ring	Carbon tool steel	Phosphate coated
10	Non-rotating guide	Oil impregnated sintered alloy	ø16, ø20 and ø25
11	Hexagon socket head cap screw	Alloy steel	Nickel plated
12	Plain washer	Rolled steel	Nickel plated
13	Rod end nut	Carbon steel	Nickel plated
14*	Rod seal for non-rotating	NBR	
15*	Rod seal	NBR	
16*	Piston seal	NBR	
17*	Tube gasket	NBR	

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
12	CQSKWB12-PS	Set of nos. above 14, 15, 16, 17.
16	CQSKWB16-PS	
20	CQSKWB20-PS	
25	CQSKWB25-PS	

* Seal kit includes 14, 15, 16, 17. Order the seal kit, based on each bore size.

* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual

-X□

Technical

data

Series CQSKW

Mounting Bolt for CQSKW


Mounting method: Mounting bolt for through-hole mounting style of CQSKW is available as an option.

Refer to the following for ordering procedures.


Order the actual number of bolts that will be used.

Example) CQ-M3x30L 2 pcs.

Round rod side mounting

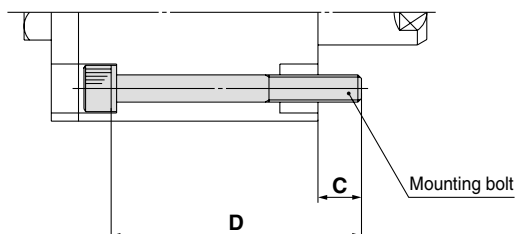

Non-rotating rod side mounting

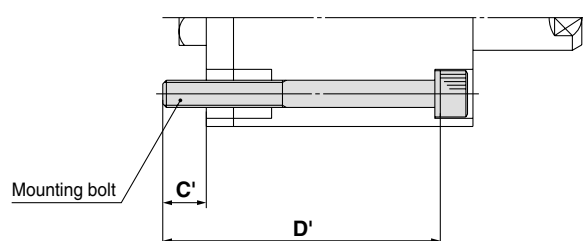

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.	C'	D'	Mounting bolt part no.
CQSKWB12-5D	6.5	25	CQ-M3 x 30L	6.5	30	CQ-M3 x 35L
-10D		30	x 35L		35	x 40L
-15D		35	x 40L		40	x 45L
-20D		40	x 45L		45	x 50L
-25D		45	x 50L		50	x 55L
-30D		50	x 55L		55	x 60L
CQSKWB16-5D	6.5	25	CQ-M3 x 30L	6.5	30	CQ-M3 x 35L
-10D		30	x 35L		35	x 40L
-15D		35	x 40L		40	x 45L
-20D		40	x 45L		45	x 50L
-25D		45	x 50L		50	x 55L
-30D		50	x 55L		55	x 60L
CQSKWB20-5D	10	25	CQ-M5 x 35L	10	30	CQ-M5 x 40L
-10D		30	x 40L		35	x 45L
-15D		35	x 45L		40	x 50L
-20D		40	x 50L		45	x 55L
-25D		45	x 55L		50	x 60L
-30D		50	x 60L		55	x 65L
-35D		55	x 65L		60	x 70L
-40D		60	x 70L		65	x 75L
-45D		65	x 75L		70	x 80L
-50D		70	x 80L		75	x 85L
CQSKWB25-5D	7	30	CQ-M5 x 35L	7	35	CQ-M5 x 40L
-10D		35	x 40L		40	x 45L
-15D		40	x 45L		45	x 50L
-20D		45	x 50L		50	x 55L
-25D		50	x 55L		55	x 60L
-30D		55	x 60L		60	x 65L
-35D		60	x 65L		65	x 70L
-40D		65	x 70L		70	x 75L
-45D		70	x 75L		75	x 80L
-50D		75	x 80L		80	x 85L

Material: Chromium molybdenum steel
Surface treatment: Zinc chromated

Mounting Bolt for CQSKW


Mounting method: Mounting bolt for through-hole mounting style of CDQSKW is available as an option.

Refer to the following for ordering procedures.


Order the actual number of bolts that will be used.

Example) CQ-M3x35L 2 pcs.

Round rod side mounting

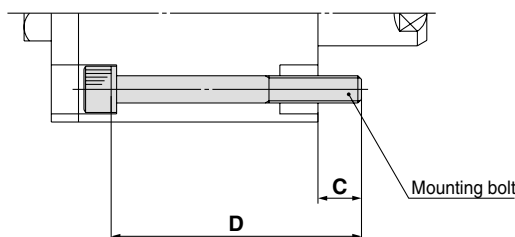

Non-rotating rod side mounting

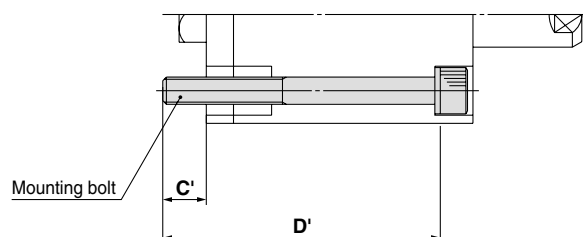


Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.	C'	D'	Mounting bolt part no.
CDQSKWB12-5D	6.5	30	CQ-M3 x 35L	6.5	35	CQ-M3 x 40L
-10D		35	x 40L		40	x 45L
-15D		40	x 45L		45	x 50L
-20D		45	x 50L		50	x 55L
-25D		50	x 55L		55	x 60L
-30D		55	x 60L		60	x 65L
CDQSKWB16-5D	6.5	30	CQ-M3 x 35L	6.5	35	CQ-M3 x 40L
-10D		35	x 40L		40	x 45L
-15D		40	x 45L		45	x 50L
-20D		45	x 50L		50	x 55L
-25D		50	x 55L		55	x 60L
-30D		55	x 60L		60	x 65L
CDQSKWB20-5D	10	35	CQ-M5 x 45L	10	40	x 50L
-10D		40	x 50L		45	x 55L
-15D		45	x 55L		50	x 60L
-20D		50	x 60L		55	x 65L
-25D		55	x 65L		60	x 70L
-30D		60	x 70L		65	x 75L
-35D		65	x 75L		70	x 80L
-40D		70	x 80L		75	x 85L
-45D		75	x 85L		80	x 90L
-50D		80	x 90L		85	x 95L
CDQSKWB25-5D	7	40	CQ-M5 x 45L	7	45	CQ-M5 x 50L
-10D		45	x 50L		50	x 55L
-15D		50	x 55L		55	x 60L
-20D		55	x 60L		60	x 65L
-25D		60	x 65L		65	x 70L
-30D		65	x 70L		70	x 75L
-35D		70	x 75L		75	x 80L
-40D		75	x 80L		80	x 85L
-45D		80	x 85L		85	x 90L
-50D		85	x 90L		90	x 95L


Material: Chromium molybdenum steel
Surface treatment: Zinc chromated

Dimensions: Ø12 to Ø25



Basic style (Through-hole/Both ends tapped common): CQSKW/CDQSKW




Ø12




Ø16

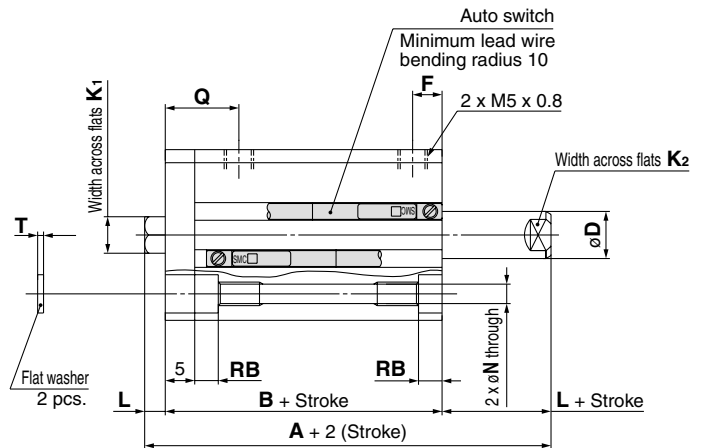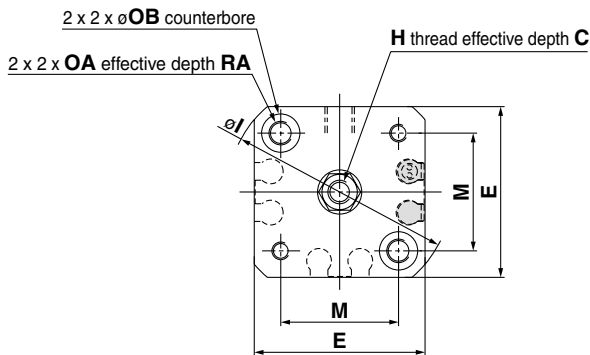

Ø20, Ø25



Rod end male thread

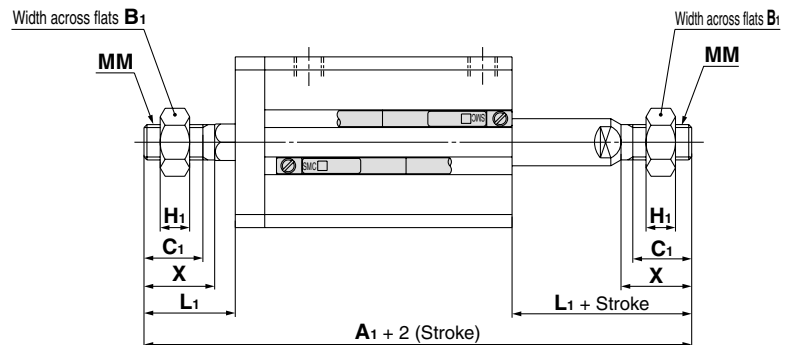


Rod End Male Thread

Bore size (mm)	Without auto switch	With auto switch	B ₁	C ₁	H ₁	L ₁	MM	X
	A ₁	A ₁						
12	55	60	8	9	4	14	M5 x 0.8	10.5
16	58	63	10	10	5	15.5	M6 x 1.0	12
20	68	78	13	12	5	18.5	M8 x 1.25	14
25	79	89	17	15	6	22.5	M10 x 1.25	17.5

Basic Style

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		C	D	E	F	H	I	K ₁	K ₂	L	M	N	OA	OB	Q	RA	RB	T
		A	B	A	B																	
12	5 to 30	34	27	39	32	6	6	25	7.5	M3 x 0.5	32	5.2	5	3.5	15.5	3.5	M4 x 0.7	6.5	12.5	7	4	0.5
16	5 to 30	34	27	39	32	8	8	29	7.5	M4 x 0.7	38	6.2	6	3.5	20	3.5	M4 x 0.7	6.5	12.5	7	4	0.5
20	5 to 50	40	31	50	41	7	10	36	9	M5 x 0.8	47	8.2	8	4.5	25.5	5.4	M6 x 1.0	9	14	10	7	1
25	5 to 50	44	34	54	44	12	12	40	11	M6 x 1.0	52	10.2	10	5	28	5.4	M6 x 1.0	9	16	10	7	1



Note 2) The positions of width across flats (K_2) on both sides are not the same.

* For details about the rod end nut and accessory brackets, refer to page 620.

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D- ☐

-X ☐

Individual



-X ☐

Technical data


Series CQSKW

Dimensions: $\phi 12$ to $\phi 25$

Foot style: CQSKWL/CDQSKWL

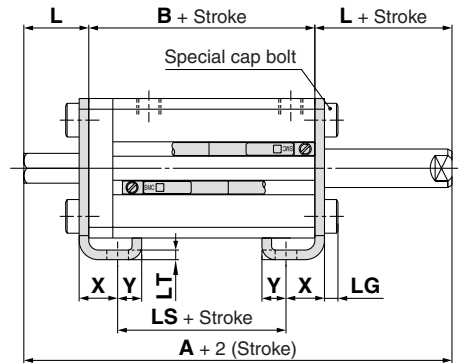

Rod end male thread


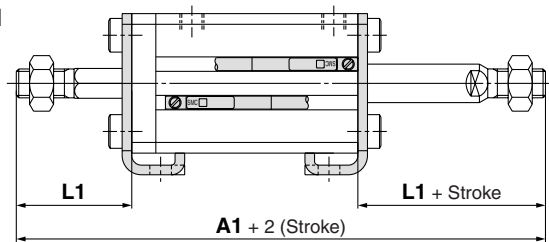


Foot Style


Bore size (mm)	Stroke range (mm)	Without auto switch				With auto switch				L	L1	LD	LG	LH	LT	LX	LY	LZ	X	Y
		A	A1	B	LS	A	A1	B	LS											
12	5 to 30	54	75	27	15	59	80	32	20	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	5 to 30	54	78	27	15	59	83	32	20	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	5 to 50	60	88	31	19	70	98	41	29	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	5 to 50	64	99	34	19	74	109	44	29	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel
Surface treatment: Nickel plated

Flange style: CQSKWF/CDQSKWF

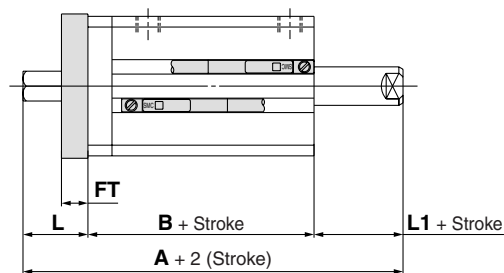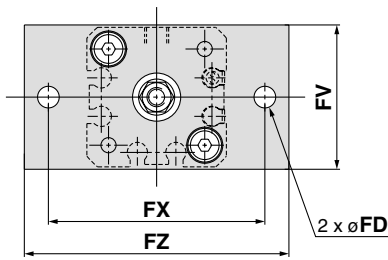

Rod end male thread

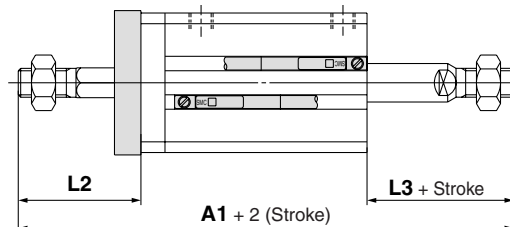

Flange Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch			FD	FT	FV	FX	FZ	L	L1	L2	L3
		A	A1	B	A	A1	B									
12	5 to 30	44	65	27	49	70	32	4.5	5.5	25	45	55	13.5	3.5	24	14
16	5 to 30	44	68	27	49	73	32	4.5	5.5	30	45	55	13.5	3.5	25.5	15.5
20	5 to 50	50	78	31	60	88	41	6.6	8	39	48	60	14.5	4.5	28.5	18.5
25	5 to 50	54	89	34	64	99	44	6.6	8	42	52	64	15	5	32.5	22.5

* For details about the rod end nut and accessory brackets, refer to page 620.
Note 1) The positions of piston rod width across flats (right side) are not constant.

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Compact Cylinder: Anti-lateral Load Type

Series CQS□S

ø12, ø16, ø20, ø25

How to Order

With auto switch CQS B S 20 - 30 D □ C □ - □

With auto switch CDQS B S 20 - 30 D □ C □ - M9BW □ - □

With auto switch
(Built-in magnet)

Mounting style

B	Through-hole/Both ends tapped common (Standard)
L	Foot style
F	Rod side flange style
G	Head side flange style
D	Double clevis style

* Mounting brackets are shipped together, (but not assembled).
* Cylinder mounting bolts are not included. Order them separately referring to "Mounting Bolt for CQSBS" on page 591.

Cushion

S	Anti-lateral load type
---	------------------------

Bore size

12	12 mm
16	16 mm
20	20 mm
25	25 mm

Cylinder stroke (mm)

Bore size (mm)	Standard stroke (mm)
12, 16	5, 10, 15, 20, 25, 30
20, 25	5, 10, 15, 20, 25, 30, 35, 40, 45, 50

For "Manufacture of Intermediate Strokes", refer to page 590.

Made to Order
Refer to page 590 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the table below for the applicable auto switch model.

Body option 2

Nil	Standard (Rod end female thread)
M	Rod end male thread

Cushion

C	Rubber bumper
---	---------------

Body option 1

Nil	Standard
F	With boss in head side

Action

D	Double acting
---	---------------

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.
(Example) CDQSLS12-25D

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC		AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)		5 (Z)		
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
	3-wire (PNP)			12 V		M9PV		M9P	●	●	●	○	○	—		
	2-wire			12 V		M9BV		M9B	●	●	●	○	○	—		
	3-wire (NPN)			24 V	5 V, 12 V	M9NWV		M9NW	●	●	●	○	○	IC circuit		
	3-wire (PNP)				12 V	M9PWV		M9PW	●	●	●	○	○	—		
	2-wire				12 V	M9BWV		M9BW	●	●	●	○	○	—		
	3-wire (NPN)			24 V	5 V, 12 V	M9NAV **		M9NA **	○	○	●	○	○	IC circuit		
	3-wire (PNP)				12 V	M9PAV **		M9PA **	○	○	●	○	○	—		
	2-wire				12 V	M9BAV **		M9BA **	○	○	●	○	○	—		
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	—	A96V	A96	●	—	●	—	—	IC circuit	—	
			No	2-wire	24 V	100 V	A93V	A93	●	—	●	—	—	—	Relay, PLC	
						100 V or less	A90V	A90	●	—	●	—	—	IC circuit		

** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed, refer to page 597 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.


* Auto switches are shipped together (not assembled).

Note) There is the case D-A9□V/M9□V/M9□WV/M9□AVL type auto switches cannot be mounted on the port surface, depending on the cylinder's stroke and the fitting size for piping. Consult with SMC for details.

Series CQS□S



JIS Symbol



Made to Order Specifications

(For details, refer to pages 1401, 1426 and 1508.)

Symbol	Specifications
–XA□	Change of Rod End Shape
–XB10	Intermediate stroke (Using exclusive body)
–XC6	Piston rod, retaining ring, rod end nut made of stainless steel
–X271	Fluororubber seals
–X1876	With concave shape end boss on the cylinder tube head side

Body Option

Description	Application
Rod end male thread	Available for Double acting, Single rod models.

Mounting Bracket Part No.

Bore size (mm)	Foot ⁽¹⁾	Flange	Double clevis
12	CQS-L012	CQS-F012	CQS-D012
16	CQS-L016	CQS-F016	CQS-D016
20	CQS-L020	CQS-F020	CQS-D020
25	CQS-L025	CQS-F025	CQS-D025



Note1) When ordering foot bracket, order 2 pieces per cylinder.

Note2) Parts belonging to each bracket are as follows.


Foot or Flange style: Body mounting bolt
Double clevis style: Clevis pin, type C retaining ring for axis, Body mounting bolt

Standard Specifications

Bore size (mm)	12	16	20	25
Action	Double acting, Single rod			
Fluid	Air			
Lubrication	Not required (Non-lube)			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Minimum operating pressure	0.07 MPa		0.05 MPa	
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing)			
	With auto switch: -10 to 60°C (No freezing)			
Cushion	Rubber bumper*			
Rod end thread	Female thread			
Stroke length tolerance	+1.0 mm * 0			
Mounting	Through-hole/Both ends tapped common			
Piston speed	50 to 500 mm/s			
Allowable kinetic energy (J)	0.043	0.075	0.11	0.18

* Stroke length tolerance does not include the deflection of the bumper.

Theoretical Output



Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)		
				0.3	0.5	0.7
12	6	IN	84.8	25	42	59
		OUT	113	34	57	79
16	8	IN	151	45	75	106
		OUT	201	60	101	141
20	10	IN	236	71	118	165
		OUT	314	94	157	220
25	12	IN	378	113	189	264
		OUT	491	147	245	344

Manufacture of Intermediate Stroke

Description		Spacer is installed in the standard stroke body.	
Part no.		Refer to "How to Order" for the standard model no. (page 589)	
Standard stroke	Description	Intermediate strokes by the 1 mm interval are available by using spacers with standard stroke cylinders.	
	Stroke range	Bore size	Stroke range
		12, 16	1 to 29
		20, 25	1 to 49
Example		Part no.: CQSBS25—47D CQSBS25-50D with 3 mm width spacer inside. B dimension is 77.5 mm.	

Refer to pages 595 to 597 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range

Compact Cylinder: Anti-lateral Load Type **Series CQS□S**

Mass/Without Auto Switch

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	37	43	50	57	63	70	—	—	—	—
16	49	57	66	74	83	92	—	—	—	—
20	75	88	101	114	127	140	153	165	178	191
25	109	125	140	156	172	188	204	220	236	252

For standard strokes

Calculation: (Example) **CQSDS20-20DCM**

• Cylinder mass: CQSBS20-20DC	114 g
• Option mass: Rod end male thread	10 g
• Double clevis style	92 g
	216 g

Mass/With Auto Switch (Built-in magnet)

(g)

Bore size (mm)	Cylinder stroke (mm)									
	5	10	15	20	25	30	35	40	45	50
12	45	51	58	65	71	78	—	—	—	—
16	59	67	76	85	94	103	—	—	—	—
20	106	119	132	145	157	170	183	195	208	221
25	151	167	183	199	215	231	246	262	278	294

Additional Mass

(g)


Bore size (mm)		12	16	20	25
Rod end male thread	Male thread	1.5	3	6	12
	Nut	1	2	4	8
Foot style (Including mounting bolt)		55	65	159	181
Rod side flange style (Including mounting bolt)		58	70	143	180
Head side flange style (Including mounting bolt)		56	66	137	171
Double clevis style (Including pin, retaining ring, bolt)		34	40	92	127

Mounting Bolt for CQSBS

Mounting method: Mounting bolt for through-hole mounting style of CQSBS is available as an option.

Refer to the following for ordering procedures.
Order the actual number of bolts that will be used.

Example) CQ-M3x30L 4 pcs.

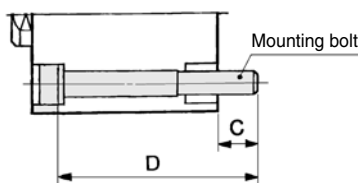

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.
CQSBS12-5DC	6.5	30	CQ-M3 x 30L
-10DC		35	x 35L
-15DC		40	x 40L
-20DC		45	x 45L
-25DC		50	x 50L
-30DC		55	x 55L
CQSBS16-5DC	6.5	30	CQ-M3 x 30L
-10DC		35	x 35L
-15DC		40	x 40L
-20DC		45	x 45L
-25DC		50	x 50L
-30DC		55	x 55L
CQSBS20-5DC	6.5	30	CQ-M5 x 30L
-10DC		35	x 35L
-15DC		40	x 40L
-20DC		45	x 45L
-25DC		50	x 50L
-30DC		55	x 55L

Cylinder model	C	D	Mounting bolt part no.
CQSBS20-25DC	6.5	50	CQ-M5 x 50L
-30DC		55	x 55L
-35DC		60	x 60L
-40DC		65	x 65L
-45DC		70	x 70L
-50DC		75	x 75L
CQSBS25-5DC	8.5	35	CQ-M5 x 35L
-10DC		40	x 40L
-15DC		45	x 45L
-20DC		50	x 50L
-25DC		55	x 55L
-30DC		60	x 60L
-35DC		65	x 65L
-40DC		70	x 70L
-45DC		75	x 75L
-50DC		80	x 80L

Material: Chromium molybdenum steel


Surface treatment: Zinc chromated

Mounting Bolt for CDQSBS with Auto Switch

Mounting method: Mounting bolt for through-hole mounting style of CDQSBS is available as an option.

Refer to the following for ordering procedures.
Order the actual number of bolts that will be used.

Example) CQ-M3x35L 4 pcs.

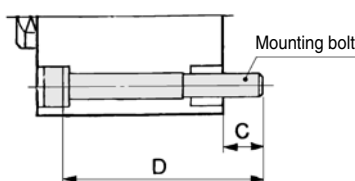

Note) When mounting a cylinder with through-hole, be sure to use the attached plain washer.

Cylinder model	C	D	Mounting bolt part no.
CDQSBS12-5DC	6.5	35	CQ-M3 x 35L
-10DC		40	x 40L
-15DC		45	x 45L
-20DC		50	x 50L
-25DC		55	x 55L
-30DC		60	x 60L
CDQSBS16-5DC	6.5	35	CQ-M3 x 35L
-10DC		40	x 40L
-15DC		45	x 45L
-20DC		50	x 50L
-25DC		55	x 55L
-30DC		60	x 60L
CDQSBS20-5DC	6.5	40	CQ-M5 x 40L
-10DC		45	x 45L
-15DC		50	x 50L
-20DC		55	x 55L

Cylinder model	C	D	Mounting bolt part no.
CDQSBS20-25DC	6.5	60	CQ-M5 x 60L
-30DC		65	x 65L
-35DC		70	x 70L
-40DC		75	x 75L
-45DC		80	x 80L
-50DC		85	x 85L
CDQSBS25-5DC	8.5	45	CQ-M5 x 45L
-10DC		50	x 50L
-15DC		55	x 55L
-20DC		60	x 60L
-25DC		65	x 65L
-30DC		70	x 70L
-35DC		75	x 75L
-40DC		80	x 80L
-45DC		85	x 85L
-50DC		90	x 90L


Material: Chromium molybdenum steel

Surface treatment: Zinc chromated


Series CQS□S

Construction

Basic style

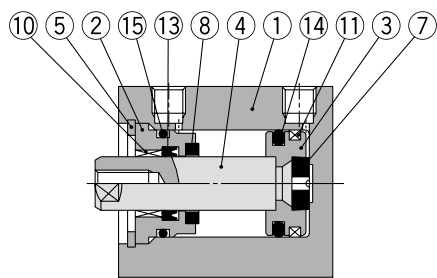


Rod end male thread




With auto switch (Built-in magnet)

ø12, ø16

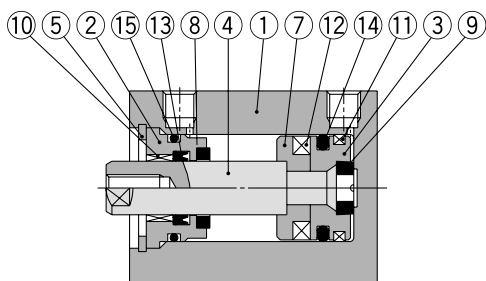


ø20, ø25

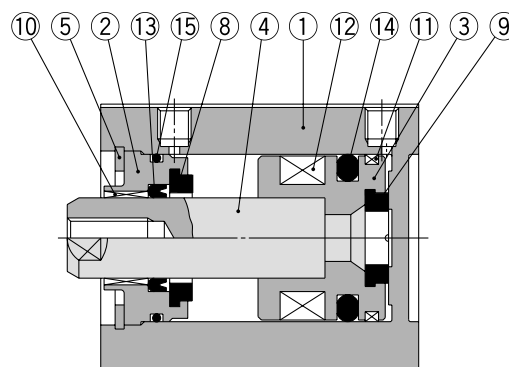

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodized
2	Collar	Aluminum alloy	Anodized
3	Piston	Aluminum alloy	Chromated
4	Piston rod	Stainless steel	
5	Retaining ring	Carbon tool steel	Phosphate coated
6	Rod end nut	Carbon steel	Nickel plated
7	Spacer for switch type	Aluminum alloy	Chromated
8	Bumper A	Urethane	
9	Bumper B	Urethane	
10	Bushing	Oil-impregnated sintered alloy	
11	Wear ring	Resin	
12	Magnet	—	
13*	Rod seal	NBR	
14*	Piston seal	NBR	
15*	Tube gasket	NBR	
16	Centering location ring	Aluminum alloy	Anodized

With rear slip fit

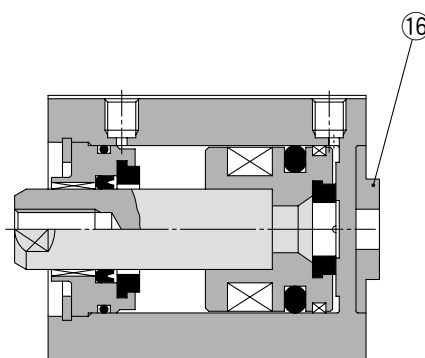

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
12	CQSB12-PS	Set of nos. above ⑬, ⑭, ⑮.
16	CQSB16-PS	
20	CQSB20-PS	
25	CQSB25-PS	

* Seal kit includes ⑬, ⑭, ⑮. Order the seal kit, based on each bore size.


* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)



Dimensions: ø12 to ø25

Basic style (Through-hole/Both ends tapped common): CQSBS/CDQSBS

ø12




ø16

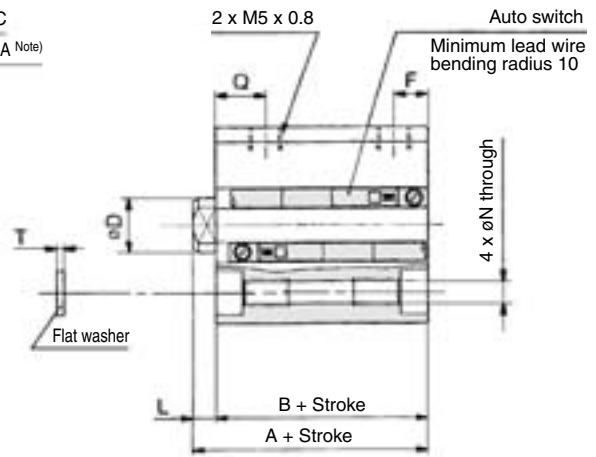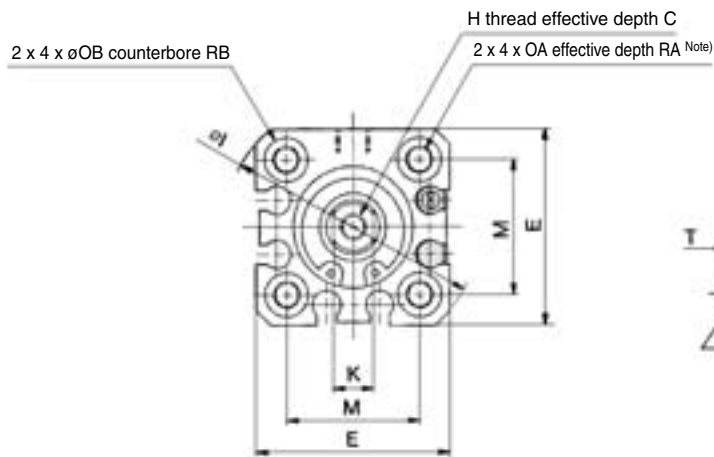

ø20, ø25



Rod end male thread

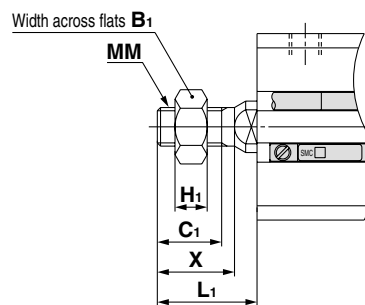

Rod End Male Thread

Bore size (mm)	B ₁	C ₁	H ₁	L ₁	MM	X
12	8	9	4	14	M5 x 0.8	10.5
16	10	10	5	15.5	M6 x 1.0	12
20	13	12	5	18.5	M8 x 1.25	14
25	17	15	6	22.5	M10 x 1.25	17.5

Basic Style

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch		C	D	E	F	H	I	K	L	M	N	OA	OB	Q	RA	RB	T
		A	B	A	B																
12	5 to 30	25.5	22	30.5	27	6	6	25	5	M3 x 0.5	32	5	3.5	15.5	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
16	5 to 30	25.5	22	30.5	27	8	8	29	5	M4 x 0.7	38	6	3.5	20	3.5	M4 x 0.7	6.5	7.5	7	4	0.5
20	5 to 50	29	24.5	39	34.5	7	10	36	5.5	M5 x 0.8	47	8	4.5	25.5	5.4	M6 x 1.0	9	9	10	7	1
25	5 to 50	32.5	27.5	42.5	37.5	12	12	40	5.5	M6 x 1.0	52	10	5	28	5.4	M6 x 1.0	9	11	10	7	1

Note) For basic style 5 to 10 stroke with ø20 and 5 stroke with ø25, through-hole is threaded over the entire length.

* For details about the rod end nut and accessory brackets, refer to page 620.

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual


-X□

Technical data

Series CQS□S

Dimensions: $\varnothing 12$ to $\varnothing 25$

Foot style: CQSLS/CDQSLs

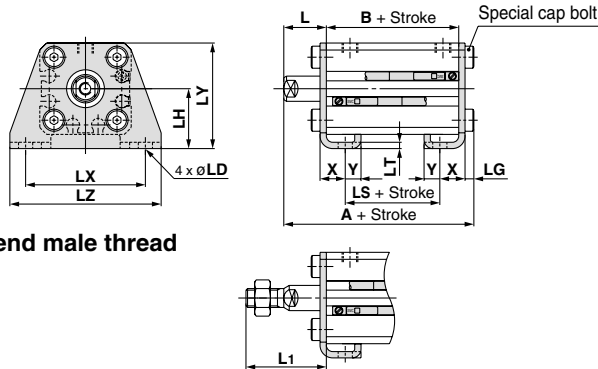

Rod end male thread


Foot Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	LS	A	B	LS
12	5 to 30	40.3	22	10	45.3	27	15
16	5 to 30	40.3	22	10	45.3	27	15
20	5 to 50	46.2	24.5	12.5	56.2	34.5	22.5
25	5 to 50	49.7	27.5	12.5	59.7	37.5	22.5


Bore size (mm)	L	L ₁	LD	LG	LH	LT	LX	LY	LZ	X	Y
12	13.5	24	4.5	2.8	17	2	34	29.5	44	8	4.5
16	13.5	25.5	4.5	2.8	19	2	38	33.5	48	8	5
20	14.5	28.5	6.6	4	24	3.2	48	42	62	9.2	5.8
25	15	32.5	6.6	4	26	3.2	52	46	66	10.7	5.8

Foot bracket material: Carbon steel
Surface treatment: Nickel plated

Rod side flange style: CQSFS/CDQSFS

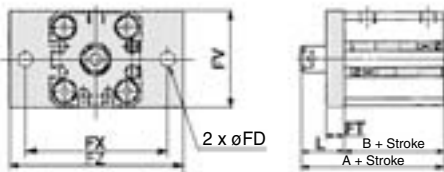

Rod end male thread




Rod Side Flange Style

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch	
		A	B	A	B
12	5 to 30	35.5	22	40.5	27
16	5 to 30	35.5	22	40.5	27
20	5 to 50	39	24.5	49	34.5
25	5 to 50	42.5	27.5	52.5	37.5


Bore size (mm)	FD	FT	FV	FX	FZ	L	L ₁
12	4.5	5.5	25	45	55	13.5	24
16	4.5	5.5	30	45	55	13.5	25.5
20	6.6	8	39	48	60	14.5	28.5
25	6.6	8	42	52	64	15	32.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Head side flange style: CQSGS/CDQSGS

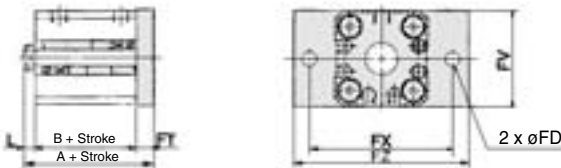

Rod end male thread




Head Side Flange Style

Bore size (mm)	Stroke range (mm)	Without auto switch		With auto switch	
		A	B	A	B
12	5 to 30	31	22	36	27
16	5 to 30	31	22	36	27
20	5 to 50	37	24.5	47	34.5
25	5 to 50	40.5	27.5	50.5	37.5


Bore size (mm)	FD	FT	FV	FX	FZ	L	L ₁
12	4.5	5.5	25	45	55	3.5	14
16	4.5	5.5	30	45	55	3.5	15.5
20	6.6	8	39	48	60	4.5	18.5
25	6.6	8	42	52	64	5	22.5

Flange bracket material: Carbon steel
Surface treatment: Nickel plated

Double clevis style: CQSDS/CDQSDS

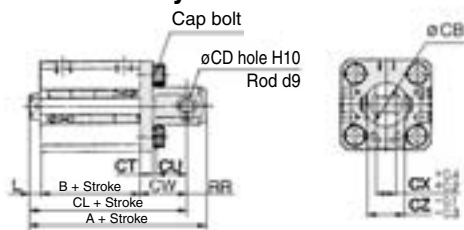

Rod end male thread



Double Clevis Style

Bore size (mm)	Stroke range (mm)	Without auto switch			With auto switch		
		A	B	CL	A	B	CL
12	5 to 30	45.5	22	39.5	50.5	27	44.5
16	5 to 30	46.5	22	40.5	51.5	27	45.5
20	5 to 50	56	24.5	47	66	34.5	57
25	5 to 50	62.5	27.5	52.5	72.5	37.5	62.5


Bore size (mm)	CB	CD	CT	CU	CW	CX	CZ	L	L ₁	RR
12	12	5	4	7	14	5	10	3.5	14	6
16	14	5	4	10	15	6.5	12	3.5	15.5	6
20	20	8	5	12	18	8	16	4.5	18.5	9
25	24	10	5	14	20	10	20	5	22.5	10

Double clevis bracket material: Carbon steel
Surface treatment: Nickel plated

* For details about the rod end nut and accessory brackets, refer to page 620.

Proper Auto Switch Mounting Position (Detection at stroke end) and Its Mounting Height

● Double acting: Single rod, Single acting: Single rod, Spring return/Spring extend; Long stroke type, Anti-lateral load type, ● Double acting: Double rod

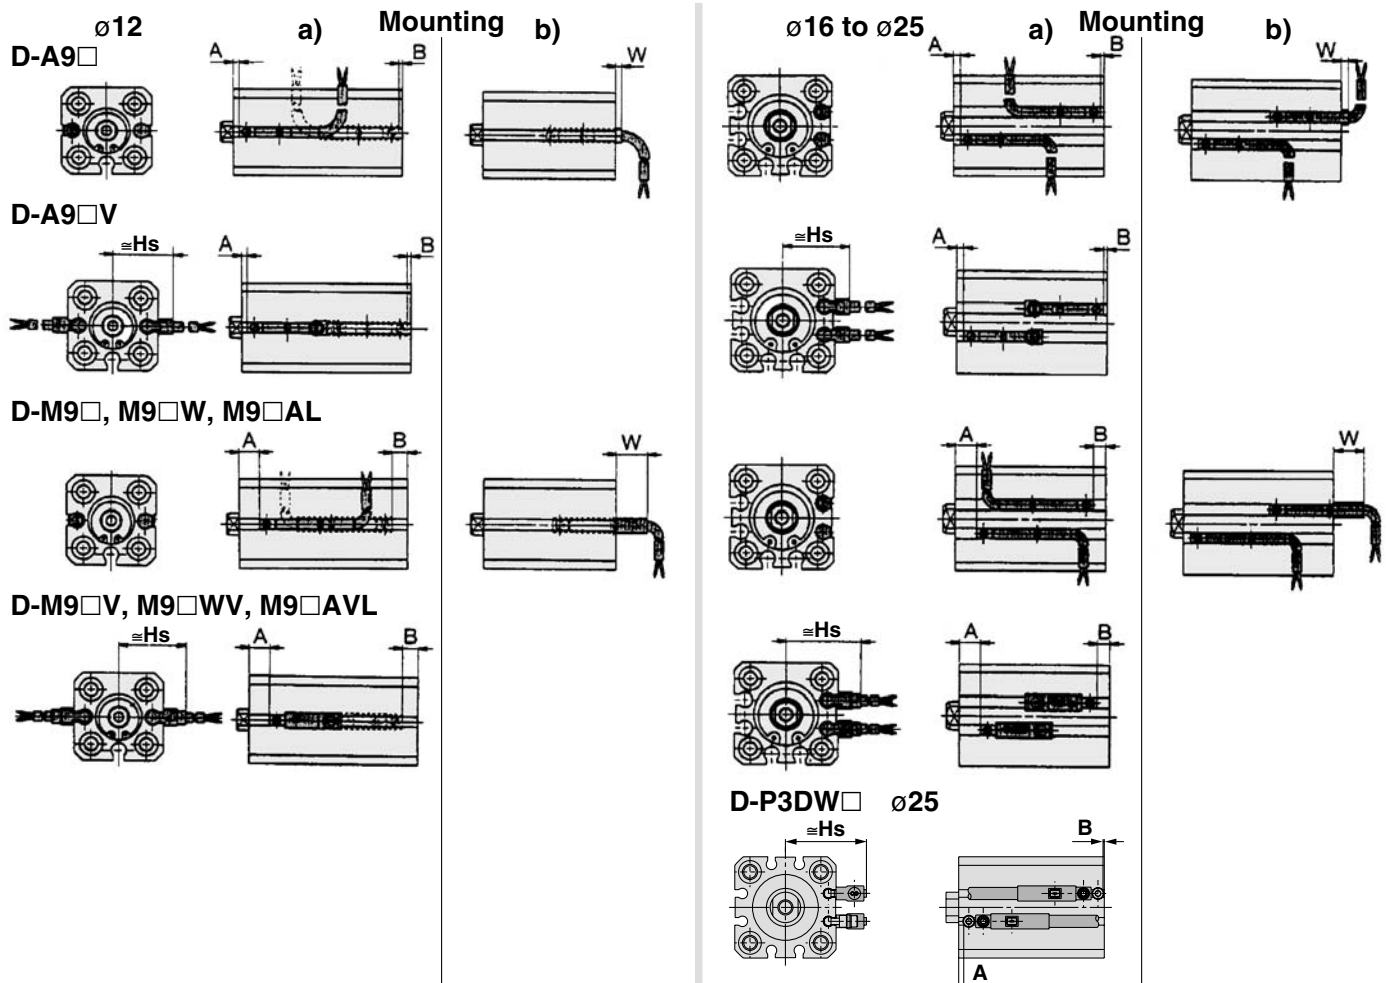

Proper Auto Switch Mounting Position (Detection at stroke end)

● Double acting: Single rod, Single acting: Single rod, Spring return/Spring extend; Long stroke type, Anti-lateral load type, ● Double acting: Double rod

Proper Auto Switch Mounting Position

Auto switch model Bore size (mm)	D-A9□			D-A9□V			D-M9□/M9□W			D-M9□V/M9□WV/M9□AVL			D-M9□AL			D-P3DW□		
	A	B	W	A	B	Hs	A	B	W	A	B	Hs	A	B	W	A	B	Hs

Double Acting, Single Rod; Single Acting, Single Rod, Spring Return/Spring Extend []: Denotes the values of D-A93. (): Denotes the values of type T.

12	1.5 (2.5)	0	1.5 [4] (2.5 [5])	1.5 (2.5)	0	17	5.5 (6.5)	3.5 (4.5)	5.5 (6.5)	5.5 (6.5)	4.5 (3.5)	19.5	5.5 (6.5)	4.5 (3.5)	7.5 (8.5)	—	—	—
16	2	0	2 [4.5]	2	0	19	6	4	6	6	4	21.5	6	4	8	—	—	—
20	6	3.5	-1.5 [1]	6	3.5	22.5	10	7.5	2.5	10	7.5	25	10	7.5	4.5	—	—	—
25	7	5.5	-3.5 [-1]	7	5.5	24.5	11	9.5	0.5	11	9.5	27	11	9.5	2.5	1.5	0	32

Long Stroke

12	5	7	-5 [-2.5]	5	7	17	9	11	-1	9	11	19.5	9	11	1	—	—	—
16	5.5	6	-4.5 [-2]	5.5	6	19	9.5	10.5	-0.5	9.5	10.5	21.5	9.5	10.5	1.5	—	—	—
20	9	12	-10 [-7.5]	9	12	22.5	13	16	-6	13	16	25	13	16	-4	—	—	—
25	10	14	-12 [-9.5]	10	14	24.5	14	18	-8	14	18	27	14	18	-6	4.5	8	32

Anti-lateral Load Type

12	6	1	1 [3.5]	6	1	17	10	5	5	10	5	19.5	10	5	7	—	—	—
16	5.5	5	0.5 [3]	5.5	5	19	9.5	9	4.5	9.5	9	21.5	9.5	9	6.5	—	—	—
20	9	5.5	-3.5 [-1]	9	5.5	22.5	13	9.5	0.5	13	9.5	25	13	9.5	2.5	—	—	—
25	10	7.5	-5.5 [-3]	10	7.5	24.5	14	11.5	-1.5	14	11.5	27	14	11.5	0.5	—	—	—

Double Acting, Double Rod


12	1.5	5.5	3.5 [6]	1.5	5.5	17	5.5	9.5	0.5	5.5	9.5	19.5	5.5	9.5	2.5	—	—	—
16	2	5	3 [5.5]	2	5	19	6	9	1	6	9	21.5	6	9	3	—	—	—
20	6	10	8 [10.5]	6	10	22.5	10	14	-4	10	14	25	10	14	-2	—	—	—
25	7	12	10 [12.5]	7	12	24.5	11	16	-6	11	16	27	11	16	-4	1.5	6.5	32



- Note 1) The product is shipped out of the factory in installation state "a)". To change the electrical entry direction of the auto switch on the head, refer to installation state "b)".
- Note 2) Negative figures in the table W indicate an auto switch is mounted inward from the edge of the cylinder body.
- Note 3) The D-M9□/M9□W and M9□AL cannot be installed on the single acting: single rod type.
- Note 4) Adjust the auto switch after confirming the operating conditions in the actual setting.
- Note 5) The D-P3DW□ is available only for ø25 of the double acting single rod, long stroke and double rod type.

Proper Auto Switch Mounting Position (Detection at stroke end)

Non-rotating rod

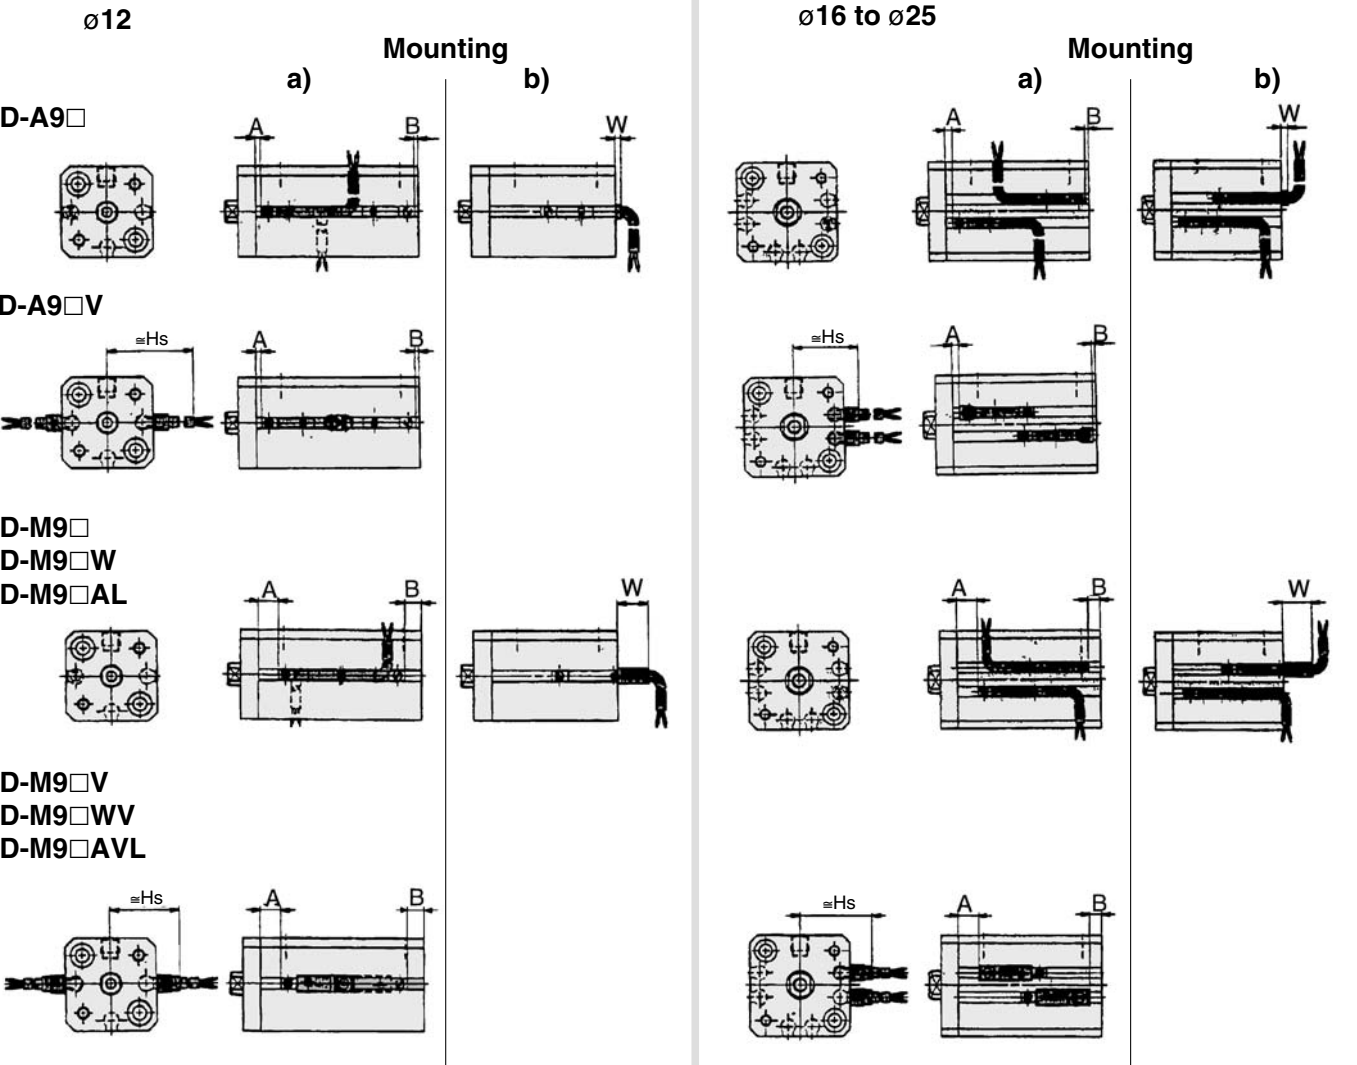

Proper Auto Switch Mounting Position

Auto switch model Bore size (mm)	D-A9□			D-A9□V			D-M9□/M9□W			D-M9□V/M9□WV/M9□AVL		
	A	B	W	A	B	Hs	A	B	W	A	B	Hs
12	1.5	0	1.5 (4)	1.5	0	17	5.5	4.5	5.5	5.5	4.5	19.5
16	2	0	2 (4.5)	2	0	19	6	4	6	6	4	21.5
20	6	3.5	-1.5 (1)	6	3.5	22.5	10	7.5	2.5	10	7.5	25
25	7	5.5	-3.5 (-1)	7	5.5	24.5	11	9.5	0.5	11	9.5	27

(): Denotes the values of D-A93.

Auto switch model Bore size (mm)	D-M9□AL		
	A	B	W
12	5.5	4.5	7.5
16	6	4	8
20	10	7.5	4.5
25	11	9.5	2.5

- Note 1) The product is shipped out of the factory in installation state "a)". To change the electrical entry direction of the auto switch on the head, refer to installation state "b)".
- Note 2) Adjust the auto switch after confirming the operating conditions in the actual setting.

Operating Range

Auto switch model	Bore size (mm)			
	12	16	20	25
D-A9□/A9□V	6	7.5	10	10
D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL	3	4	5.5	5.5
D-P3DW□	—	—	—	5.5

* Since this is a guideline including hysteresis, not meant to be guaranteed. (assuming approximately ±30% dispersion.) There may be the case it will vary substantially depending on an ambient environment.

Minimum Auto Switch Mounting Stroke

No. of auto switch mounted	D-M9□V	D-A9□ D-M9□WV D-M9□AVL	D-A9□V	D-M9□ D-M9□W D-M9□AL	D-P3DW□ ⁽³⁾
1 pc.	5	10 ⁽¹⁾	5	15 ⁽¹⁾	15
2 pcs.	5	10	10	15 ⁽¹⁾	15

Note 1) When the cylinder is used under the strokes indicated, consult with SMC.


Note 2) The D-M9□/M9□W/M9□AL and P3DW□ cannot be installed on the single acting: single rod type.

Note 3) Available only for ø25.

⚠ Precautions

Be sure to read before handling.
Refer to front matters 54 and 55 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

• If the cylinder is used in an application in which a magnetic material is placed in close contact around the cylinder as shown in the graph on the right (including cases in which even one of the sides is in close contact) the operation of auto switches could become unstable. Therefore, please check with SMC for this type of application.

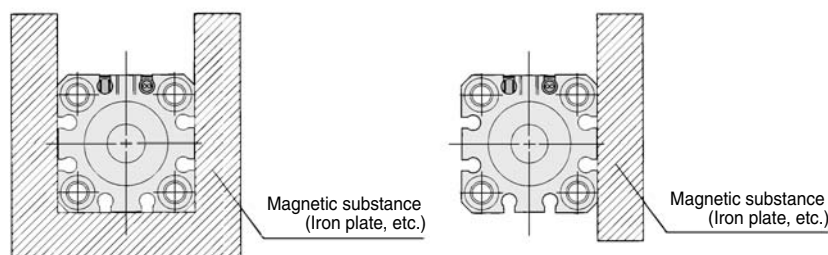

Other than the applicable auto switches listed in “How to Order”, the following auto switches can be mounted.

- * Normally closed (NC = b contact), solid state auto switch (D-F9G/F9H type, and D-F8 type) are also available. For details, refer to pages 1289 and 1290.
- * For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1328 and 1329 for details.

CUJ

CU

CQS

CQ2

RQ

CQM

MU

D-□

-X□

Individual
-X□

Technical
data

