


Shock Absorber

Series 25A-RB/RBC

How to Order

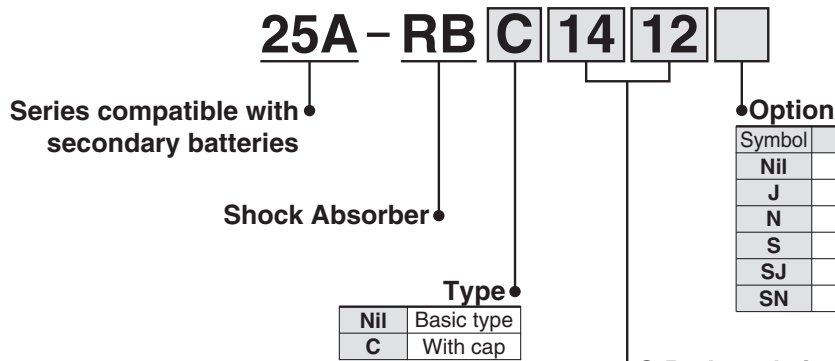

•O.D. thread size/Stroke


Symbol	O.D. thread size	Stroke	Symbol	O.D. thread size	Stroke
0805	8 mm	5 mm	1411	14 mm	11 mm
0806	8 mm	6 mm	1412	14 mm	12 mm
1006	10 mm	6 mm	2015	20 mm	15 mm
1007	10 mm	7 mm	2725	27 mm	25 mm

* Specifications and dimensions for the 25A-series are the same as standard products.

Shock Absorber

Series 25A-RJ

How to Order

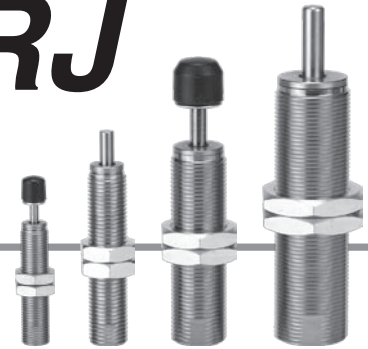

25A - RJ 0604

25A - RJ 0806 H U

Series compatible with
secondary batteries

Shock Absorber/Soft type

O.D. thread size/Stroke

Symbol	O.D. thread	Stroke
0604	6 mm	4 mm
0806	8 mm	6 mm
1007	10 mm	7 mm
1412	14 mm	12 mm
2015	20 mm	15 mm
2725	27 mm	25 mm

Collision speed range

H	0.05 to 2 m/s
L	0.05 to 1 m/s

* RJ0604: 0.05 to 1.0m/s

* RJ2725H: 0.05 to 1.0m/s

Option

Symbol	Hexagon nut	Stopper nut
Nil	2 pcs.	—
J	3 pcs.	—
N	—	—
S	2 pcs.	1 pc.
SJ	3 pcs.	1 pc.
SN	—	1 pc.

With Cap

Nil	Basic Type
U	With urethane cap

* Specifications and dimensions for the 25A-series are the same as standard products.

Directional
Control Valves

Actuators

Related
Products

Rotary
Actuators

Air Grippers

Vacuum
Equipment

Air Preparation
Equipment

Clean
Air Filters

Air Filters/Pressure
Control Equipment

Fittings/Flow
Control Equipment

Detection
Switches

Fluid Control
Equipment

Auto
Switches

Shock Absorber

Series 25A-RJ

How to Order

Short stroke type

25A - RJ

0805

U

Series compatible with
secondary batteries

Shock Absorber/Soft type

O.D. thread size/Stroke


Symbol	O.D. thread	Stroke
0805	8 mm	5 mm
1006	10 mm	6 mm
1410	14 mm	10 mm

Option

Symbol	Hexagon nut	Stopper nut
Nil	2 pcs.	—
J	3 pcs.	—
N	—	—
S	2 pcs.	1 pc.
SJ	3 pcs.	1 pc.
SN	—	1 pc.

With cap

Nil	Basic Type
U	With urethane cap



* Specifications and dimensions for the 25A-series are the same as standard products.

Floating Joint

Series 25A-J□

How to Order

Standard type

25A - JA 80 - 22-150

Series compatible with secondary batteries

Applicable bore size (mm)

Model	Symbol	Applicable bore size (mm)
Standard	80	80
	100	100

Thread nominal size (Standard)

Nominal thread size	Applicable cylinder nominal thread size
22-150	M22 x 1.5
26-150	M26 x 1.5

* Specifications and dimensions for the 25A-series are the same as standard products.



How to Order

For compact cylinders

25A - J B 40 - 8-125

Series compatible with secondary batteries

For compact cylinders/Female thread

Applicable bore size (mm)

Symbol	Applicable bore size (mm)
12	12
16	16
20	20
25	25
40	32, 40
63	50, 63
80	80
100	100

Thread nominal size

Nominal thread size	Applicable cylinder nominal thread size
3-050	M3 x 0.5
4-070	M4 x 0.7
5-080	M5 x 0.8
6-100	M6 x 1
8-125	M8 x 1.25
10-150	M10 x 1.5
16-200	M16 x 2
20-250	M20 x 2.5

* Specifications and dimensions for the 25A-series are the same as standard products.



How to Order

Stainless steel type

25A - J S 32 - 10-125

Series compatible with secondary batteries

Stainless steel type

Applicable bore size (mm)

Symbol	Applicable bore size (mm)
10	10
16	10, 16
20	20
32	25, 32
40	40
63	50, 63

Thread nominal size

Nominal thread size	Applicable cylinder nominal thread size
4-070	M4 x 0.7
5-080	M5 x 0.8
8-125	M8 x 1.25
10-125	M10 x 1.25
14-150	M14 x 1.5
18-150	M18 x 1.5

* Specifications and dimensions for the 25A-series are the same as standard products.



Directional Control Valves

Actuators

Related Products

Rotary Actuators

Air Grippers

Vacuum Equipment

Air Preparation Equipment

Clean Air Filters

Air Filters/Pressure Control Equipment

Fittings/Flow Control Equipment

Detection Switches

Fluid Control Equipment

Auto Switches