

Series 11-/12- 21-/22-**CXSJ**

Dual rod cylinder/Compact type
ø6, ø10

How to Order



• **Clean series**

11	Vacuum suction type
12	Relief type (with specially treated sliding parts)

11 — **CXS** **J** **L** **6** — **50** — **M9B** **S**

21 — **CXS** **J** **L** **6** — **50** — **M9B** **S**

• **Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	n pcs.

• **Type of auto switch**

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Select the applicable auto switch from the table below.

• **Bore size / Stroke** (mm)

Bore size	Standard stroke
6	10, 20, 30, 40, 50
10	10, 20, 30, 40, 50

• **Bearing type**

M	Slide Bearing
L*	Ball bushing bearing

* Only ball bushing bearing is available for series 12- and 21-.

• **Compact Cylinder**

Copper, fluorine and silicon-free + low particle generation

21	Relief type
22	Vacuum suction type

Auto switch specifications (Refer to Best Pneumatics No. 7 to 12 for detailed specifications and auto switches not in the following table.)

Style	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage			Auto switch model	Lead wire length (m)*			Applicable load	
					DC		AC		0.5 Nil	3 (L)	5 (Z)		
Reed switch	—	Grommet	Yes	2-wire	24V	12V	100V	A93	●	●	—	—	Relay, PLC
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24V	12V	—	M9N	●	●	—	—	Relay, PLC
				2-wire		12V		M9B	●	●	—	—	

* Lead wire symbol 0.5m.....Nil (Example) A93
3m.....L A93L

Refer to applicable auto switch list — Page 182.

PLC: Programmable Logic Controller

Specifications



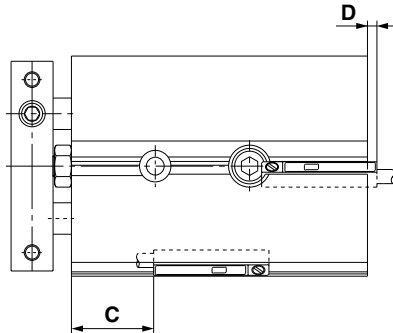
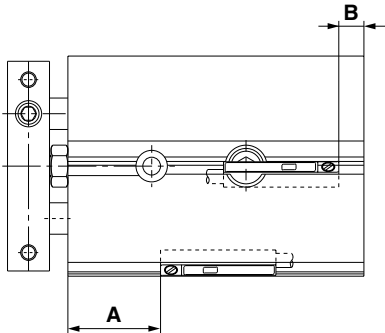
Bore size mm	6	10
Fluid	Air (Non-lube)	
Proof pressure	1.05MPa	
Max. operating pressure	0.7MPa	
Min. operating pressure	0.15MPa	0.1MPa
Ambient and fluid temperature	-10°C to 60°C (With no condensation)	
Piston speed	30 to 400 mm/s	
Cushion	Rubber bumper	
Stroke adjustable range	0 to -5mm compared to the standard stroke	
Port size	M3 x 0.5	M5 x 0.8
Grease	11-/12-: Fluorine grease 21-/22-: Lithium soap base grease	
Particle generation grade	12-: Grade 2, 21-: Grade 3	
(Refer to front matter pages 13 to 22 for details.)	11-/22-: Grade 1	

*The maximum piston speed shown in the table above applies to the extension side.
The maximum piston speed for retraction is approximately 70% that of extension.


Suction flow rate of vacuum suction type (Reference values)

Size	Suction flow rate l/min (ANR)
6	7
10	15

Auto switches / Proper mounting positions for stroke end detection

11- **CXSJ**□6 / 21- **CXSJ**□611- **CXSJ**□10 / 21- **CXSJ**□10

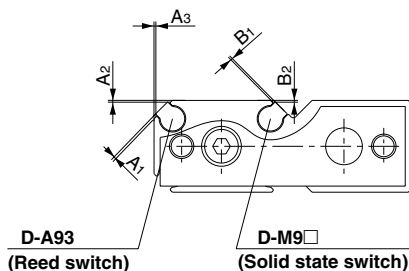Auto switch mounting dimensions



(mm)		
Symbol	D-A93	D-M9
A	19(20)	23(24)
B ^{Note 1)}	—	2(1)
C	14.5(15.5)	13(11.5)
D	6.5(7.5)	8(9)

Note 1) The above mentioned values are indicated as a guide for auto switch mounting position for stroke end detection. When actually mounting an auto switch, adjust the position after confirming the operating state of the auto switch.

Note 2) For D-A93, only outward electrical entry (D dimension) is available.

Note 3) Dimensions in parentheses apply to 12-CXSJ□6.

(mm)		
Symbol	D-A93	D-M9
A	30 (31.5)	34(35.5)
B ^{Note 1)}	—	3.5(2)
C	25.5 (27)	24(25.5)
D	5 (6.5)	6.5(8)

Note 1) The above mentioned values are indicated as a guide for auto switch mounting position for stroke end detection. When actually mounting an auto switch, adjust the position after confirming the operating state of the auto switch.

Note 2) For D-A93, only outward electrical entry (D dimension) is available.

Note 3) Dimensions in parentheses apply to 12-CXSJ□10.

(mm)		
Auto switch model	Symbol	Bore size
		6, 10
D-A93	A1	0.4
	A2, A3	0.3
	B1	0.4
D-M9	B2	0.3



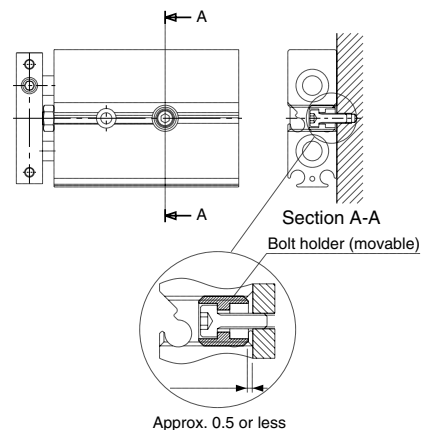
Specific product precautions

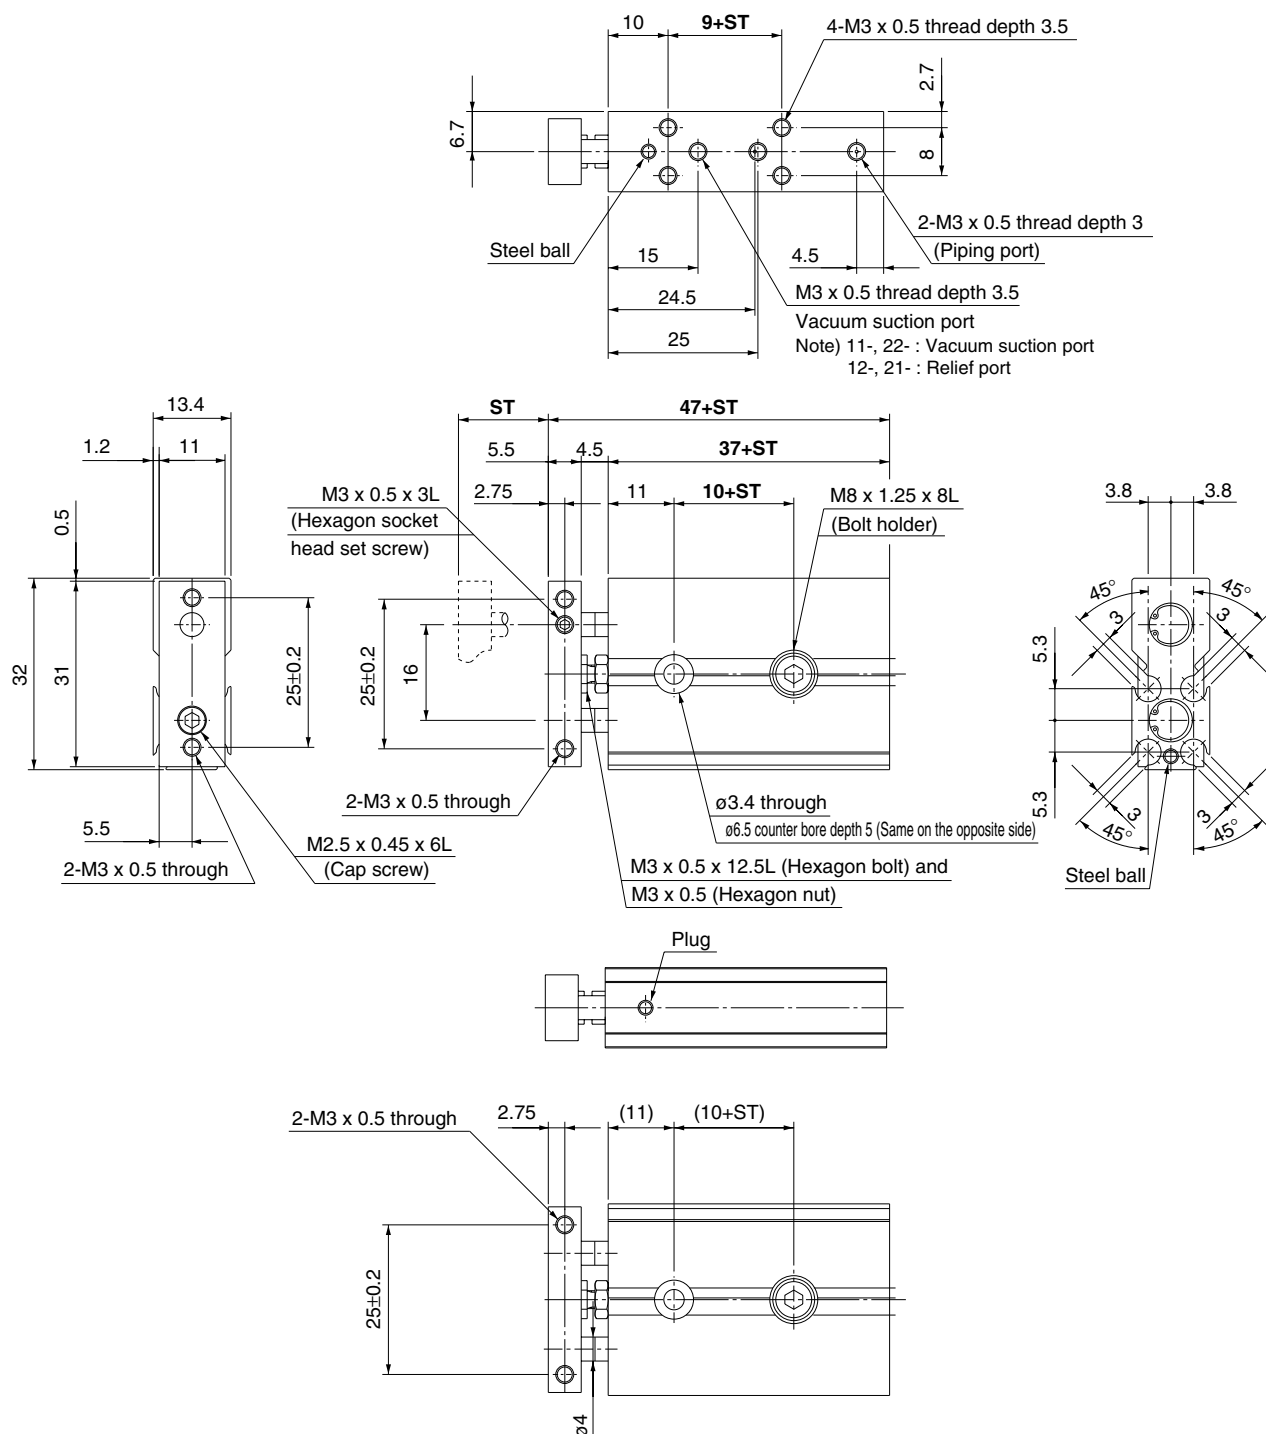
Be sure to read before handling.

Mounting

Adjust the bolt holder with a hexagon wrench 3mm in width across flats so that it does not protrude from the cylinder surface (approx. 0.5mm depth from the cylinder surface to the top of the holder).


If the bolt holder is not properly adjusted, it can interfere with the switch rail, hindering the auto switch mounting.



Dimensions / $\phi 6$ 

Part no.	ST	9+ST	10+ST	37+ST	47+ST
11-12- CXSJ □6-10	10	19	20	47	57
11-12- CXSJ □6-20	20	29	30	57	67
11-12- CXSJ □6-30	30	39	40	67	77
11-12- CXSJ □6-40	40	49	50	77	87
11-12- CXSJ □6-50	50	59	60	87	97

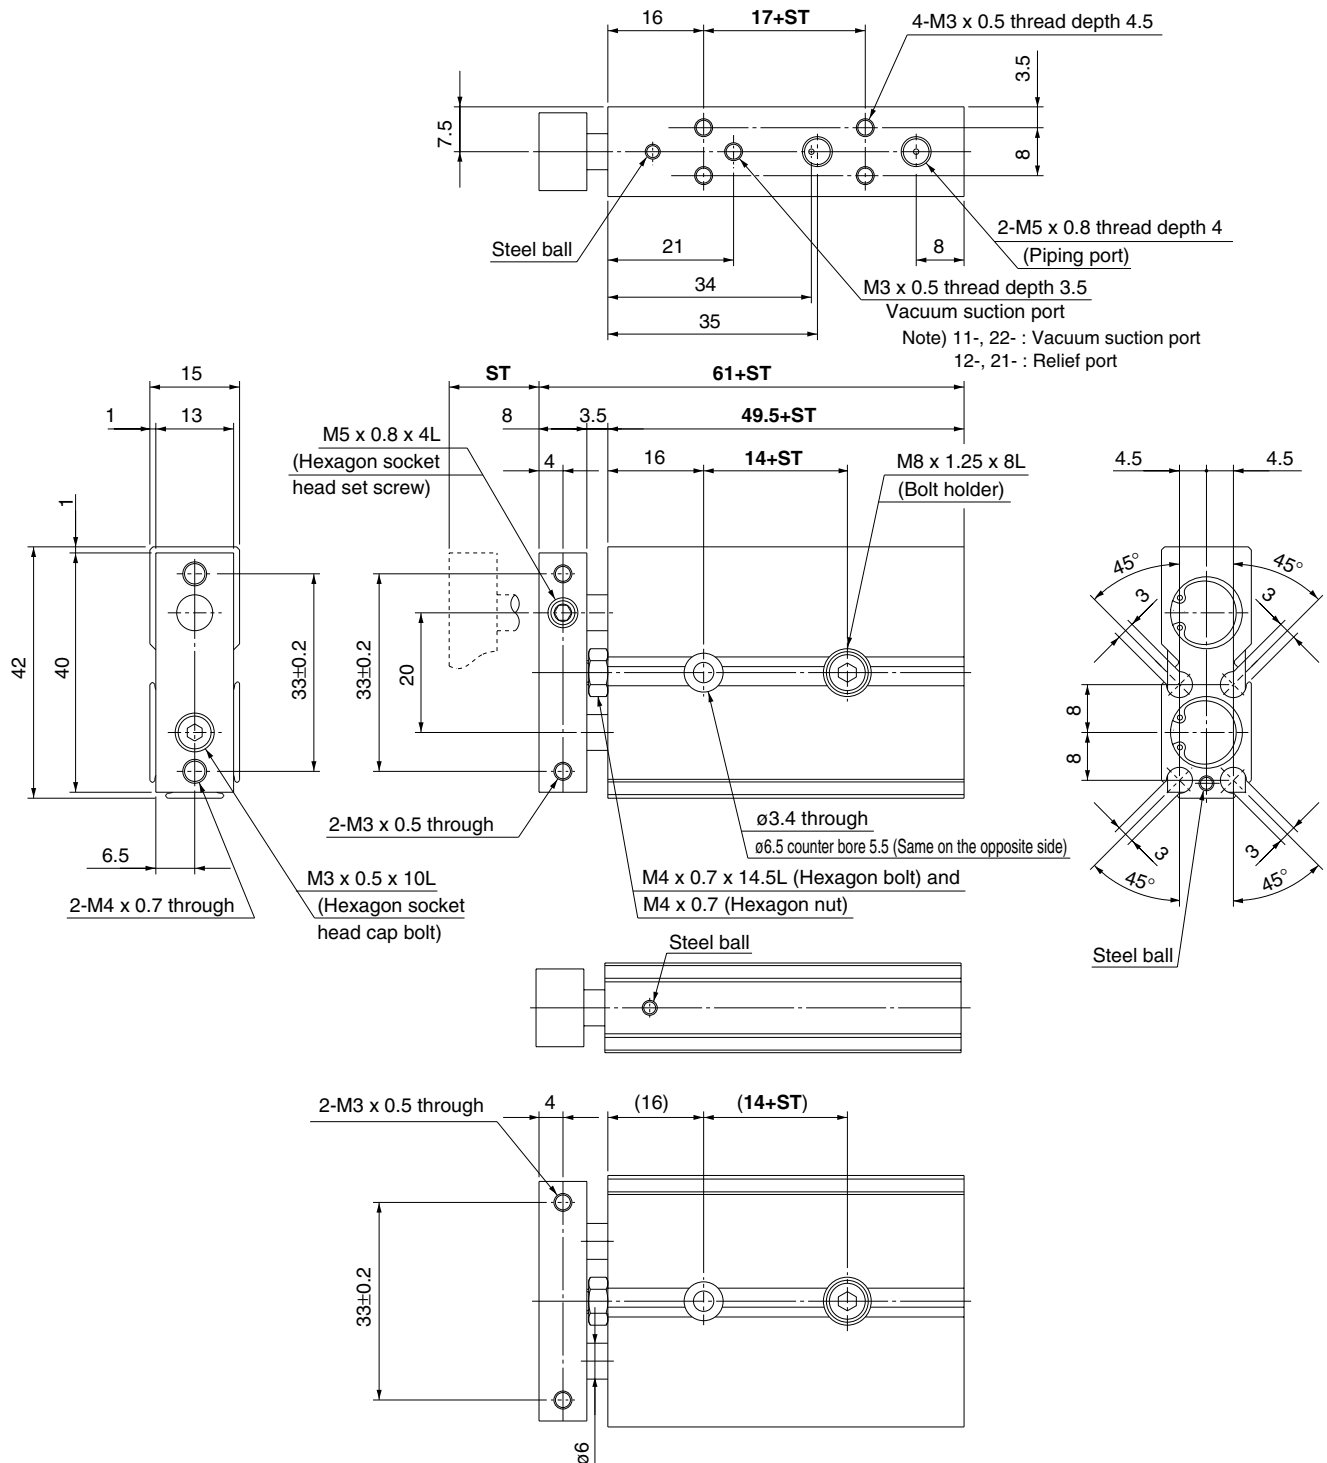Dimensions / ø10



(mm)

Part no.	ST	14+ST	17+ST	49.5+ST	61+ST
¹¹⁻¹²⁻ ²¹⁻²²⁻ CXSJ □10-10	10	24	27	59.5	71
¹¹⁻¹²⁻ ²¹⁻²²⁻ CXSJ □10-20	20	34	37	69.5	81
¹¹⁻¹²⁻ ²¹⁻²²⁻ CXSJ □10-30	30	44	47	79.5	91
¹¹⁻¹²⁻ ²¹⁻²²⁻ CXSJ □10-40	40	54	57	89.5	101
¹¹⁻¹²⁻ ²¹⁻²²⁻ CXSJ □10-50	50	64	67	99.5	111