

Clean Gas Filter

Cartridge Type/Disposable Type



SMC Clean Gas Filter

Integrated production in a clean environment

Under a clean environment, all components are washed by ultrasonic wave/ ultra-pure deionized water. Assembly, inspection and antistatic double packaging processes are done in an integrated production system.



Shipping inspection

At the time of shipment, the SF□ series clean gas filter, is 100% inspected, and only those that pass our inspection are allowed for delivery.

Cartridge type

- 0.1 μm purification test
- Airtight test

Disposable type


- 0.1 μm purification test
- Helium leak test
- Pressure holding test

- Assembly environment**
- Clean room M5.5 (ISO class 7)*
 - Clean bench M3.5 (ISO class 5)*

* Fed.std.209E () : based on ISO 14644-1


Application Examples

Cartridge type

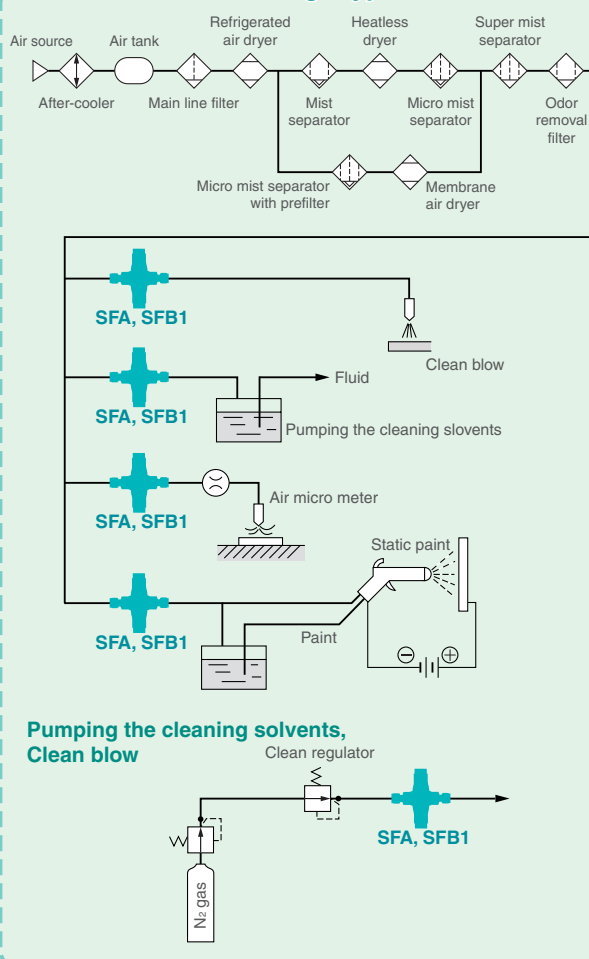


Disposable type

Gas filtration and gas flow

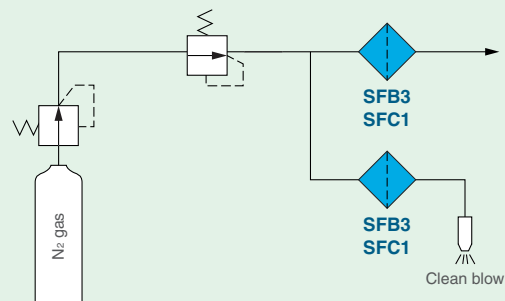

Gas system

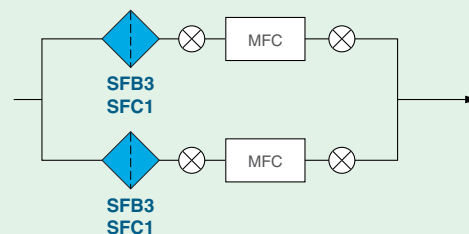

		Series	Filtration	Flow rate ℓ/min (ANR) (Max. flow rate at 0.7 MPa)	Pressure MPa	Temperature °C	Replacement of element	Page
Cartridge type	Disc style 	SFA10□	0.01 μm	26	1.0	5 to 80	Replaceable	P. 2
		SFA20□		70				
		SFA30□		140				
	Straight style 	SFB10□	120 μm	26	1.0	5 to 80	Replaceable	P. 4
SFB20□ (Strainer)		400		P. 4				
Disposable type	Straight style 	SFB30□	0.01 μm	26	15	5 to 120	Nonreplaceable	P. 7
	Multiple disc style 	SFC10□		300	1.8			P. 9
Made to Order		• Case/Cover material: Aluminum alloy (SFB100) • Strainer with other filtrations 1, 2, 5, 10, 20, 40, 70, 100 μm (SFB200)						P. 11
Specific Product Precautions								Back page 1

Model Selection

Determine the model by using the following procedures involving the inlet pressure and the maximum flow rate.

Example) Inlet pressure: 0.6 MPa

Maximum flow rate: 200 ℓ /min (ANR)


1. Determine intersection A for the inlet pressure and the maximum flow rate by using the maximum flow rate graph.
2. If the obtained intersection A is above the maximum flow rate line, SFC10□ is selected.

Note) Please be sure to select a model with a maximum flow rate line which is above the obtained intersection A.


If the obtained intersection A is below the maximum flow rate line, overflow will occur. This will cause a nonconformance in which the specification will not be satisfied.

Maximum Flow Rate Lines

Clean Gas Filter

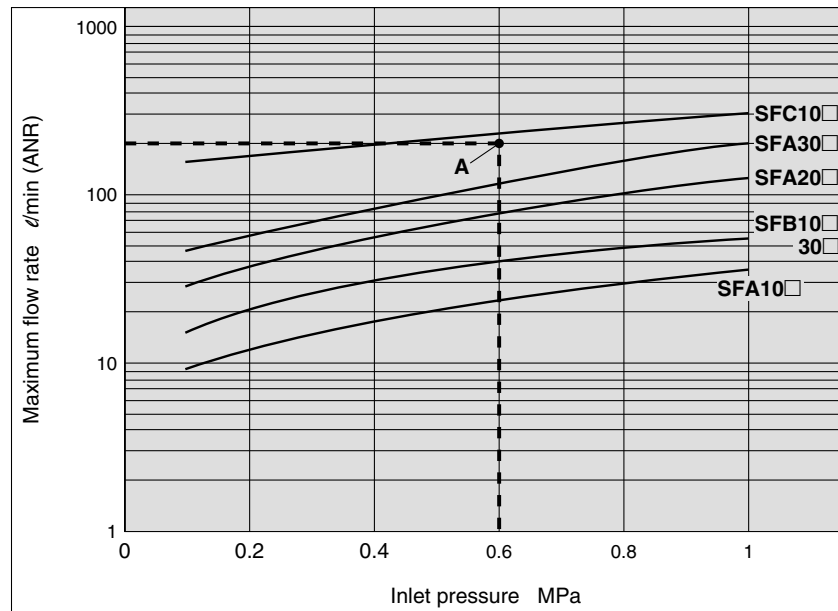

Clean Gas Strainer

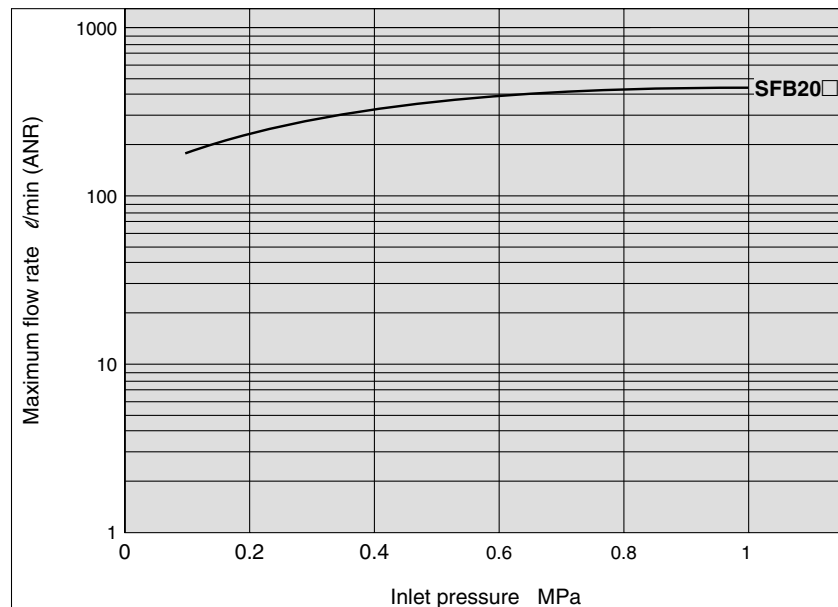

Clean Gas Filter: Cartridge Type/Disc Style

Series *SFA100/200/300*

Precision filtration for general gases used in the electronic industry, etc.

Compressed air, Nitrogen, etc.

PTFE membrane element is made into a cartridge.

Made into a cartridge by polyester holder and fluorine rubber (FKM) gasket.

All products are tested at the time of shipment.

0.1 µm purification test
Airtight test

Elements are replaceable.



Specifications

Operating fluid		Air, Nitrogen
Operating pressure ^{Note)}		Max. 1.0 MPa, Vacuum 1.3×10^{-6} kPa
Operating temperature		5 to 80°C
Element proof differential pressure		Max. 0.1 MPa
Element reverse differential pressure		Max. 0.05 MPa
Filtration		0.01 µm
Purification in the outlet side		Particle with 0.1 µm or larger 0 pcs/6 ℓ
Main material	Case	Stainless steel 316 (Interior/Exterior: Electrolytic polishing)
	Filter medium	PTFE membrane
	Seal	Fluoro rubber (FKM)
Packaging		Antistatic sealed double package


Note) The maximum operating pressure for Nitrogen is 0.97 MPa.

Model

Model	Rated flow rate ^{Note)} g/min (ANR)	Connection	Filtration area cm ²	Element part no.	Weight kg
SFA100-02	26	Rc1/4 (Female thread)	13.85	ED001S-X10V	0.34
SFA101-02		NPT1/4 (Female thread)			
SFA200-02	70	Rc1/4 (Female thread)	33.18	ED101S-X10V	0.44
SFA201-02		NPT1/4 (Female thread)			
SFA300-02	140	Rc1/4 (Female thread)	56.75	ED201S-X10V	0.66
SFA301-02		NPT1/4 (Female thread)			
SFA102-02	26	TSJ1/4 Tube swage joint	13.85	ED001S-X10V	0.38
SFA202-02	70		33.18	ED101S-X10V	0.49
SFA302-02	140		56.75	ED201S-X10V	0.70
SFA103-02	26	UOJ1/4 Union O-ring joint	13.85	ED001S-X10V	0.42
SFA203-02	70		33.18	ED101S-X10V	0.53
SFA303-02	140		56.75	ED201S-X10V	0.75

Note) The maximum flow rate when the inlet pressure is 0.7 MPa.

Construction

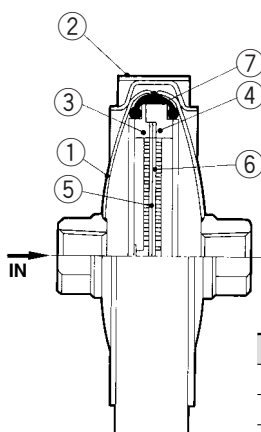


No.	Description	Material	Note
1	Case	Stainless steel 316	Electrolytic polishing (Interior/Exterior)
2	V-clamp	Stainless steel 304	—
3	Holder 1	Polyester	Cartridge element
4	Holder 2		
5	Filter medium	PTFE	
6	Seal	FKM	
7	V-seal		

Series SFA100/200/300


Flow Characteristics Fluid: Compressed air Inlet temperature: 20°C

SFA10□

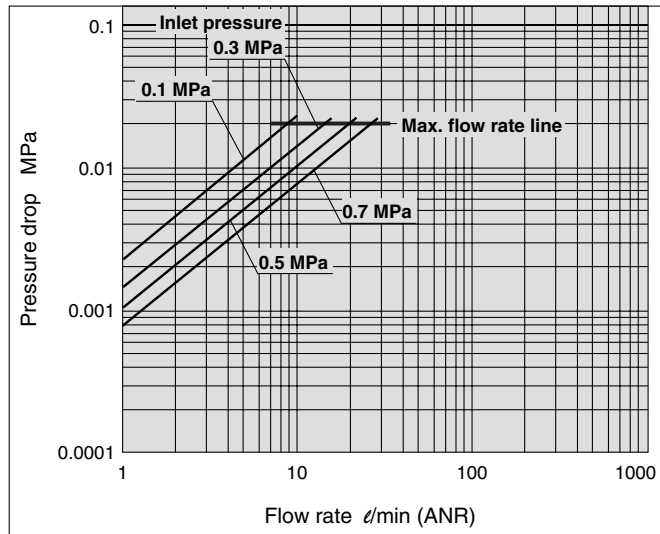


Dimensions

SFA100/101, SFA200/201, SFA300/301

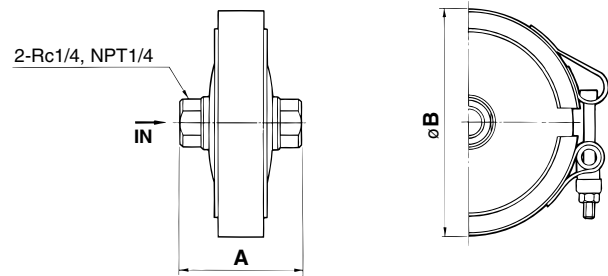


Model	Connection	A	øB
SFA100-02	Rc1/4	46	76
SFA101-02	NPT1/4	46	76
SFA200-02	Rc1/4	51	96
SFA201-02	NPT1/4	51	96
SFA300-02	Rc1/4	59	120
SFA301-02	NPT1/4	59	120

SFA20□

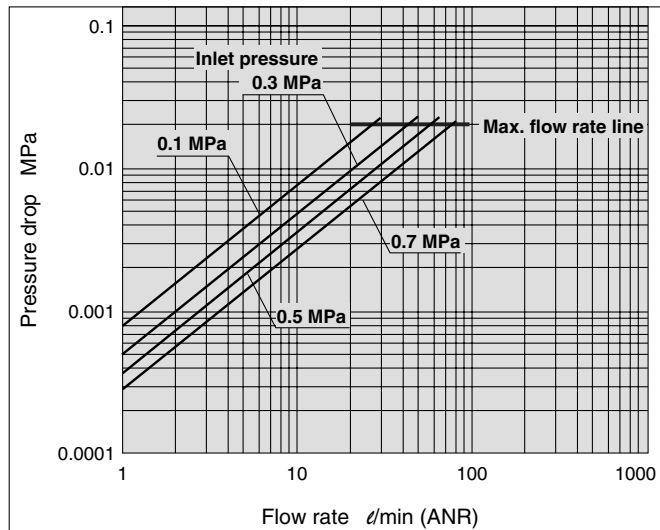


SFA102, SFA202, SFA302

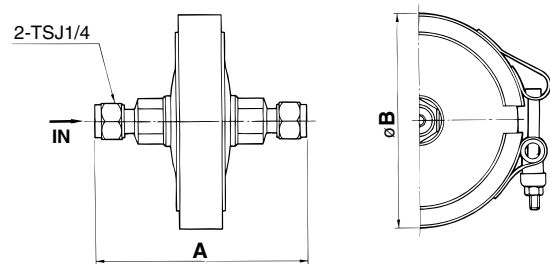


Model	Connection	A	øB
SFA102-02	TSJ1/4 (Tube swage joint)	89	76
SFA202-02		93	96
SFA302-02		101	120

SFA30□

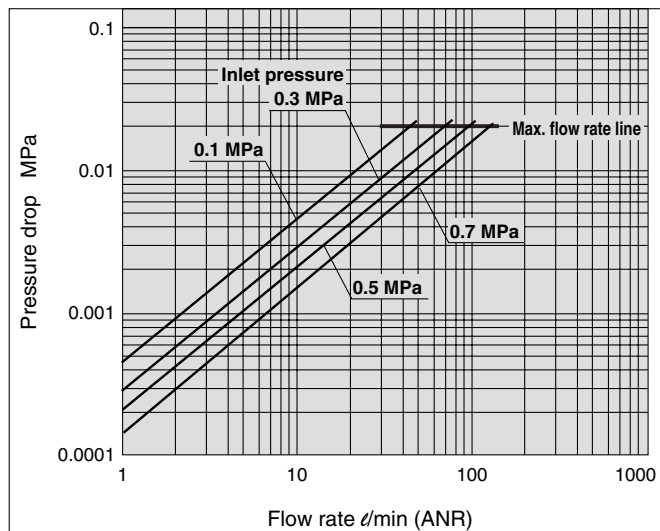

SFA103, SFA203, SFA303

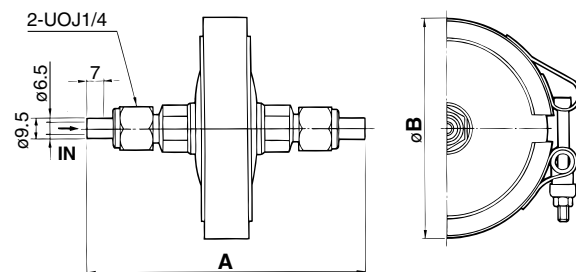

Model	Connection	A	øB
SFA103-02	UOJ1/4 (Union O-ring joint)	117	76
SFA203-02		122	96
SFA303-02		130	120

Clean Gas Filter: Cartridge Type/Straight Style Series *SFB100/200*

Clean gas filter/Series SFB100

Precision filtration for general gases used in the electronic industry, etc.

Compressed air, Nitrogen, etc.

PTFE membrane element is made into a cartridge.

Made into a cartridge by polyester holder and fluorine rubber (FKM) gasket.

All products are tested at the time of shipment.

0.1 μm purification test
Airtight test

Elements are replaceable.

Bracket is included as a standard.



Specifications

Operating fluid		Air, Nitrogen
Operating pressure ^{Note)}		Max. 1.0 MPa, Vacuum 1.3×10^{-6} kPa
Operating temperature		5 to 80°C
Element proof differential pressure		Max. 0.1 MPa
Element reverse differential pressure		Max. 0.07 MPa
Filtration		0.01 μm
Purification in the outlet side		Particle with 0.1 μm or larger 0 pcs/6 ℓ
Main material	Case/Cover	Stainless steel 316 (Interior/Exterior: Electrolytic polishing)
	Filter medium	PTFE membrane
	Seal	Fluoro rubber (FKM)
Packaging		Antistatic sealed double package

Note) The maximum operating pressure for Nitrogen is 0.97 MPa.

Model

Model	Rated flow rate ^{Note)} /min (ANR)	Connection	Filtration area cm ²	Element part no.	Weight kg
SFB100-02	26	Rc1/4 (Female thread)	10	ED301S-X10V	0.15
SFB101-02		NPT1/4 (Female thread)			
SFB102-02		TSJ1/4			0.16
SFB103-02		UOJ1/4			0.19
SFB104-M5		M5 (Female thread)			0.16

Note) The maximum flow rate when the inlet pressure is 0.7 MPa.

Clean gas strainer/Series SFB200

Clean gas strainer is also available using an element (with 120 μm, stainless steel 316 sintered metal) to protect a regulator, vacuum regulator, et cetera.

Specifications

Operating fluid		Air, Nitrogen
Operating pressure ^{Note)}		Max. 1.0 MPa, Vacuum 1.3×10^{-6} kPa
Operating temperature		5 to 80°C
Element proof differential pressure		Max. 1.0 MPa
Element reverse differential pressure		Max. 1.0 MPa
Filtration		120 μm
Main material	Case/Cover	Stainless steel 316 (Interior/Exterior: Electrolytic polishing)
	Seal	Fluoro rubber (FKM)
	Filter medium	Stainless steel 316 sintered metal
Packaging		Antistatic sealed double package

Note) The maximum operating pressure for Nitrogen is 0.97 MPa.


Model

Model	Rated flow rate ^{Note)} /min (ANR)	Connection	Filtration area cm ²	Element part no.	Weight kg
SFB200-02	400	Rc1/4 (Female thread)	10	ES001S-120V	0.16
SFB201-02		NPT1/4 (Female thread)			
SFB202-02		TSJ1/4			0.17
SFB203-02		UOJ1/4			0.20

Note) The maximum flow rate when the inlet pressure is 0.7 MPa.

Series SFB100/200


Construction

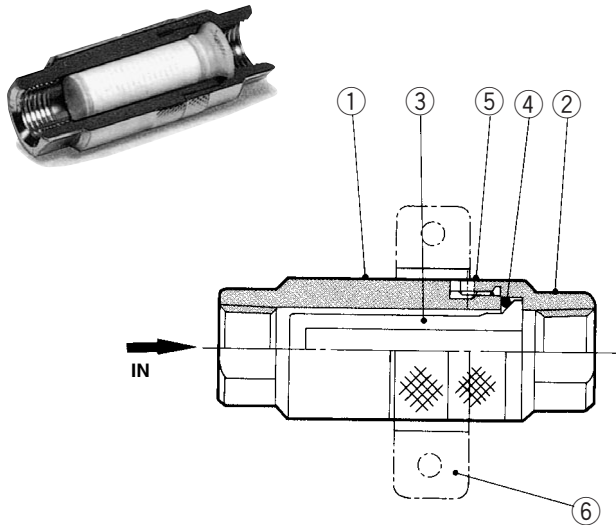


No.	Description	Material	Note
1	Case	Stainless steel 316	Electrolytic polishing (Interior/Exterior)
2	Cover		
3	Element	PTFE membrane	For SFB10□
	Clean gas strainer	Stainless steel 316 sintered metal	For SFB20□
4	O-ring	FKM	—
5	Hexagon socket head screw	Stainless steel 304	M3
6	Bracket		—

Flow Characteristics Fluid: Compressed air Inlet temperature: 20°C


SFB104-M5

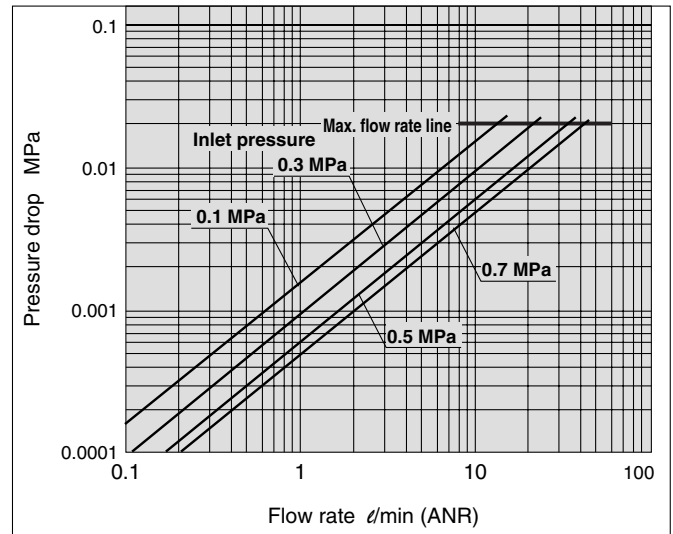

SFB10□-02

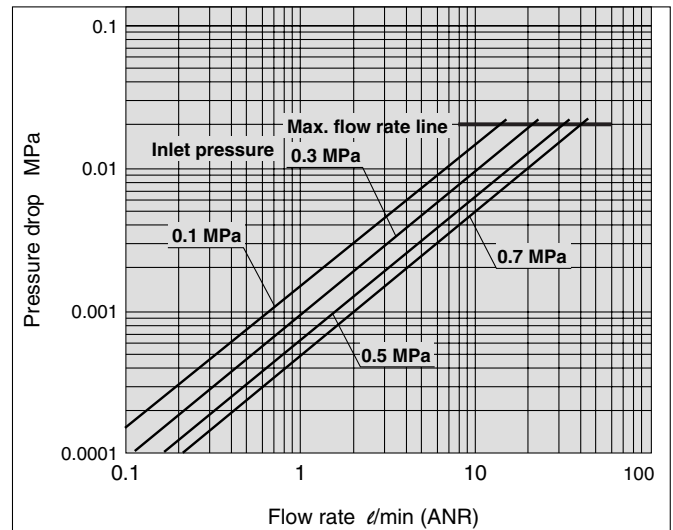

SFB20□-02

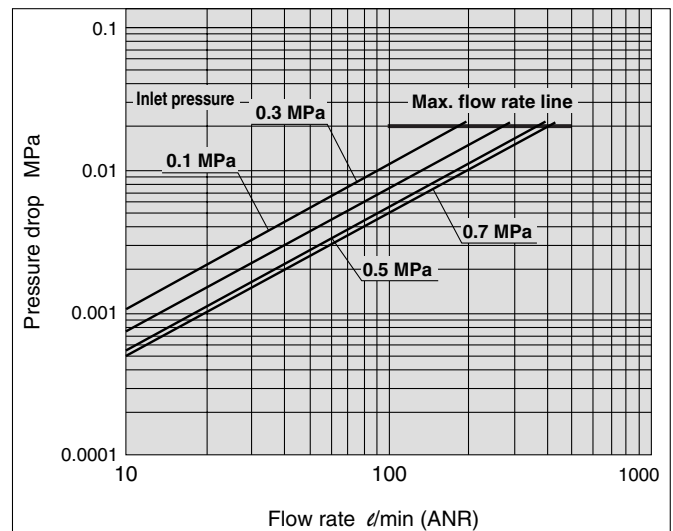


Dimensions

SFB100/200: Rc1/4


SFB101/201: NPT1/4

SFB104: M5

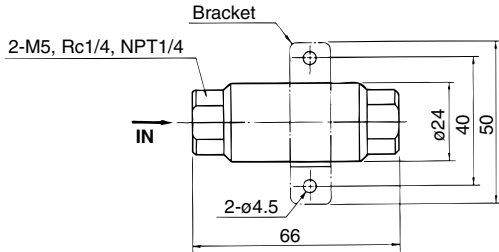


Model	Connection
SFB100-02, 200-02	Rc1/4
SFB101-02, 201-02	NPT1/4
SFB104-M5	M5

SFB102-02, SFB202-02: TSJ1/4 (Tube swage joint)

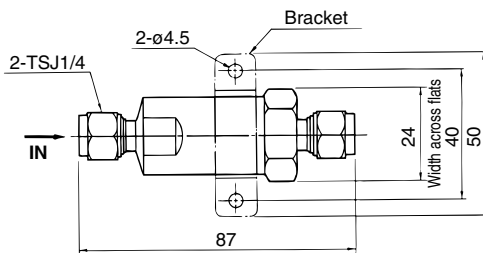

SFB103-02, SFB203-02: UOJ1/4 (Union O-ring joint)

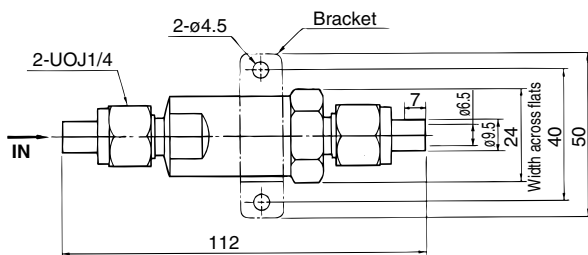

Clean Gas Filter: Disposable Type/Straight Style Series *SFB300*

Precision filtration for gases used in the semiconductor process

Compressed air, Nitrogen, etc.

PTFE membrane with high reliability

Filtration 0.01 μm

All products are tested at the time of shipment.

0.1 μm purification test

Helium leak test

Pressure holding test

Bracket is included as a standard.



Specifications

Operating fluid		Air, Nitrogen
Operating pressure ^{Note)}		Max. 1.0 MPa, Vacuum 1.3×10^{-6} kPa
Operating temperature		5 to 120°C
Element proof differential pressure		Max. 0.5 MPa
Element reverse differential pressure		Max. 0.07 MPa
Filtration		0.01 μm
Purification in the outlet side		Particle with 0.1 μm or larger 0 pcs/6 l
Helium leak volume		4.0×10^{-9} Pa·m ³ /sec or less
Main material	Case/Cover	Stainless steel 316 (Interior/Exterior: Electrolytic polishing)
	Filter medium	PTFE membrane
	O-ring	Stainless steel 304


^{Note)} Set pressure for this product is designed to withstand 15 MPa. All the products are proof pressure tested at the time of shipment. However, the maximum operating pressure is up to 1.0 MPa because the products are not conforming to the high pressure gas security law (in Japan). Also, the maximum pressure for Nitrogen is 0.97 MPa.

Model

Model	Rated flow rate ^{Note)} l/min (ANR)	Connection	Filtration area cm ²	Weight kg
SFB300-02	26	Rc1/4 (Female thread)	10	0.14
SFB302-02		TSJ1/4		0.15
SFB305-02		URJ1/4		0.14
SFB315-02		URJ1/4		0.15

^{Note)} The maximum flow rate when the inlet pressure is 0.7 MPa.


Construction

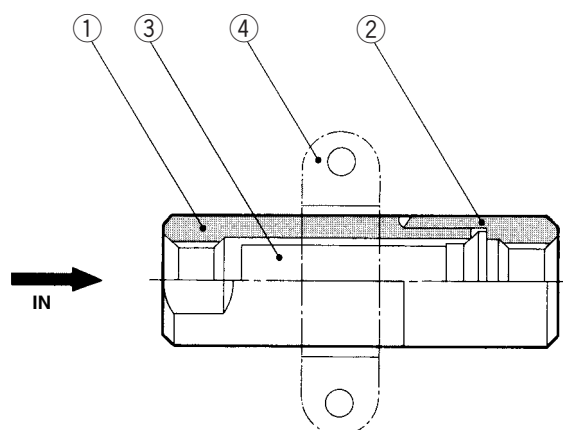

No.	Description	Material	Note
1	Case	Stainless steel 316	Electrolytic polishing (Interior/Exterior)
2	Cover		
3	Element	PTFE membrane	
4	Bracket	Stainless steel 316 sintered meal	


Flow Characteristics Fluid: Compressed air Inlet temperature: 20°C

SFB30□-02

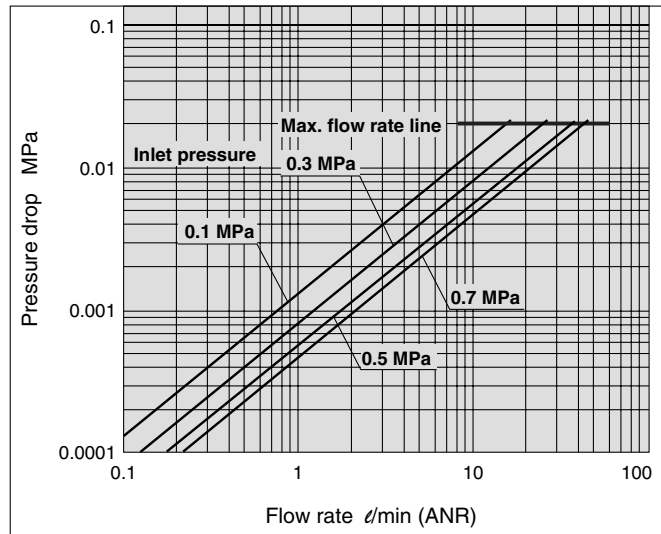


Dimensions


SFB300-02: Rc1/4

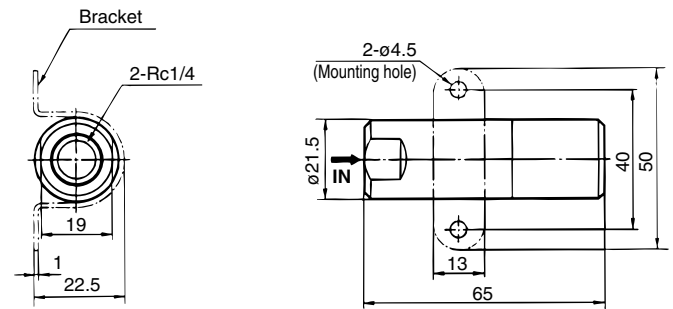

SFB302-02: TSJ1/4 (Tube swage joint)

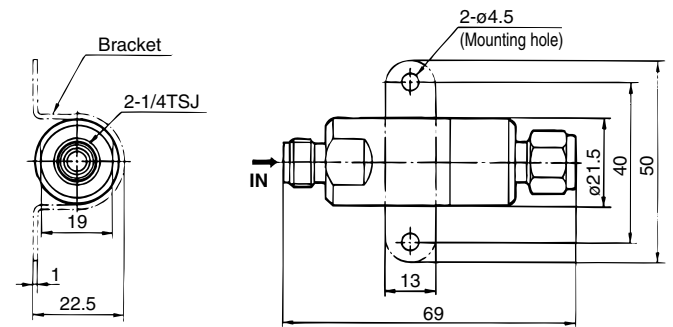

SFB305-02, SFB315-02: URJ1/4 (Union ring joint)

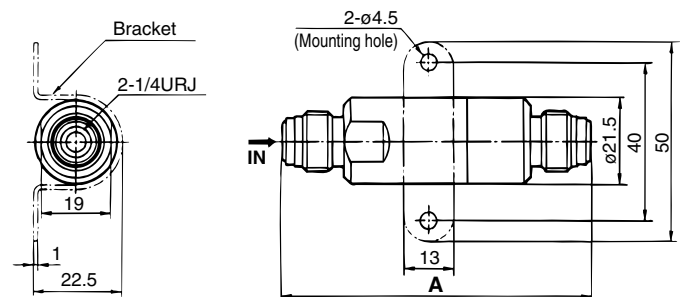

Model	A
SFB305-02	79
SFB315-02	84

Clean Gas Filter: Disposable Type/Multiple Disc Style Series *SFC100*

Precision filtration for gases used in the semiconductor process

Compressed air, Nitrogen, etc.

PTFE membrane with high reliability

Filtration 0.01 μm

All products are tested at the time of shipment.

0.1 μm purification test
Helium leak test
Pressure holding test



Specifications

Operating fluid		Air, Nitrogen
Operating pressure ^{Note)}		Max. 1.0 MPa, Vacuum 1.3×10^{-6} kPa
Operating temperature		5 to 120°C
Element proof differential pressure		Max. 0.42 MPa
Element reverse differential pressure		Max. 0.07 MPa
Filtration		0.01 μm
Purification in the outlet side		Particle with 0.1 μm or larger 0 pcs/6 ℓ
Helium leak volume		4.0×10^{-9} Pa·m ³ /sec or less
Main material	Case/Cover	Stainless steel 316 (Interior/Exterior: Electrolytic polishing)
	Filter medium	PTFE membrane
	O-ring	PTFE


Note) Set pressure for this product is designed to withstand 1.8 MPa. All the products are proof pressure tested at the time of shipment. However, the maximum operating pressure is up to 1.0 MPa because the products are not conforming to the high pressure gas security law (in Japan). Also, the maximum pressure for Nitrogen is 0.97 MPa.

Model

Model	Rated flow rate ^{Note)} ℓ/min (ANR)	Connection	Filtration area cm ²	Weight kg
SFC100-02	300	Rc1/4 (Female thread)	300	0.36
SFC100-03		Rc1/4 (Female thread)		0.35
SFC102-02		TSJ1/4		0.40
SFC102-03		TSJ3/8		0.41
SFC105-02		URJ1/4		0.44
SFC105-03		URJ3/8		0.49

Note) The maximum flow rate when the inlet pressure is 0.7 MPa.


Construction

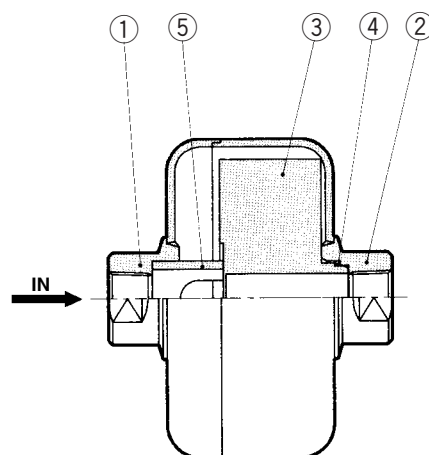

No.	Description	Material	Note
1	Case 1	Stainless steel 316	Electrolytic polishing (Interior/Exterior)
2	Case 2		
3	Element	PTFE, PVDF	
4	O-ring	PTFE	
5	Spacer	PVDF	

Flow Characteristics Fluid: Compressed air Inlet temperature: 20°C


SFC10□

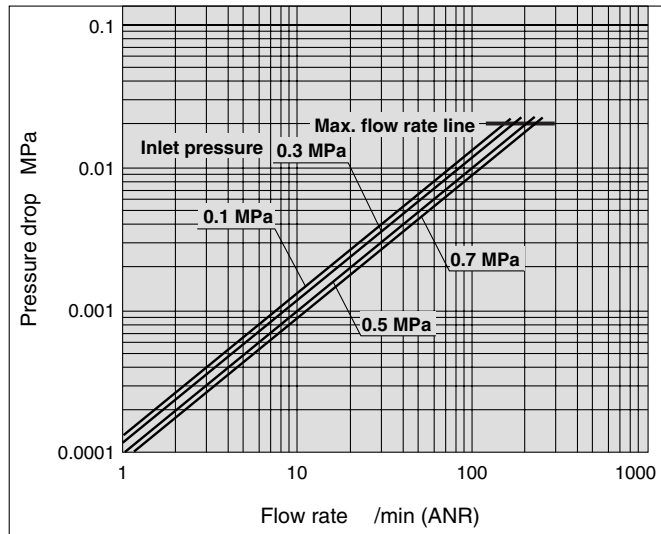

Dimensions

SFC100-02: Rc1/4


SFC100-03: Rc3/8

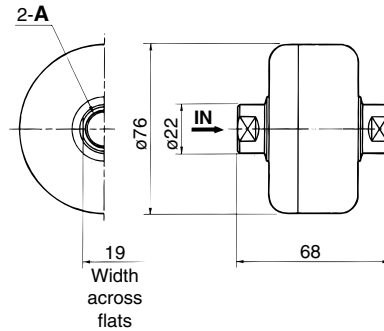

Model	A
SFC100-02	Rc1/4
SFC100-03	Rc3/8

SFC102-02: TSJ1/4 (Tube swage joint)


SFC102-03: TSJ3/8 (Tube swage joint)

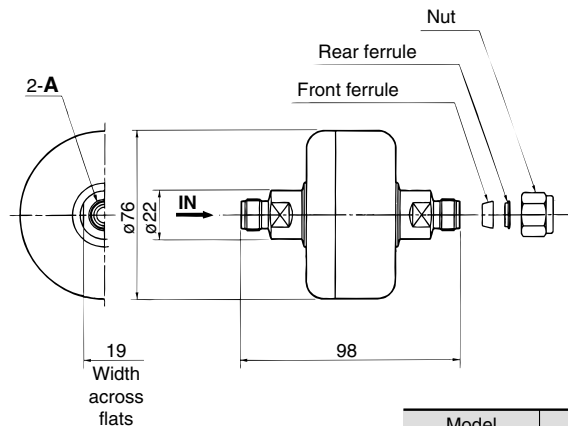

Model	A
SFC102-02	TSJ1/4
SFC102-03	TSJ3/8

SFC105-02: URJ1/4 (Union ring joint)

SFC105-03: URJ3/8 (Union ring joint)

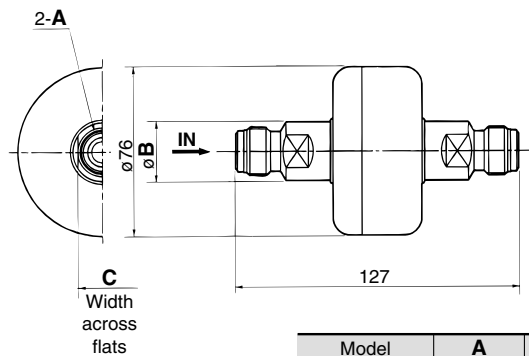

Model	A	B	C
SFC105-02	URJ1/4	22	19
SFC105-03	URJ3/8	26.5	22

Series SF Made to Order

Contact us for detailed dimensions, specifications and delivery.



Case/Cover material: Aluminum alloy

Part No.: SFB100-02X8

Specifications

Operating fluid		Air
Operating pressure		MAX. 1.0 MPa
Max. operating temperature		80°C
Element proof differential pressure		MAX. 0.5 MPa
Element reverse differential pressure		MAX. 0.07 MPa
Filtration		0.01 μm
Connection		Rc1/4
Filtration area		10 cm ²
Element part no.		ED301S-X10V
Weight		0.06 kg
Main material	Case/Cover	A2017 (Clear anodized)
	Seal	Fluoro rubber (FKM)
	Element	PTFE membrane

Dimensions are identical to the standard models. For details, refer to page 6.

Strainer with other filtrations (1,2,5,10,20,40,70,100 μm)

The filtration accuracies other than the standard filtration accuracy, 120 μm, are available with the clean gas strainer.

Part No.: SFB200-02-S **002** **VX3**

Filtration

Symbol	Filtration μm
001	1
002	2
005	5
010	10
020	20
040	40
070	70
100	100

Specifications and dimensions are identical to the standard models. For details, refer to page 6.



Series SF

Safety Instructions

The following safety instructions are intended to prevent a hazardous situation and/or equipment damage. The instructions indicate the level of potential hazard by label of "**Caution**", "**Warning**" or "**Danger**". To ensure safety, please observe all safety practices, including ISO 4414 Note 1), JIS B 8370 Note 2).

 **Caution** : Operator error could result in injury or equipment damage.

 **Warning** : Operator error could result in serious injury or loss of life.

 **Danger** : In extreme conditions, there is a possible result of serious injury or loss of life.

Note 1) ISO 4414 : Pneumatic fluid power --General rules relating to systems.

Note 2) JIS B 8370: General rules for pneumatic equipment

Warning

1. The compatibility of the pneumatic equipment is the responsibility of the person who designs the pneumatic system or decides its specifications.

Since the products specified here are used in various operating conditions, their compatibility with a specific pneumatic system must be based on specifications, post analysis and/or tests to meet a specific requirements. The expected performance and safety assurance are the responsibility of the person who determined the compatibility of the system. This person should continuously review the suitability of all specified items by referring to the latest information in the catalog and by taking into consideration the possibility of equipment failure when constructing the system.

2. Only trained personnel should operate pneumatically operated machinery and equipment.

Compressed air can be dangerous if handled incorrectly. Assembly, handling or repair of pneumatic systems should be performed by trained and experienced operators.

3. Do not service machinery/equipment or attempt to remove components until safety is confirmed.

1. Inspection and maintenance of machinery/equipment should only be performed once measures to prevent the driven objects from falling or running away have been confirmed.
2. When equipment will be removed, confirm that safety precautions have been followed. Turn off the supply pressure for this equipment and exhaust all residual compressed air in the system.
3. Before restarting any machinery/equipment, exercise caution to prevent the quick extension of a cylinder piston rod, etc.

4. Contact SMC if the product will be used in any of the following conditions:

1. Conditions and environments beyond the given specifications, or if product is used outdoors.
2. Installation on equipment in conjunction with atomic energy, railway, air navigation, vehicles, medical equipment, food and beverages, recreation equipment, emergency stop circuits, clutch and brake circuits in press applications, or safety equipment.
3. An application which has the possibility of having a negative effects on people, property, or animals, requiring special safety analysis.

Specific Product Precautions 1

Be sure to read this before handling. Refer to the back of page 1 for Safety Instructions.
Consult the instruction manual for details.

Selection

⚠ Warning

1. Confirm the specifications.

This product is designed for only general gases such as compressed air or Nitrogen.

Do not use this product with special gases, pressure or temperature beyond the specifications. Otherwise, they could cause damage to the product.

(Refer to the specifications.)

Mounting

⚠ Warning

1. Instruction manual

Mount the product after reading and understanding the instruction manual. Keep it in a location where it can easily be found.

2. Provide enough space for maintenance.

Provide space for maintenance because the IN/OUT pipings have to be removed when the elements are replaced.

3. Follow the piping instructions on the back of pages 3 and 4 when a screw is tightened.

Operating Environment

⚠ Warning

1. Do not use the product in a place where corrosive gas, chemicals, brine, water and/or water steam are present or can splash on it.

2. Insulate the product if it is used under direct sunlight.

3. Avoid using the product in a place where vibration or impact can occur.

4. Do not use the product in the vicinity of a heat source or under radiant heat.

Maintenance

⚠ Warning

1. Follow the maintenance procedures in the instruction manual. If handled incorrectly equipment or device can be damaged or cause a malfunction.

2. Maintenance

Product specification must be observed, because mishandling compressed air and/or Nitrogen can cause a dangerous situation. Maintenance such as replacing elements has to be performed by a well-experienced and knowledgeable person.

3. Pre-maintenance inspection

When removing the product, turn off the electrical power, and be sure to shut off the supply pressure and exhaust the compressed air in the system. Proceed only after confirming that all pressure has been released to the atmosphere.

Maintenance

⚠ Warning

4. Post maintenance inspection

After installation or repair, perform an appropriate function and leakage test.

5. Modification is prohibited.

Do not disassemble or modify the product.

Caution on Design

⚠ Caution

1. If the pressure difference (pressure drop) between the inlet and the outlet exceeds 0.1 MPa, it can cause damage to the product.

2. Do not install the product in a place where it can be affected by a pulsation of over 0.1 MPa.

3. Use caution regarding the particles that may be emitted from the outlet side of a pneumatic equipment.

Installation of a pneumatic equipment on the outlet side of the SF□ series can deteriorate the cleanliness because a particle will be generated from the equipment. In the case of installing the pneumatic equipment in the outlet side of the SF□ series, dusts can be generated from the equipment, and the degree of cleanliness can be deteriorated.

The mounting position of the pneumatic equipment needs to be considered depending on the degree of cleanliness of a required operating fluid.

4. Design the system to prevent reverse pressure and reverse flow.

Reverse pressure and reverse flow can damage the element.

5. Design that the piping load should not be applied on the product body.

Mount a bracket for the piping and the other connecting equipment so that the piping load is not applied to the product body.

6. Generally, the following pollutant particles are contained in compressed air, although the degree of cleanliness of the compressed air is different depending on the compressor type and specification.

[Pollutant particle substances contained in the compressed air]

- Moisture (drainage)
- Dusts and particles which are in the surrounding air
- Deteriorated oil which is discharged from the compressor
- Solid foreign matter such as rust and/or oil in the piping

1) The SF□ series is not compatible with compressed air which contains fluids such as water and/or oil.

2) Install a dryer (IDF, IDG, ID series), mist separator (AM series), micro mist separator (AMD series), super mist separator (AME series), or odor removal filter (AMF series), etc., for the source of the air for the SF□ series.

Selection

⚠ Warning

1. Thoroughly and carefully confirm the purpose of use, required specifications and operating conditions (fluid, pressure, flow rate and environment) then select a model within the specifications.
2. Contact us beforehand when the product will be used in applications such as a caisson shield, and breathing and/or medical treatment that affects the human body directly or indirectly.
3. Determine the product by the maximum consumption flow rate.
When using compressed air for an air blow application, calculate the maximum volume of air that will be consumed before selecting the SF□ series product size. (Using a product which exceeds the maximum air flow and running excessive compressed air can cause the cleanliness of the compressed air to deteriorate and/or its element to be damaged.)
4. Set the air flow capacity with an initial pressure drop of 0.02 MPa or less.
If the initial pressure drop is set to be high, its service life will be shorten due to clogging.

Piping

⚠ Caution


1. Unpacking the sealed package
Since the filter is sealed in an antistatic double bag, the inner package should be unpacked in a clean atmosphere (such as a clean room).
2. Confirm that there is enough space for maintenance before installing and piping this product.
3. Apply a wrench to 2 chamfered flats on the IN side or the OUT side to prevent the housing from rotating.
4. Confirm the IN and the OUT before piping.
The product should not be used with the wrong connection.
5. Wrapping of pipe tape
When screwing together pipes and fittings, etc., confirm that chips from the pipe threads and sealing material do not enter the piping.
Also, when pipe tape is used, leave 1.5 to 2 thread ridges exposed at the end of the threads.
6. Connection
 - 1) Rc and NPT connection
Confirm that chips from the pipe threads and sealing material do not enter the piping.
Also, when pipe tape is used, leave 1.5 to 2 thread ridges exposed at the end of the threads.

Piping

⚠ Caution

2) TSJ connection

The TSJ fitting is a kind of a self-align fittings. Set it as shown in the figure.

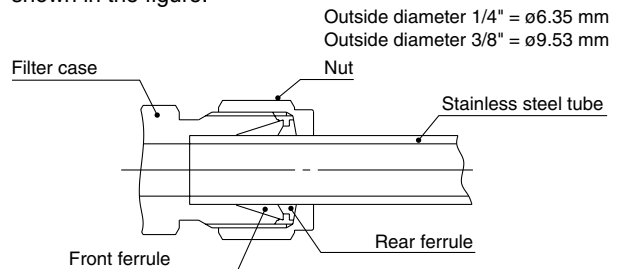

Regarding the TSJ fittings, after tightening the nut by hand, add another 1 1/4 to 1 1/2 turns with a wrench to seal the fitting. In case the fitting is re-installed after filter replacement, first tighten the nut by hand and add another 1/4 to 1/2 turns for sealing. Use the following parts as piping and fittings.


- Piping
 - Outside diameter 1/4" = ø6.35 mm
Stainless steel pipe
 - or
 - Outside diameter 3/8" = ø9.53 mm
Stainless steel pipe
 - Nut
 - Front ferrule
 - Rear ferrule
- Attached to product (2 pcs each)

In the event of replacing the body, a space (20 mm or longer) for extending the stainless steel tubes from the IN and OUT side will be required.

When using similar fittings of other brands, be sure to conduct a helium leak test to confirm there is no leakage before using.

3) UOJ fittings

The UOJ fitting is a union type fitting using a O-ring seal. Install it as illustrated below.

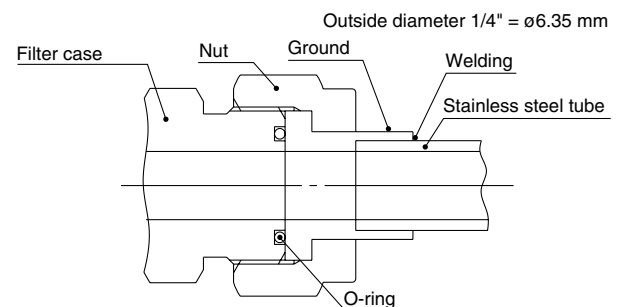

Weld the ground and piping when the fitting is used. At the time of welding, supply inert gas such as Nitrogen to the piping to prevent the formation of an oxide film. Also, remove the oxide film on the external surface through electrolytic polishing or acid cleaning.

After tightening the nut by hand, add another 1/8 turn with a wrench to seal the fitting. Use the following parts for piping and fittings.

- Piping
 - Outside diameter 1/4" = ø6.35 mm
Stainless steel pipe
 - Nut
 - Ground
 - O-ring
- Attached to product (2 pcs each)

Specific Product Precautions 3


Be sure to read this before handling. Refer to the back of page 1 for Safety Instructions.
Consult the instruction manual for details.

Piping

⚠ Caution

4) URJ fittings

The URJ fitting is a union type fitting using a metal gasket. Install it as illustrated below.

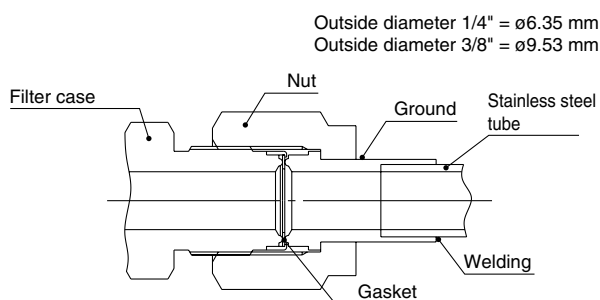

Weld the ground and piping when the fitting is used. At the time of welding, supply inert gas such as Nitrogen to the piping to prevent the formation of an oxide film. Also, remove the oxide film on the external surface through electrolytic polishing or acid cleaning.

After tightening the nut by hand, add another 1/8 turn with a wrench to seal the fitting. Use the following parts for piping and fittings.

<1/4">

- Nut VCR® fittings by Cajon Company
VCR female nut
(SS-4-VCR-1)
- Ground VCR® fittings by Cajon Company
VCR female ground
(SS-4-VCR-3)
- Gasket VCR® fittings by Cajon Company
VCR gasket retainer assembly
(SS-4-VCR-2-GR)

<3/8">

- Piping O.D. 3/8" = ø9.53 mm
Stainless steel pipe
- Nut VCR® fittings by Cajon Company
VCR female nut
(SS-8-VCR-1)
- Ground VCR® fittings by Cajon Company
VCR female ground
(SS-8-VCR-3)
- Gasket VCR® fittings by Cajon Company
VCR gasket retainer assembly
(SS-8-VCR-2-GR)

Be sure to conduct a helium leak test before using similar fittings from other companies.

Piping

⚠ Caution

7. Line flushing

Flush the piping line when the filter is used for the first time or has been replaced. In the event of connecting such as piping, flush (air blow) when using this product for the first time or replacing its elements in order to reduce the affect of the dust generated from the connection, etc.

Flushing the line is also required to eliminate contamination resulting from the piping line installation. Therefore, be sure to flush the line before actually running the system.

When general gases (excluding toxic, corrosive and flammable gases) are used after mounting the filter, sufficiently flush the line with a dry inert gas such as Nitrogen gas. This should be followed by a helium leak test on the fittings before actually running the product.

8. Filter replacement (or element replacement)

Release the gas from the piping to reduce the internal pressure to 0.

Also, when Nitrogen gas is used, replace it with dry Nitrogen gas by purging it in advance.

Replace the filter (or cartridge element) when a differential pressure of 0.1 MPa (pressure drop) between IN and OUT is reached and/or when 1 year has elapsed.

9. Filter replacement should be performed according to the instruction manual to maintain the filter performance and safety.

The instruction manual is contained in the replacement element. However, if the manual is lost, another one can be requested by inquiring to our company.

Operating Fluid

⚠ Warning

1. Do not use the clean gas filter with fluids other than compressed air and Nitrogen gas.

Using this product with fluids other than compressed air and Nitrogen gas can cause damage and leaks in the seals and O-rings, depending on the operating fluid.

Confirm the seal material in the specifications and the compatibility with the operating fluid.

Model Series SFA
Series SFB10, 20

Model Series SFB30
Series SFC

Operating Environment

Caution

- 1. When the product is used for blowing, use caution to prevent the work from being damaged by entrained air from the surrounding area.**

When the compressed air is used for air blow, the exhausted air from the blow nozzle may have taken in airborne foreign matter (such as solid particle, fluid particle) from the surround air. The foreign matter will be sprayed on the work, and the airborne foreign matter may adhere to it.

Therefore, use caution for the surrounding environment.

Maintenance

- 1. When the element comes to the end of its life, immediately replace it with a new filter or replacement element (cartridge type).**

2. Service life of element

The service life of the element ends when either of the following two conditions occurs.


- 1) After 1 year of usage has elapsed.
- 2) When the pressure drop reaches 0.1 MPa even though the operating period has been less than 1 year.

3. Unpacking the sealed package

Since the filter, as well as the cartridge element (cartridge type) are sealed in an antistatic double bag, the inner package should be unpacked in a clean atmosphere (such as a clean room).



SMC'S GLOBAL MANUFACTURING, DISTRIBUTION AND SERVICE NETWORK

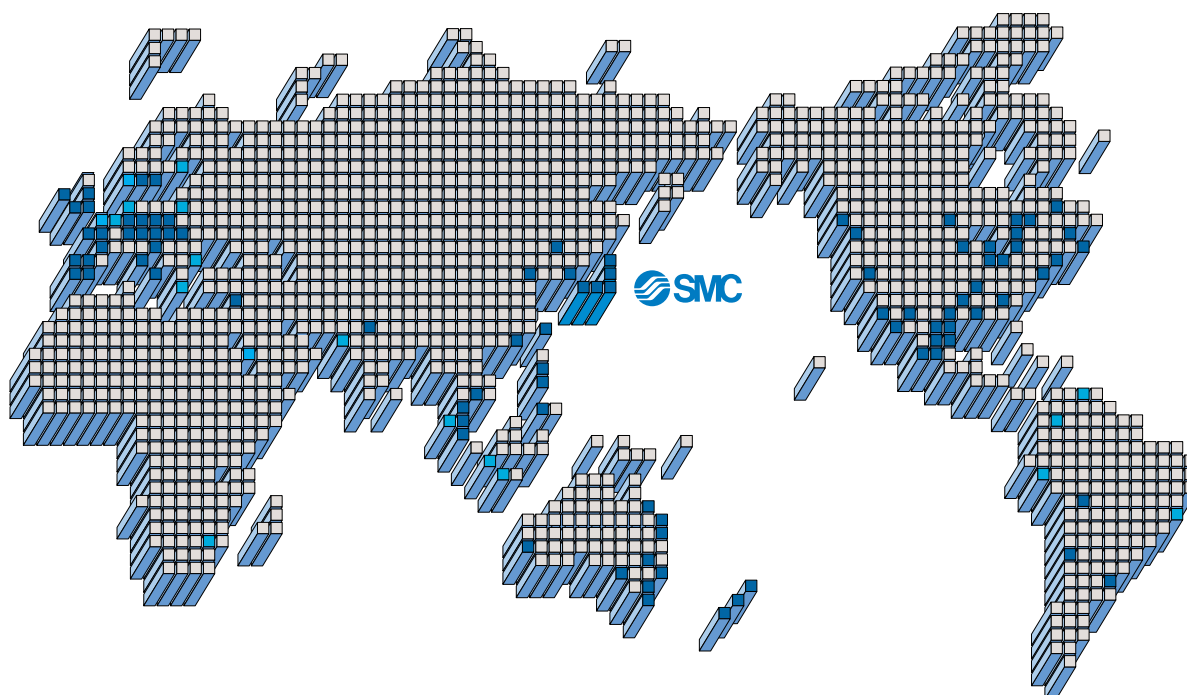

EUROPE

AUSTRIA

SMC Pneumatik GmbH

BELGIUM

SMC Pneumatics N.V./S.A.

BULGARIA

SMC Industrial Automation Bulgaria EOOD

CROATIA

SMC Industrijska automatika d.o.o.

CZECH REPUBLIC

SMC Industrial Automation CZ s.r.o.

DENMARK

SMC Pneumatik A/S

ESTONIA

SMC Pneumatics Estonia OÜ

FINLAND

SMC Pneumatics Finland OY

FRANCE

SMC Pneumatique SA

GERMANY

SMC Pneumatik GmbH

HUNGARY

SMC Hungary Ipari Automatizálási Kft.

IRELAND

SMC Pneumatics (Ireland) Ltd.

ITALY

SMC Italia S.p.A.

LATVIA

SMC Pnuematics Latvia SIA

NETHERLANDS

SMC Pneumatics BV.

NORWAY

SMC Pneumatics Norway A/S

POLAND

SMC Industrial Automation Polska Sp.z.o.o.

ROMANIA

SMC Romania s.r.l.

RUSSIA

SMC Pneumatik LLC.

SLOVAKIA

SMC Priemyselná automatizácia, s.r.o.

SLOVENIA

SMC INDUSTRIJSKA AVTOMATIKA d.o.o.

SPAIN/PORTUGAL

SMC España, S.A.

SWEDEN

SMC Pneumatics Sweden AB

SWITZERLAND

SMC Pneumatik AG.

UK

SMC Pneumatics (U.K.) Ltd.

ASIA

CHINA

SMC (China) Co., Ltd.

HONG KONG

SMC Pneumatics (Hong Kong) Ltd.

INDIA

SMC Pneumatics (India) Pvt. Ltd.

INDONESIA

PT. SMC Pneumatics Indonesia

MALAYSIA

SMC Pneumatics (S.E.A.) Sdn. Bhd.

PHILIPPINES

SHOKETSU-SMC Corporation

SINGAPORE

SMC Pneumatics (S.E.A.) Pte. Ltd.

SOUTH KOREA

SMC Pneumatics Korea Co., Ltd.

TAIWAN

SMC Pneumatics (Taiwan) Co., Ltd.

THAILAND

SMC Thailand Ltd.

NORTH AMERICA

CANADA

SMC Pneumatics (Canada) Ltd.

MEXICO

SMC Corporation (Mexico) S.A. de C.V.

USA

SMC Corporation of America

SOUTH AMERICA

ARGENTINA

SMC Argentina S.A.

BOLIVIA

SMC Pneumatics Bolivia S.R.L.

BRAZIL

SMC Pneumaticos Do Brazil Ltda.

CHILE

SMC Pneumatics (Chile) S.A.

VENEZUELA

SMC Neumatica Venezuela S.A.

OCEANIA

AUSTRALIA

SMC Pneumatics (Australia) Pty. Ltd.

NEW ZEALAND

SMC Pneumatics (N.Z.) Ltd.

SMC Corporation

1-16-4 Shimbashi, Minato-ku, Tokyo 105-8659 JAPAN

Tel: 03-3502-2740 Fax: 03-3508-2480

URL <http://www.smcworld.com>

© 2005 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice
and any obligation on the part of the manufacturer.

D-KS

Printing JQ 120KS Printed in Japan.

This catalog is printed on recycled paper with concern for the global environment.