

3 Port Direct Operated Solenoid Valve


Series VS3115/3110

Metal Seal

Multiple pressure supply is possible with balanced spool sleeve.

Any given port can accept high or low pressure supply without affecting the system life or operation.

No-lubrication and dry-air operation possible.

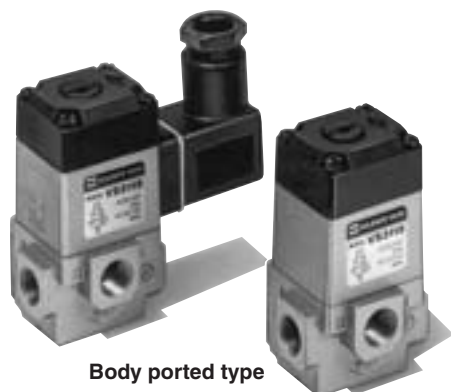


Body ported type



Sub-plate type

JIS Symbol



Standard Specifications

Fluid			Air/Inert gas		
Operating pressure range			0 to 1.0 MPa		
Proof pressure			1.5 MPa		
Ambient and fluid temperature			-20 to 60°C (No freezing)		
Response time ⁽¹⁾			10 ms or less (AC), 45 ms or less (DC)		
Max. operating frequency ⁽²⁾			1,500 c.p.m. (AC), 180 c.p.m. (DC)		
Manual override			Non-locking		
Lubrication			Not required (Use turbine oil Class 1 ISO VG32, if lubricated.)		
Enclosure			Dustproof [Degrees of protection 0] ⁽⁴⁾		
Shock/Vibration resistance (m/s ²)			150/50 ⁽⁵⁾		
Electrical entry				Grommet, DIN terminal	
Coil rated voltage		Standard	100, 200 VAC, 50/60 Hz; 24 VDC		
			220, 110, 48, and 24 VAC (50/60 Hz) 100, 48, and 12 VDC		
Allowable voltage fluctuation			-15 to +10% of rated voltage		
Coil insulation type			Class B or equivalent (130°C) ⁽⁶⁾		
Apparent power (VA) (Power consumption (W))	AC	Inrush	50 Hz	51	
			60 Hz	45	
		Holding	50 Hz	17 (5.3)	
			60 Hz	11 (2.9)	
Power consumption (W)		DC	5.5		
Accessory (Option)			Bracket (AXT338-11)/For body ported type		
			Indicator light		
			Manual override		



Note 1) Based on JIS B 8375-1981. (at 0.5 MPa, without surge voltage suppressor)

Note 2) Minimum operating frequency is once in 30 days. (Based on JIS B 8375.)

Note 3) "Note 1)" and "Note 2)" are with controlled clean air.

Note 4) Based on JIS C 0920.

Note 5) Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Note 6) Based on JIS C 4003.

Flow Characteristics/Mass

Body type	Valve model	Port size Rc	Flow characteristics						Mass (kg)	
			P → A			A → E				
			C [dm³/(s·bar)]	b	Cv	C [dm³/(s·bar)]	b	Cv	AC	DC
Body ported	VS3115-01 □□	1/8	3.3	0.36	0.86	2.5	0.39	0.66	0.34	0.46
	VS3115-02 □□	1/4	3.8	0.19	0.86	3.6	0.34	0.88	0.34	0.46
Base mounted	VS3110-02 □□	1/4	4.0	0.12	0.93	3.2	0.31	0.76	0.40	0.52
	VS3110-03 □□	3/8	4.0	0.15	0.94	3.6	0.18	0.82	0.40	0.52
For manifold use	VS3114-00 □□		Without sub-plate						0.32	0.44

⚠ Caution

Be sure to read before handling. Refer to front matters 58 and 59 for Safety Instructions and pages 3 to 7 for 3/4/5 Port Solenoid Valve Precautions.

How to Calculate the Flow Rate

For obtaining the flow rate, refer to front matters 44 to 47.

Series VS3115/3110

How to Order

VS311

5

-

01

5

D

L

-

Piping

5 Body ported type

0 Sub-plate type

4 Manifold type

Port size

01 Rc 1/8

02 Rc 1/4

03 Rc 3/8

00 Without sub-plate

Coil rated voltage

1 100 VAC, 50/60 Hz

2 200 VAC, 50/60 Hz

3 110VAC *

4 220VAC *

5 24 VDC *

Mounting

Nil Without bracket

B With bracket

Accessory (Option)

L With indicator light

P With manual override

Thread type

Nil Rc

N * NPT

T * NPTF

F * Parallel thread

Electrical entry

G Grommet

D DIN terminal

* Semi-standard

For other rated voltages,

please consult with SMC.

* DC: DL (With indicator light)

Construction

Body ported type

Sub-plate type

Sub-plate Assembly Part No.: VS3110-S-0203

* Mounting bolts and gaskets are not attached.

Part No. for Mounting Bolt and Gasket

BG-VS3010

Accessory (Option)

Indicator light

When solenoid is energized, indicator light illuminates, thus the electrical state of the solenoid can be seen from the outside.

Note) There is polarity of (1) +, (2) -.

Manual override

Remove the rubber plug on the top of the solenoid cap to mount the manual override. Push the override with a screwdriver to the required stroke and the valve will shift. Turn to the right or left at 90 degrees to lock it. Turn it back 90 degrees to unlock. Be sure to unlock the override before energizing the valve electrically.

Description	Part no.	
	AC	DC
Manual override (With lock)	PB0111-3 (PB0111)	PB0111-1
Manual override (Non-locking)	PB0101	PB0101-1

(): With indicator light

A 1630


SMC

3 Port Direct Operated Solenoid Valve **Series VS3115/3110**


Dimensions

Body ported type

VS3115-□□G

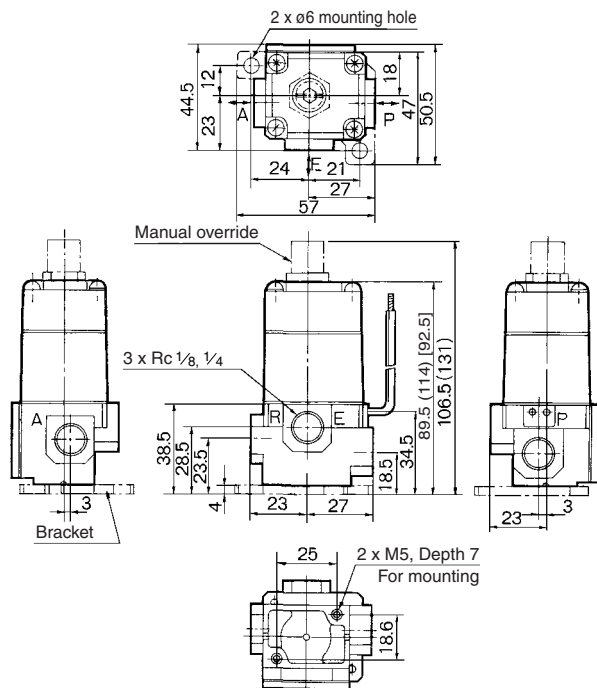

VS3115-□□D

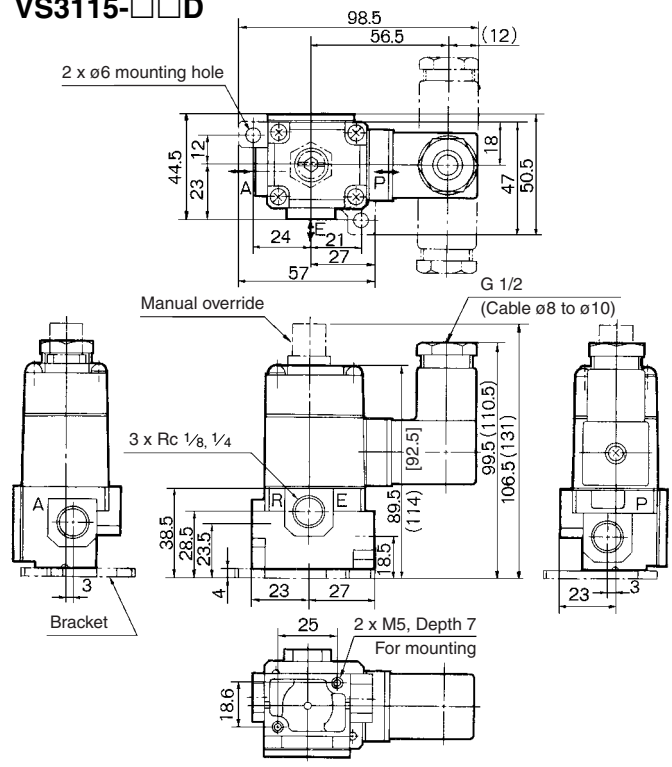

(): DC
[]: AC, with indicator light

VV061

V100

S070

VQD

VKF


VK

VT


VS

Sub-plate type

VS3110-□□G

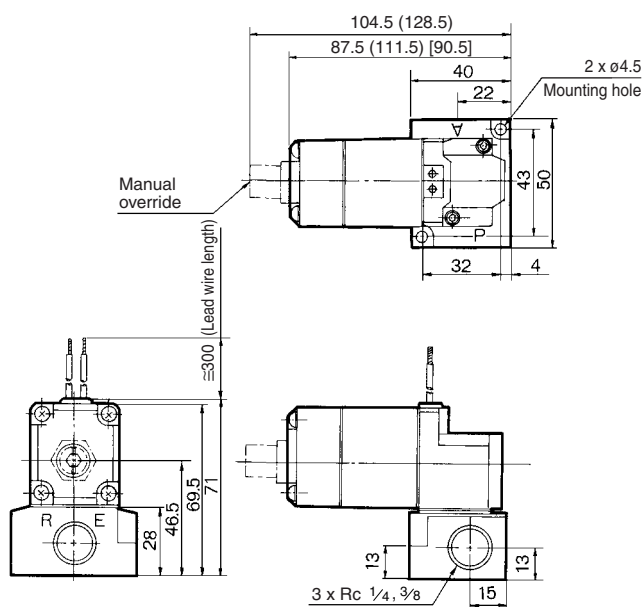


VS3110-□□D

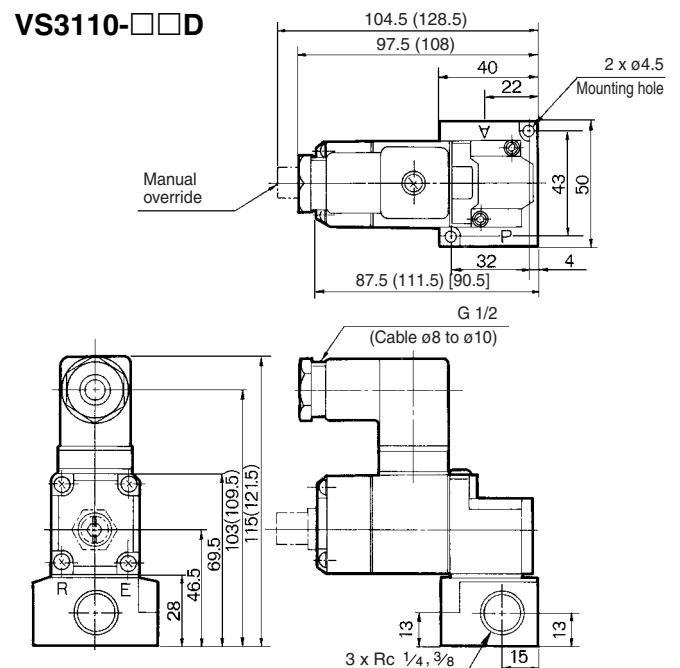

(): DC
[]: AC, with indicator light

Series VS3115/3110

Manifold Specifications

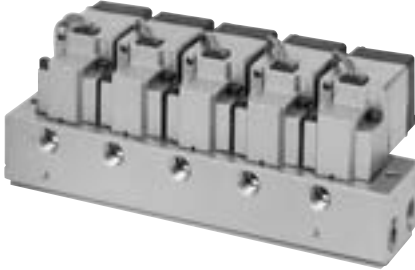

Specifications

Manifold type				B mount			
Max. number of stations				10 stations			
Exhaust type	Port location/Port size			Port direction			Applicable valve model
	P	A	E	P	A	E	
Common	Base	Base	Base	Side	Side	Side	VS3114-00□□
	3/8	1/4	3/8	Side	Bottom	Side	
Accessory		Blanking plate (With gaskets and screw)			AXT338-17A		

How to order manifold

VVS31 **0** - **05** **1** - **□**

	P	A	E
0	Side	Side	Side
1	Side	Bottom	Side

Valve stations

05	5 stations
10	10 stations

EXH port type



1	Common EXH
---	------------

Thread type

Nil	Rc
N*	NPT
T*	NPTF
F*	Parallel thread

* Option

Dimensions

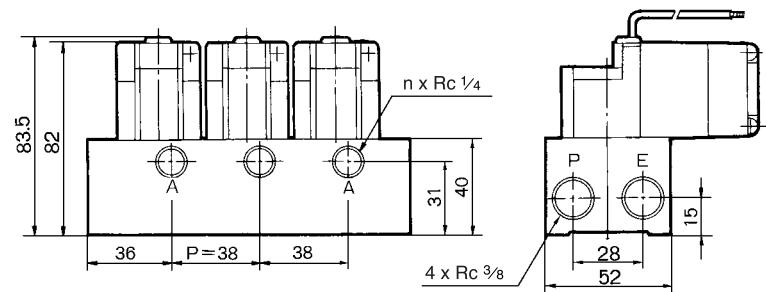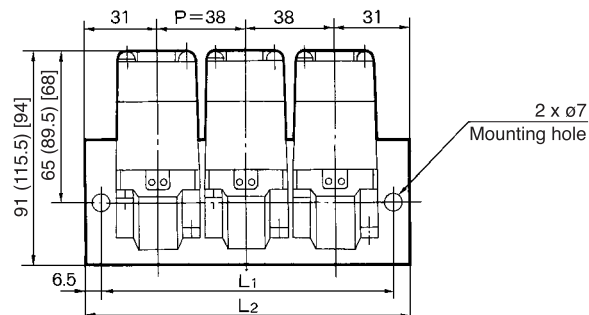

(): DC
[]: AC, with indicator light

L	n	2	3	4	5	6	7	8	9	10
L ₁		87	125	163	201	239	277	315	353	391
L ₂		100	138	176	214	252	290	328	366	404

L₁ = 38n + 11, L₂ = 38n + 24 n: Station

Formula for manifold weight M = 0.16n + 0.1 (kg)

3 Port Direct Operated Solenoid Valve

Series VS3135/3145


Metal Seal



Terminal type



Symbol



Specifications

Fluid		Air/Inert gas
Proof pressure		1.5 MPa
Operating pressure range		0 to 1.0 MPa
Ambient and fluid temperature (°C) ⁽¹⁾		-20 to 60
Lubrication ⁽²⁾		Not required
Manual override		Option (Non-locking type available)
Electrical entry		Grommet, Conduit terminal, Dripproof conduit terminal
Coil rated voltage	AC	100, 200 V 50/60 Hz
	DC	24 V
Allowable voltage fluctuation		-15 to +10% of rated voltage
Coil insulation type		Class B or equivalent (130°C) ⁽³⁾
Shock/Vibration resistance (m/s²)		150/50 ⁽⁴⁾



Note 1) If it is low temperature, dry air should be used. (No freezing)

Note 2) Use turbine oil Class 1 (ISO VG32), if lubricated.

Note 3) Based on JIS C 4003.

Note 4) Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Model

Valve model			VS3135						VS3145						
Flow characteristics			P → A			A → E			P → A			A → E			
			C	b	Cv	C	b	Cv	C	b	Cv	C	b	Cv	
			[dm ³ /(s·bar)]			[dm ³ /(s·bar)]			[dm ³ /(s·bar)]			[dm ³ /(s·bar)]			
			1/4	6.1	0.3	1.5	6.1	0.4	1.6	—	—	—	—	—	—
			3/8	7.2	0.2	1.8	7.3	0.2	1.8	—	—	—	—	—	—
			1/2	9.0	0.2	2.3	9.0	0.3	2.4	18	0.27	4.8	16	0.34	4.1
3/4	—	—	—	—	—	—	20	0.21	5.1	15	0.46	4.5			
Response time ⁽¹⁾ (ms)			AC						30 or less						
			DC						60 or less						
Max. operating ⁽²⁾ frequency (c.p.m.)			AC						300 or less						
			DC						180 or less						
Weight (kg)			AC						0.8						
			DC						1.1						
Apparent power (VA)			Inrush	50 Hz						100					
				60 Hz						90					
			Holding	50 Hz						20					
				60 Hz						14					
Power consumption (W)			DC						13.2						



Note 1) Based on JIS B 8375-1981. (at 0.5 MPa, without surge voltage suppressor)

Note 2) Min. operating frequency is once in 30 days. (Based on JIS B 8375.)

Note 3) "Note 1)" and "Note 2)" are with controlled clean air.

How to Order

VS31 3 5-02 1 - -

Caution

Be sure to read before handling. Refer to front matters 58 and 59 for Safety Instructions and pages 3 to 7 for 3/4/5 Port Solenoid Valve Precautions.

How to Calculate the Flow Rate

For obtaining the flow rate, refer to front matters 44 to 47.

Body size

3	3/8 Standard
4	1/2 Standard

Port size

02	Rc 1/4
03	Rc 3/8
04	Rc 1/2
06	Rc 3/4

Coil rated

1	100 VAC, 50/60 Hz
2	200 VAC, 50/60 Hz
3 *	110 VAC, 50/60 Hz
4 *	220 VAC, 50/60 Hz
5	24 VDC

* Semi-standard
For other rated voltages, please consult with SMC.

Electrical entry

Nil	Grommet
T	Conduit terminal
WTB	Dripproof conduit terminal
TZ	Conduit terminal w/ surge voltage suppressor
TL	Conduit terminal w/ indicator light

Thread type

Nil	Rc
N *	NPT
T *	NPTF
F *	Parallel thread


* Semi-standard

Option

Nil	None
P	Manual override

Series VS3135/3145

Construction

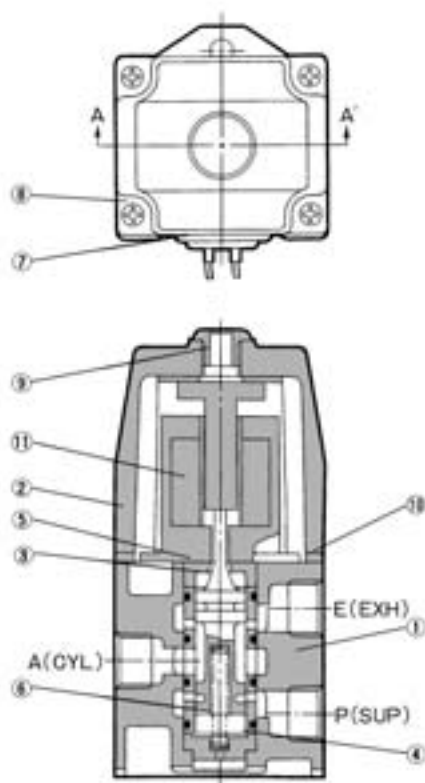

A-A' cross section

Component Parts

No.	Description	Material	Note
1	Body	Aluminum die-casted	Platinum silver
2	Solenoid cover	Aluminum die-casted	Platinum silver
3	Spool/Sleeve	Stainless steel	

⑪ Solenoid Coil Assembly Part No.

Electrical entry	Voltage	Part no.	
		VS3135	VS3145
Grommet	100 VAC	A01-01	A12-01
	200 VAC	A01-02	A12-02
	24 VDC	A07-52	A08-52
Conduit terminal	100 VAC	A01-01-63	A12-01-63
	200 VAC	A01-02-63	A12-02-63
	24 VDC	A07-52-63	A08-52-63


Replacement Parts

No.	Description	Material	Part no.	
			VS3135	VS3145
4	Cap	Resin	XT019-6	AXT103-4
5	Bushing	Resin	XT013-13-2	XT021-12
6	Spring	Steel wire	XT010-15	XT103-5
7	Rubber plug for wire	NBR	XT010-20	XT010-20
8	Round head combination screw	Steel wire	XT010-21	XT010-21
9	Plug for cover	NBR	XT041-1	XT041-1
10	Gasket	NBR	XT013-31-2	NXT030-8

3 Port Direct Operated Solenoid Valve **Series VS3135/3145**

Dimensions

VS3135/3145

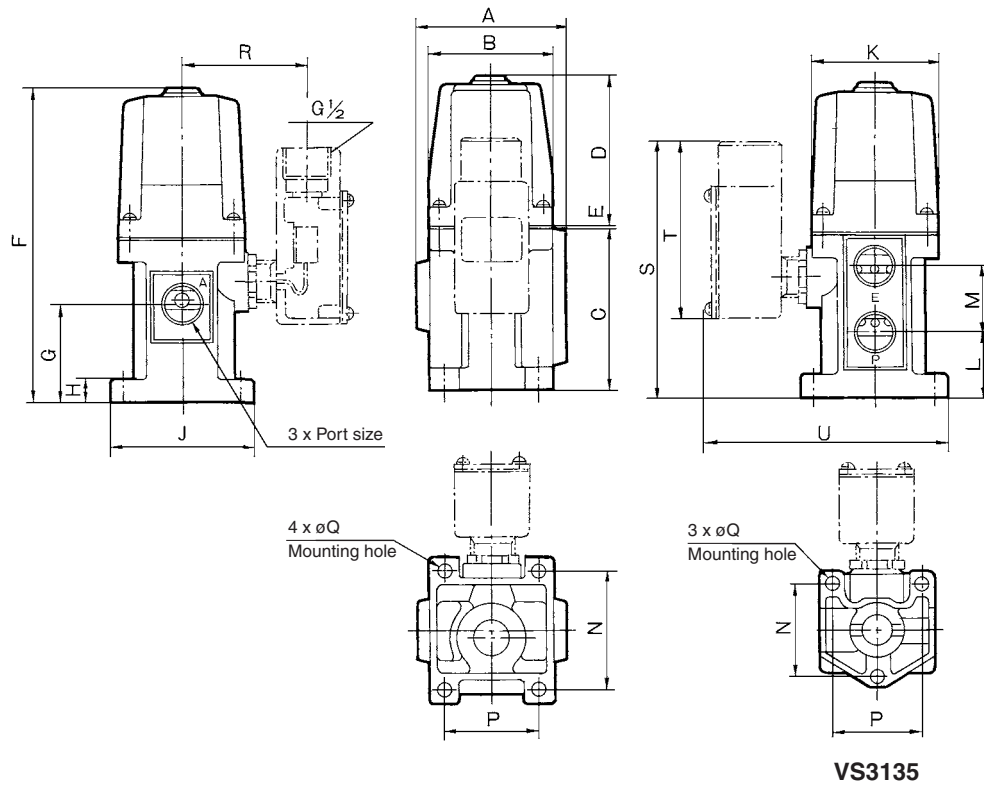

VV061

V100

S070

VQD

VKF


VK

VT

VS

Model	Port size Rc	A	B	C	D	E	F	G	H	J	K	L	M	N	P	øQ	Terminal dimensions			
																	R	S	T	U
VS3135-02	1/4, 3/8, 1/2	64	64	65	70	1	136	35	9	64	54	19	32	50	50	7	60	120	96	118
VS3135-03																				
VS3135-04																				
VS3145-04	1/2, 3/4	82	68	88	92	1	181	53	12	81	70	35	36	66	52	9	66	140	96	133
VS3145-06																				

DC

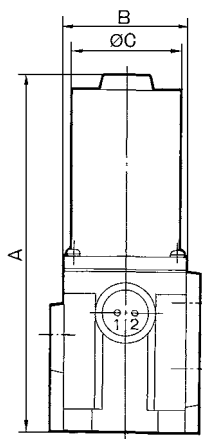

Model	Port size Rc	A	B	øC
VS3135-02	1/4, 3/8, 1/2	129	64	50.8
VS3135-03				
VS3135-04				
VS3145-04	1/2, 3/4	196	68	60.5
VS3145-06				