


Speed Controller with Uni One-touch Fitting Series AS

New-stand male threads for piping that reduces the screw-in time by 1/3.

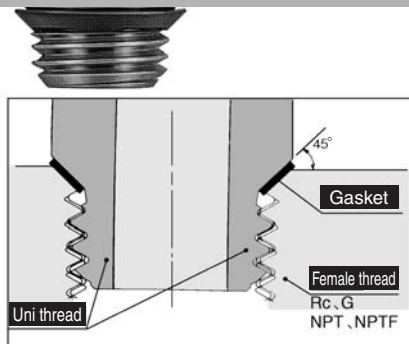

Shape of Uni thread ridge


Use of the chamfered surface of the female thread as the seat surface and adoption of gaskets made by laminating NBR on both surfaces of stainless steel plates achieve secure sealing regardless of the difference of diameters due to the female thread type, deviations due to the tolerance, or the size of the chamfered corner.
(Any standard chamfered female thread can be used.)

A ridge shape has been created as a Uni thread for common applications for Rc, G, NPT and NPTF.

The male thread for piping drastically cuts piping man-hours.



JIS Symbol



Flow Direction Symbols on Body

	Meter-out type	Meter-in type
Indication symbol		
Symbol		

Model

Model		Connection thread Uni thread	Applicable tubing O.D.													
Elbow type	Universal type		Metric size						Inch size							
			3.2	4	6	8	10	12	1 8	5 32	3 16	1 4	5 16	3 8	1 2	
AS22□1F-U01	AS23□1F-U01	1 8	●	●	●	●	●	※		●	●	●	●	●		
AS22□1F-U02	AS23□1F-U02	1 4		●	●	●	●				●	●	●	●		
AS32□1F-U02	AS33□1F-U02	1 4			●	●	●	●					●	●	●	
AS32□1F-U03	AS33□1F-U03	3 8			●	●	●	●					●	●	●	
AS42□1F-U04	AS43□1F-U04	1 2						●	●						●	

Note 1) * Elbow type only

Note 2) □ indicates the control type ("0" for meter-out and "1" for meter-in).

Note 3) Meter-out and meter-in types can be visually differentiated by the lock nut.

The lock nut on the meter-out type is zinc chromated, while that on the meter-in type is black zinc chromate plated.

Note 4) Models marked with "●" are nickel plated as standard.

Specifications

Fluid	Air
Max. operating pressure	1 MPa
Min. operating pressure	0.1 MPa
Proof pressure	1.5 MPa
Ambient and fluid temperature	-5 to 60°C (No freezing)
Number of needle rotations	10 turns
Applicable tubing material ⁽¹⁾	Nylon, Soft-nylon, Polyurethane
Mounting thread	Uni-thread
Thread seal	Gasket
Option	Round lock nut, Electroless nickel plated ⁽²⁾

Note 1) Use caution regarding the max. operating pressure when soft nylon or polyurethane tubing is used.
(Refer to pages 371 and 372 for details.)

Note 2) Brass parts are all electroless nickel plated.

Flow Rate and Effective Area

Model		AS22□1F-U01 AS23□1F-U02		AS22□1F-U02 AS23□1F-U02			AS32□1F AS33□1F			AS42□1F-U04 AS43□1F-U04	
Tubing O.D.	Metric size	ø3.2, ø4	ø6, ø8, ø4	ø4	ø6	ø8, ø10	ø6	ø8	ø10, ø12	ø10	ø12
	Inch size	1⁄8", 5⁄32"	3⁄16", 1⁄4" 5⁄16"	5⁄32"	3⁄16"	1⁄4", 5⁄16" 3⁄8"	1⁄4"	5⁄16"	3⁄8"	3⁄8"	1⁄2"
Controlled flow (Free flow)	Flow rate (ℓ/min (ANR))	180	230	260	390	460	660	790	920	1580	1710
	Effective area (mm²)	2.7	3.7	4	6	7	10	12	14	24	26

Note 1) Flow rate values are measured at 0.5 MPa and 20°C.

Note 2) □ indicates the control type ("0" for meter-out and "1" for meter-in).

How to Order

AS 2 2 1 1F - U02 - 06

Body size

2	1/8, 1/4 standard
3	3/8 standard
4	1/2 standard

Type

2	Elbow
3	Universal

Control type

0	Meter-out
1	Meter-in

With One-touch fitting

Lock nut option

Nil	Hexagon lock nut
J	Round lock nut

Made to Order

X260	Antistatic type
------	-----------------

Refer to page 450 for details.

Option

Nil	None
N	Electroless nickel plated

Applicable tubing O.D. Note)

Metric size	Inch size
23	01
04	03
06	05
08	07
10	09
12	11
	13


Note) For applicable tubing O.D. selection, refer to the Model on page 445.
* Use 01/8" tube.

Bore size


U01	Uni 1/8
U02	Uni 1/4
U03	Uni 3/8
U04	Uni 1/2

Needle Valve/Flow Characteristics


AS2201F-U01, AS2211F-U01
AS2301F-U01, AS2311F-U01

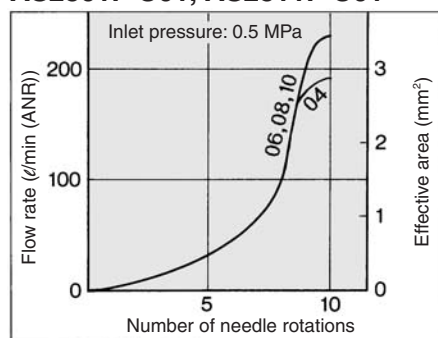


AS2201F-U02, AS2211F-U02
AS2301F-U02, AS2311F-U02

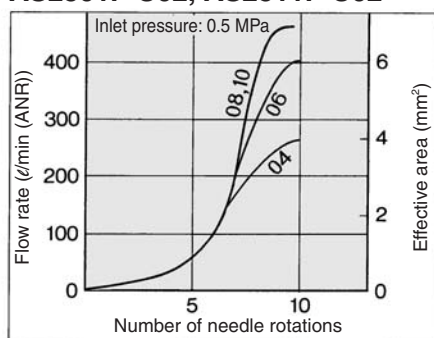

AS3201F, AS3211F
AS3301F, AS3311F

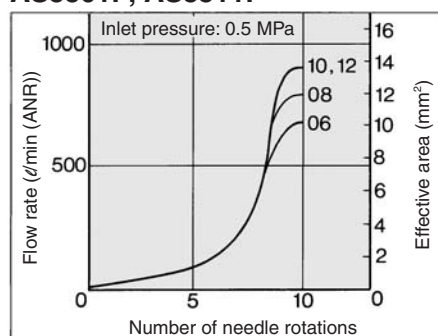


AS4201F, AS4211F
AS4301F, AS4311F

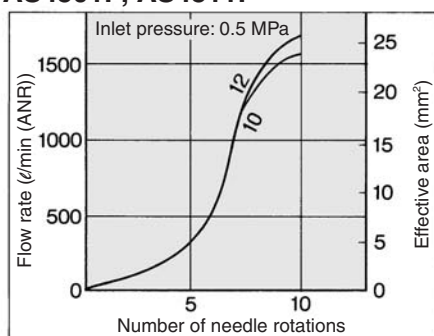


Construction/Component Parts


Elbow type Meter-out type

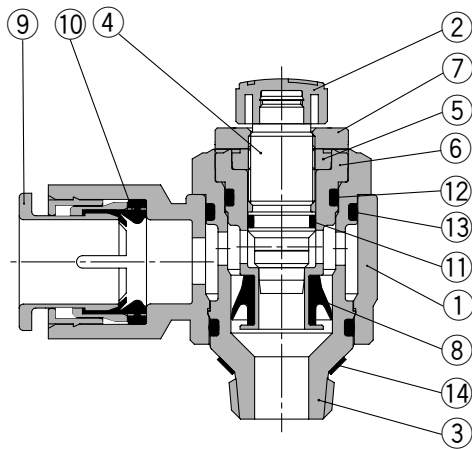


Meter-in type

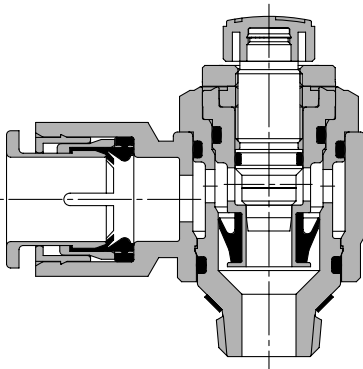

Universal type Meter-out type

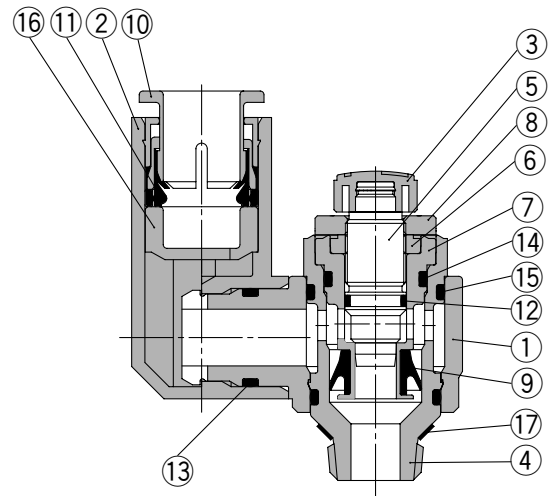

Meter-in type

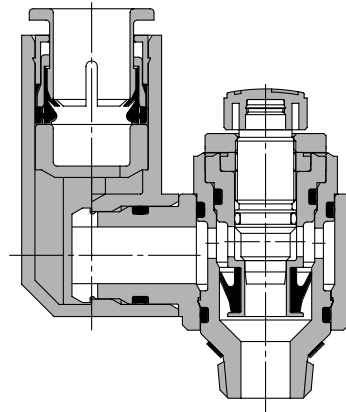

Component Parts: Elbow Type

No.	Description	Material	Note
1	Body A	PBT	
2	Handle	PBT	
3	Body B	Brass	Electroless nickel plated
4	Needle	Brass	Electroless nickel plated
5	Needle guide	Brass	Electroless nickel plated
6	Seat ring	Brass	(1)
7	Lock nut	Steel	Zinc chromated (2)
8	U seal	HNBR	
9	Cassette	—	
10	Seal	NBR	
11	O-ring	NBR	
12	O-ring	NBR	
13	O-ring	NBR	
14	Gasket	NBR, Stainless steel	

Note 1) Only AS22□1F-U01 and AS32□1F-U02 are electroless nickel plated.
Note 2) Meter-in type is black zinc chromate plated.

Component Parts: Universal Type

No.	Description	Material	Note
1	Body A	PBT	
2	Elbow body	PBT	
3	Handle	PBT	
4	Body B	Brass	Electroless nickel plated
5	Needle	Brass	Electroless nickel plated
6	Needle guide	Brass	Electroless nickel plated
7	Seat ring	Brass	(1)
8	Lock nut	Steel	Zinc chromated (2)
9	U seal	HNBR	
10	Cassette	—	
11	Seal	NBR	
12	O-ring	NBR	
13	O-ring	NBR	
14	O-ring	NBR	
15	O-ring	NBR	
16	Spacer	—	
17	Gasket	NBR, Stainless steel	

Note 1) Only AS22□1F-U01 and AS32□1F-U02 are electroless nickel plated.
Note 2) Meter-in type is black zinc chromate plated.

AS

ASP

ASN

AQ

ASV

AK

VCHC

ASS

ASR
ASQ


KE

TMH

Series AS



Elbow Type/Metric Size

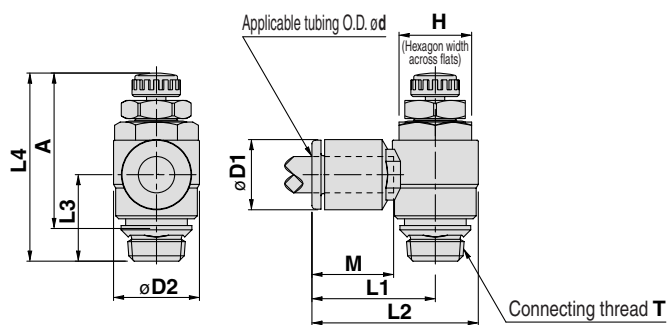


Model	Applicable tubing O.D. ød	T Uni thread	H	øD1	øD2	L1	L2	L3	L4 ⁽¹⁾		A ⁽²⁾		M	Mass (g)
									Max.	Min.	Max.	Min.		
AS22□1F-U01-23	3.2	1/8	12	7.8	14.2	20.8	27.9	14.3	36.1	31.1	30.5	25.5	14.5	17
AS22□1F-U01-04	4			8.9		21.1	28.2						15.5	17
AS22□1F-U01-06	6			11.0		22.5	29.6						18.5	19
AS22□1F-U01-08	8			15.2		25.3	32.4						21.0	21
AS22□1F-U01-10	10			18.5		33.1	40.2	15.0						
AS22□1F-U02-04	4	1/4	17	8.9	18.5	23.3	32.5	17.2	39.4	34.4	32.0	26.6	14.5	32
AS22□1F-U02-06	6			11.0		23.9	33.1						15.5	32
AS22□1F-U02-08	8			15.2		27.2	36.4						18.5	34
AS22□1F-U02-10	10			18.5		35.3	44.5						19	
AS32□1F-U02-06	6			1/4		19	11.0	23.0	26.4	37.9	20.3	45.9	40.9	38.1
AS32□1F-U02-08	8	15.2	29.5		41.0		18.5		55					
AS32□1F-U02-10	10	18.5	31.8		43.3		21.0		57					
AS32□1F-U02-12	12	20.9	32.8		44.3		22.0		59					
AS32□1F-U03-06	6	3/8	19	11.0	23.0	26.4	37.9	19.4	45.0	40.0	37.6	32.6	15.5	53
AS32□1F-U03-08	8			15.2		29.5	41.0						18.5	55
AS32□1F-U03-10	10			18.5		31.8	43.3						21.0	57
AS32□1F-U03-12	12			20.9		32.8	44.3						22.0	59
AS42□1F-U04-10	10	1/2	24	18.5	28.6	33.6	47.9	22.4	54.6	47.1	44.5	37.0	21.0	94
AS42□1F-U04-12	12			21.7		34.6	48.9						22.0	95

Note 1) Reference dimensions

Note 2) Reference dimensions of Uni thread after installation.



Universal Type/Metric Size

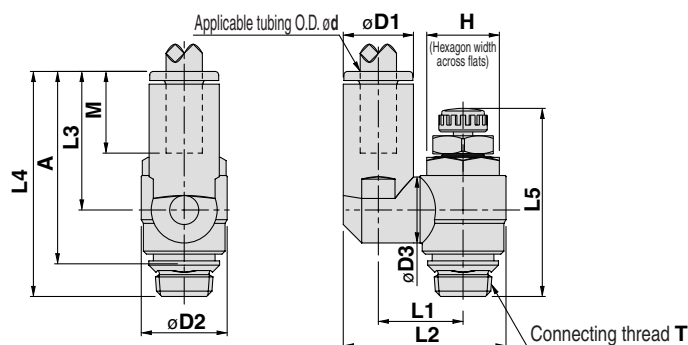


Model	Applicable tubing O.D. ϕd	T Uni thread	H	$\phi D1$	$\phi D2$	$\phi D3$	L1	L2	L3	L4	L5 ⁽¹⁾		A ⁽²⁾		M	Mass (g)
											Max.	Min.	Max.	Min.		
AS23□1F-U01-23	3.2	1/8	12	7.8	14.2	9.3	13.4	24.8	18.9	33.2	36.1	31.1	30.5	25.5	14.5	17
AS23□1F-U01-04	4			8.9		10.9	14.5	27.1	20.6	34.9					15.5	18
AS23□1F-U01-06	6			11.0		12.9	16.2	30.9	24.7	38.2					18.5	21
AS23□1F-U01-08	8			15.2		12.9	16.2	30.9	24.7	38.2					18.5	21
AS23□1F-U02-04	4			8.9		9.3	15.6	29.2	18.9	36.1	39.4	34.4	32.0	26.6	14.5	32
AS23□1F-U02-06	6	1/4	17	11.0	18.5	10.9	16.7	31.4	20.6	37.8					15.5	33
AS23□1F-U02-08	8			15.2		12.9	18.3	35.2	24.4	40.8					18.5	36
AS23□1F-U02-10	10			18.5		12.9	19.6	38.1	26.8	43.2					21.0	40
AS33□1F-U02-06	6			11.0		10.9	18.9	35.9	20.6	42.5	45.9	40.9	38.1	33.1	15.5	54
AS33□1F-U02-08	8	1/4	19	15.2	23.0	12.9	20.6	39.7	24.4	43.7					18.5	57
AS33□1F-U02-10	10			18.5		16.2	22.5	43.3	28.3	48.6					21.0	61
AS33□1F-U02-12	12			20.9		16.2	23.5	45.5	29.3	49.6					22.0	63
AS33□1F-U03-06	6			11.0		10.9	18.9	35.9	20.6	41.6	45.0	40.0	37.6	32.6	15.5	54
AS33□1F-U03-08	8	3/8	19	15.2	23.0	12.9	20.6	39.7	24.4	42.8					18.5	57
AS33□1F-U03-10	10			18.5		16.2	22.5	43.3	28.3	47.7					21.0	61
AS33□1F-U03-12	12			20.9		16.2	23.5	45.5	29.3	48.7					22.0	63
AS43□1F-U04-10	10	1/2	24	18.5	28.6	16.2	25.3	48.9	28.3	50.7	54.6	47.1	44.5	37.0	21.0	98
AS43□1F-U04-12	12			20.9		19.4	26.8	51.6	30.8	53.2					22.0	100

Note 1) Reference dimensions

Note 2) Reference dimensions of Uni thread after installation.



Elbow Type/Inch Size

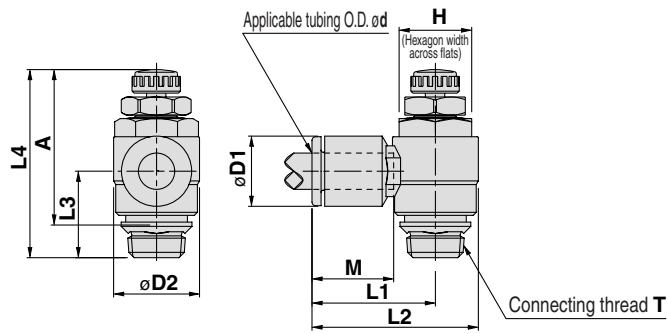


Model	Applicable tubing O.D. ød	T Uni thread	H	øD1	øD2	L1	L2	L3	L4 ⁽¹⁾		A ⁽²⁾		M	Mass (g)
									Max.	Min.	Max.	Min.		
AS22□1F-U01-01	1 8"	1 8	12	7.8	14.2	20.8	27.9	14.3	36.1	31.1	30.5	25.5	14.5	17
AS22□1F-U01-03	5 32"			8.9		21.1	28.2						16.5	17
AS22□1F-U01-05	3 16"			11.4		23.1	30.2						16.5	18
AS22□1F-U01-07	1 4"			13.2		23.9	31.0						17.0	19
AS22□1F-U01-09	5 16"			15.2		25.3	32.4						18.5	19
AS22□1F-U02-03	5 32"	1 4	17	8.9	18.5	23.3	32.5	17.2	39.4	34.4	32.0	26.6	14.5	32
AS22□1F-U02-05	3 16"			11.4		24.9	34.2						16.5	33
AS22□1F-U02-07	1 4"			13.2		25.2	34.5						17.0	33
AS22□1F-U02-09	5 16"			15.2		27.2	36.4						18.5	34
AS22□1F-U02-11	3 8"			17.9		35.3	44.5						19	21.0
AS32□1F-U02-07	1 4"	1 4	19	13.2	23.0	27.8	39.3	20.3	45.9	40.9	38.1	33.1	17.0	54
AS32□1F-U02-09	5 16"			15.2		29.5	41.0						18.5	55
AS32□1F-U02-11	3 8"			17.9		31.8	43.3						21.0	57
AS32□1F-U03-07	1 4"	3 8	19	13.2	23.0	27.8	39.3	19.4	45.0	40.0	37.6	32.6	17.0	54
AS32□1F-U03-09	5 16"			15.2		29.5	41.0						18.5	55
AS32□1F-U03-11	3 8"			17.9		31.8	43.3						21.0	57
AS42□1F-U04-11	3 8"	1 2	24	17.9	18.6	33.6	47.9	22.4	54.6	47.1	44.5	37.0	21.0	94
AS42□1F-U04-13	1 2"			21.4		35.2	49.5						22.0	96

Note 1) Reference dimensions

Note 2) Reference dimensions of Uni thread after installation.



Universal Type/Inch Size

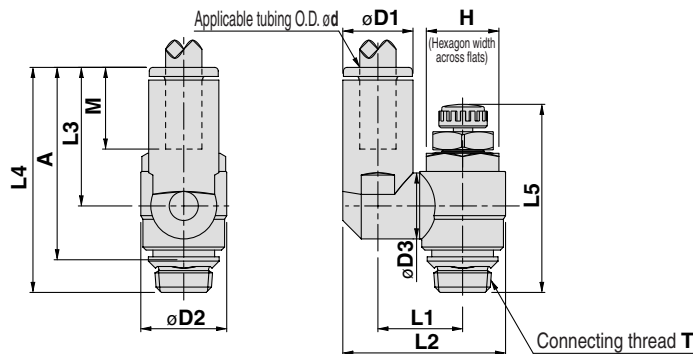

Model	Applicable tubing O.D. ød	T Uni thread	H	øD1	øD2	øD3	L1	L2	L3	L4	L5 (1)		A (2)		M	Mass (g)
											Max.	Min.	Max.	Min.		
AS23□1F-U01-01	1/8"	1/8	12	7.8	14.2	9.3	13.4	24.8	18.9	33.2	36.1	31.1	30.5	25.5	14.5	17
AS23□1F-U01-03	5/32"			8.9		10.3	14.2	27.0	21.5	35.9					16.5	19
AS23□1F-U01-05	3/16"			11.4		11.4	15.2	28.9	22.3	36.3					17.0	20
AS23□1F-U01-07	1/4"			13.2		12.9	16.2	30.9	24.7	38.2					18.5	21
AS23□1F-U01-09	5/16"	1/4	17	15.2	18.5	12.9	16.2	30.9	24.7	38.2	39.4	34.4	32.0	26.6	14.5	32
AS23□1F-U02-03	5/32"			8.9		9.3	15.6	29.2	18.9	36.1					16.5	34
AS23□1F-U02-05	3/16"			11.4		10.3	16.4	31.1	21.5	38.8					17.0	34
AS23□1F-U02-07	1/4"			13.2		11.4	17.4	33.2	22.3	39.5					18.5	36
AS23□1F-U02-09	5/16"	3/8	19	15.2	23.0	12.9	18.3	35.2	24.4	40.8	45.0	40.0	37.6	32.6	29.4	39
AS23□1F-U02-11	3/8"			17.9		19.6	38.1	26.8	43.2	44.2					17.0	56
AS33□1F-U02-07	1/4"			13.2		11.4	19.6	37.7	22.3	44.2	45.9	40.9	38.1	33.1	18.5	57
AS33□1F-U02-09	5/16"			15.2		12.9	20.6	39.7	24.4	42.8					21.0	61
AS33□1F-U02-11	3/8"	1/2	24	17.9	28.6	16.2	22.5	42.9	28.3	47.7					21.0	61
AS33□1F-U03-07	1/4"			13.2		11.4	19.6	37.7	22.3	43.3	54.6	47.1	44.5	37.0	17.0	56
AS33□1F-U03-09	5/16"			15.2		12.9	20.6	39.7	24.4	42.8					18.5	57
AS33□1F-U03-11	3/8"			17.9		16.2	22.5	42.9	28.3	47.7					21.0	61
AS43□1F-U04-11	3/8"	1/2	24	17.9	28.6	16.2	25.3	48.6	28.3	50.7	54.6	47.1	44.5	37.0	21.1	97
AS43□1F-U04-13	1/2"			21.7		19.4	26.8	52.5	30.8	53.2					22.0	100

Note 1) Reference dimensions

Note 2) Reference dimensions of Uni thread after installation.

Antistatic Type

X260

Model

Model	Applicable tubing O.D.			
	Metric size			
	4	6	8	10
AS22□1F-U01	●	●	●	●
AS22□1F-U02	●	●	●	●
AS32□1F-U03		●	●	

Note 1) Electroless nickel plated

How to Order

