



Speed Controller with One-touch Fittings/Centralized Piping Type Series *AS-DPP00092/00093*

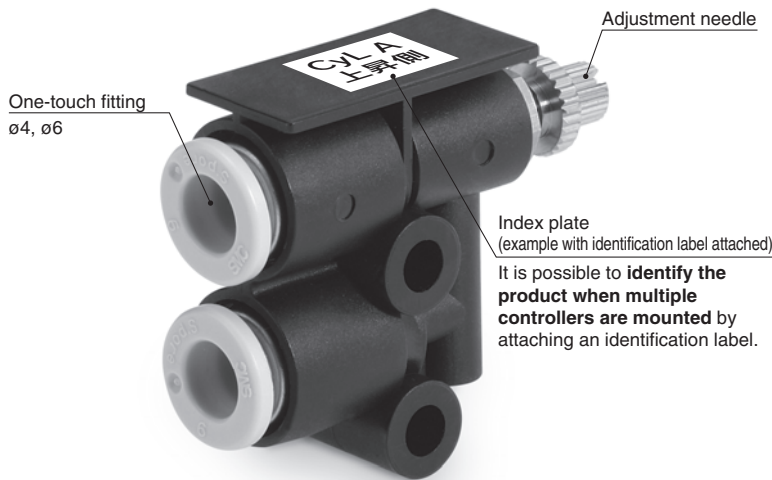

Installation example

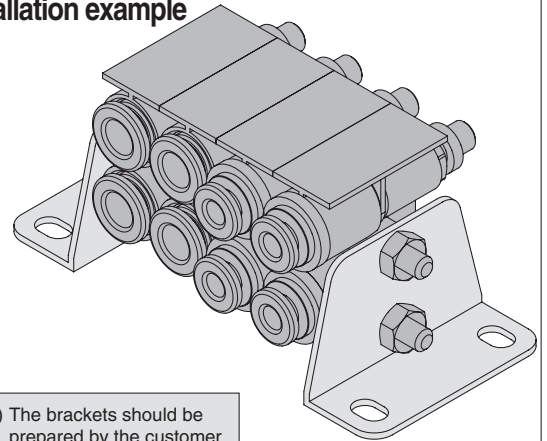

Specifications

Model	AS-DPP00092	AS-DPP00093
Applicable tubing O.D.	ø4	ø6
Fluid	Air	
Proof pressure	1.5 MPa	
Max. operating pressure	1 MPa (0.7 MPa Note 1))	
Min. operating pressure	0.1 MPa	
Ambient and fluid temperature	-5 to 60°C (No freezing)	
Applicable tubing material Note 1)	Nylon, Soft nylon, Polyurethane	


Note 1) Use caution at the max. operating pressure when soft nylon or polyurethane tubing is used.

(Refer to pages 371 and 372 of Best Pneumatics Vol. 6)


Note 2) Brass parts are all electroless nickel plated.

Flow-rate Characteristics

AS-DPP00092 AS-DPP00093

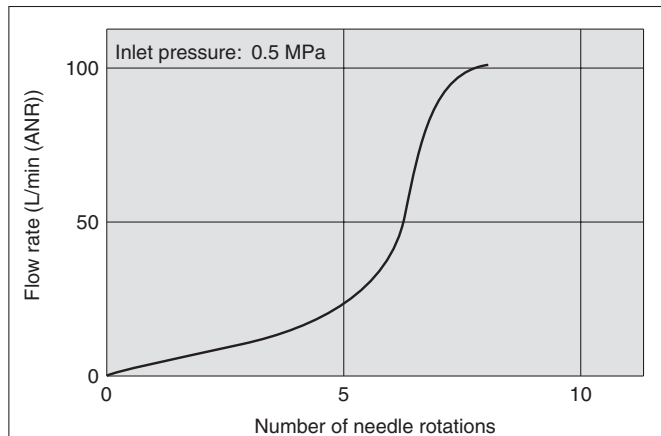

Dimensions

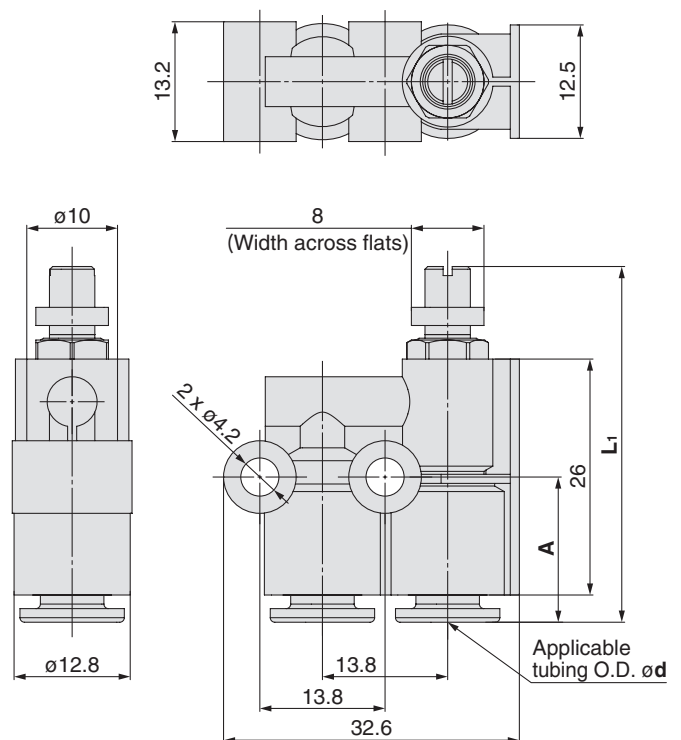

Dimensions

Model	Applicable tubing O.D. d	A	L1 (mm)	
			MAX.	MIN.
AS-DPP00092	4	19.4	46.9	42.7
AS-DPP00093	6	16	43.5	39.3