

DIAPHRAGM

Pumps and Compressors

107 Series

MODELS:

Standard models available.

107CAB18, 107CCD18, 107CEF18, 107CGH18
107CDC20

Other models based on availability and minimum purchase.

FEATURES (AC& DC):

- Oil-less operation
- Permanently lubricated bearings
- Closed housing and motor vents (107CDC/C only)
- Stainless valves
- Die cast aluminum head, valve plate and diaphragm hold down plate with dichromate conversion treatment
- Balanced for smooth, low vibration operation
- Long-life diaphragm
- Field service capability
- UL® recognized motor and thermal protector (115 Volt, AC only)
- Inlet filter
- CE approval on all standard 220-240/50hz models (Consult factory for non-standard models.)


Consult factory for custom applications



107CAB, CCD



107CEF, CGH




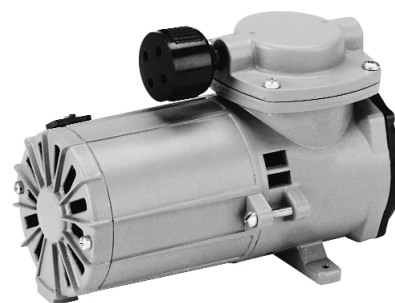


107CDC







107 SERIES (AC) PERFORMANCE DATA:

				STANDARD						STANDARD	
MODEL NUMBER:		107CAB050		107CAB11		107CAB14		107CAB18		107CCD050	
HEAD CONFIGURATION:		Pressure/Vacuum		Pressure/Vacuum		Pressure/Vacuum		Pressure/Vacuum		Pressure/Vacuum	
STROKE:		.050 Inches		.110 Inches		.140 Inches		.180 Inches		.050 Inches	
PRESSURE:		Flow @ 115v/110v		Flow @ 115v/110v		Flow @ 115v/110v		Flow @ 115v/110v		Flow @ 230v/220v	
CFM @ PSI		LPM @ bar									
PSI	bar	CFM	LPM	CFM	LPM	CFM	LPM	CFM	LPM	CFM	LPM
0	0	.19 / .17	5.4 / 4.8	.49 / .40	13.9 / 11.3	.66 / .55	18.7 / 15.6	.69 / .58	19.5 / 16.4	.18 / .15	5.1 / 4.2
5	.5	.02 / .03		.31 / .28	7.1 / 6.4	.45 / .40	11.1 / 10.1	.60 / .49	15.8 / 12.9	.10 / .08	1.8 / 1.4
10	1.0			.18 / .16	2.3 / 2.0	.32 / .30	6.8 / 6.0	.51 / .41	11.6 / 9.9		
15	1.5			.07 / .06		.23 / .20	3.0 / 2.7	.40 / .33	8.0 / 6.4		
20	2.0					.13 / .12		.31 / .25	4.5 / 3.5		
25	3.0					.06 / .05		.23 / .18			
30								.14 / .11			
35											
MAX. CONTINUOUS PRESSURE:		5 PSI	0.3 bar	15 PSI	1.0 bar	25 PSI	1.7 bar	20 PSI	1.4 bar	5 PSI	0.3 bar
MAX. INTERMITTENT PRESSURE:		5 PSI	0.3 bar	15 PSI	1.0 bar	25 PSI	1.7 bar	30 PSI	2.1 bar	5 PSI	0.3 bar
VACUUM:		Flow @ 115v/110v	Flow @ 115v/110v	Flow @ 115v/110v	Flow @ 115v/110v	Flow @ 115v/110v	Flow @ 115v/110v	Flow @ 115v/110v	Flow @ 115v/110v	Flow @ 230v/220v	Flow @ 230v/220v
CFM @ IN. hg	LPM @ mbar (gauge)	CFM	LPM	CFM	LPM	CFM	LPM	CFM	LPM	CFM	LPM
IN. hg	mbar (gauge)	CFM	LPM	CFM	LPM	CFM	LPM	CFM	LPM	CFM	LPM
0	0	.19 / .17	5.4 / 4.8	.49 / .40	13.9 / 11.3	.66 / .55	18.7 / 15.6	.69 / .58	19.5 / 16.4	.18 / .15	5.1 / 4.2
5	-100	.10 / .08		.34 / .27	11.4 / 9.2	.45 / .38	15.2 / 12.7	.54 / .44	17.0 / 14.1	.08 / .06	1.8 / 1.2
10	-200			.19 / .15	8.9 / 7.0	.29 / .25	12.0 / 10.1	.36 / .29	14.4 / 11.7		
15	-400					.16 / .12		.20 / .16	8.6 / 6.9		
20	-600					.25 / .14		.05 / .04	3.4 / 2.7		
25	-800										
MAX. VACUUM:		9.0" hg	-305 mbar	17.2" hg	-582 mbar	20.1" hg	-681 mbar	22.1" hg	-748 mbar	9.0" hg	-305 mbar
MAX. AMBIENT TEMPERATURE:		104°F	40°C	104°F	40°C	104°F	40°C	104°F	40°C	104°F	40°C
MIN. AMBIENT TEMPERATURE:		50°F	10°C	50°F	10°C	50°F	10°C	50°F	10°C	50°F	10°C
MAX. RESTART PRESSURE:		0 PSI	0 bar	0 PSI	0 bar	0 PSI	0 bar	0 PSI	0 bar	0 PSI	0 bar
MAX. RESTART VACUUM:		0" hg	0 mbar	0" hg	0 mbar	0" hg	0 mbar	0" hg	0 mbar	0" hg	0 mbar
MOTOR VOLTAGE/FREQUENCY:		115/60/1-110/50/1	115/60/1-110/50/1	115/60/1-110/50/1	115/60/1-110/50/1	115/60/1-110/50/1	115/60/1-110/50/1	115/60/1-110/50/1	115/60/1-110/50/1	230/60/1-220/50/1	230/60/1-220/50/1
HORSEPOWER:		1/20		1/20		1/20		1/20		1/20	
MOTOR TYPE:		Shaded Pole		Shaded Pole		Shaded Pole		Shaded Pole		Shaded Pole	
CURRENT AT RATED LOAD (AMPS):		1.40 / 1.60		1.45 / 1.64		1.50 / 1.74		1.69 / 2.18		.6 / .8	
POWER AT RATED LOAD (WATTS):		80 / 85		85 / 90		92 / 100		107 / 136		75 / 85	
STARTING CURRENT (LOCKED ROTOR AMPS):		2.77 / 3.09		2.77 / 3.09		2.77 / 3.09		2.77 / 3.09		1.2	
INSULATION CLASS:		B		B		B		B		B	
MIN. FULL LOAD SPEED (RPM):		1740 / 1490		1720 / 1470		1700 / 1430		1630 / 1260		1750 / 1450	
THERMAL PROTECTOR:		Yes		Yes		Yes		Yes		Yes	
CAPACITOR VALUE:											
NET WEIGHT:		5.1 lbs.	2.3 Kg	5.1 lbs.	2.3 Kg	5.1 lbs.	2.3 Kg	5.1 lbs.	2.3 Kg	5.1 lbs.	2.3 Kg

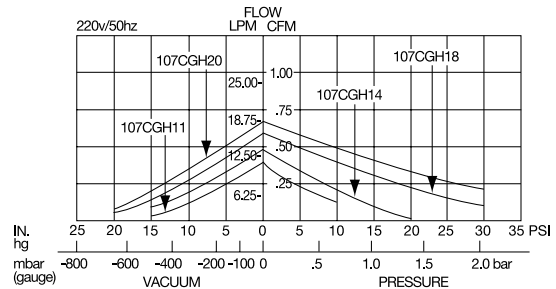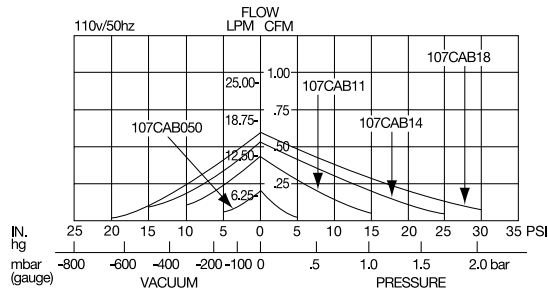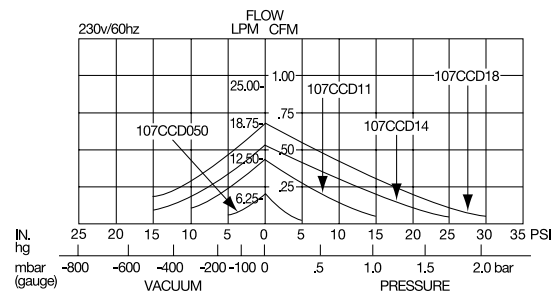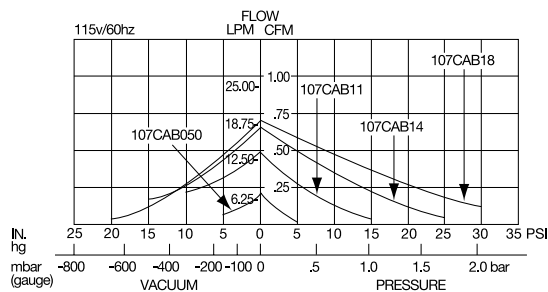


107 SERIES (AC) PERFORMANCE DATA:

		STANDARD							
MODEL NUMBER:		107CEF11		107CEF14		107CEF18		107CEF20	
HEAD CONFIGURATION:		Pressure/Vacuum		Pressure/Vacuum		Pressure/Vacuum		Pressure/Vacuum	
STROKE:		.110 Inches		.140 Inches		.180 Inches		.200 Inches	
PRESSURE:		Flow @ 115v/110v		Flow @ 115v/110v		Flow @ 115v/110v		Flow @ 115v/110v	
CFM @ PSI		LPM @ bar							
PSI	bar	CFM	LPM	CFM	LPM	CFM	LPM	CFM	LPM
0	0	.51 / .43	14.4 / 12.2	.65 / .56	18.4 / 15.9	.73 / .60	20.7 / 17.0	.85 / .75	24.1 / 21.2
5	.5	.29 / .25	6.3 / 5.3	.43 / .37	10.4 / 8.8	.66 / .53	17.3 / 13.9	.69 / .57	18.0 / 15.0
10	1.0	.14 / .11		.29 / .24	5.2 / 4.0	.55 / .44	13.0 / 10.4	.57 / .48	13.1 / 11.3
15	1.5			.17 / .13		.45 / .36	9.1 / 7.5		
20	2.0			.05 / .03		.35 / .29	5.6 / 4.2		
25	3.0					.27 / .22			
30						.18 / .13			
35									
MAX. CONTINUOUS PRESSURE:		10 PSI	0.7 bar	20 PSI	1.4 bar	30 PSI	2.1 bar	10 PSI	0.7 bar
MAX. INTERMITTENT PRESSURE:		10 PSI	0.7 bar	20 PSI	1.4 bar	30 PSI	2.1 bar	10 PSI	0.7 bar
VACUUM:		Flow @ 115v/110v		Flow @ 115v/110v		Flow @ 115v/110v		Flow @ 115v/110v	
CFM @ IN. hg		LPM @ mbar (gauge)							
IN. hg	mbar (gauge)	CFM	LPM	CFM	LPM	CFM	LPM	CFM	LPM
0	0	.51 / .43	14.4 / 12.2	.65 / .56	18.4 / 15.9	.73 / .60	20.7 / 17.0	.85 / .75	24.1 / 21.2
5	-100	.34 / .28	11.6 / 10.0	.43 / .38	14.7 / 12.8	.55 / .46	17.7 / 14.6	.64 / .54	21.0 / 17.7
10	-200	.19 / .15	8.9 / 7.3	.27 / .24	11.4 / 10.0	.38 / .31	14.7 / 12.3	.44 / .37	17.1 / 14.4
15	-400	.05 / .03	4.0 / 3.0	.15 / .14	6.4 / 5.8	.23 / .17	9.2 / 7.3	.28 / .22	11.0 / 9.0
20	-600				2.4 / 2.4	.07 / .05	4.0 / 3.0		5.5 / 4.0
25	-800								
MAX. VACUUM:		16.7" hg	-565 mbar	19.5" hg	-660 mbar	22.7" hg	-769 mbar	23.2" hg	-786 mbar
MAX. AMBIENT TEMPERATURE:		104°F	40°C	104°F	40°C	104°F	40°C	104°F	40°C
MIN. AMBIENT TEMPERATURE:		50°F	10°C	50°F	10°C	50°F	10°C	50°F	10°C
MAX. RESTART PRESSURE:		0 PSI	0 bar	0 PSI	0 bar	0 PSI	0 bar	0 PSI	0 bar
MAX. RESTART VACUUM:		0" hg	0 mbar	0" hg	0 mbar	0" hg	0 mbar	0" hg	0 mbar
MOTOR VOLTAGE/FREQUENCY:		115/60/1-110/50/1		115/60/1-110/50/1		115/60/1-110/50/1		115/60/1-110/50/1	
HORSEPOWER:		1/20		1/20		1/20		1/20	
MOTOR TYPE:		Permanent Split Capacitor		Permanent Split Capacitor		Permanent Split Capacitor		Permanent Split Capacitor	
CURRENT AT RATED LOAD (AMPS):		.86 / 1.15		.93 / 1.22		1.05 / 1.48		1.14 / 1.55	
POWER AT RATED LOAD (WATTS):		70 / 79		77 / 93		90 / 118		99 / 126	
STARTING CURRENT (LOCKED ROTOR AMPS):		2.07 / 2.17		2.07 / 2.17		2.07 / 2.17		2.07 / 2.17	
INSULATION CLASS:		B		B		B		B	
MIN. FULL LOAD SPEED (RPM):		1755 / 1505		1535 / 1480		1720 / 1330		1675 / 1400	
THERMAL PROTECTOR:		Yes		Yes		Yes		Yes	
CAPACITOR VALUE:		5 mfd		5 mfd		5 mfd		5 mfd	
NET WEIGHT:		6 lbs. 2.7 Kg		6 lbs. 2.7 Kg		6 lbs. 2.7 Kg		6 lbs. 2.7 Kg	

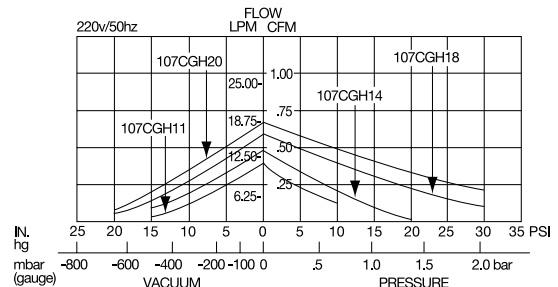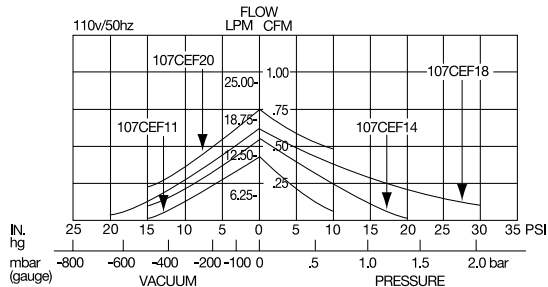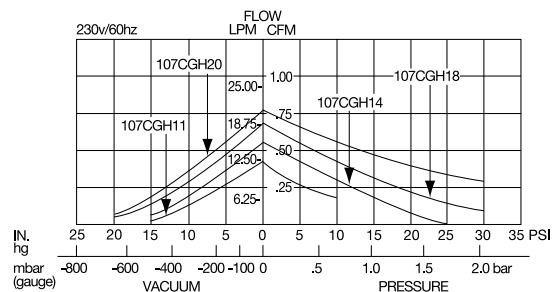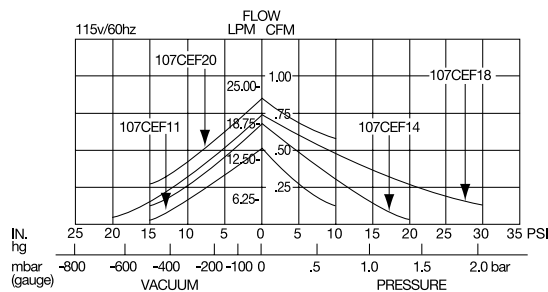


107 SERIES (DC) PERFORMANCE DATA:

		STANDARD			
MODEL NUMBER:		107CDC20		107CDC/C20	
HEAD CONFIGURATION:		Pressure/Vacuum		Pressure/Vacuum	
STROKE:		.200 Inches		.200 Inches	
PRESSURE:		Flow @ 12v		Flow @ 12v	
CFM @ PSI		LPM @ bar			
PSI	bar	CFM	LPM	CFM	LPM
0	0	1.40	39.6	1.40	39.6
5	.5	1.34	35.1	1.34	35.1
10	1.0	1.12	27.1	1.12	27.1
15	1.5	.94	20.2	.94	20.1
20	2.0	.77	14.5	.77	
25	3.0	.61	6.2		
30		.49			
35		.39			
MAX. CONTINUOUS PRESSURE:		35 PSI	2.4 bar	20 PSI	1.4 bar
MAX. INTERMITTENT PRESSURE:		35 PSI	2.4 bar	20 PSI	1.4 bar
VACUUM:		Flow @ 12v		Flow @ 12v	
CFM @ IN. hg	LPM @ mbar (gauge)	CFM	LPM	CFM	LPM
IN. hg	mbar (gauge)	CFM	LPM	CFM	LPM
0	0	1.40	39.6	1.40	39.6
5	-100	1.09	34.4	1.09	34.4
10	-200	.80	29.3	.80	29.3
15	-400	.48	19.3	.48	19.3
20	-600		8.6		8.6
25					
MAX. VACUUM:		22.9" hg	-775 mbar	22.9" hg	-775 mbar
MAX. AMBIENT TEMPERATURE:		104°F	40°C	104°F	40°C
MIN. AMBIENT TEMPERATURE:		50°F	10°C	50°F	10°C
MAX. RESTART PRESSURE:		15 PSI	1.0 bar	15 PSI	1.0 bar
MAX. RESTART VACUUM:		22.9" hg	-775 mbar	22.9" hg	-775 mbar
MOTOR VOLTAGE/FREQUENCY:		12v DC		12v DC	
HORSEPOWER:		1/10		1/10	
MOTOR TYPE:		Permanent Magnet		Permanent Magnet	
CURRENT AT RATED LOAD (AMPS):		8.5		8.5	
POWER AT RATED LOAD (WATTS):					
STARTING CURRENT (LOCKED ROTOR AMPS):		40.0		40.0	
INSULATION CLASS:		A		A	
MIN. FULL LOAD SPEED (RPM):		2970		2970	
THERMAL PROTECTOR:		No		No	
CAPACITOR VALUE:					
NET WEIGHT:		4.5 lbs.	2.0 Kg	4.7 lbs.	2.1 Kg

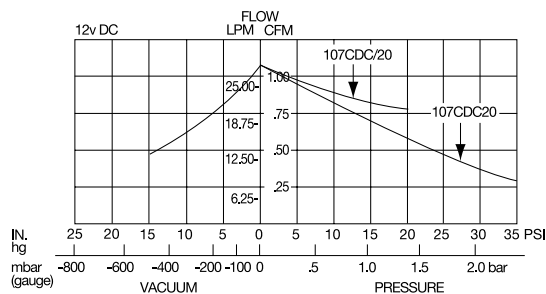


DIMENSIONS:


Millimeters are in ()

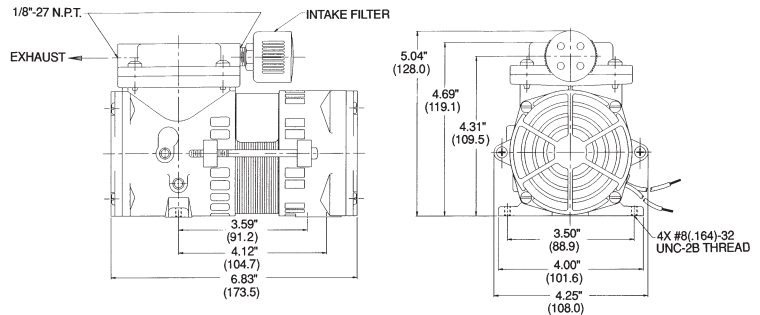

107CAB, CCD

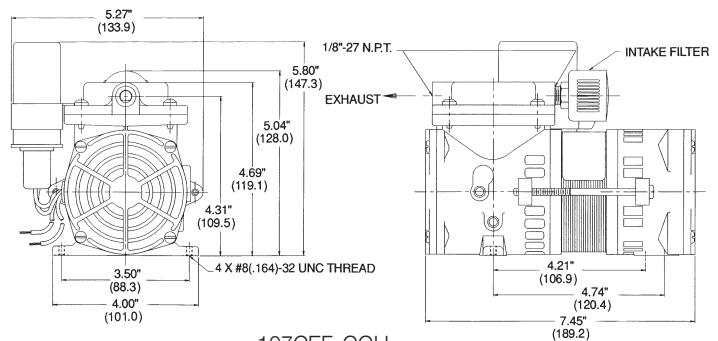

107CEF, CGH

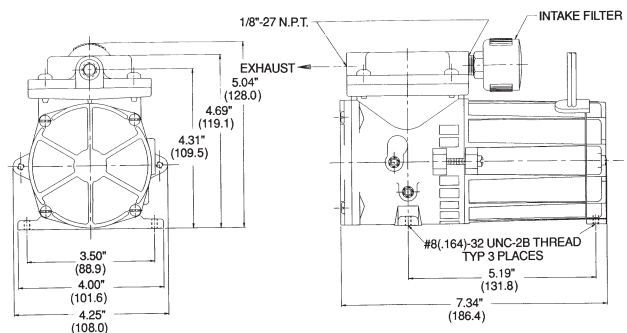

107CDC & 107CDC/C

NOTE: 107CDC/C has closed motor vents

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of Thomas products. It is the responsibility of the user to determine the suitability of the product for his intended use and the user assumes all risk and liability whatsoever in connection therewith. Thomas Industries does not warrant, guarantee or assume any obligation or liability in connection with this information.

Note: Models pictured are representative of the series and do not represent a specific model number. Consult factory for detailed physical description.

