

Pin Clamp Cylinder

Series **C(L)KQG□/C(L)KQP□**

Adjustable height for clamping a workpiece reduces interference with the body!




MK


CKQ
CLKQ

CK□1


CLK2

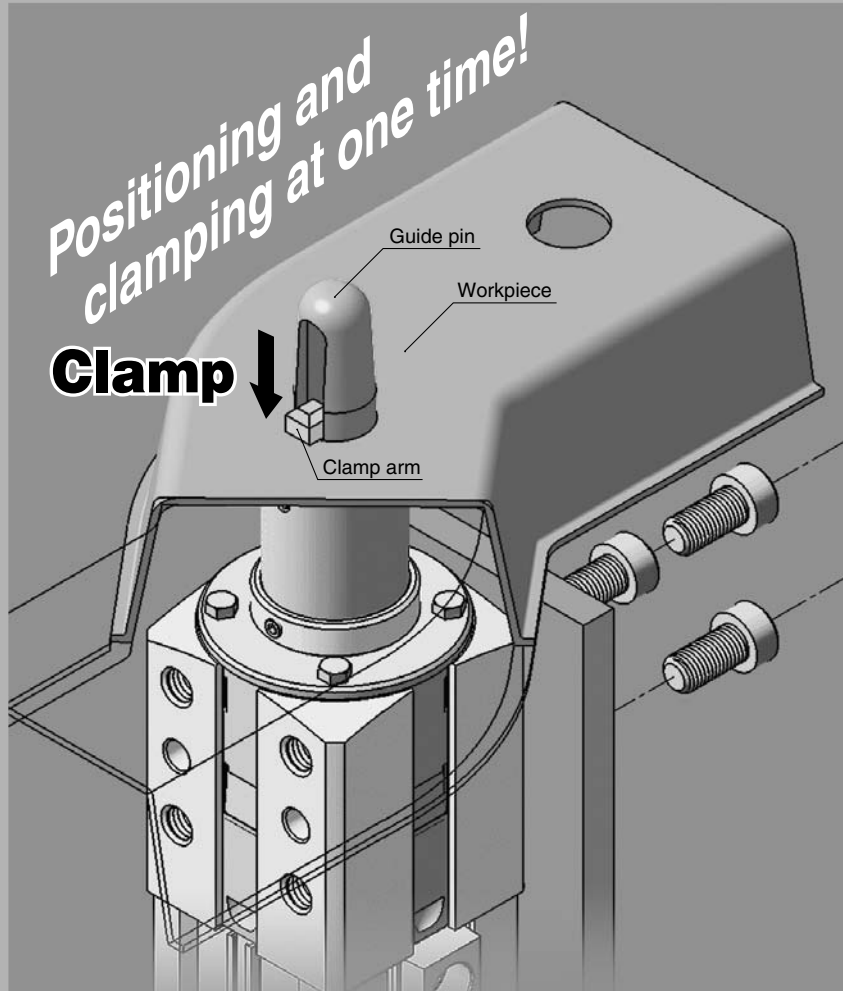

Clamping Height

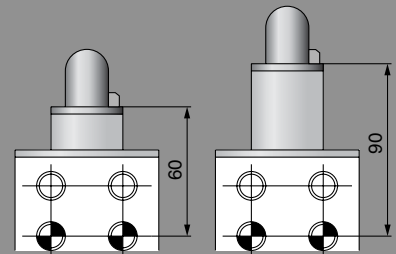

Body shape: **D type**

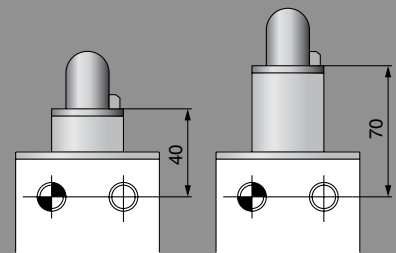


Body shape: **U, K, M type***

* Refer to page 1266 for further details.

55 types of guide pins

Compatible with a broad range of workpiece configurations

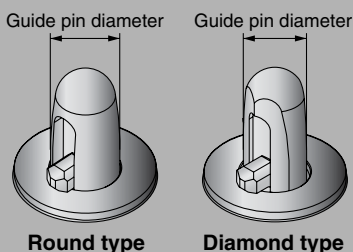

Applicable Guide Pin Diameter

Round type	Guide pin diameter (mm)														
	Applicable hole diameter of workpiece	125	127	128	129	130	14.5	14.7	14.8	14.9	15.0	15.5	15.7	15.8	15.9
Guide pin shape	For ø13			For ø15			For ø16								
	Round type														


Round type Diamond type	Guide pin diameter (mm)																			
	Applicable hole diameter of workpiece	17.5	17.7	17.8	17.9	18.0	19.5	19.7	19.8	19.9	20.0	24.5	24.7	24.8	24.9	25.0	29.5	29.7	29.8	29.9
Guide pin shape	For ø18				For ø20				For ø25				For ø30							
	Round type, Diamond type																			

D-□

-X□


Individual
-X□

Precision adjustment of clamping height is possible by choosing the with-shim type.
[Adjustment range: 0.5 to 3 mm]

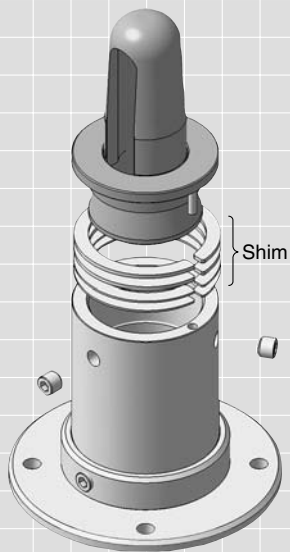

A total shim height of 3 mm consists of 2 shims with a thickness of 1 mm each and 2 shims with a thickness of 0.5 mm each. (assembled before shipping)

Optional locking mechanism is available.

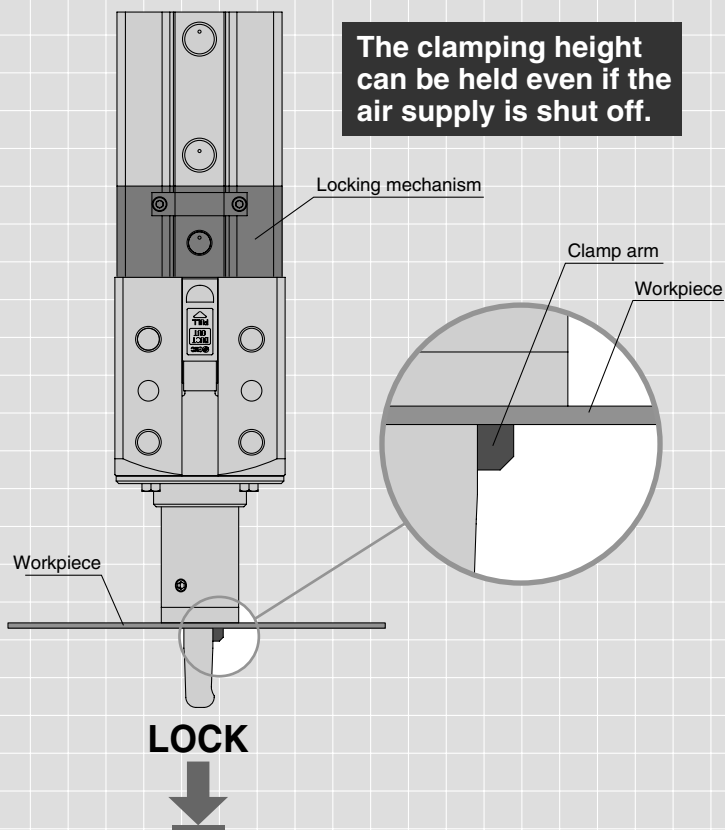


The clamping height can be held even if the air supply is shut off.

4 body types for a broad range of installation conditions


D series

Mounting tap : 4 x M10 x 1.5
 Pin hole : 2 x ø8H7

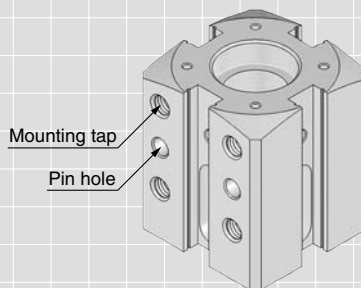


U series

Mounting tap : 2 x M10 x 1.5
 Pin hole : 2 x ø8H7




K series

Mounting tap : 2 x M10 x 1.5
 Pin hole : 2 x ø10H7





















M series

Mounting tap : 2 x M12 x 1.75
 Pin hole : 2 x ø10H7



Pin Clamp Cylinder Mounting Variations

Series C(L)KQG□/C(L)KQP□

Series	Body shape symbol	Dimension	Mounting	Mounting hole (tap, pin hole) arrangement	Mounting surface (viewed from top)	
					Symbol	Port location
C(L)KQG (Built-in standard magnet) C(L)KQP (Built-in strong magnet)	D	□66	Mounting tap: 4 x M10 x 1.5 Pin hole: 2 x ø8H7	Taps are parallel.  ○: Mounting tap ●: Pin hole	A	
					B	
	U		Mounting tap: 2 x M10 x 1.5 Pin hole: 2 x ø8H7	Taps diagonal (top right and bottom left)  ○: Mounting tap ●: Pin hole	A	
					B	
	K		Mounting tap: 2 x M10 x 1.5 Pin hole: 2 x ø10H7	Taps diagonal (top right and bottom left) Taps diagonal (top left and bottom right)  ○: Mounting tap ●: Pin hole	C	Mounting surface with the taps diagonal (top right and bottom left) 
					D	Mounting surface with the taps diagonal (top right and bottom left) 
					E	Mounting surface with the taps diagonal (top left and bottom right) 
					F	Mounting surface with the taps diagonal (top left and bottom right) 
					C	Mounting surface with the taps diagonal (top right and bottom left) 
					D	Mounting surface with the taps diagonal (top left and bottom right) 
	M		Mounting tap: 2 x M12 x 1.75 Pin hole: 2 x ø10H7	Taps diagonal (top right and bottom left) Taps diagonal (top left and bottom right)  ○: Mounting tap ●: Pin hole	C	Mounting surface with the taps diagonal (top right and bottom left) 
					D	Mounting surface with the taps diagonal (top right and bottom left) 
E		Mounting surface with the taps diagonal (top left and bottom right) 				
F		Mounting surface with the taps diagonal (top left and bottom right) 				

P.1268

P.1278

P.1288

P.1298

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□

Individual
-X□

Pin Clamp Cylinder

D series



Series CKQ^G_PD/CLKQ^G_PD

How to Order

Built-in standard magnet
With magnetic field resistant auto switch

C □ KQGD A 50 □ - 177 R A L □ - P4DWSC □

Built-in strong magnet
With magnetic field resistant auto switch

C □ KQP D A 50 □ - 198 R A L □ - P79WSE □

With lock on the clamp side

Nil	Without lock
L	With lock

Number of auto switches

Nil	2 pcs.
S	1 pc. (Unclamp side)

* The D-P4/P7 type is different-surface mounting. (Refer to page 1308.)

Auto switch type

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* For applicable auto switch models, refer to page 1269.

* Auto switches are included, (but not assembled).

Shim

Nil	Without shims
S	With 3 mm shims*


* When a model includes shims, two 1 mm shims and two 0.5 mm shims are attached.

Clamping height (Refer to the below figure.)

L	LOW type (60 mm)
H	HIGH type (90 mm)

LOW type

HIGH type



Clamping height

Body shape

Symbol	Dimension	Mounting hole (tap, pin hole) arrangement	Mounting	Mounting surface (viewed from top)
D	□66	: Mounting tap ● : Pin hole	Mounting tap: 4 x M10 x 1.5 Pin hole: 2 x ø8H7	 Mounting surface (Two facing sides)

Guide pin shape

R	Round type
D	Diamond type*

* Diamond type guide pin diameter is ø17.5 or more.

Clamp arm position (clockwise viewed from top)

A	Same direction as port	C	180° from port
B	90° from port	D	270° from port

Table 1. Guide Pin Diameter

Symbol	125	127	128	129	130	145	147	148	149	150	155	157	158	159	160
Guide pin diameter	12.5	12.7	12.8	12.9	13.0	14.5	14.7	14.8	14.9	15.0	15.5	15.7	15.8	15.9	16.0
Applicable hole diameter of workpiece	For ø13					For ø15					For ø16				
Guide pin shape	Round type														



Round type Diamond type

Symbol	175	177	178	179	180	195	197	198	199	200	245	247	248	249	250	295	297	298	299	300
Guide pin diameter	17.5	17.7	17.8	17.9	18.0	19.5	19.7	19.8	19.9	20.0	24.5	24.7	24.8	24.9	25.0	29.5	29.7	29.8	29.9	30.0
Applicable hole diameter of workpiece	For ø18					For ø20					For ø25					For ø30				
Guide pin shape	Round type, Diamond type																			

Pin Clamp Cylinder *Series CKQ^G_PD/CLKQ^G_PD*

Table 2. Applicable Auto Switches / For detailed specifications about an auto switch for itself, refer to pages 1719 to 1827.

Applicable cylinder series	Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no in use)	Load voltage	Lead wire length	Applicable load
Series C(L)KQG	Solid state auto switch	D-P4DWSC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color display	2-wire (3-4)	24 VDC	0.3 m	Relay, PLC <small>Note 1)</small>
		Grommet		2-wire (1-4)		3 m			
				2-wire	5 m				
Series C(L)KQP	Reed auto switch	D-P79WSE	DC/AC magnetic field	Pre-wired connector	2-color display	2-wire (1-4)	24 VDC	0.3 m	
		Grommet		1-color display	2-wire	24 VDC 100 VAC	3 m		
							5 m		

Note 1) PLC: Programmable Logic Controller

Note 2) There are other applicable auto switches other than the listed above. For details, refer to page 1307.

MK
CKQ
CLKQ
CK□1
CLK2

D-□
-X□
Individual
-X□

Series CKQ^G_PD/CLKQ^G_PD



Basic Specifications

Action	Double acting	
Bore size (mm)	50	
Fluid	Air	
Minimum operating pressure	CKQ□: 0.1 MPa	CLKQ□ (With lock): 0.15 MPa*
Ambient and fluid temperature	-10 to 60°C (No freezing)	
Cushion	None	
Lubrication	Non-lube	
Piston speed (Clamp speed)	50 to 150 mm/sec	
Port size (Cylinder port)	1/4 (Rc, NPT, G)	

* Minimum operating pressure is 0.2 MPa when cylinder part and locking part use the same piping.

Proof Pressure/Maximum Operating Pressure

Guide pin diameter	Proof pressure	Max. operating pressure
ø12.5 to ø13.0	1.0 MPa	0.7 MPa
ø14.5 to ø30.0	1.5 MPa	1.0 MPa

Clamp Specifications

Clamp stroke	Without shims	With shims
	10 mm	10 to 13 mm
Clamp arm	1 pc.	
Guide pin shape	Round type, Diamond type	

* Refer to the below "Clamp Specifications" and Selection regarding detailed specifications of the clamping force, etc.

* Diamond type guide pin diameter is ø17.5 or more.

Lock Specifications

Locking action	Spring locking (Exhaust locking)
Unlocking pressure	0.2 MPa or more
Lock starting pressure	0.05 MPa or less
Locking direction	Lock at extended direction (Clamp holding)
Port size (Lock release port)	1/8 (Rc, NPT, G)
Holding force (N) (Maximum static load)	982

Mass

Unit: kg

Model	C(L)KQ ^G _P D			
	Without lock		With lock	
	L	H	L	H
ø12.5 to 13.0	1.66	1.83	2.18	2.34
ø14.5 to 15.0	1.66	1.83	2.18	2.34
ø15.5 to 16.0	1.67	1.83	2.18	2.35
ø17.5 to 18.0	1.71	1.88	2.22	2.4
ø19.5 to 20.0	1.72	1.89	2.23	2.41
ø24.5 to 25.0	1.78	1.98	2.29	2.5
ø29.5 to 30.0	1.82	2.02	2.33	2.54

Clamp Specifications

(N)

Model	Guide pin diameter	Operating pressure (MPa)								
		0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
CKQ ^G _P	ø12.5 to ø13.0	164.9	329.8	494.7	659.6	824.5	989.4	—	—	—
	ø14.5 to ø30.0	164.9	329.8	494.7	659.6	824.5	989.4	1154.3	1319.2	1484.1
CLKQ ^G _P	ø12.5 to ø13.0	82.4	247.3	412.2	577.1	742.0	906.9	—	—	—
	ø14.5 to ø30.0	82.4	247.3	412.2	577.1	742.0	906.9	Note 1) 1071.8	Note 1) 1236.7	Note 1) 1401.6

Note 1) Lock holding force of the CLKQ□ is 982 N. Design the circuit such that the lock holding force is taken into consideration when the operating pressure exceeds 0.75 MPa.

The operating pressure should be not greater than the lock holding force as it may cause wearing out and/or damage of the locking part and shorten lock life and may lead to possible failure if applied with a load larger than the lock holding force.

Note 2) It takes approximately 0.3 seconds for the cylinder to operate to generate clamping force from an unclamping state (when no speed controller is installed). Design circuit taking into consideration the time before the clamping force is generated.

Note 3) Determine the clamping force according to the strength of the workpiece. It can be damaged if the clamping force is too large.

Maintenance Parts

Replacement Parts: Seal Kit

Kit No.	Content
CQ2B50-PS	Piston seal Rod seal Tube gasket

* Consult SMC for maintenance service. Seal kit for maintenance of the CLKQ^G_P series with lock is not available.

Replacement Parts: Grease Pack


Kit No.	Content
GR-S-010	Grease 10 g

* Consult SMC when replacing the actuating cylinders.

Construction

CKQGDA50

* The below figures indicate the CKQGDA50-□RAL.

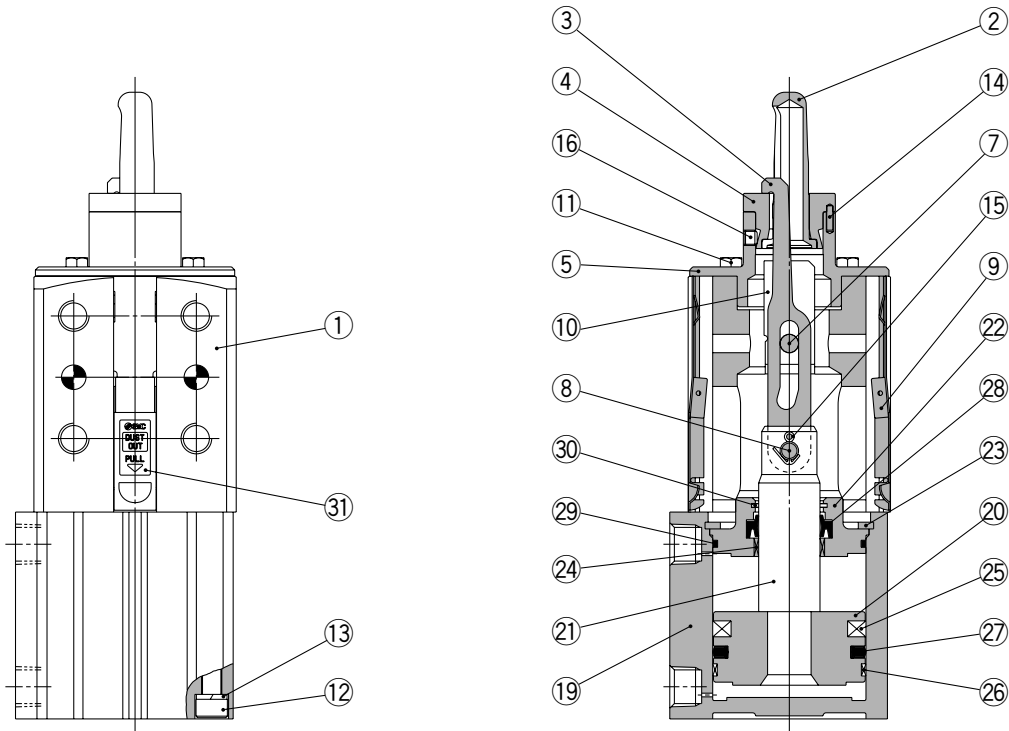


MK

**CKQ
CLKQ**

CK□1

CLK2

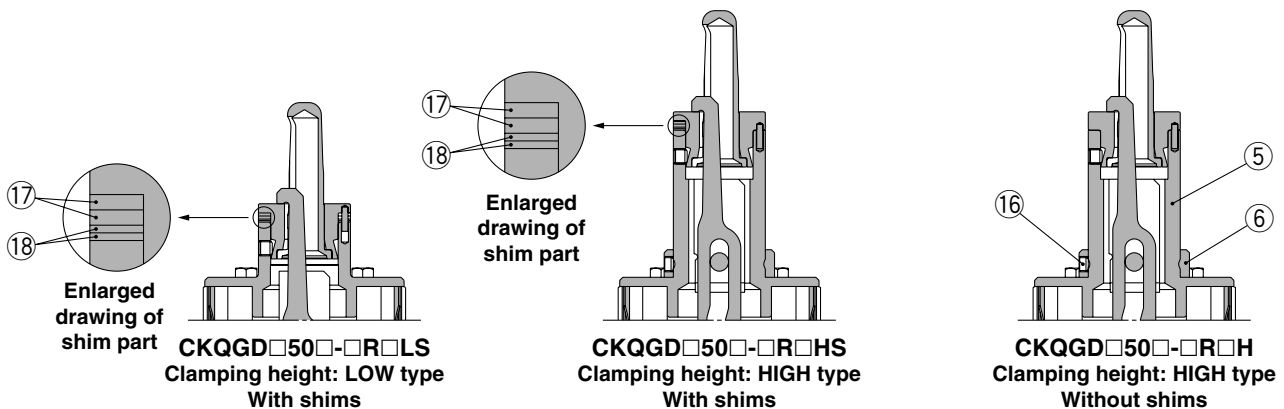

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Piston	Aluminum alloy	
21	Piston rod	Structural steel	
22	Collar	Aluminum alloy	
23	Retaining ring	Tool steel	
24	Bushing	Lead-bronze casted	
25	Magnet	—	
26	Wear ring	Resin	
27	Piston seal	NBR	
28	Rod seal	NBR	
29	Tube gasket	NBR	
30	Coil scraper	Bronze	
31	Seal	PET	

D-□

-X□


**Individual
-X□**

Series CKQ^G_PD/CLKQ^G_PD

Construction

CLKQGDA50

* The below figures indicate the CLKQGDA50-□RAL.

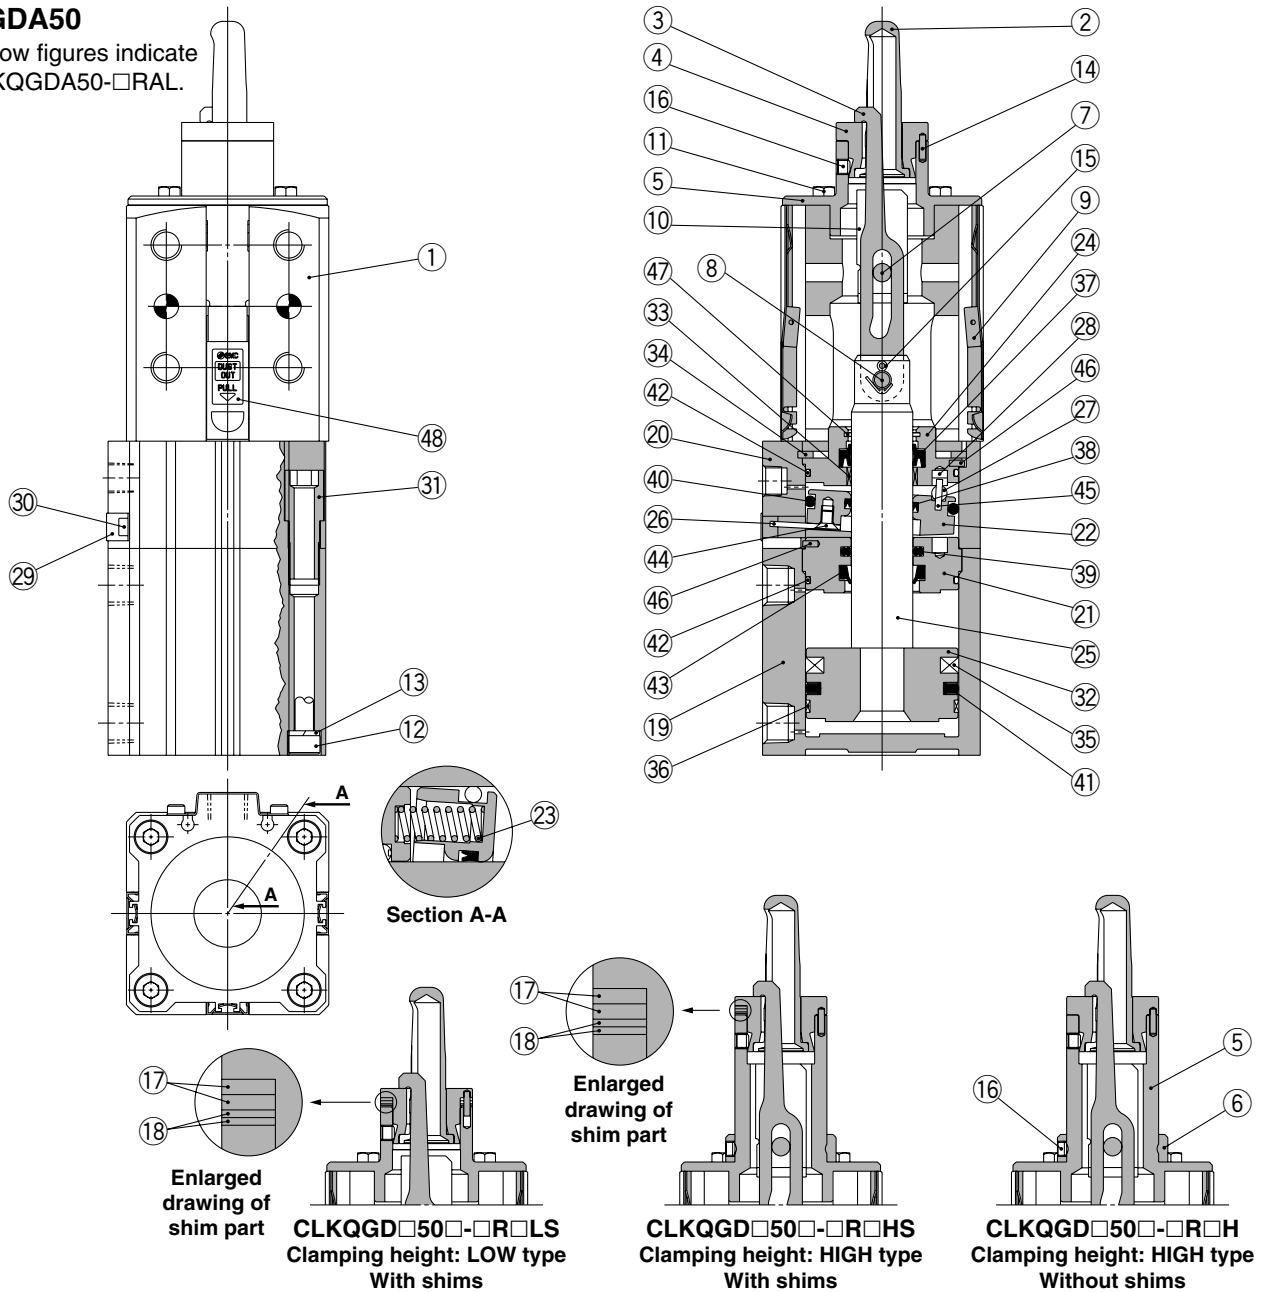

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Lock body	Aluminum alloy	
21	Intermediate collar	Aluminum alloy	
22	Lock ring	Tool steel	
23	Brake spring	Steel wire	
24	Collar	Aluminum alloy	
25	Piston rod	Structural steel	
26	Lever	Stainless steel	
27	Pivot pin	Structural steel	
28	Pivot key	Structural steel	
29	Dust cover	Steel strip	
30	Dust cover holding bolt	Structural steel	
31	Unit holding bolt	Structural steel	
32	Piston	Aluminum alloy	



Component Parts

No.	Description	Material	Note
33	Bushing	Lead-bronze casted	
34	Retaining ring	Tool steel	
35	Magnet	—	
36	Wear ring	Resin	
37	Rod seal A	NBR	
38	Rod seal B	NBR	
39	Rod seal C	NBR	
40	Piston seal A	NBR	
41	Piston seal B	NBR	
42	Tube gasket	NBR	
43	Scraper	NBR	
44	Hex. socket counter-sunk head screw	Structural steel	
45	Spring pin	Tool steel	
46	Parallel pin	Stainless steel	
47	Coil scraper	Bronze	
48	Seal	PET	

Construction

CKQPDA50

* The below figures indicate the CKQPDA50-□RAL.

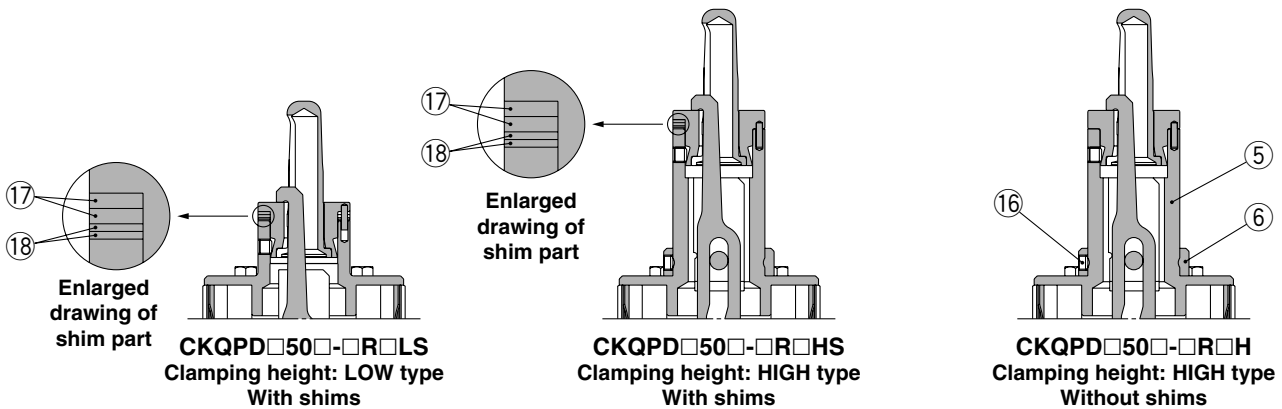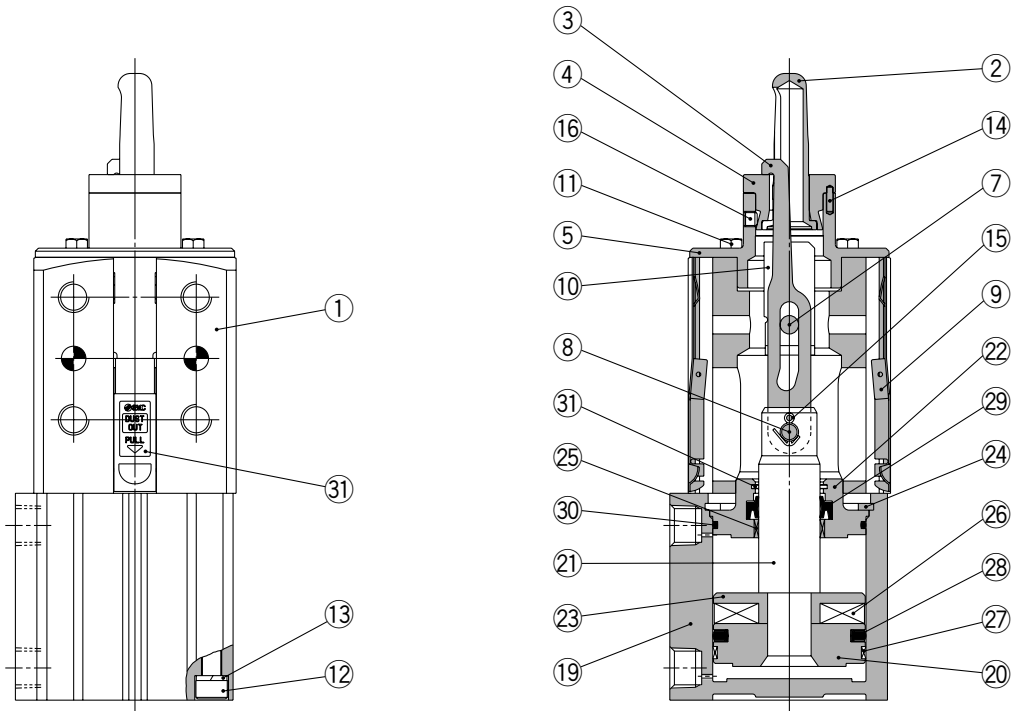

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Piston	Aluminum alloy	
21	Piston rod	Stainless steel	
22	Collar	Aluminum alloy	
23	Magnet holder	Aluminum alloy	
24	Retaining ring	Tool steel	
25	Bushing	Lead-bronze casted	
26	Magnet	—	
27	Wear ring	Resin	
28	Piston seal	NBR	
29	Rod seal	NBR	
30	Tube gasket	NBR	
31	Coil scraper	Bronze	
32	Seal	PET	

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□


Individual
-X□

Series CKQ_P^GD/CLKQ_P^GD

Construction

CLKQPDA50

* The below figures indicate the CLKQPDA50-□RAL.

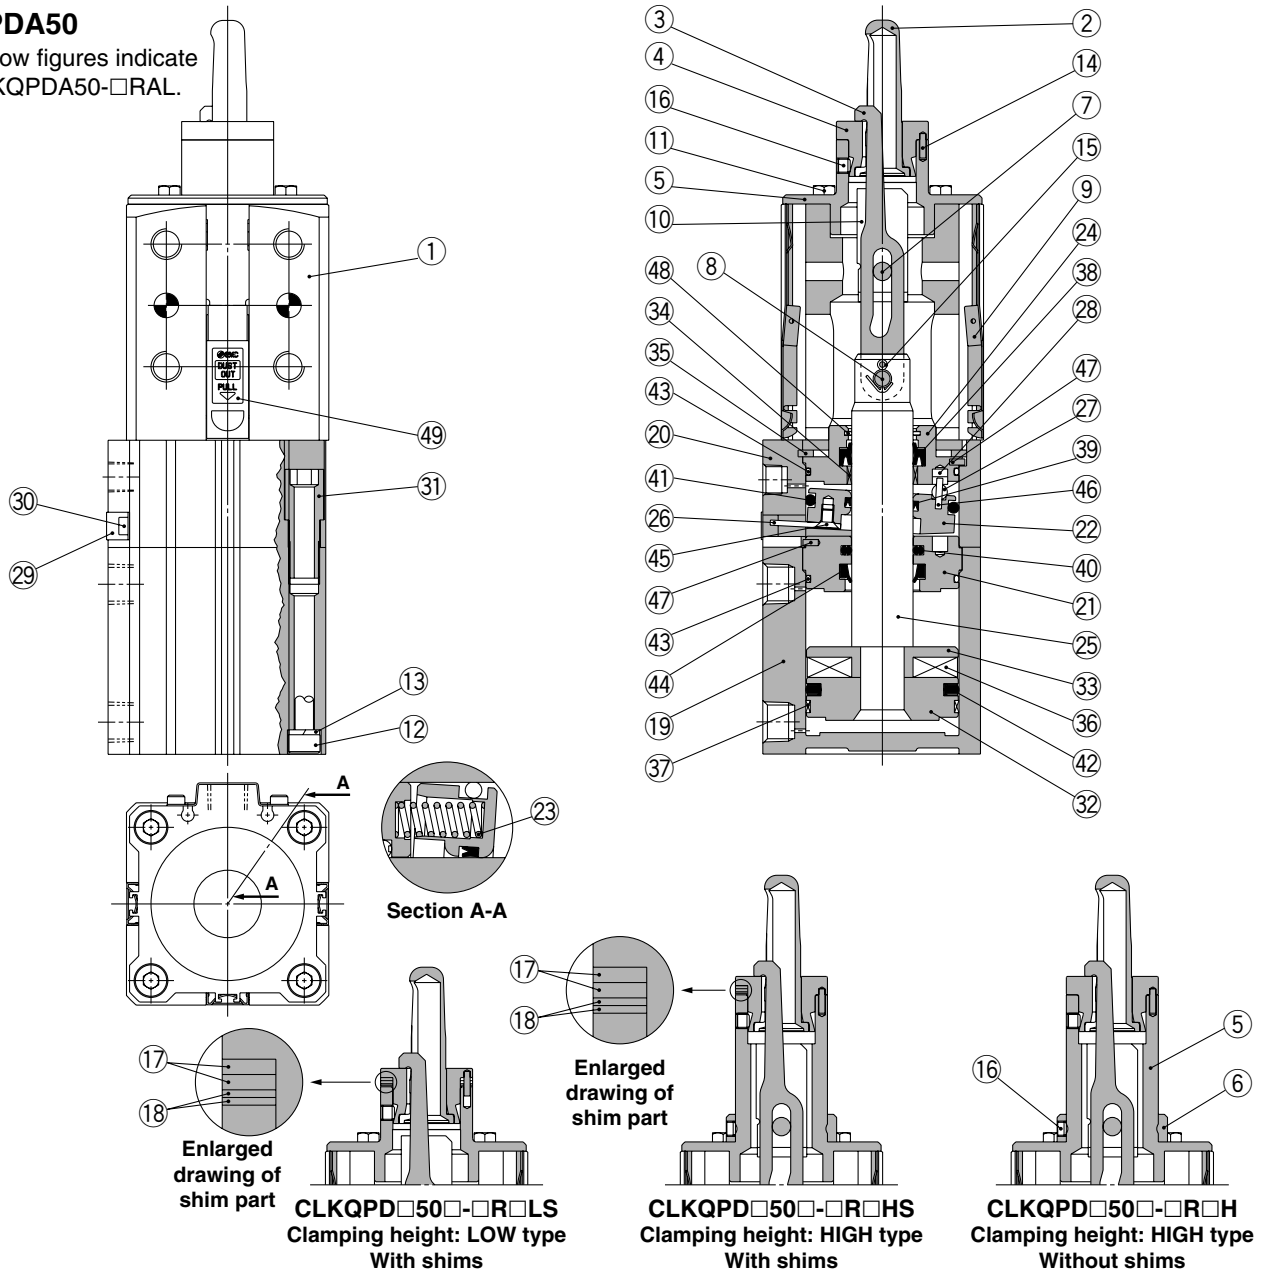

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	
17	Shim A	Stainless steel	t = 1 mm

Component Parts

No.	Description	Material	Note
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Lock body	Aluminum alloy	
21	Intermediate collar	Aluminum alloy	
22	Lock ring	Tool steel	
23	Brake spring	Steel wire	
24	Collar	Aluminum alloy	
25	Piston rod	Stainless steel	
26	Lever	Stainless steel	
27	Pivot pin	Structural steel	
28	Pivot key	Structural steel	
29	Dust cover	Steel strip	
30	Dust cover holding bolt	Structural steel	
31	Unit holding bolt	Structural steel	
32	Piston	Aluminum alloy	
33	Magnet holder	Aluminum alloy	
34	Bushing	Lead-bronze casted	

Component Parts

No.	Description	Material	Note
35	Retaining ring	Tool steel	
36	Magnet	—	
37	Wear ring	Resin	
38	Rod seal A	NBR	
39	Rod seal B	NBR	
40	Rod seal C	NBR	
41	Piston seal A	NBR	
42	Piston seal B	NBR	
43	Tube gasket	NBR	
44	Scraper	NBR	
45	Hex. socket counter-sunk head screw	Structural steel	
46	Spring pin	Tool steel	
47	Parallel pin	Stainless steel	
48	Coil scraper	Bronze	
49	Seal	PET	







Dimensions

CKQ_P^GDA50

(CKQ_P^GDB50 The angle of the cylinder port location against the mounting surface is 90°.)

* Refer to "How to Order" on page 1268 for relationship between the mounting surface and a port location.

* The below figures indicate the CKQ_P^GDA50-□RAH.

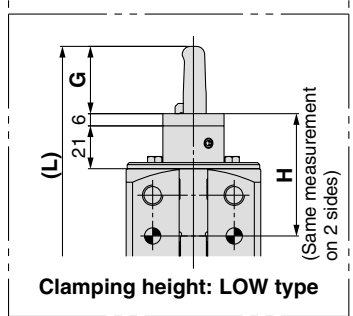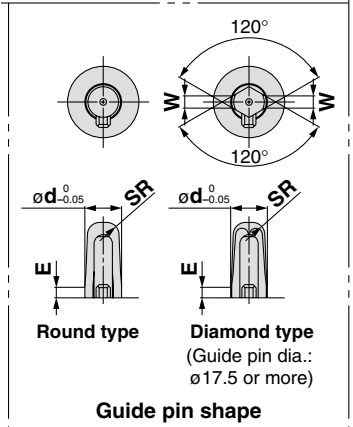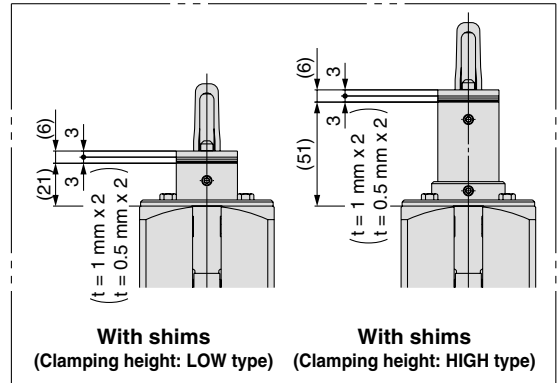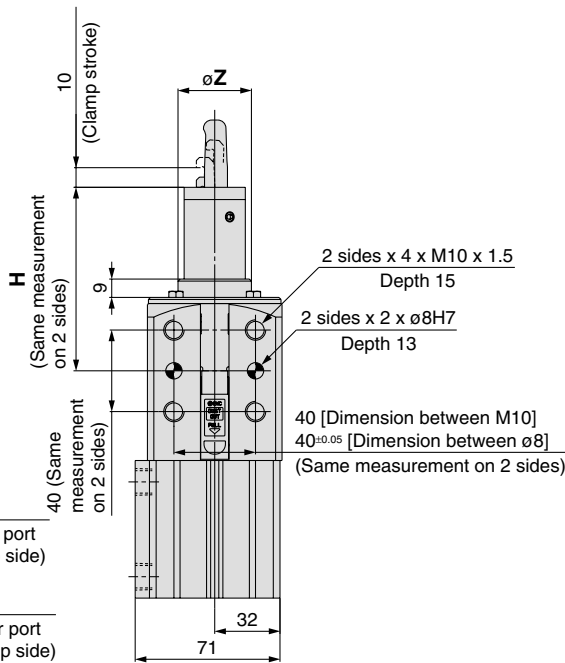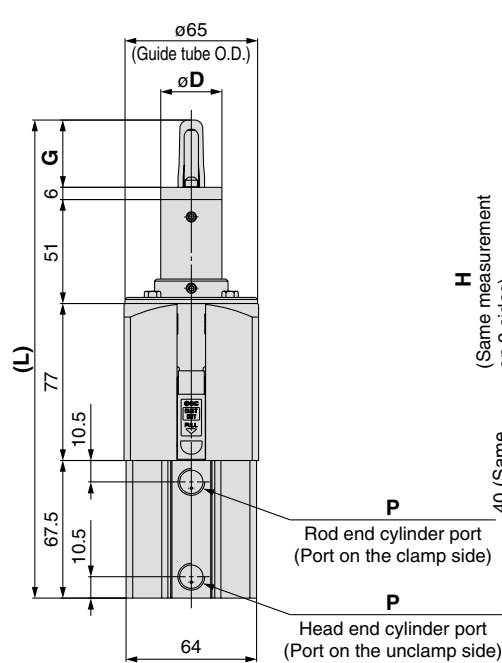

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø13	9	ø30	ø12.5	≈10	33	Without shims	Without shims	6	204.5	234.5	4	—	ø36
			ø12.7	≈9		60±0.05	90±0.05						
			ø12.8	≈8		With shims	With shims						
			ø12.9	≈8		60	90						
			ø13.0	≈7		With shims	With shims						
ø15	11	ø30	ø14.5	≈9	34	Without shims	Without shims	7	205.5	235.5	5	—	ø36
			ø14.7	≈8		60±0.05	90±0.05						
			ø14.8	≈8		With shims	With shims						
			ø14.9	≈7		60	90						
			ø15.0	≈7		With shims	With shims						
ø16	11	ø30	ø15.5	≈10	34	Without shims	Without shims	7	205.5	235.5	5.5	—	ø36
			ø15.7	≈9		60±0.05	90±0.05						
			ø15.8	≈8		With shims	With shims						
			ø15.9	≈8		60	90						
			ø16.0	≈7		With shims	With shims						

P		
Nil	TN	TF
Rc 1/4	NPT 1/4	G 1/4

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø18	12	ø35	ø17.5	≈10	37	Without shims	Without shims	7	208.5	238.5	6	6	ø40
			ø17.7	≈9		60±0.05	90±0.05						
			ø17.8	≈8		With shims	With shims						
			ø17.9	≈8		60	90						
			ø18.0	≈7		With shims	With shims						
ø20	13	ø35	ø19.5	≈10	39	Without shims	Without shims	8	210.5	240.5	7	7	ø40
			ø19.7	≈9		60±0.05	90±0.05						
			ø19.8	≈8		With shims	With shims						
			ø19.9	≈8		60	90						
			ø20.0	≈7		With shims	With shims						
ø25	16	ø40	ø24.5	≈10	39	Without shims	Without shims	8	210.5	240.5	9.5	7	ø47
			ø24.7	≈9		60±0.05	90±0.05						
			ø24.8	≈8		With shims	With shims						
			ø24.9	≈8		60	90						
			ø25.0	≈7		With shims	With shims						
ø30	18	ø40	ø29.5	≈10	39	Without shims	Without shims	8	210.5	240.5	11	9	ø47
			ø29.7	≈9		60±0.05	90±0.05						
			ø29.8	≈8		With shims	With shims						
			ø29.9	≈8		60	90						
			ø30.0	≈7		With shims	With shims						

MK
CKQ
CLKQ
CK□1
CLK2

D-□
-X□
Individual
-X□

Series CKQ_P^GD/CLKQ_P^GD




Dimensions

CLKQ_P^GDA50

(CLKQ_P^GDB50 The angle of the cylinder port location against the mounting surface is 90°.)

* Refer to "How to Order" on page 1268 for relationship between the mounting surface and a port location.

* The below figures indicate the CLKQ_P^GDA50-□RAH.

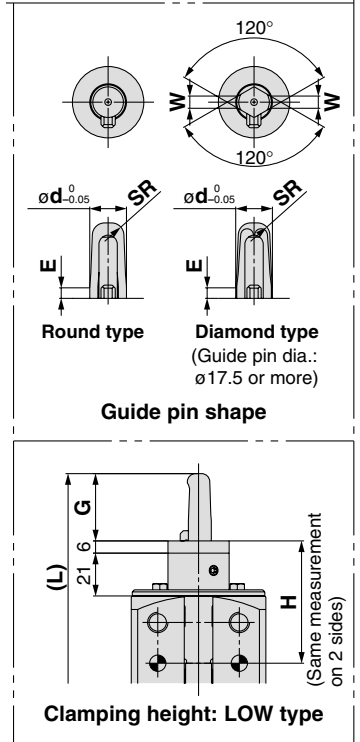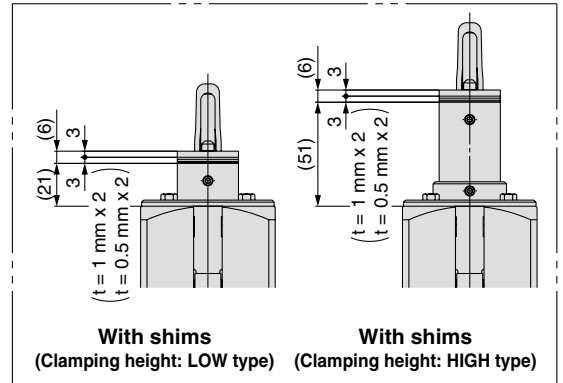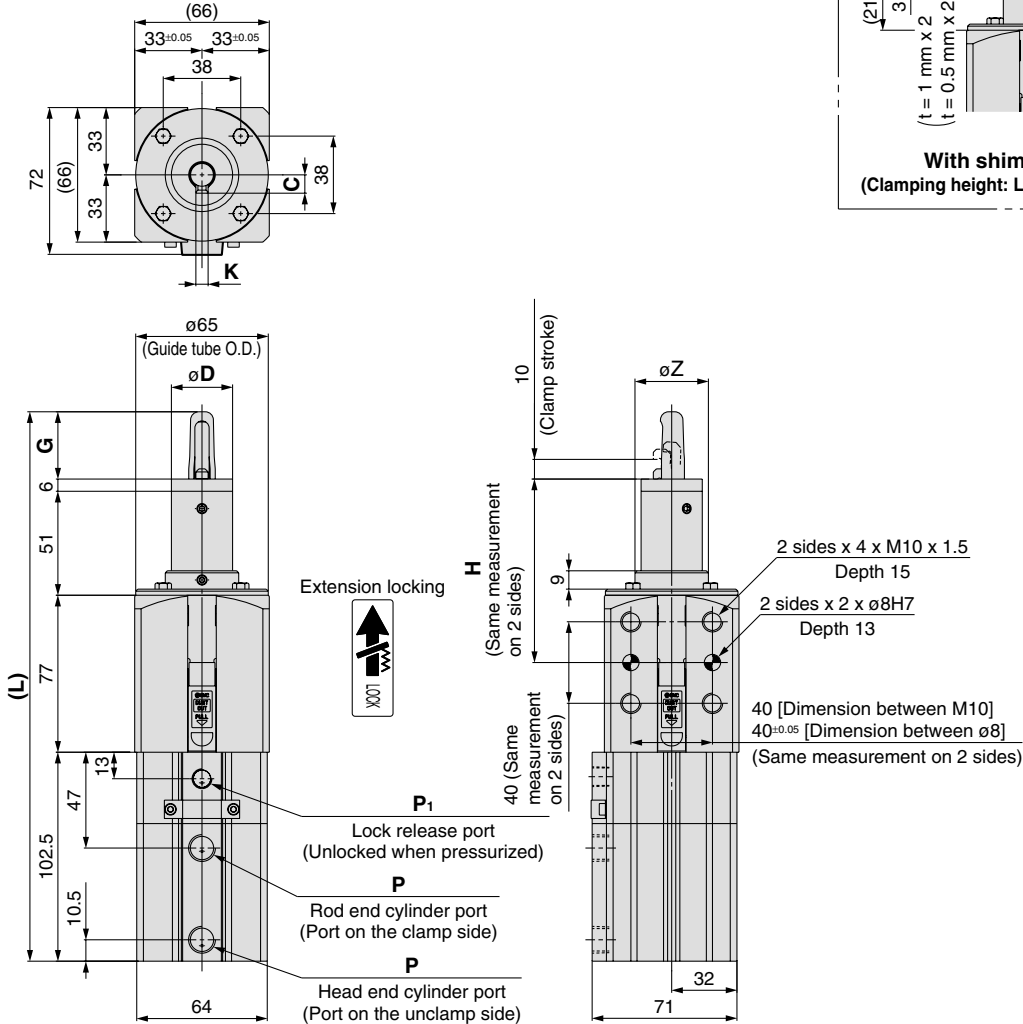


Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø13	9	ø30	ø12.5	≈10	33	Without shims	Without shims	6	239.5	269.5	4	—	ø36
			ø12.7	≈9		60±0.05	90±0.05						
			ø12.8	≈8		With shims	With shims						
			ø12.9	≈8		60	90						
			ø13.0	≈7		60	90						
ø15	11	ø30	ø14.5	≈9	34	Without shims	Without shims	7	240.5	270.5	5	—	ø36
			ø14.7	≈8		60±0.05	90±0.05						
			ø14.8	≈8		With shims	With shims						
			ø14.9	≈7		60	90						
			ø15.0	≈7		60	90						
ø16	11	ø30	ø15.5	≈10	34	Without shims	Without shims	7	240.5	270.5	5.5	—	ø36
			ø15.7	≈9		60±0.05	90±0.05						
			ø15.8	≈8		With shims	With shims						
			ø15.9	≈8		60	90						
			ø16.0	≈7		60	90						

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø18	12	ø35	ø17.5	≈10	37	Without shims	Without shims	7	243.5	273.5	6	6	ø40
			ø17.7	≈9		60±0.05	90±0.05						
			ø17.8	≈8		With shims	With shims						
			ø17.9	≈8		60	90						
			ø18.0	≈7		60	90						
ø20	13	ø35	ø19.5	≈10	39	Without shims	Without shims	8	245.5	275.5	7	7	ø40
			ø19.7	≈9		60±0.05	90±0.05						
			ø19.8	≈8		With shims	With shims						
			ø19.9	≈8		60	90						
			ø20.0	≈7		60	90						
ø25	16	ø40	ø24.5	≈10	39	Without shims	Without shims	8	245.5	275.5	9.5	7	ø47
			ø24.7	≈9		60±0.05	90±0.05						
			ø24.8	≈8		With shims	With shims						
			ø24.9	≈8		60	90						
			ø25.0	≈7		60	90						
ø30	18	ø40	ø29.5	≈10	39	Without shims	Without shims	8	245.5	275.5	11	9	ø47
			ø29.7	≈9		60±0.05	90±0.05						
			ø29.8	≈8		With shims	With shims						
			ø29.9	≈8		60	90						
			ø30.0	≈7		60	90						

P			P ₁		
Nil	TN	TF	Nil	TN	TF
Rc 1/4	NPT 1/4	G 1/4	Rc 1/8	NPT 1/8	G 1/8

Pin Clamp Cylinder

U series



Series CKQ^G_PU/CLKQ^G_PU

How to Order

Built-in standard magnet
With magnetic field resistant auto switch

C K Q G U A 50 - 177 R A L - P4DWSC

Built-in strong magnet
With magnetic field resistant auto switch

C K Q P U A 50 - 198 R A L - P79WSE

With lock on the clamp side

Nil	Without lock
L	With lock

Number of auto switches

Nil	2 pcs.
S	1 pc. (Unclamp side)

* The D-P4/P7 type is different-surface mounting. (Refer to page 1308.)

Auto switch type

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* For applicable auto switch models, refer to page 1279.

* Auto switches are included, (but not assembled).

Shim


Nil	Without shims
S	With 3 mm shims*

* When a model includes shims, two 1 mm shims and two 0.5 mm shims are attached.

Clamping height (Refer to the below figure.)

L	LOW type (40 mm)
H	HIGH type (70 mm)

LOW type HIGH type



Clamping height

Clamp arm position (clockwise viewed from top)

A	Same direction as port Port Clamp arm Guide pin	C	180° from port Port Clamp arm Guide pin
B	90° from port Port Clamp arm Guide pin	D	270° from port Port Clamp arm Guide pin

Mounting surface (viewed from top)

Symbol	Port location
A	Port Mounting surface
B	Port Mounting surface

Bore size

50	50 mm
----	-------

Port thread type

Nil	Rc
TN	NPT
TF	G

Guide pin diameter

* For guide pin diameter, refer to Table 1 below.

Body shape

Symbol	Dimension	Mounting hole (tap, pin hole) arrangement	Mounting	Mounting surface (viewed from top)
U	□66	: Mounting tap : Pin hole	Mounting tap: 2 x M10 x 1.5 Pin hole: 2 x ø8H7	Mounting surface (Two facing sides)

Guide pin shape


R	Round type
D	Diamond type*

* Diamond type guide pin diameter is ø17.5 or more.

Table 1. Guide Pin Diameter

Symbol	125	127	128	129	130	145	147	148	149	150	155	157	158	159	160
Guide pin diameter	12.5	12.7	12.8	12.9	13.0	14.5	14.7	14.8	14.9	15.0	15.5	15.7	15.8	15.9	16.0
Applicable hole diameter of workpiece	For ø13					For ø15					For ø16				
Guide pin shape	Round type														

Symbol	175	177	178	179	180	195	197	198	199	200	245	247	248	249	250	295	297	298	299	300
Guide pin diameter	17.5	17.7	17.8	17.9	18.0	19.5	19.7	19.8	19.9	20.0	24.5	24.7	24.8	24.9	25.0	29.5	29.7	29.8	29.9	30.0
Applicable hole diameter of workpiece	For ø18					For ø20					For ø25					For ø30				
Guide pin shape	Round type, Diamond type																			



Pin Clamp Cylinder *Series CKQ_P^GU/CLKQ_P^GU*

Table 2. Applicable Auto Switches / For detailed specifications about an auto switch for itself, refer to pages 1719 to 1827.

Applicable cylinder series	Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no in use)	Load voltage	Lead wire length	Applicable load
Series C(L)KQG	Solid state auto switch	D-P4DWSC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color display	2-wire (3-4)	24 VDC	0.3 m	Relay, PLC <small>Note 1)</small>
		2-wire (1-4)				3 m			
		Grommet		2-wire		5 m			
Series C(L)KQP	Reed auto switch	D-P79WSE	DC/AC magnetic field	Pre-wired connector	2-color display	2-wire (1-4)	24 VDC	0.3 m	
		Grommet		1-color display	2-wire	24 VDC 100 VAC	3 m		
							5 m		

Note 1) PLC: Programmable Logic Controller

Note 2) There are other applicable auto switches other than the listed above. For details, refer to page 1307.

MK
CKQ
CLKQ
CK□1
CLK2

D-□
-X□
Individual
-X□

Series CKQ^G_PU/CLKQ^G_PU



Basic Specifications

Action	Double acting	
Bore size (mm)	50	
Fluid	Air	
Minimum operating pressure	CKQ□: 0.1 MPa	CLKQ□ (With lock): 0.15 MPa*
Ambient and fluid temperature	-10 to 60°C (No freezing)	
Cushion	None	
Lubrication	Non-lube	
Piston speed (Clamp speed)	50 to 150 mm/sec	
Port size (Cylinder port)	1/4 (Rc, NPT, G)	

* Minimum operating pressure is 0.2 MPa when cylinder part and locking part use the same piping.

Proof Pressure/Maximum Operating Pressure

Guide pin diameter	Proof pressure	Max. operating pressure
ø12.5 to ø13.0	1.0 MPa	0.7 MPa
ø14.5 to ø30.0	1.5 MPa	1.0 MPa

Clamp Specifications

Clamp stroke	Without shims	With shims
	10 mm	10 to 13 mm
Clamp arm	1 pc.	
Guide pin shape	Round type, Diamond type	

* Refer to the below "Clamp Specifications" and Selection regarding detailed specifications of the clamping force, etc.

* Diamond type guide pin diameter is ø17.5 or more.

Lock Specifications

Locking action	Spring locking (Exhaust locking)
Unlocking pressure	0.2 MPa or more
Lock starting pressure	0.05 MPa or less
Locking direction	Lock at extended direction (Clamp holding)
Port size (Lock release port)	1/8 (Rc, NPT, G)
Holding force (N) (Maximum static load)	982

Mass

Unit: kg

Model	C(L)KQ ^G _P U			
	Without lock		With lock	
	L	H	L	H
ø12.5 to 13.0	1.67	1.84	2.19	2.36
ø14.5 to 15.0	1.67	1.84	2.19	2.36
ø15.5 to 16.0	1.68	1.85	2.19	2.36
ø17.5 to 18.0	1.72	1.9	2.24	2.41
ø19.5 to 20.0	1.73	1.91	2.24	2.42
ø24.5 to 25.0	1.79	2	2.3	2.51
ø29.5 to 30.0	1.83	2.04	2.35	2.55

Clamp Specifications

(N)

Model	Guide pin diameter	Operating pressure (MPa)								
		0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
CKQ ^G _P	ø12.5 to ø13.0	164.9	329.8	494.7	659.6	824.5	989.4	—	—	—
	ø14.5 to ø30.0	164.9	329.8	494.7	659.6	824.5	989.4	1154.3	1319.2	1484.1
CLKQ ^G _P	ø12.5 to ø13.0	82.4	247.3	412.2	577.1	742.0	906.9	—	—	—
	ø14.5 to ø30.0	82.4	247.3	412.2	577.1	742.0	906.9	Note 1) 1071.8	Note 1) 1236.7	Note 1) 1401.6

Note 1) Lock holding force of the CLKQ□ is 982 N. Design the circuit such that the lock holding force is taken into consideration when the operating pressure exceeds 0.75 MPa.

The operating pressure should be not greater than the lock holding force as it may cause wearing out and/or damage of the locking part and shorten lock life and may lead to possible failure if applied with a load larger than the lock holding force.

Note 2) It takes approximately 0.3 seconds for the cylinder to operate to generate clamping force from an unclamping state (when no speed controller is installed). Design circuit taking into consideration the time before the clamping force is generated.

Note 3) Determine the clamping force according to the strength of the workpiece. It can be damaged if the clamping force is too large.

Maintenance Parts

Replacement Parts: Seal Kit

Kit No.	Content
CQ2B50-PS	Piston seal Rod seal Tube gasket

* Consult SMC for maintenance service. Seal kit for maintenance of the CLKQ^G_P series with lock is not available.

Replacement Parts: Grease Pack



Kit No.	Content
GR-S-010	Grease 10 g

* Consult SMC when replacing the actuating cylinders.

Construction

CKQGUA50

* The below figures indicate the CKQGUA50-□RAL.

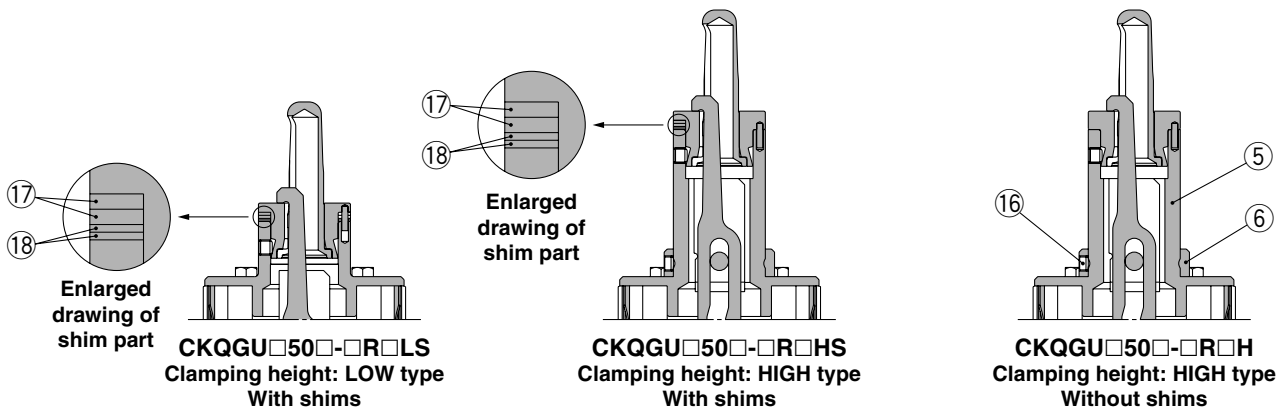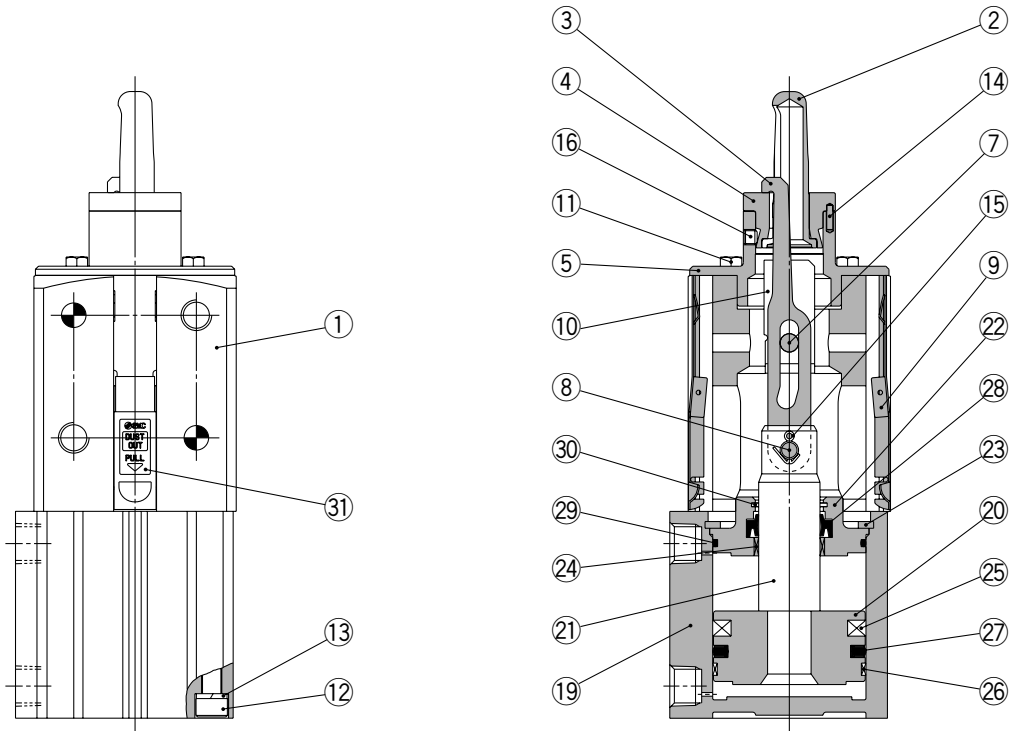

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Piston	Aluminum alloy	
21	Piston rod	Structural steel	
22	Collar	Aluminum alloy	
23	Retaining ring	Tool steel	
24	Bushing	Lead-bronze casted	
25	Magnet	—	
26	Wear ring	Resin	
27	Piston seal	NBR	
28	Rod seal	NBR	
29	Tube gasket	NBR	
30	Coil scraper	Bronze	
31	Seal	PET	

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□


Individual
-X□

Series CKQ^G_PU/CLKQ^G_PU

Construction

CLKQGUA50

* The below figures indicate the CLKQGUA50-□RAL.

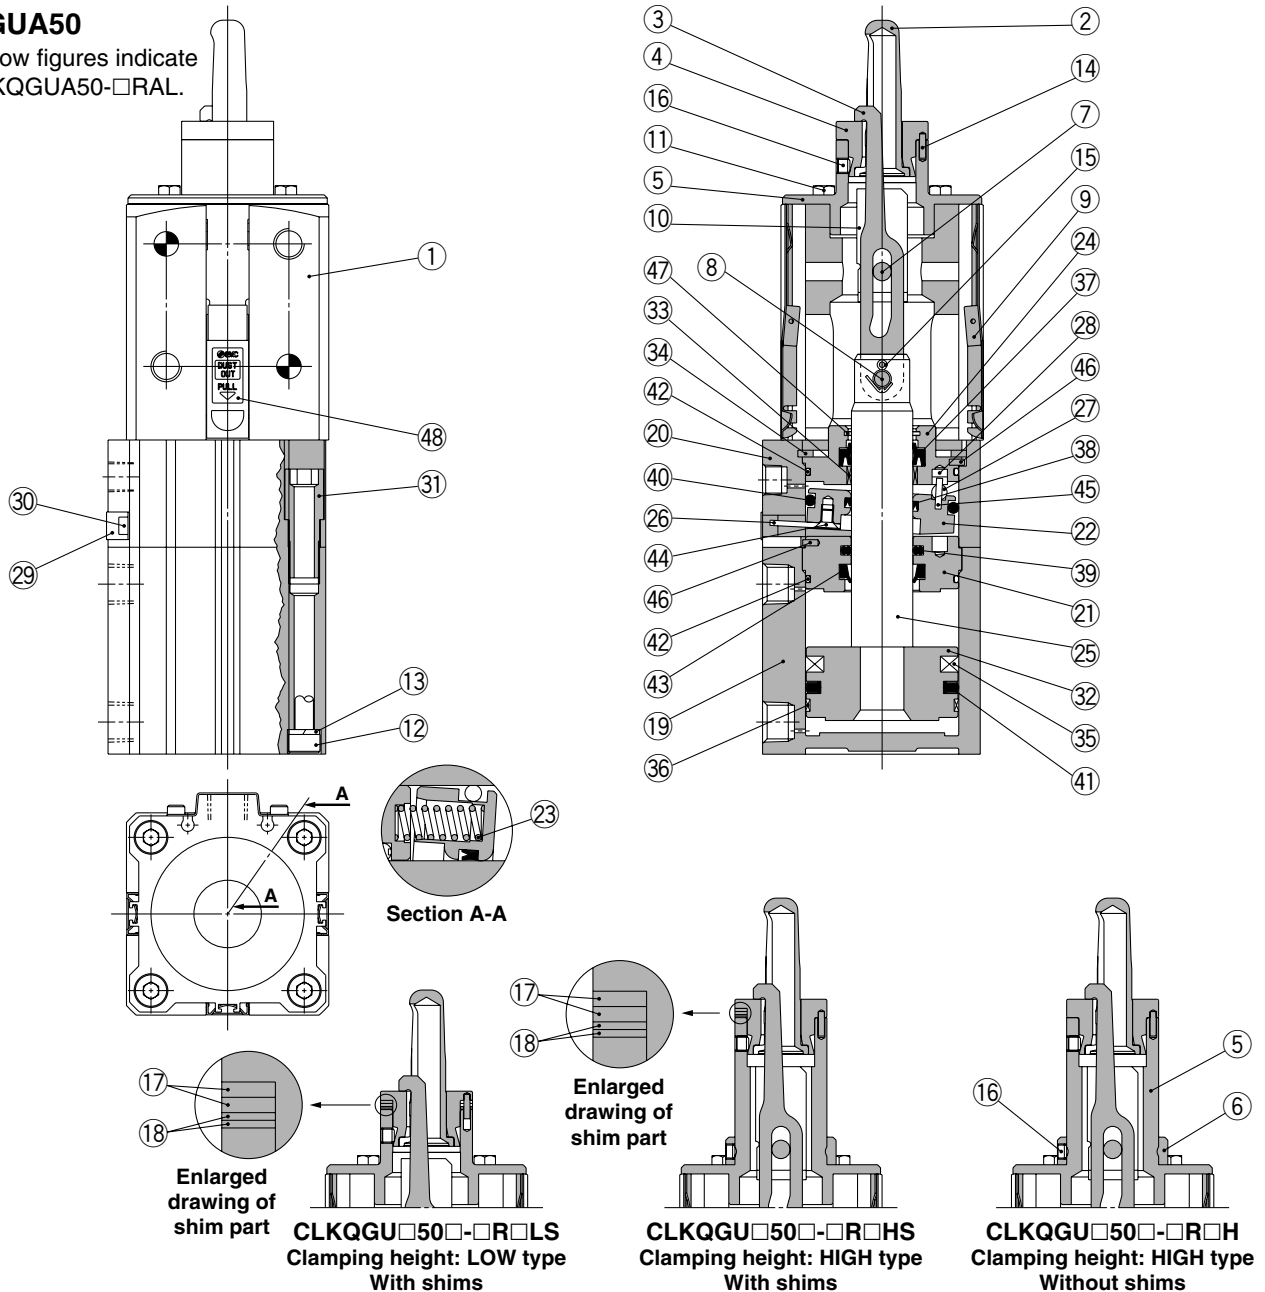

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Lock body	Aluminum alloy	
21	Intermediate collar	Aluminum alloy	
22	Lock ring	Tool steel	
23	Brake spring	Steel wire	
24	Collar	Aluminum alloy	
25	Piston rod	Structural steel	
26	Lever	Stainless steel	
27	Pivot pin	Structural steel	
28	Pivot key	Structural steel	
29	Dust cover	Steel strip	
30	Dust cover holding bolt	Structural steel	
31	Unit holding bolt	Structural steel	
32	Piston	Aluminum alloy	


Component Parts

No.	Description	Material	Note
33	Bushing	Lead-bronze casted	
34	Retaining ring	Tool steel	
35	Magnet	—	
36	Wear ring	Resin	
37	Rod seal A	NBR	
38	Rod seal B	NBR	
39	Rod seal C	NBR	
40	Piston seal A	NBR	
41	Piston seal B	NBR	
42	Tube gasket	NBR	
43	Scraper	NBR	
44	Hex. socket counter-sunk head screw	Structural steel	
45	Spring pin	Tool steel	
46	Parallel pin	Stainless steel	
47	Coil scraper	Bronze	
48	Seal	PET	

Construction

CKQPUA50

* The below figures indicate the CKQPUA50-□RAL.

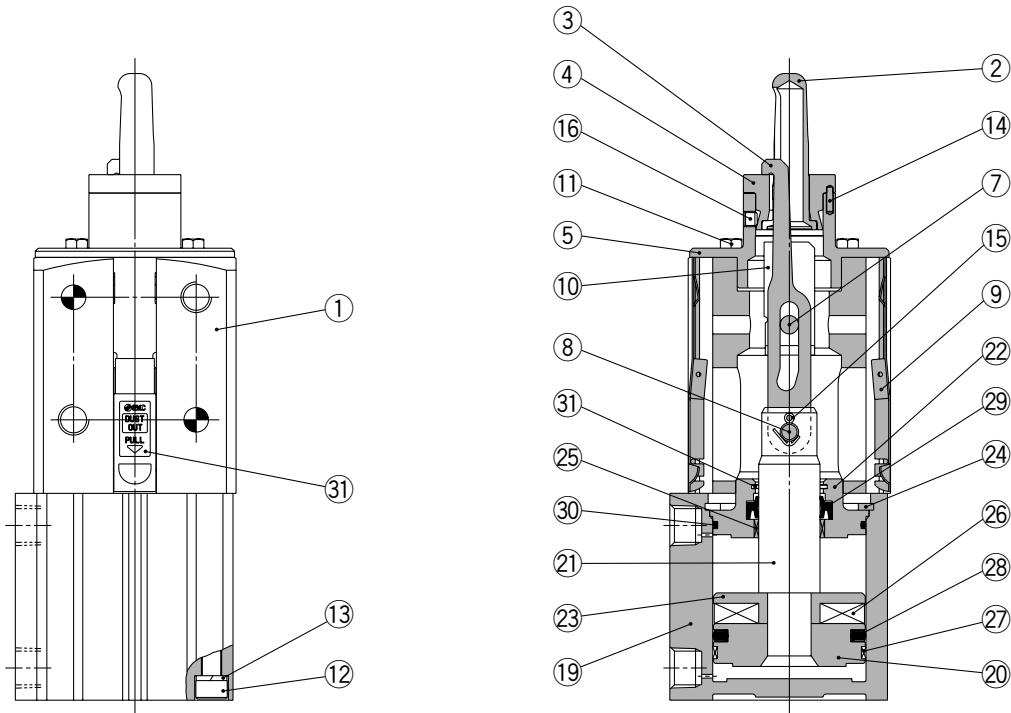


MK

CKQ
CLKQ

CK□1

CLK2

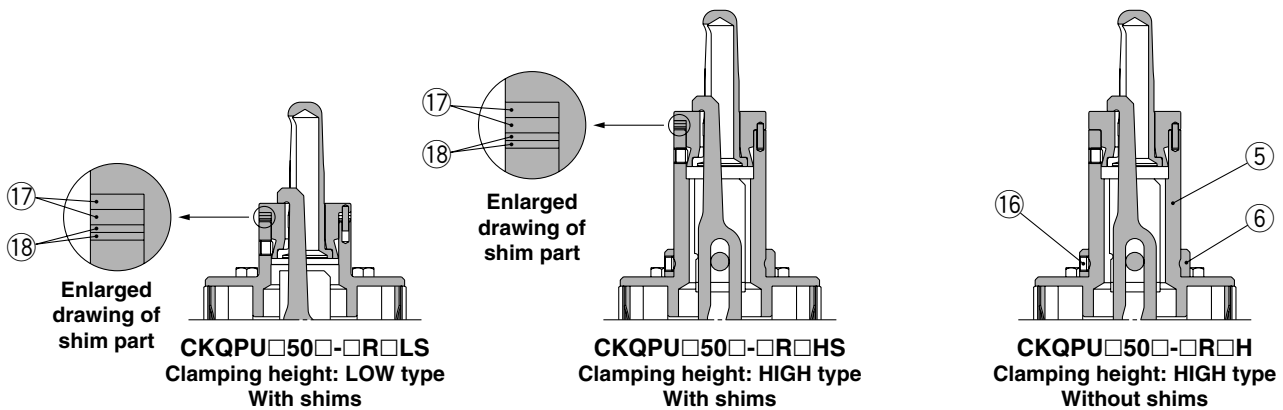

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Piston	Aluminum alloy	
21	Piston rod	Stainless steel	
22	Collar	Aluminum alloy	
23	Magnet holder	Aluminum alloy	
24	Retaining ring	Tool steel	
25	Bushing	Lead-bronze casted	
26	Magnet	—	
27	Wear ring	Resin	
28	Piston seal	NBR	
29	Rod seal	NBR	
30	Tube gasket	NBR	
31	Coil scraper	Bronze	
32	Seal	PET	

D-□

-X□


Individual
-X□

Series CKQ_PU/CLKQ_PU

Construction

CLKQPUA50

* The below figures indicate the CLKQPUA50-□RAL.

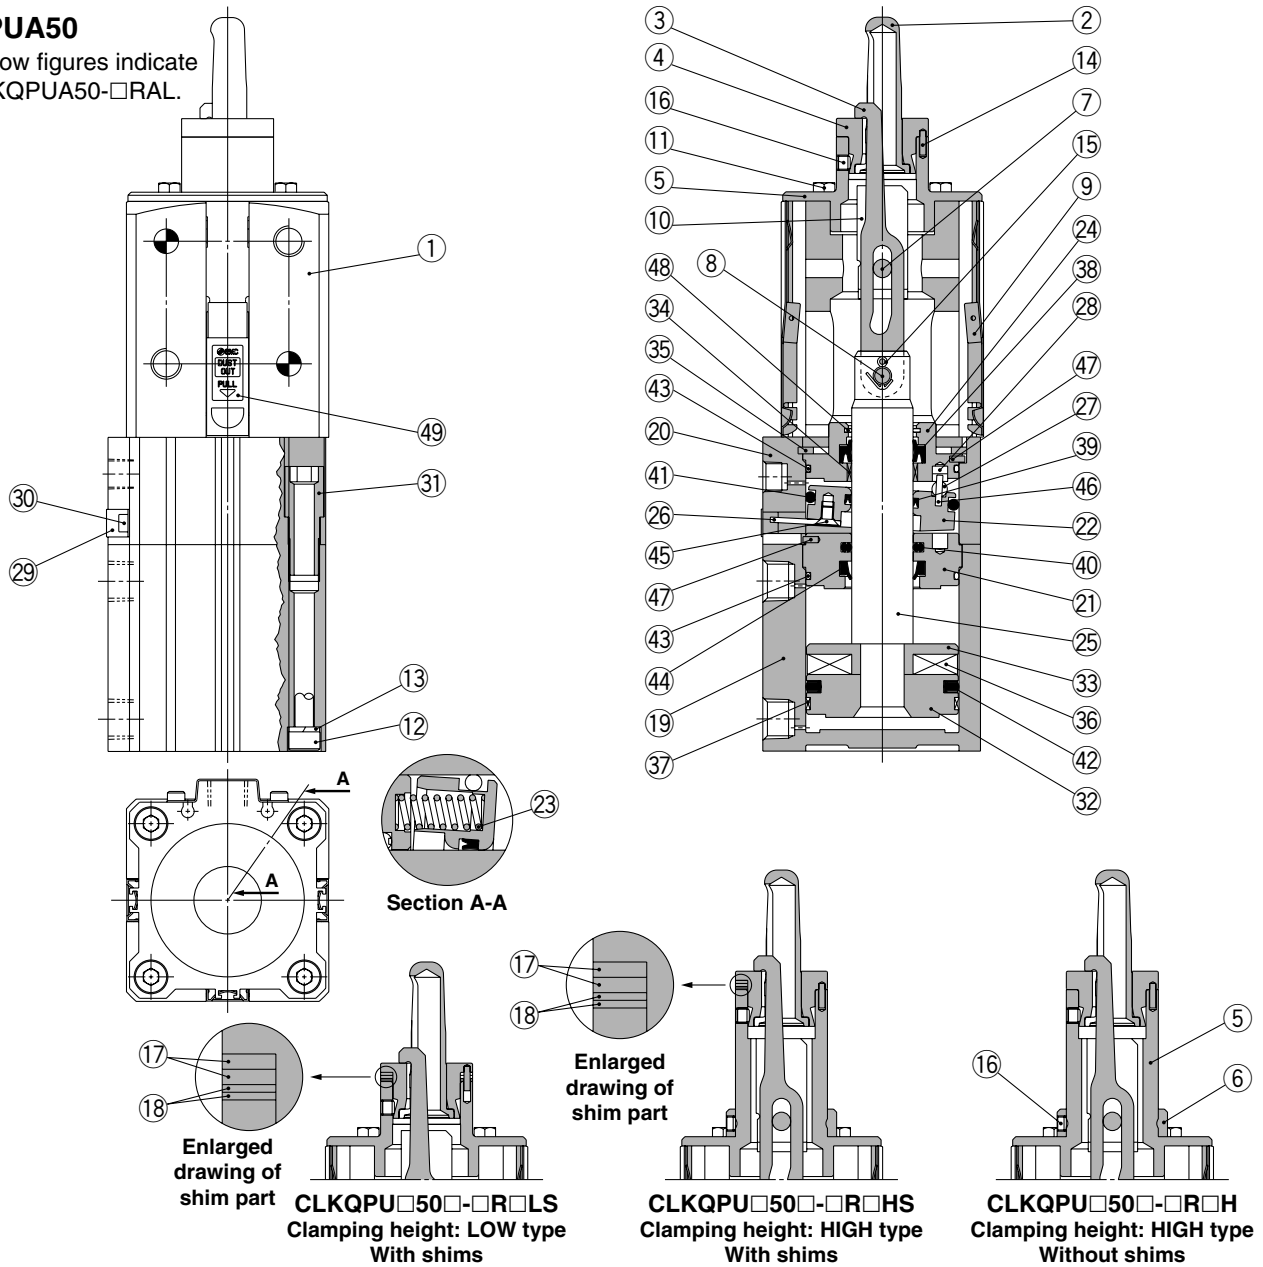

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	
17	Shim A	Stainless steel	t = 1 mm

Component Parts

No.	Description	Material	Note
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Lock body	Aluminum alloy	
21	Intermediate collar	Aluminum alloy	
22	Lock ring	Tool steel	
23	Brake spring	Steel wire	
24	Collar	Aluminum alloy	
25	Piston rod	Stainless steel	
26	Lever	Stainless steel	
27	Pivot pin	Structural steel	
28	Pivot key	Structural steel	
29	Dust cover	Steel strip	
30	Dust cover holding bolt	Structural steel	
31	Unit holding bolt	Structural steel	
32	Piston	Aluminum alloy	
33	Magnet holder	Aluminum alloy	
34	Bushing	Lead-bronze casted	

Component Parts

No.	Description	Material	Note
35	Retaining ring	Tool steel	
36	Magnet	—	
37	Wear ring	Resin	
38	Rod seal A	NBR	
39	Rod seal B	NBR	
40	Rod seal C	NBR	
41	Piston seal A	NBR	
42	Piston seal B	NBR	
43	Tube gasket	NBR	
44	Scraper	NBR	
45	Hex. socket counter-sunk head screw	Structural steel	
46	Spring pin	Tool steel	
47	Parallel pin	Stainless steel	
48	Coil scraper	Bronze	
49	Seal	PET	







Dimensions

CKQ_P^GUA50

(CKQ_P^GUB50 The angle of the cylinder port location against the mounting surface is 90°.)

* Refer to "How to Order" on page 1278 for relationship between the mounting surface and a port location.

* The below figures indicate the CKQ_P^GUA50-□RAH.

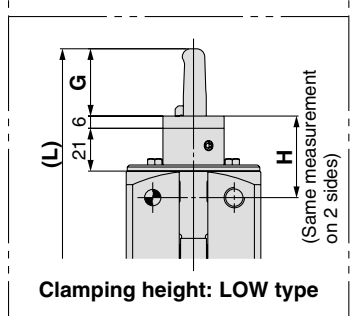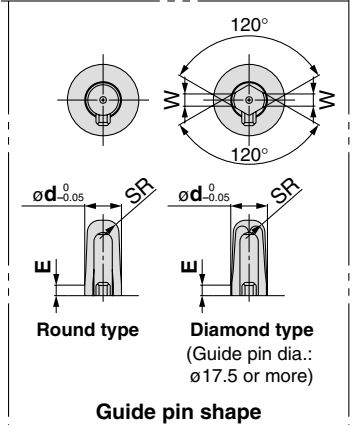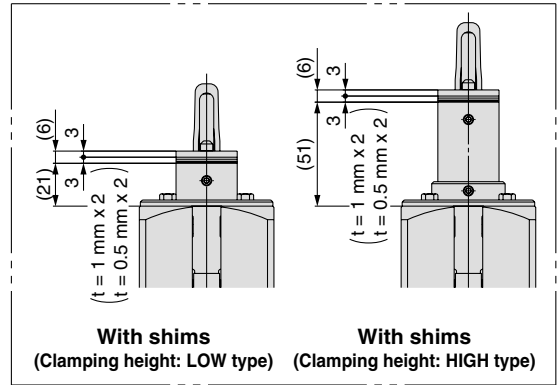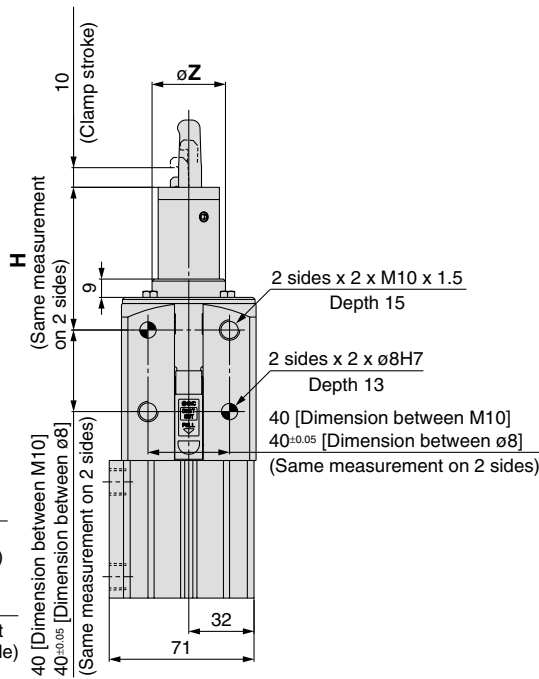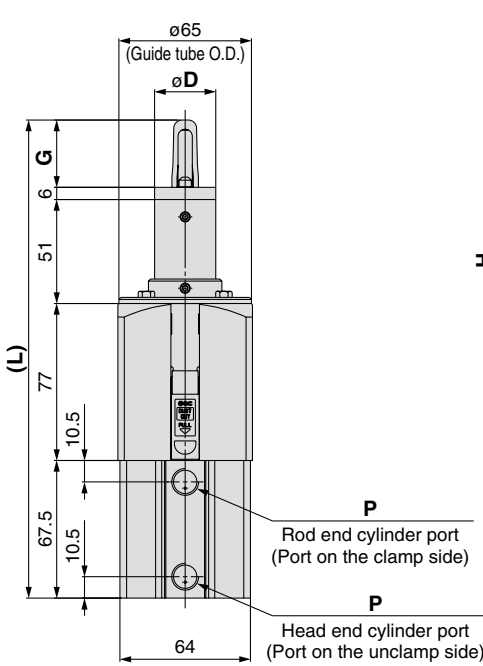

Hole diameter of workpiece	C	ØD	Ød	E	G	H		K	L		SR	W	ØZ
						LOW type	HIGH type		LOW type	HIGH type			
Ø13	9	Ø30	Ø12.5	≈10	33	Without shims	Without shims	6	204.5	234.5	4	—	Ø36
			Ø12.7	≈9		40±0.05	70±0.05						
			Ø12.8	≈8		With shims	With shims						
			Ø12.9	≈8		40	70						
			Ø13.0	≈7		40	70						
Ø15	11	Ø30	Ø14.5	≈9	34	Without shims	Without shims	7	205.5	235.5	5	—	Ø36
			Ø14.7	≈8		40±0.05	70±0.05						
			Ø14.8	≈8		With shims	With shims						
			Ø14.9	≈7		40	70						
			Ø15.0	≈7		40	70						
Ø16	11	Ø30	Ø15.5	≈10	34	Without shims	Without shims	7	205.5	235.5	5.5	—	Ø36
			Ø15.7	≈9		40±0.05	70±0.05						
			Ø15.8	≈8		With shims	With shims						
			Ø15.9	≈8		40	70						
			Ø16.0	≈7		40	70						

P		
Nil	TN	TF
Rc 1/4	NPT 1/4	G 1/4

Hole diameter of workpiece	C	ØD	Ød	E	G	H		K	L		SR	W	ØZ
						LOW type	HIGH type		LOW type	HIGH type			
Ø18	12	Ø35	Ø17.5	≈10	37	Without shims	Without shims	7	208.5	238.5	6	6	Ø40
			Ø17.7	≈9		40±0.05	70±0.05						
			Ø17.8	≈8		With shims	With shims						
			Ø17.9	≈8		40	70						
			Ø18.0	≈7		40	70						
Ø20	13	Ø35	Ø19.5	≈10	39	Without shims	Without shims	8	210.5	240.5	7	7	Ø40
			Ø19.7	≈9		40±0.05	70±0.05						
			Ø19.8	≈8		With shims	With shims						
			Ø19.9	≈8		40	70						
			Ø20.0	≈7		40	70						
Ø25	16	Ø40	Ø24.5	≈10	39	Without shims	Without shims	8	210.5	240.5	9.5	7	Ø47
			Ø24.7	≈9		40±0.05	70±0.05						
			Ø24.8	≈8		With shims	With shims						
			Ø24.9	≈8		40	70						
			Ø25.0	≈7		40	70						
Ø30	18	Ø40	Ø29.5	≈10	39	Without shims	Without shims	8	210.5	240.5	11	9	Ø47
			Ø29.7	≈9		40±0.05	70±0.05						
			Ø29.8	≈8		With shims	With shims						
			Ø29.9	≈8		40	70						
			Ø30.0	≈7		40	70						

MK
CKQ
CLKQ
CK□1
CLK2

D-□
-X□
Individual
-X□

Series CKQ_PU/CLKQ_PU




Dimensions

CLKQ_PUA50

(CLKQ_PUB50 The angle of the cylinder port location against the mounting surface is 90°.)

* Refer to "How to Order" on page 1278 for relationship between the mounting surface and a port location.

* The below figures indicate the CLKQ_PUA50-□RAH.

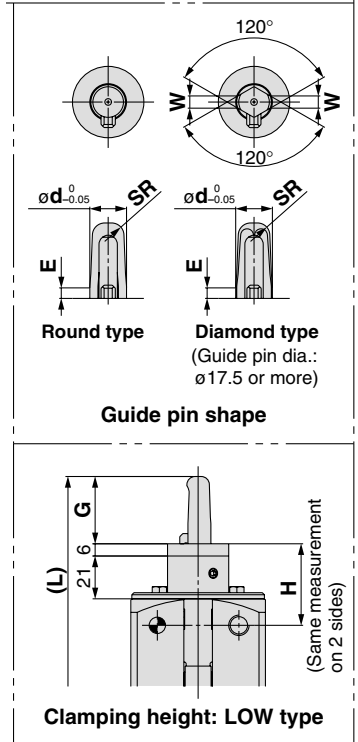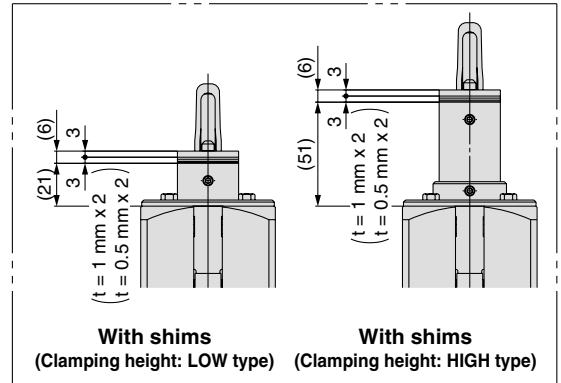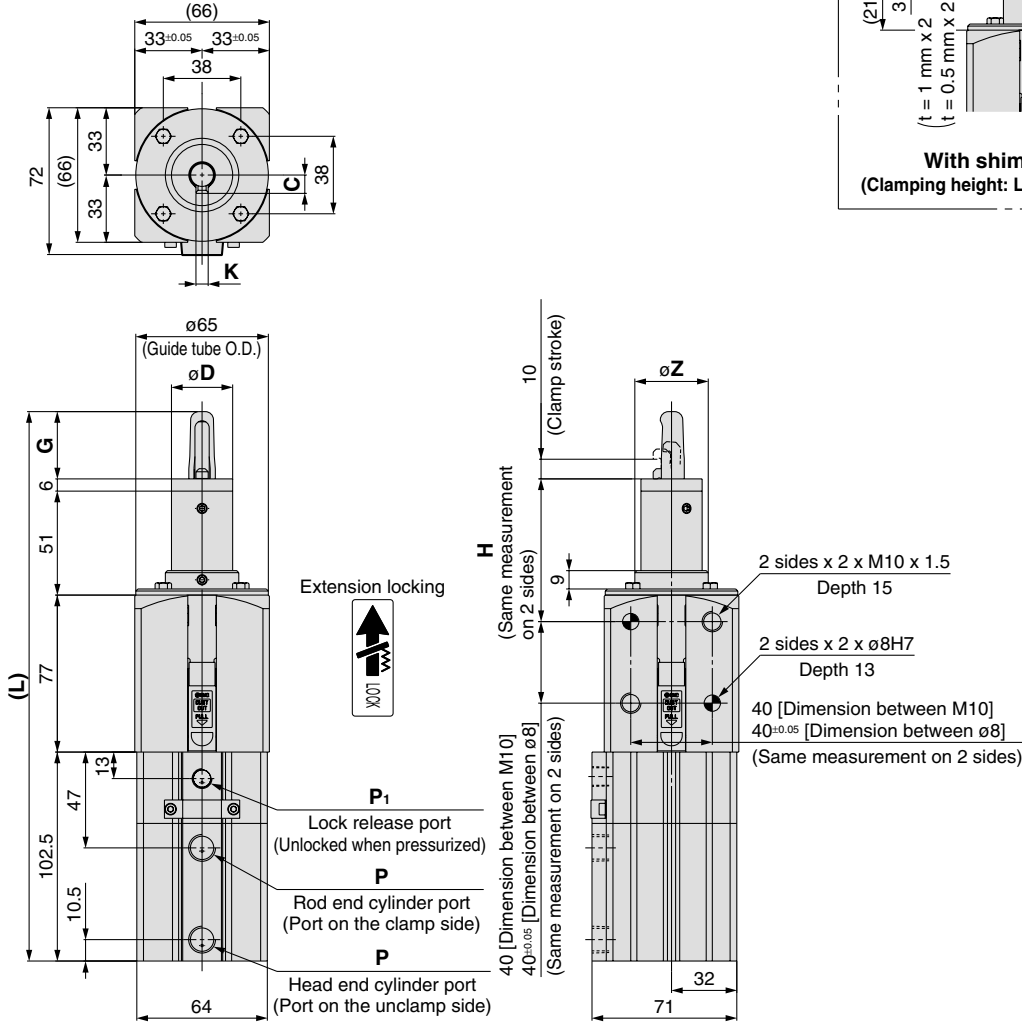


Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø13	9	ø30	ø12.5	≈10	33	Without shims	Without shims	6	239.5	269.5	4	—	ø36
			ø12.7	≈9		40±0.05	70±0.05						
			ø12.8	≈8		With shims	With shims						
			ø12.9	≈8		40	70						
			ø13.0	≈7		40	70						
ø15	11	ø30	ø14.5	≈9	34	Without shims	Without shims	7	240.5	270.5	5	—	ø36
			ø14.7	≈8		40±0.05	70±0.05						
			ø14.8	≈8		With shims	With shims						
			ø14.9	≈7		40	70						
			ø15.0	≈7		40	70						
ø16	11	ø30	ø15.5	≈10	34	Without shims	Without shims	7	240.5	270.5	5.5	—	ø36
			ø15.7	≈9		40±0.05	70±0.05						
			ø15.8	≈8		With shims	With shims						
			ø15.9	≈8		40	70						
			ø16.0	≈7		40	70						

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø18	12	ø35	ø17.5	≈10	37	Without shims	Without shims	7	243.5	273.5	6	6	ø40
			ø17.7	≈9		40±0.05	70±0.05						
			ø17.8	≈8		With shims	With shims						
			ø17.9	≈8		40	70						
			ø18.0	≈7		40	70						
ø20	13	ø35	ø19.5	≈10	39	Without shims	Without shims	8	245.5	275.5	7	7	ø40
			ø19.7	≈9		40±0.05	70±0.05						
			ø19.8	≈8		With shims	With shims						
			ø19.9	≈8		40	70						
			ø20.0	≈7		40	70						
ø25	16	ø40	ø24.5	≈10	39	Without shims	Without shims	8	245.5	275.5	9.5	7	ø47
			ø24.7	≈9		40±0.05	70±0.05						
			ø24.8	≈8		With shims	With shims						
			ø24.9	≈8		40	70						
			ø25.0	≈7		40	70						
ø30	18	ø40	ø29.5	≈10	39	Without shims	Without shims	8	245.5	275.5	11	9	ø47
			ø29.7	≈9		40±0.05	70±0.05						
			ø29.8	≈8		With shims	With shims						
			ø29.9	≈8		40	70						
			ø30.0	≈7		40	70						

P			P1		
Nil	TN	TF	Nil	TN	TF
Rc 1/4	NPT 1/4	G 1/4	Rc 1/8	NPT 1/8	G 1/8

Pin Clamp Cylinder

K series



Series CKQ^G_PK/CLKQ^G_PK

How to Order

Built-in standard magnet
With magnetic field resistant auto switch

C □ KQG K C 50 □ - 177 R A L □ - P4DWSC □

Built-in strong magnet
With magnetic field resistant auto switch

C □ KQP K C 50 □ - 198 R A L □ - P79WSE □

With lock on the clamp side

Nil	Without lock
L	With lock

Number of auto switches

Nil	2 pcs.
S	1 pc. (Unclamp side)

* The D-P4/P7 type is different-surface mounting. (Refer to page 1308.)

Auto switch type

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* For applicable auto switch models, refer to page 1289.

* Auto switches are included, (but not assembled).

Shim

Nil	Without shims
S	With 3 mm shims*


* When a model includes shims, two 1 mm shims and two 0.5 mm shims are attached.

Clamping height (Refer to the below figure.)

L	LOW type (40 mm)
H	HIGH type (70 mm)

LOW type

HIGH type



Clamping height

Mounting surface (viewed from top)

Symbol	Port location	Symbol	Port location
C	Mounting surface with the taps diagonal (top right and bottom left) Port	E	Mounting surface with the taps diagonal (top left and bottom right) Port
	Mounting surface with the taps diagonal (top left and bottom right)		Mounting surface with the taps diagonal (top right and bottom left)
D	Mounting surface with the taps diagonal (top right and bottom left) Port	F	Mounting surface with the taps diagonal (top left and bottom right) Port
	Mounting surface with the taps diagonal (top left and bottom right)		Mounting surface with the taps diagonal (top right and bottom left)

Bore size

50	50 mm
----	-------

Port thread type

Nil	Rc
TN	NPT
TF	G

Guide pin diameter

* For guide pin diameter, refer to Table 1 below.

Body shape

Symbol	Dimension	Mounting hole (tap, pin hole) arrangement	Mounting	Mounting surface (viewed from top)
K	□66	 ○: Mounting tap ●: Pin hole	Mounting tap: 2 x M10 x 1.5 Pin hole: 2 x ø10H7	 Mounting surface (Two facing sides)

Guide pin shape

R	Round type
D	Diamond type*

* Diamond type guide pin diameter is ø17.5 or more.

Clamp arm position (clockwise viewed from top)

A	Same direction as port Port Clamp arm Guide pin	C	180° from port Port Clamp arm Guide pin
B	90° from port Port Clamp arm Guide pin	D	270° from port Port Clamp arm Guide pin

Table 1. Guide Pin Diameter

Symbol	125	127	128	129	130	145	147	148	149	150	155	157	158	159	160
Guide pin diameter	12.5	12.7	12.8	12.9	13.0	14.5	14.7	14.8	14.9	15.0	15.5	15.7	15.8	15.9	16.0
Applicable hole diameter of workpiece	For ø13					For ø15					For ø16				
Guide pin shape	Round type														



Round type Diamond type

Symbol	175	177	178	179	180	195	197	198	199	200	245	247	248	249	250	295	297	298	299	300
Guide pin diameter	17.5	17.7	17.8	17.9	18.0	19.5	19.7	19.8	19.9	20.0	24.5	24.7	24.8	24.9	25.0	29.5	29.7	29.8	29.9	30.0
Applicable hole diameter of workpiece	For ø18					For ø20					For ø25					For ø30				
Guide pin shape	Round type, Diamond type																			

Pin Clamp Cylinder *Series CKQ_P^GK/CLKQ_P^GK*

Table 2. Applicable Auto Switches / For detailed specifications about an auto switch for itself, refer to pages 1719 to 1827.

Applicable cylinder series	Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no in use)	Load voltage	Lead wire length	Applicable load
Series C(L)KQG	Solid state auto switch	D-P4DWSC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color display	2-wire (3-4)	24 VDC	0.3 m	Relay, PLC <small>Note 1)</small>
		Grommet		2-wire (1-4)		3 m			
				2-wire	5 m				
Series C(L)KQP	Reed auto switch	D-P79WSE	DC/AC magnetic field	Pre-wired connector	2-color display	2-wire (1-4)	24 VDC	0.3 m	
		Grommet		1-color display	2-wire	24 VDC 100 VAC	3 m		
							5 m		

Note 1) PLC: Programmable Logic Controller

Note 2) There are other applicable auto switches other than the listed above. For details, refer to page 1307.

MK
CKQ
CLKQ
CK□1
CLK2

D-□
-X□
Individual
-X□

Series CKQ_P^GK/CLKQ_P^GK



Basic Specifications

Action	Double acting	
Bore size (mm)	50	
Fluid	Air	
Minimum operating pressure	CKQ□: 0.1 MPa	CLKQ□ (With lock): 0.15 MPa*
Ambient and fluid temperature	-10 to 60°C (No freezing)	
Cushion	None	
Lubrication	Non-lube	
Piston speed (Clamp speed)	50 to 150 mm/sec	
Port size (Cylinder port)	1/4 (Rc, NPT, G)	

* Minimum operating pressure is 0.2 MPa when cylinder part and locking part use the same piping.

Proof Pressure/Maximum Operating Pressure

Guide pin diameter	Proof pressure	Max. operating pressure
ø12.5 to ø13.0	1.0 MPa	0.7 MPa
ø14.5 to ø30.0	1.5 MPa	1.0 MPa

Clamp Specifications

Clamp stroke	Without shims	With shims
	10 mm	10 to 13 mm
Clamp arm	1 pc.	
Guide pin shape	Round type, Diamond type	

* Refer to the below "Clamp Specifications" and Selection regarding detailed specifications of the clamping force, etc.

* Diamond type guide pin diameter is ø17.5 or more.

Lock Specifications

Locking action	Spring locking (Exhaust locking)
Unlocking pressure	0.2 MPa or more
Lock starting pressure	0.05 MPa or less
Locking direction	Lock at extended direction (Clamp holding)
Port size (Lock release port)	1/8 (Rc, NPT, G)
Holding force (N) (Maximum static load)	982

Mass

Unit: kg

Model	C(L)KQ _P ^G K			
	Without lock		With lock	
	L	H	L	H
ø12.5 to 13.0	1.67	1.84	2.19	2.35
ø14.5 to 15.0	1.67	1.84	2.19	2.35
ø15.5 to 16.0	1.68	1.84	2.19	2.36
ø17.5 to 18.0	1.72	1.89	2.23	2.41
ø19.5 to 20.0	1.73	1.9	2.24	2.42
ø24.5 to 25.0	1.79	1.99	2.3	2.51
ø29.5 to 30.0	1.83	2.03	2.34	2.55

Clamp Specifications

(N)

Model	Guide pin diameter	Operating pressure (MPa)								
		0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
CKQ _P ^G	ø12.5 to ø13.0	164.9	329.8	494.7	659.6	824.5	989.4	—	—	—
	ø14.5 to ø30.0	164.9	329.8	494.7	659.6	824.5	989.4	1154.3	1319.2	1484.1
CLKQ _P ^G	ø12.5 to ø13.0	82.4	247.3	412.2	577.1	742.0	906.9	—	—	—
	ø14.5 to ø30.0	82.4	247.3	412.2	577.1	742.0	906.9	Note 1) 1071.8	Note 1) 1236.7	Note 1) 1401.6

Note 1) Lock holding force of the CLKQ□ is 982 N. Design the circuit such that the lock holding force is taken into consideration when the operating pressure exceeds 0.75 MPa.

The operating pressure should be not greater than the lock holding force as it may cause wearing out and/or damage of the locking part and shorten lock life and may lead to possible failure if applied with a load larger than the lock holding force.

Note 2) It takes approximately 0.3 seconds for the cylinder to operate to generate clamping force from an unclamping state (when no speed controller is installed). Design circuit taking into consideration the time before the clamping force is generated.

Note 3) Determine the clamping force according to the strength of the workpiece. It can be damaged if the clamping force is too large.

Maintenance Parts

Replacement Parts: Seal Kit

Kit No.	Content
CQ2B50-PS	Piston seal Rod seal Tube gasket

* Consult SMC for maintenance service. Seal kit for maintenance of the CLKQ_P^G series with lock is not available.

Replacement Parts: Grease Pack



Kit No.	Content
GR-S-010	Grease 10 g

* Consult SMC when replacing the actuating cylinders.

Construction

CKQGKC50

* The below figures indicate the CKQGKC50-□RAL.

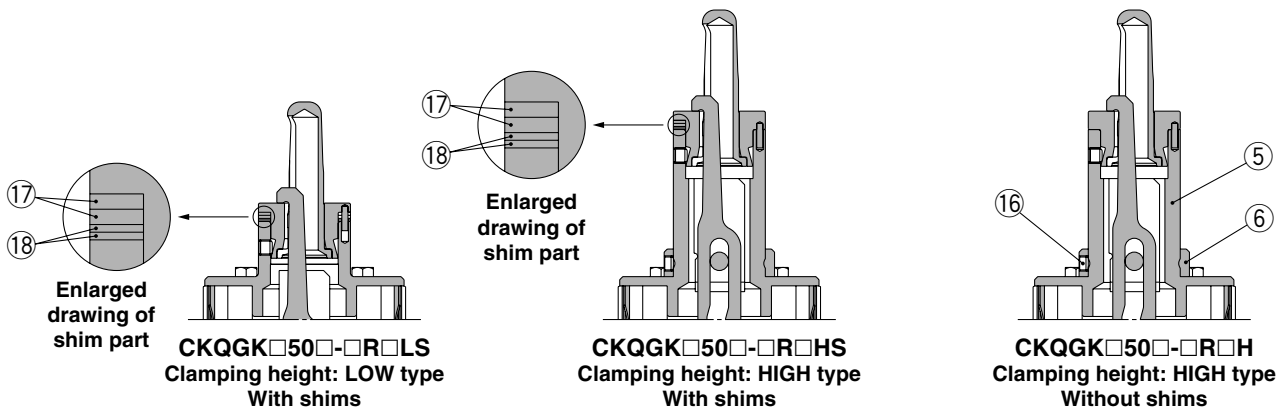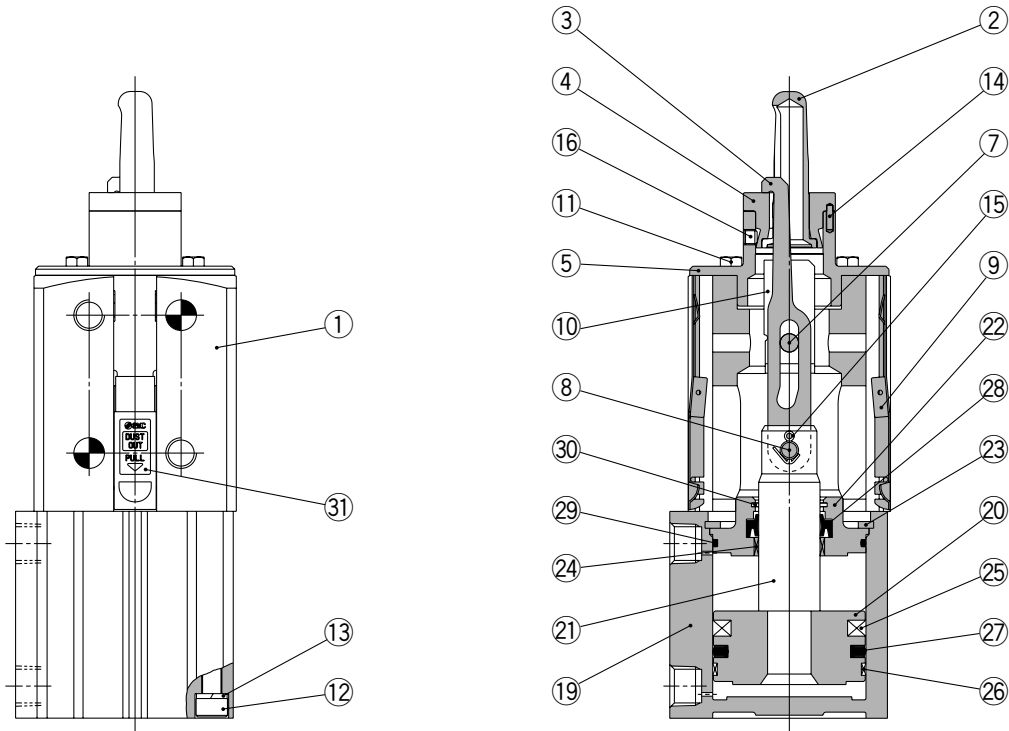

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Piston	Aluminum alloy	
21	Piston rod	Structural steel	
22	Collar	Aluminum alloy	
23	Retaining ring	Tool steel	
24	Bushing	Lead-bronze casted	
25	Magnet	—	
26	Wear ring	Resin	
27	Piston seal	NBR	
28	Rod seal	NBR	
29	Tube gasket	NBR	
30	Coil scraper	Bronze	
31	Seal	PET	

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□


Individual
-X□

Series CKQ_P^GK/CLKQ_P^GK

Construction

CLKQGKC50

* The below figures indicate the CLKQGKC50-□RAL.

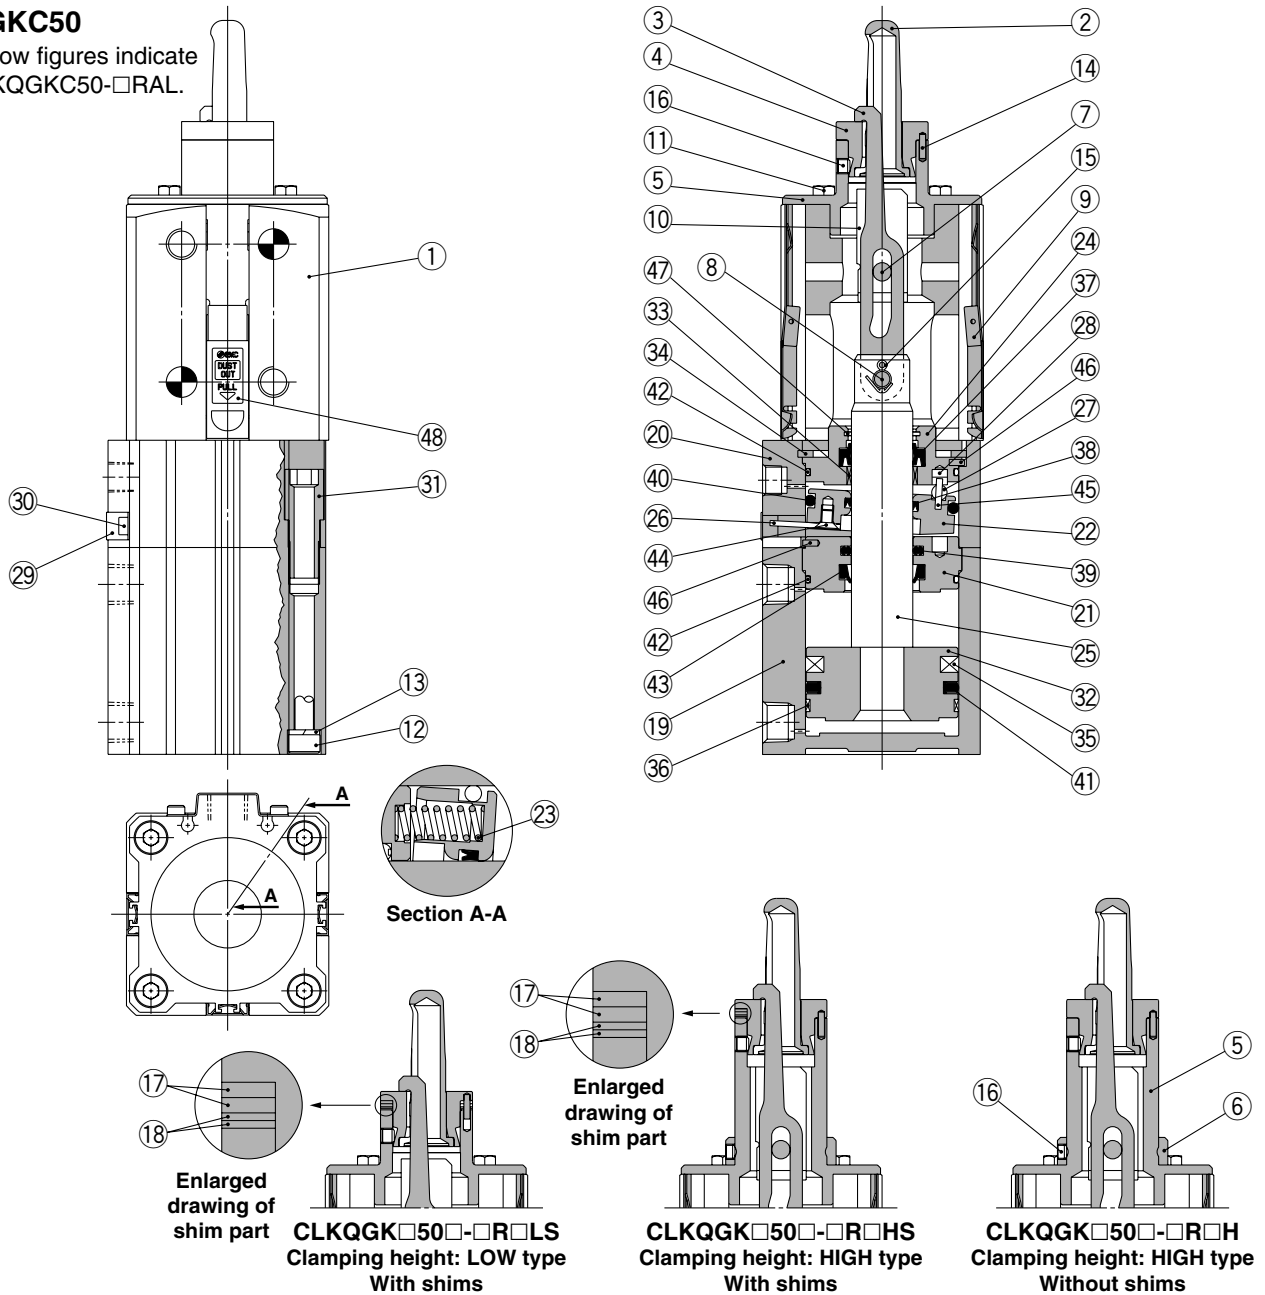

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Lock body	Aluminum alloy	
21	Intermediate collar	Aluminum alloy	
22	Lock ring	Tool steel	
23	Brake spring	Steel wire	
24	Collar	Aluminum alloy	
25	Piston rod	Structural steel	
26	Lever	Stainless steel	
27	Pivot pin	Structural steel	
28	Pivot key	Structural steel	
29	Dust cover	Steel strip	
30	Dust cover holding bolt	Structural steel	
31	Unit holding bolt	Structural steel	
32	Piston	Aluminum alloy	



Component Parts

No.	Description	Material	Note
33	Bushing	Lead-bronze casted	
34	Retaining ring	Tool steel	
35	Magnet	—	
36	Wear ring	Resin	
37	Rod seal A	NBR	
38	Rod seal B	NBR	
39	Rod seal C	NBR	
40	Piston seal A	NBR	
41	Piston seal B	NBR	
42	Tube gasket	NBR	
43	Scraper	NBR	
44	Hex. socket counter-sunk head screw	Structural steel	
45	Spring pin	Tool steel	
46	Parallel pin	Stainless steel	
47	Coil scraper	Bronze	
48	Seal	PET	

Construction

CKQPK50

* The below figures indicate the CKQPK50-□RAL.

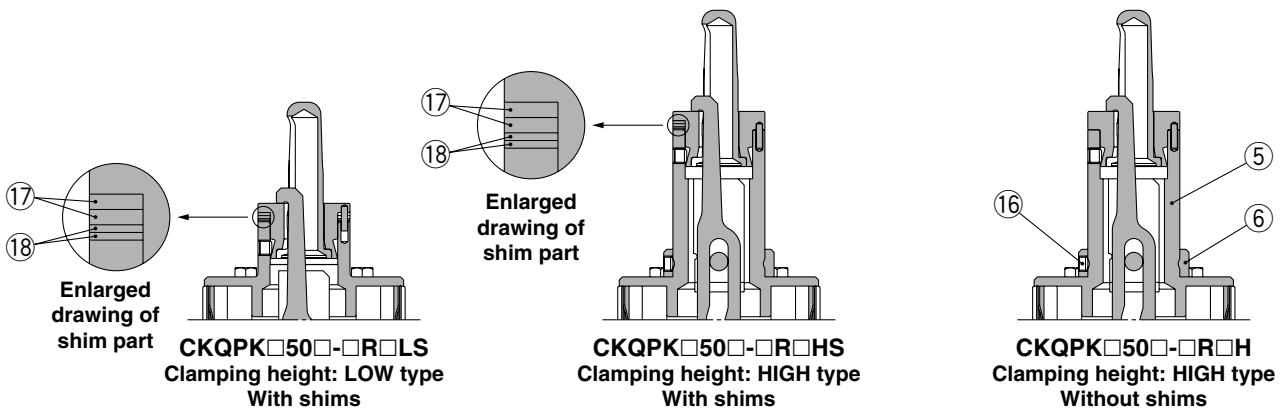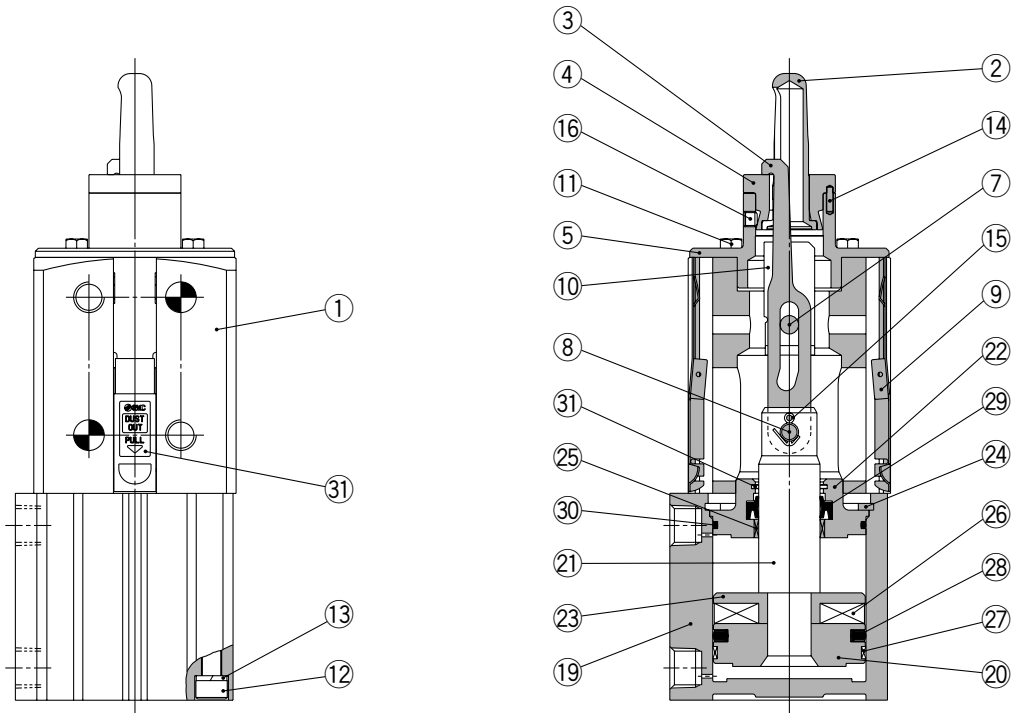

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Piston	Aluminum alloy	
21	Piston rod	Stainless steel	
22	Collar	Aluminum alloy	
23	Magnet holder	Aluminum alloy	
24	Retaining ring	Tool steel	
25	Bushing	Lead-bronze casted	
26	Magnet	—	
27	Wear ring	Resin	
28	Piston seal	NBR	
29	Rod seal	NBR	
30	Tube gasket	NBR	
31	Coil scraper	Bronze	
32	Seal	PET	

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□


Individual
-X□

Series CKQ_P^GK/CLKQ_P^GK

Construction

CLKQPK50

* The below figures indicate the CLKQPK50-□RAL.

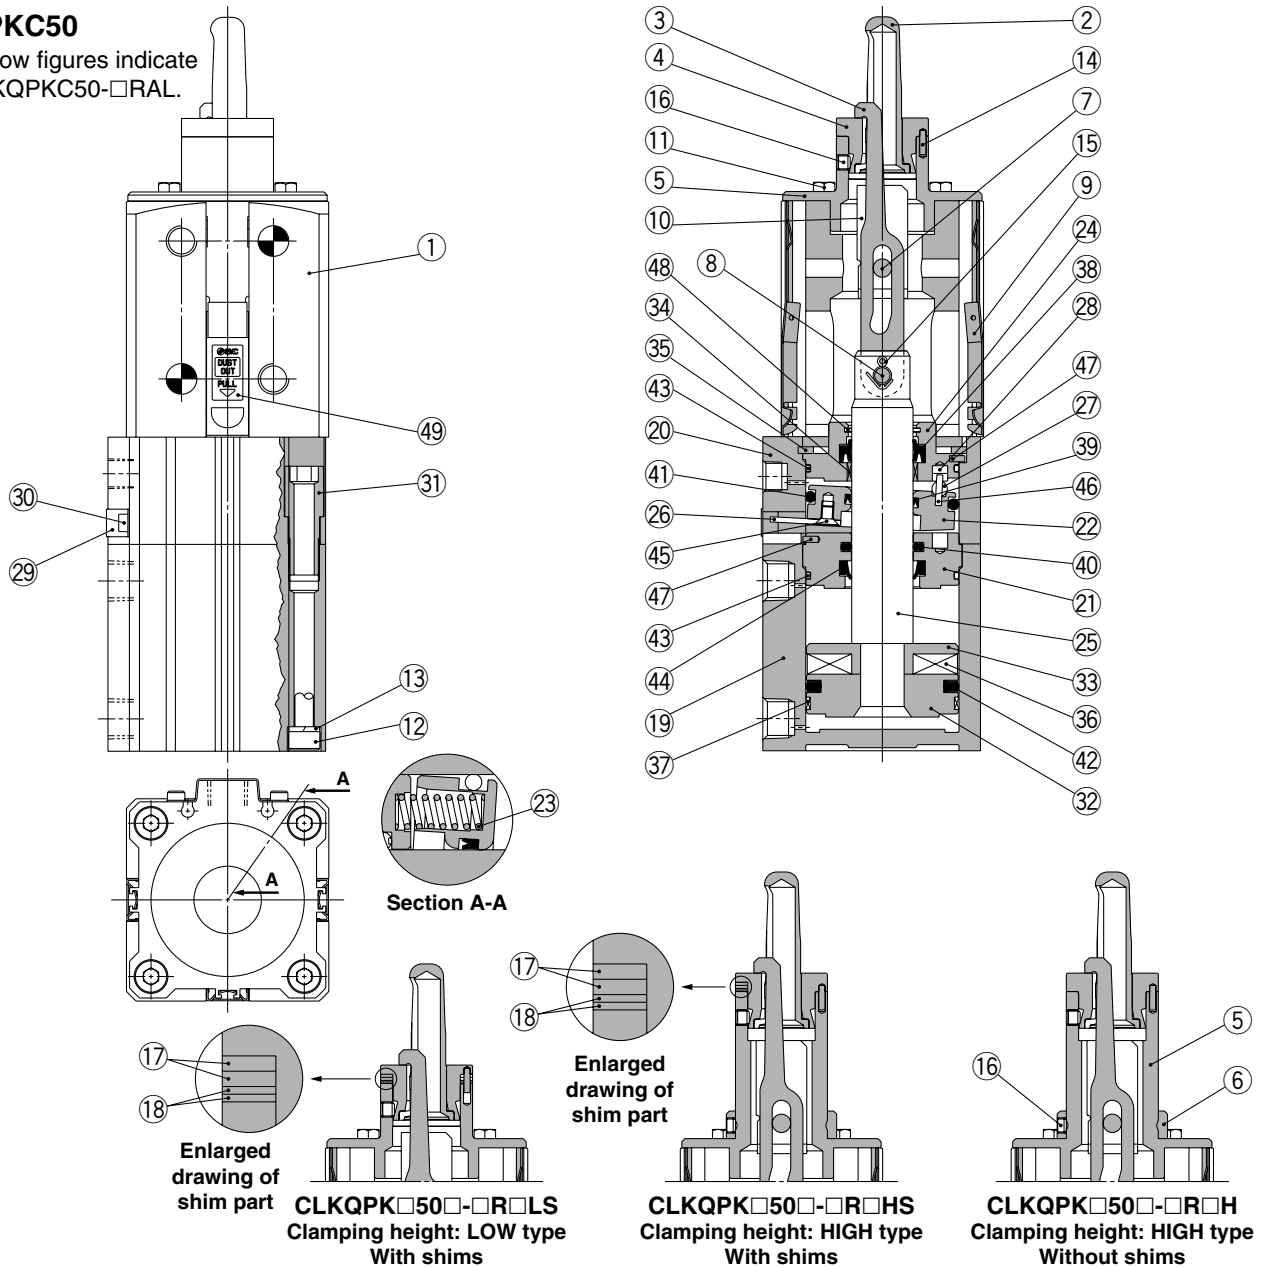

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	
17	Shim A	Stainless steel	t = 1 mm

Component Parts


No.	Description	Material	Note
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Lock body	Aluminum alloy	
21	Intermediate collar	Aluminum alloy	
22	Lock ring	Tool steel	
23	Brake spring	Steel wire	
24	Collar	Aluminum alloy	
25	Piston rod	Stainless steel	
26	Lever	Stainless steel	
27	Pivot pin	Structural steel	
28	Pivot key	Structural steel	
29	Dust cover	Steel strip	
30	Dust cover holding bolt	Structural steel	
31	Unit holding bolt	Structural steel	
32	Piston	Aluminum alloy	
33	Magnet holder	Aluminum alloy	
34	Bushing	Lead-bronze casted	


Component Parts


No.	Description	Material	Note
35	Retaining ring	Tool steel	
36	Magnet	—	
37	Wear ring	Resin	
38	Rod seal A	NBR	
39	Rod seal B	NBR	
40	Rod seal C	NBR	
41	Piston seal A	NBR	
42	Piston seal B	NBR	
43	Tube gasket	NBR	
44	Scraper	NBR	
45	Hex. socket counter-sunk head screw	Structural steel	
46	Spring pin	Tool steel	
47	Parallel pin	Stainless steel	
48	Coil scraper	Bronze	
49	Seal	PET	

Dimensions

CKQ_PKC50





(CKQ_PKD50 Relationship between the mounting surface and a port location is )

(CKQ_PKE50 Relationship between the mounting surface and a port location is )

(CKQ_PKF50 Relationship between the mounting surface and a port location is )

* Refer to "How to Order" on page 1288 for relationship between the mounting surface and a port location.

* The below figures indicate the CKQ_PKC50-□RAH.

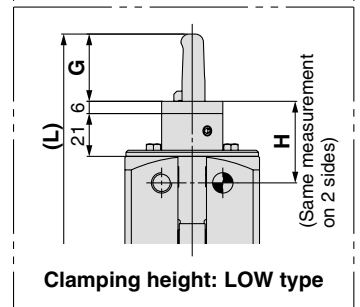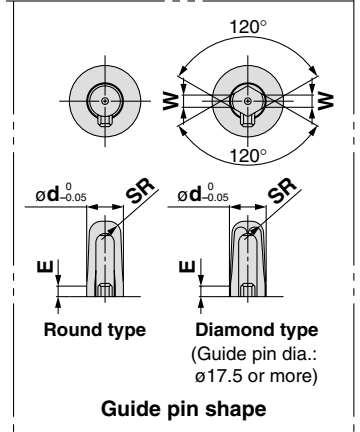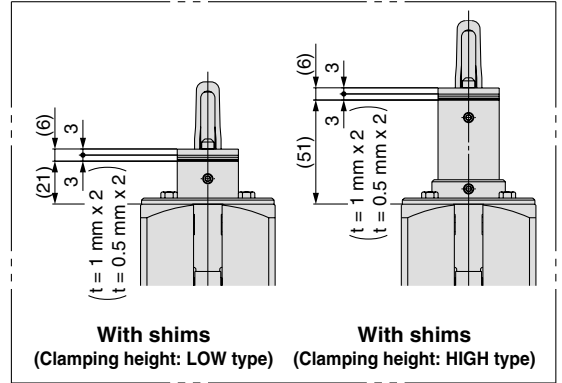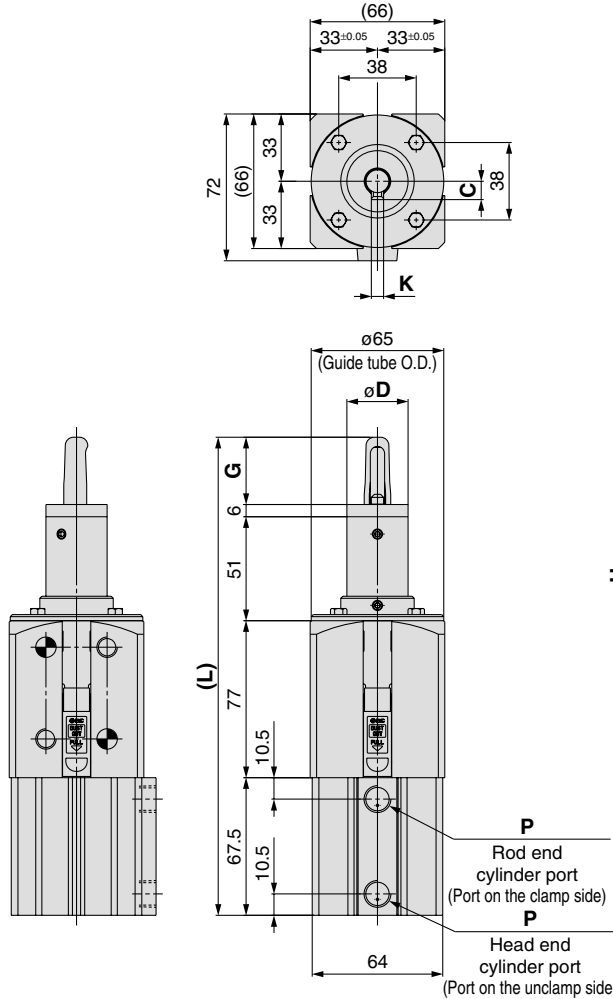

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø13	9	ø30	ø12.5	≈10	33	Without shims	Without shims	6	204.5	234.5	4	—	ø36
			ø12.7	≈9		40±0.05	70±0.05						
			ø12.8	≈8		With shims	With shims						
			ø12.9	≈8		40	70						
			ø13.0	≈7		40	70						
ø15	11	ø30	ø14.5	≈9	34	Without shims	Without shims	7	205.5	235.5	5	—	ø36
			ø14.7	≈8		40±0.05	70±0.05						
			ø14.8	≈8		With shims	With shims						
			ø14.9	≈7		40	70						
			ø15.0	≈7		40	70						
ø16	11	ø30	ø15.5	≈10	34	Without shims	Without shims	7	205.5	235.5	5.5	—	ø36
			ø15.7	≈9		40±0.05	70±0.05						
			ø15.8	≈8		With shims	With shims						
			ø15.9	≈8		40	70						
			ø16.0	≈7		40	70						

P		
Nil	TN	TF
Rc 1/4	NPT 1/4	G 1/4

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø18	12	ø35	ø17.5	≈10	37	Without shims	Without shims	7	208.5	238.5	6	6	ø40
			ø17.7	≈9		40±0.05	70±0.05						
			ø17.8	≈8		With shims	With shims						
			ø17.9	≈8		40	70						
			ø18.0	≈7		40	70						
ø20	13	ø35	ø19.5	≈10	39	Without shims	Without shims	8	210.5	240.5	7	7	ø40
			ø19.7	≈9		40±0.05	70±0.05						
			ø19.8	≈8		With shims	With shims						
			ø19.9	≈8		40	70						
			ø20.0	≈7		40	70						
ø25	16	ø40	ø24.5	≈10	39	Without shims	Without shims	8	210.5	240.5	9.5	7	ø47
			ø24.7	≈9		40±0.05	70±0.05						
			ø24.8	≈8		With shims	With shims						
			ø24.9	≈8		40	70						
			ø25.0	≈7		40	70						
ø30	18	ø40	ø29.5	≈10	39	Without shims	Without shims	8	210.5	240.5	11	9	ø47
			ø29.7	≈9		40±0.05	70±0.05						
			ø29.8	≈8		With shims	With shims						
			ø29.9	≈8		40	70						
			ø30.0	≈7		40	70						

MK

CKQ
CLKQ

CK□1

CLK2

D-□


-X□


Individual
-X□


Series CKQ_P^GK/CLKQ_P^GK

Dimensions

CLKQ_P^GKC50


(CLKQ_P^GKD50 Relationship between the mounting surface and a port location is .)

(CLKQ_P^GKE50 Relationship between the mounting surface and a port location is .)

(CLKQ_P^GKF50 Relationship between the mounting surface and a port location is .)

* Refer to "How to Order" on page 1288 for relationship between the mounting surface and a port location.

* The below figures indicate the CLKQ_P^GKC50-□RAH.

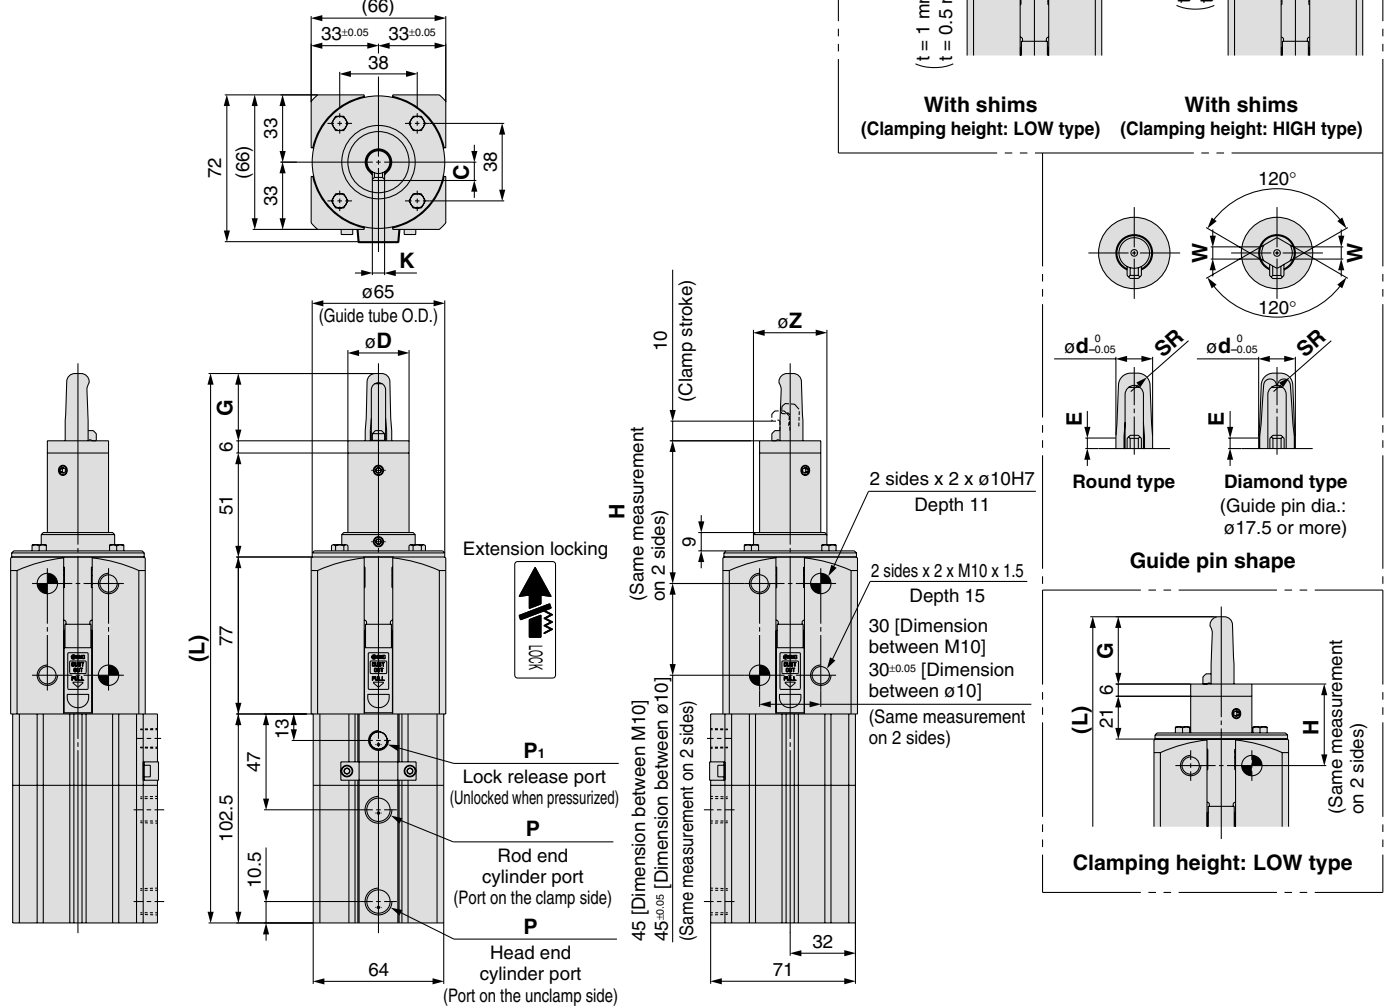


Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø13	9	ø30	ø12.5	≈10	33	Without shims	Without shims	6	239.5	269.5	4	—	ø36
			ø12.7	≈9		40±0.05	70±0.05						
			ø12.8	≈8		With shims 40	With shims 70						
			ø12.9	≈8									
			ø13.0	≈7									
ø15	11	ø30	ø14.5	≈9	34	Without shims	Without shims	7	240.5	270.5	5	—	ø36
			ø14.7	≈8		40±0.05	70±0.05						
			ø14.8	≈8		With shims 40	With shims 70						
			ø14.9	≈7									
			ø15.0	≈7									
ø16	11	ø30	ø15.5	≈10	34	Without shims	Without shims	7	240.5	270.5	5.5	—	ø36
			ø15.7	≈9		40±0.05	70±0.05						
			ø15.8	≈8		With shims 40	With shims 70						
			ø15.9	≈8									
			ø16.0	≈7									

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø18	12	ø35	ø17.5	≈10	37	Without shims	Without shims	7	243.5	273.5	6	6	ø40
			ø17.7	≈9		40±0.05	70±0.05						
			ø17.8	≈8		With shims 40	With shims 70						
			ø17.9	≈8									
			ø18.0	≈7									
ø20	13	ø35	ø19.5	≈10	39	Without shims	Without shims	8	245.5	275.5	7	7	ø40
			ø19.7	≈9		40±0.05	70±0.05						
			ø19.8	≈8		With shims 40	With shims 70						
			ø19.9	≈8									
			ø20.0	≈7									
ø25	16	ø40	ø24.5	≈10	39	Without shims	Without shims	8	245.5	275.5	9.5	7	ø47
			ø24.7	≈9		40±0.05	70±0.05						
			ø24.8	≈8		With shims 40	With shims 70						
			ø24.9	≈8									
			ø25.0	≈7									
ø30	18	ø40	ø29.5	≈10	39	Without shims	Without shims	8	245.5	275.5	11	9	ø47
			ø29.7	≈9		40±0.05	70±0.05						
			ø29.8	≈8		With shims 40	With shims 70						
			ø29.9	≈8									
			ø30.0	≈7									

P			P ₁		
Nil	TN	TF	Nil	TN	TF
Rc 1/4	NPT 1/4	G 1/4	Rc 1/8	NPT 1/8	G 1/8

Pin Clamp Cylinder

M series



Series CKQ^G_PM/CLKQ^G_PM

How to Order

Built-in standard magnet
With magnetic field resistant auto switch

C □ KQGM C 50 □ - 177 R A L □ - P4DWSC □

Built-in strong magnet
With magnetic field resistant auto switch

C □ KQP M C 50 □ - 198 R A L □ - P79WSE □

With lock on the clamp side ●

Nil	Without lock
L	With lock

Number of auto switches ●

Nil	2 pcs.
S	1 pc. (Unclamp side)

* The D-P4/P7 type is different-surface mounting. (Refer to page 1308)

Auto switch type

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* For applicable auto switch models, refer to page 1299.
* Auto switches are included, (but not assembled).

Shim


Nil	Without shims
S	With 3 mm shims*

* When a model includes shims, two 1 mm shims and two 0.5 mm shims are attached.

Clamping height (Refer to the below figure.)

L	LOW type (40 mm)
H	HIGH type (70 mm)

LOW type HIGH type



Clamping height

Mounting surface (viewed from top) ●

Symbol	Port location	Symbol	Port location
C	Mounting surface with the taps diagonal (top right and bottom left) Port	E	Mounting surface with the taps diagonal (top left and bottom right) Port
	Mounting surface with the taps diagonal (top left and bottom right)		Mounting surface with the taps diagonal (top right and bottom left)
D	Mounting surface with the taps diagonal (top right and bottom left) Port	F	Mounting surface with the taps diagonal (top left and bottom right) Port
	Mounting surface with the taps diagonal (top left and bottom right)		Mounting surface with the taps diagonal (top right and bottom left)

Bore size ●

50	50 mm
----	-------

Port thread type ●

Nil	Rc
TN	NPT
TF	G

Guide pin diameter ●

* For guide pin diameter, refer to Table 1 below.

Body shape

Symbol	Dimension	Mounting hole (tap, pin hole) arrangement	Mounting	Mounting surface (viewed from top)
M	□66	 ○: Mounting tap ●: Pin hole	Mounting tap: 2 x M12 x 1.75 Pin hole: 2 x ø10H7	 Mounting surface (Two facing sides)

Guide pin shape ●

R	Round type
D	Diamond type*


* Diamond type guide pin diameter is ø17.5 or more.

Clamp arm position (clockwise viewed from top)

A	Same direction as port Port Clamp arm Guide pin	C	180° from port Port Clamp arm Guide pin
B	90° from port Port Clamp arm Guide pin	D	270° from port Port Clamp arm Guide pin

Table 1. Guide Pin Diameter

Symbol	125	127	128	129	130	145	147	148	149	150	155	157	158	159	160
Guide pin diameter	12.5	12.7	12.8	12.9	13.0	14.5	14.7	14.8	14.9	15.0	15.5	15.7	15.8	15.9	16.0
Applicable hole diameter of workpiece	For ø13					For ø15					For ø16				
Guide pin shape	Round type														



Symbol	175	177	178	179	180	195	197	198	199	200	245	247	248	249	250	295	297	298	299	300
Guide pin diameter	17.5	17.7	17.8	17.9	18.0	19.5	19.7	19.8	19.9	20.0	24.5	24.7	24.8	24.9	25.0	29.5	29.7	29.8	29.9	30.0
Applicable hole diameter of workpiece	For ø18					For ø20					For ø25					For ø30				
Guide pin shape	Round type, Diamond type																			

Pin Clamp Cylinder *Series CKQ_P^GM/CLKQ_P^GM*

Table 2. Applicable Auto Switches / For detailed specifications about an auto switch for itself, refer to pages 1719 to 1827.

Applicable cylinder series	Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no in use)	Load voltage	Lead wire length	Applicable load
Series C(L)KQG	Solid state auto switch	D-P4DWSC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color display	2-wire (3-4)	24 VDC	0.3 m	Relay, PLC <small>Note 1)</small>
		Grommet		2-wire (1-4)		3 m			
				2-wire	5 m				
Series C(L)KQP	Reed auto switch	D-P79WSE	DC/AC magnetic field	Pre-wired connector	2-color display	2-wire (1-4)	24 VDC	0.3 m	
		Grommet		1-color display	2-wire	24 VDC 100 VAC	3 m		
							5 m		

Note 1) PLC: Programmable Logic Controller

Note 2) There are other applicable auto switches other than the listed above. For details, refer to page 1307.

MK

**CKQ
CLKQ**

CK□1

CLK2

D-□

-X□

**Individual
-X□**

Series CKQ_P^GM/CLKQ_P^GM



Basic Specifications

Action	Double acting	
Bore size (mm)	50	
Fluid	Air	
Minimum operating pressure	CKQ□: 0.1 MPa	CLKQ□ (With lock): 0.15 MPa*
Ambient and fluid temperature	-10 to 60°C (No freezing)	
Cushion	None	
Lubrication	Non-lube	
Piston speed (Clamp speed)	50 to 150 mm/sec	
Port size (Cylinder port)	1/4 (Rc, NPT, G)	

* Minimum operating pressure is 0.2 MPa when cylinder part and locking part use the same piping.

Proof Pressure/Maximum Operating Pressure

Guide pin diameter	Proof pressure	Max. operating pressure
ø12.5 to ø13.0	1.0 MPa	0.7 MPa
ø14.5 to ø30.0	1.5 MPa	1.0 MPa

Clamp Specifications

Clamp stroke	Without shims	With shims
	10 mm	10 to 13 mm
Clamp arm	1 pc.	
Guide pin shape	Round type, Diamond type	

* Refer to the below "Clamp Specifications" and Selection regarding detailed specifications of the clamping force, etc.

* Diamond type guide pin diameter is ø17.5 or more.

Lock Specifications

Locking action	Spring locking (Exhaust locking)
Unlocking pressure	0.2 MPa or more
Lock starting pressure	0.05 MPa or less
Locking direction	Lock at extended direction (Clamp holding)
Port size (Lock release port)	1/8 (Rc, NPT, G)
Holding force (N) (Maximum static load)	982

Mass

Unit: kg

Model	C(L)KQ _P ^G M			
	Without lock		With lock	
	L	H	L	H
ø12.5 to 13.0	1.67	1.84	2.18	2.35
ø14.5 to 15.0	1.67	1.84	2.18	2.35
ø15.5 to 16.0	1.67	1.84	2.19	2.36
ø17.5 to 18.0	1.72	1.89	2.23	2.41
ø19.5 to 20.0	1.72	1.9	2.24	2.42
ø24.5 to 25.0	1.78	1.99	2.3	2.51
ø29.5 to 30.0	1.83	2.03	2.34	2.55

Clamp Specifications

(N)

Model	Guide pin diameter	Operating pressure (MPa)								
		0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
CKQ _P ^G	ø12.5 to ø13.0	164.9	329.8	494.7	659.6	824.5	989.4	—	—	—
	ø14.5 to ø30.0	164.9	329.8	494.7	659.6	824.5	989.4	1154.3	1319.2	1484.1
CLKQ _P ^G	ø12.5 to ø13.0	82.4	247.3	412.2	577.1	742.0	906.9	—	—	—
	ø14.5 to ø30.0	82.4	247.3	412.2	577.1	742.0	906.9	Note 1) 1071.8	Note 1) 1236.7	Note 1) 1401.6

Note 1) Lock holding force of the CLKQ□ is 982 N. Design the circuit such that the lock holding force is taken into consideration when the operating pressure exceeds 0.75 MPa.

The operating pressure should be not greater than the lock holding force as it may cause wearing out and/or damage of the locking part and shorten lock life and may lead to possible failure if applied with a load larger than the lock holding force.

Note 2) It takes approximately 0.3 seconds for the cylinder to operate to generate clamping force from an unclamping state (when no speed controller is installed). Design circuit taking into consideration the time before the clamping force is generated.

Note 3) Determine the clamping force according to the strength of the workpiece. It can be damaged if the clamping force is too large.

Maintenance Parts

Replacement Parts: Seal Kit

Kit No.	Content
CQ2B50-PS	Piston seal Rod seal Tube gasket

* Consult SMC for maintenance service. Seal kit for maintenance of the CLKQ_P^G series with lock is not available.

Replacement Parts: Grease Pack


Kit No.	Content
GR-S-010	Grease 10 g

* Consult SMC when replacing the actuating cylinders.

Construction

CKQGM50

* The below figures indicate the CKQGM50-□RAL.

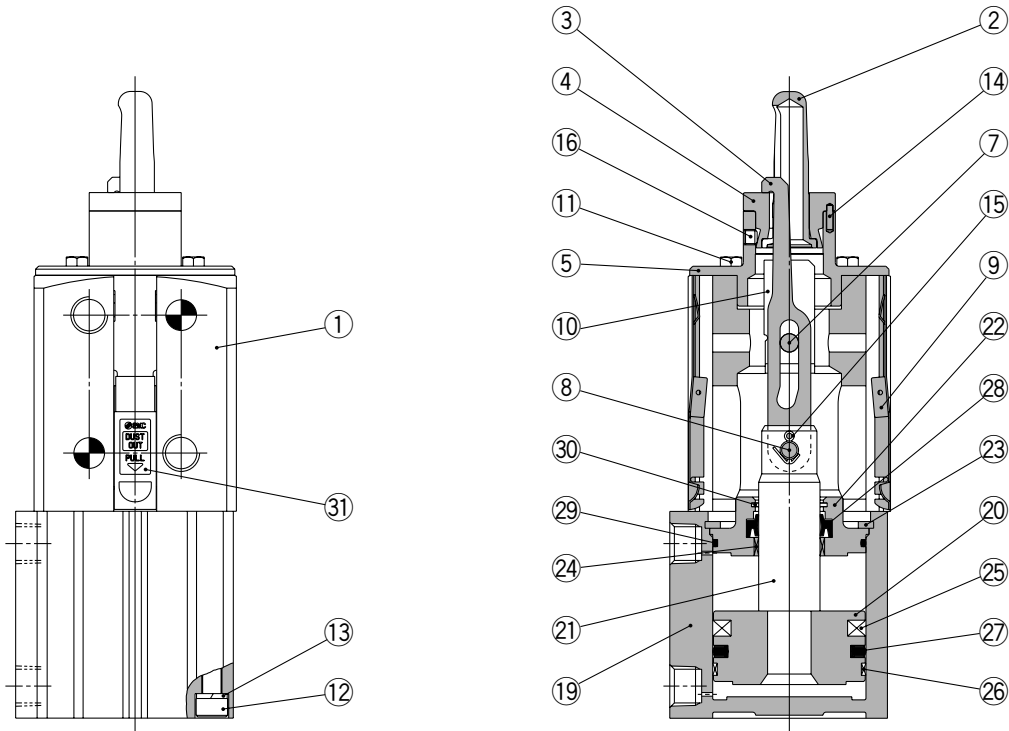


MK

CKQ
CLKQ

CK□1

CLK2

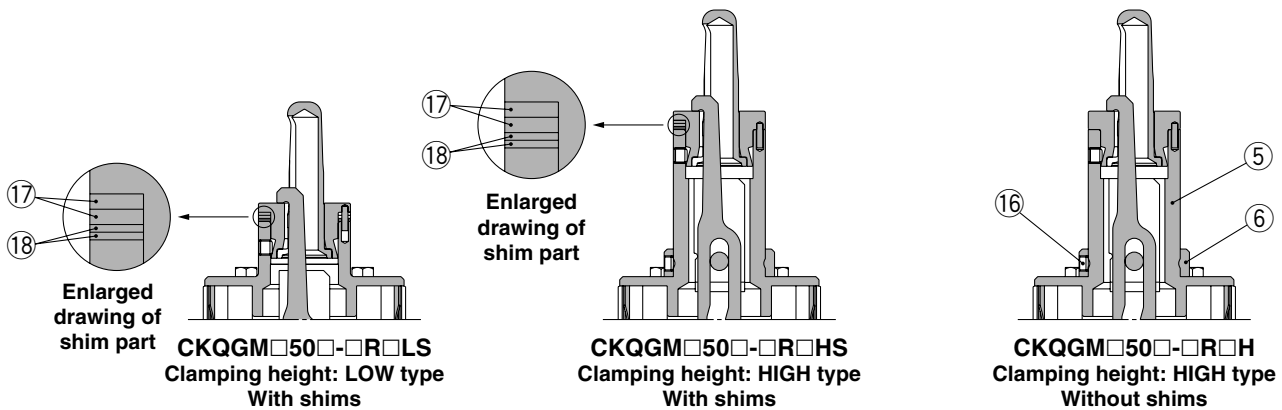

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Piston	Aluminum alloy	
21	Piston rod	Structural steel	
22	Collar	Aluminum alloy	
23	Retaining ring	Tool steel	
24	Bushing	Lead-bronze casted	
25	Magnet	—	
26	Wear ring	Resin	
27	Piston seal	NBR	
28	Rod seal	NBR	
29	Tube gasket	NBR	
30	Coil scraper	Bronze	
31	Seal	PET	

D-□

-X□


Individual
-X□

Series CKQ_P^GM/CLKQ_P^GM

Construction

CLKQGM50

* The below figures indicate the CLKQGM50-□RAL.

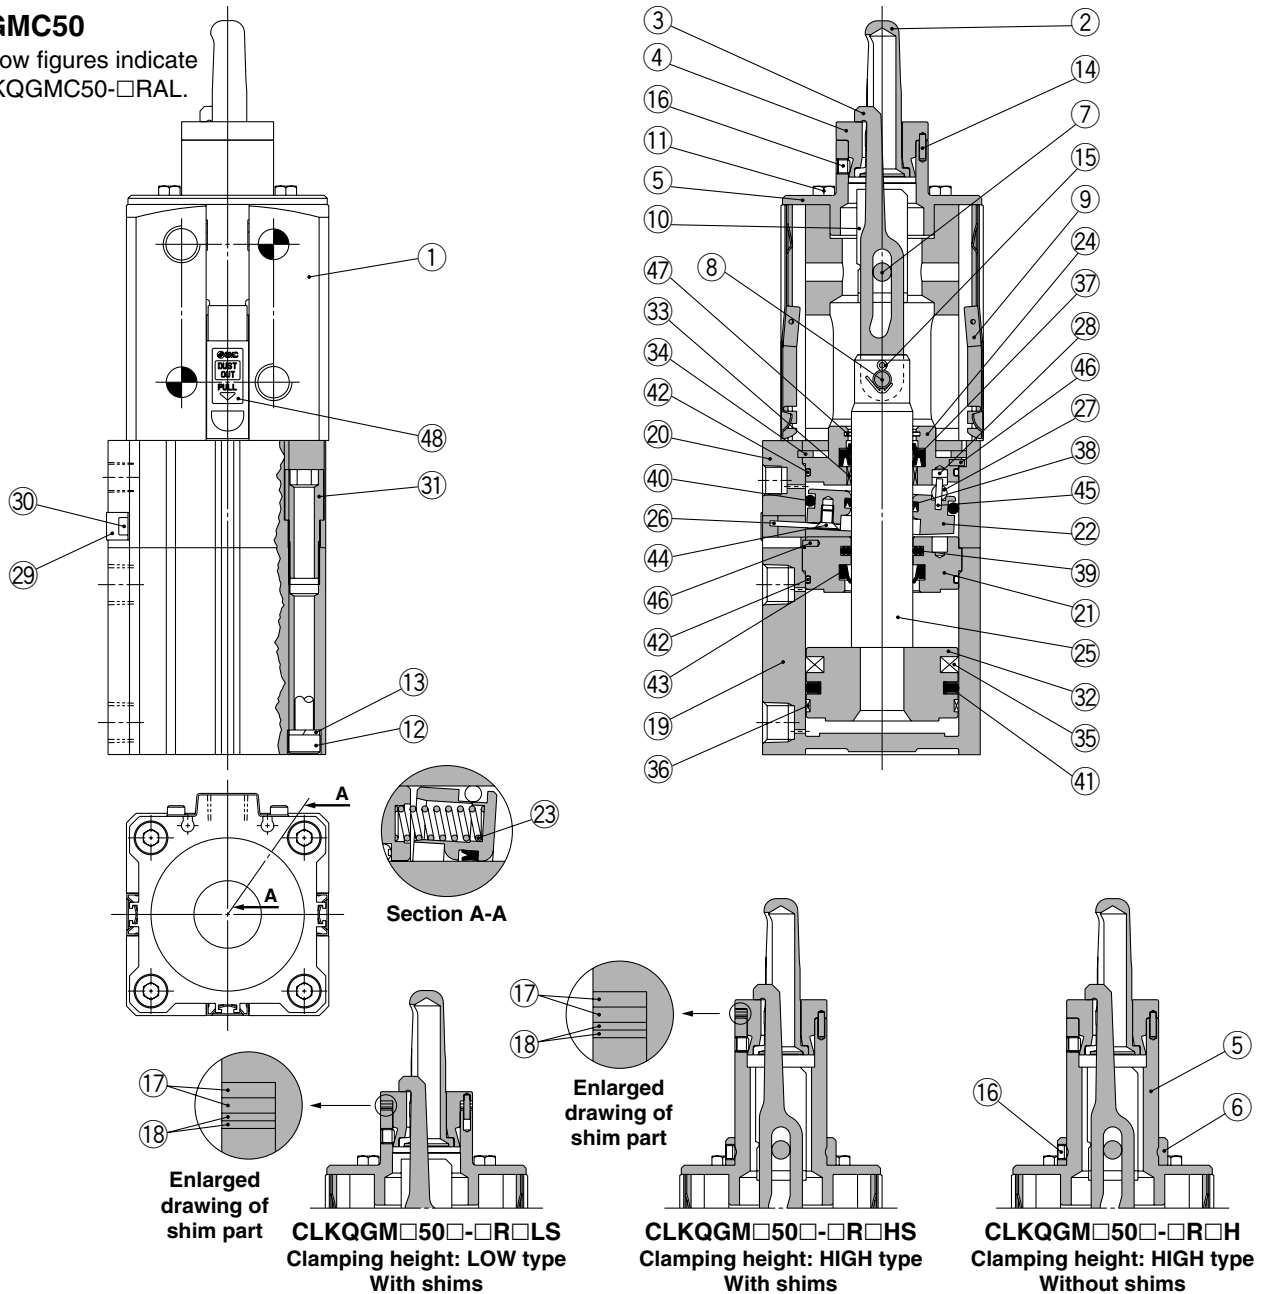

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Lock body	Aluminum alloy	
21	Intermediate collar	Aluminum alloy	
22	Lock ring	Tool steel	
23	Brake spring	Steel wire	
24	Collar	Aluminum alloy	
25	Piston rod	Structural steel	
26	Lever	Stainless steel	
27	Pivot pin	Structural steel	
28	Pivot key	Structural steel	
29	Dust cover	Steel strip	
30	Dust cover holding bolt	Structural steel	
31	Unit holding bolt	Structural steel	
32	Piston	Aluminum alloy	


Component Parts

No.	Description	Material	Note
33	Bushing	Lead-bronze casted	
34	Retaining ring	Tool steel	
35	Magnet	—	
36	Wear ring	Resin	
37	Rod seal A	NBR	
38	Rod seal B	NBR	
39	Rod seal C	NBR	
40	Piston seal A	NBR	
41	Piston seal B	NBR	
42	Tube gasket	NBR	
43	Scraper	NBR	
44	Hex. socket counter-sunk head screw	Structural steel	
45	Spring pin	Tool steel	
46	Parallel pin	Stainless steel	
47	Coil scraper	Bronze	
48	Seal	PET	

Construction

CKQPMC50

* The below figures indicate the CKQPMC50-□RAL.

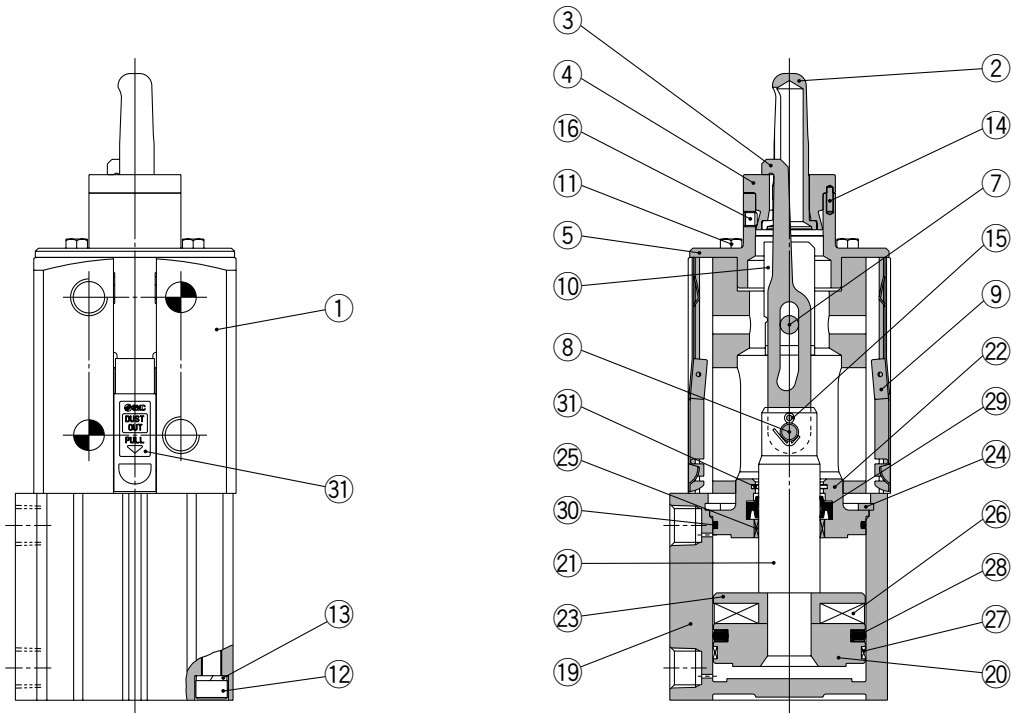


MK

CKQ
CLKQ

CK□1

CLK2

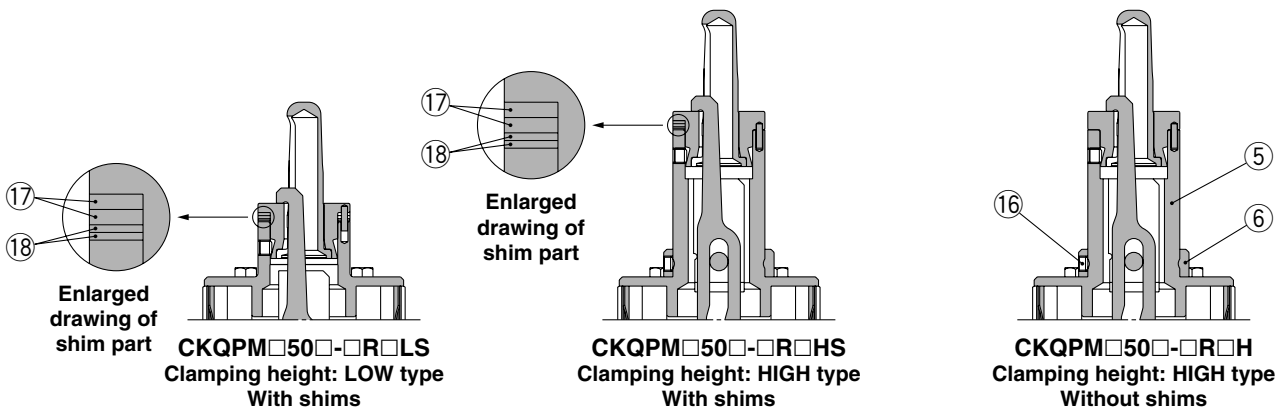

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	

Component Parts

No.	Description	Material	Note
17	Shim A	Stainless steel	t = 1 mm
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Piston	Aluminum alloy	
21	Piston rod	Stainless steel	
22	Collar	Aluminum alloy	
23	Magnet holder	Aluminum alloy	
24	Retaining ring	Tool steel	
25	Bushing	Lead-bronze casted	
26	Magnet	—	
27	Wear ring	Resin	
28	Piston seal	NBR	
29	Rod seal	NBR	
30	Tube gasket	NBR	
31	Coil scraper	Bronze	
32	Seal	PET	

D-□

-X□


Individual
-X□

Series CKQ_PM/CLKQ_PM

Construction

CLKQPMC50

* The below figures indicate the CLKQPMC50-□RAL.

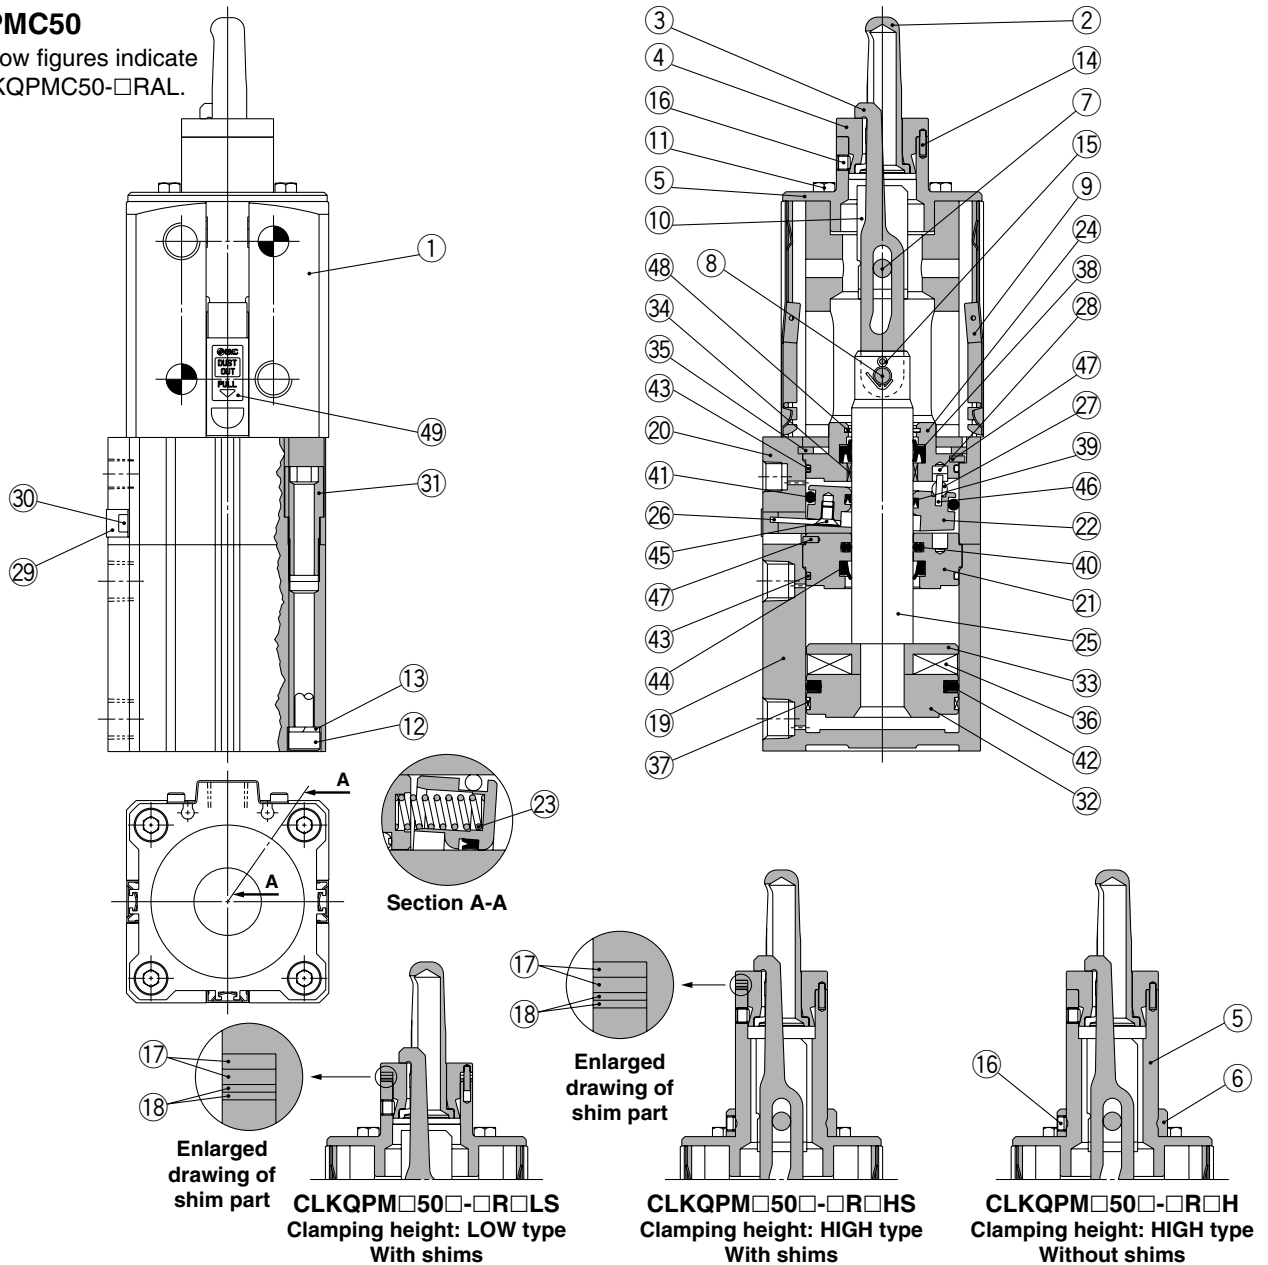

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	
2	Guide pin	Stainless steel	
3	Clamp arm	Structural steel	
4	Seat	Stainless steel	
5	Guide tube	Structural steel	
6	Ring	Aluminum alloy	
7	Pin A	Structural steel	
8	Pin B	Structural steel	
9	Cover assembly	Stainless steel	
10	Spatter cover	Tough pitch copper	
11	Hexagon bolt	Structural steel	
12	Hexagon socket head cap screw	Stainless steel	
13	Spring washer	Stainless steel	
14	Parallel pin	Tool steel	
15	Cotter pin	Stainless steel	
16	Hexagon socket head set screw	Structural steel	
17	Shim A	Stainless steel	t = 1 mm

Component Parts


No.	Description	Material	Note
18	Shim B	Stainless steel	t = 0.5 mm
19	Cylinder tube	Aluminum alloy	
20	Lock body	Aluminum alloy	
21	Intermediate collar	Aluminum alloy	
22	Lock ring	Tool steel	
23	Brake spring	Steel wire	
24	Collar	Aluminum alloy	
25	Piston rod	Stainless steel	
26	Lever	Stainless steel	
27	Pivot pin	Structural steel	
28	Pivot key	Structural steel	
29	Dust cover	Steel strip	
30	Dust cover holding bolt	Structural steel	
31	Unit holding bolt	Structural steel	
32	Piston	Aluminum alloy	
33	Magnet holder	Aluminum alloy	
34	Bushing	Lead-bronze casted	


Component Parts


No.	Description	Material	Note
35	Retaining ring	Tool steel	
36	Magnet	—	
37	Wear ring	Resin	
38	Rod seal A	NBR	
39	Rod seal B	NBR	
40	Rod seal C	NBR	
41	Piston seal A	NBR	
42	Piston seal B	NBR	
43	Tube gasket	NBR	
44	Scraper	NBR	
45	Hex. socket counter-sunk head screw	Structural steel	
46	Spring pin	Tool steel	
47	Parallel pin	Stainless steel	
48	Coil scraper	Bronze	
49	Seal	PET	

Dimensions

CKQ_PMC50



(CKQ_PMD50 Relationship between the mounting surface and a port location is )

(CKQ_PME50 Relationship between the mounting surface and a port location is )



(CKQ_PMF50 Relationship between the mounting surface and a port location is )

* Refer to "How to Order" on page 1298 for relationship between the mounting surface and a port location.

* The below figures indicate the CKQ_PMC50-□RAH.

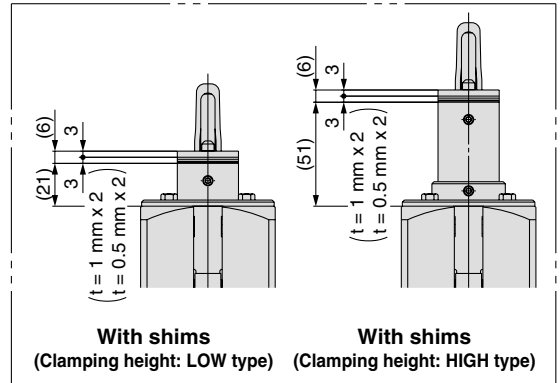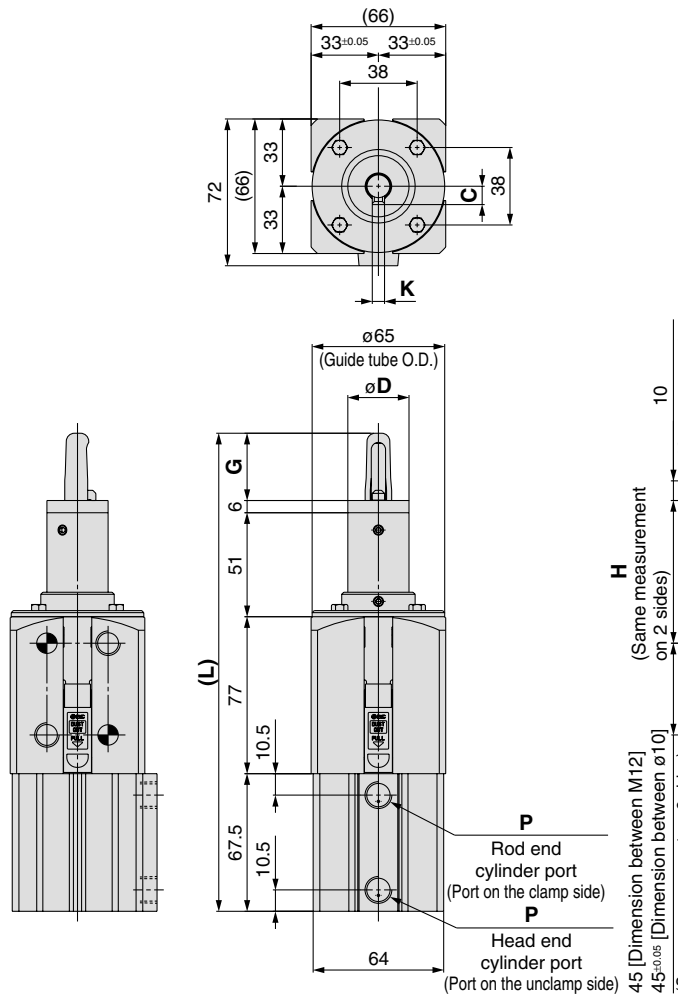

MK
CKQ
CLKQ
CK□1
CLK2

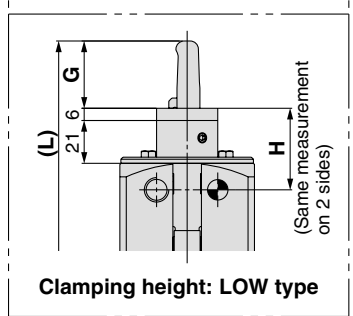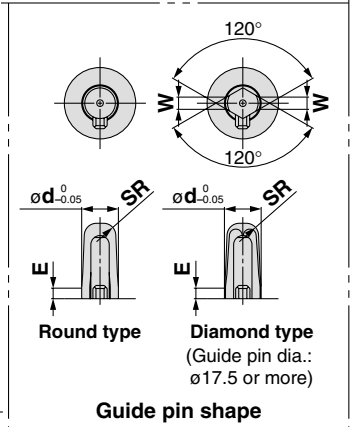

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø13	9	ø30	ø12.5	≈10	33	Without shims	Without shims	6	204.5	234.5	4	—	ø36
			ø12.7	≈9		40±0.05	70±0.05						
			ø12.8	≈8		With shims	With shims						
			ø12.9	≈8		40	70						
ø15	11	ø30	ø14.5	≈9	34	Without shims	Without shims	7	205.5	235.5	5	—	ø36
			ø14.7	≈8		40±0.05	70±0.05						
			ø14.8	≈8		With shims	With shims						
			ø14.9	≈7		40	70						
			ø15.0	≈7		40	70						
ø16	11	ø30	ø15.5	≈10	34	Without shims	Without shims	7	205.5	235.5	5.5	—	ø36
			ø15.7	≈9		40±0.05	70±0.05						
			ø15.8	≈8		With shims	With shims						
			ø15.9	≈8		40	70						
			ø16.0	≈7		40	70						

P		
Nil	TN	TF
Rc 1/4	NPT 1/4	G 1/4


Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø18	12	ø35	ø17.5	≈10	37	Without shims	Without shims	7	208.5	238.5	6	6	ø40
			ø17.7	≈9		40±0.05	70±0.05						
			ø17.8	≈8		With shims	With shims						
			ø17.9	≈8		40	70						
			ø18.0	≈7		40	70						
ø20	13	ø35	ø19.5	≈10	39	Without shims	Without shims	8	210.5	240.5	7	7	ø40
			ø19.7	≈9		40±0.05	70±0.05						
			ø19.8	≈8		With shims	With shims						
			ø19.9	≈8		40	70						
			ø20.0	≈7		40	70						
ø25	16	ø40	ø24.5	≈10	39	Without shims	Without shims	8	210.5	240.5	9.5	7	ø47
			ø24.7	≈9		40±0.05	70±0.05						
			ø24.8	≈8		With shims	With shims						
			ø24.9	≈8		40	70						
			ø25.0	≈7		40	70						
ø30	18	ø40	ø29.5	≈10	39	Without shims	Without shims	8	210.5	240.5	11	9	ø47
			ø29.7	≈9		40±0.05	70±0.05						
			ø29.8	≈8		With shims	With shims						
			ø29.9	≈8		40	70						
			ø30.0	≈7		40	70						


D-□
-X□
Individual
-X□


Series CKQ_PM/CLKQ_PM

Dimensions

CLKQ_PMC50


(CLKQ_PMD50 Relationship between the mounting surface and a port location is )

(CLKQ_PME50 Relationship between the mounting surface and a port location is )

(CLKQ_PMF50 Relationship between the mounting surface and a port location is )

* Refer to "How to Order" on page 1298 for relationship between the mounting surface and a port location.

* The below figures indicate the CLKQ_PMC50-□RAH.

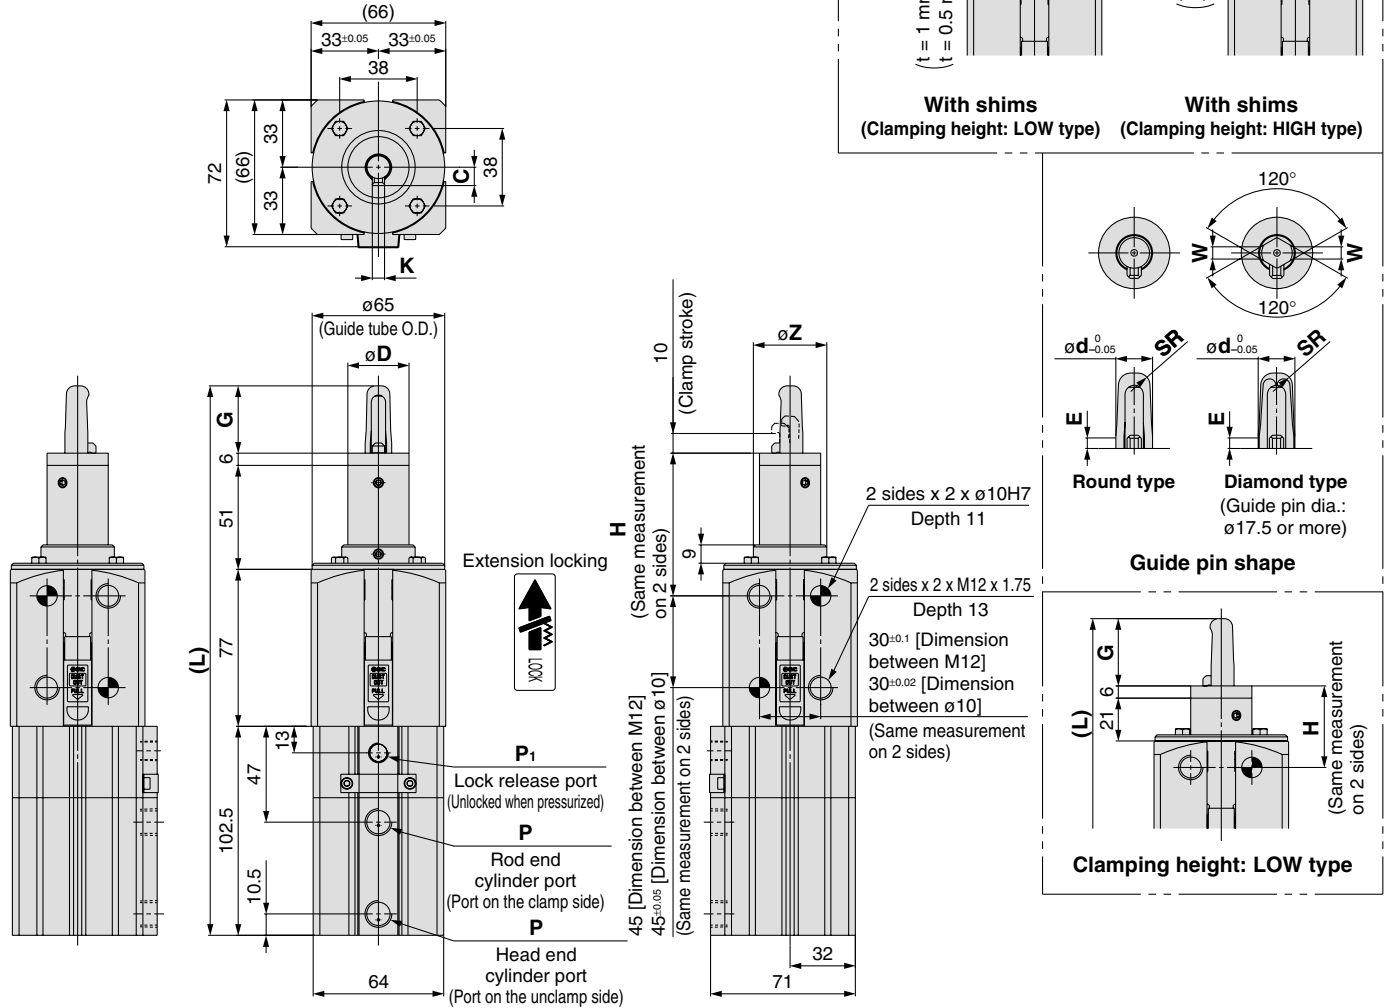

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø13	9	ø30	ø12.5	≈10	33	Without shims	Without shims	6	239.5	269.5	4	—	ø36
			ø12.7	≈9		40±0.05	70±0.05						
			ø12.8	≈8		With shims	With shims						
			ø12.9	≈8		40	70						
			ø13.0	≈7		40	70						
ø15	11	ø30	ø14.5	≈9	34	Without shims	Without shims	7	240.5	270.5	5	—	ø36
			ø14.7	≈8		40±0.05	70±0.05						
			ø14.8	≈8		With shims	With shims						
			ø14.9	≈7		40	70						
			ø15.0	≈7		40	70						
ø16	11	ø30	ø15.5	≈10	34	Without shims	Without shims	7	240.5	270.5	5.5	—	ø36
			ø15.7	≈9		40±0.05	70±0.05						
			ø15.8	≈8		With shims	With shims						
			ø15.9	≈8		40	70						
			ø16.0	≈7		40	70						

Hole diameter of workpiece	C	øD	ød	E	G	H		K	L		SR	W	øZ
						LOW type	HIGH type		LOW type	HIGH type			
ø18	12	ø35	ø17.5	≈10	37	Without shims	Without shims	7	243.5	273.5	6	6	ø40
			ø17.7	≈9		40±0.05	70±0.05						
			ø17.8	≈8		With shims	With shims						
			ø17.9	≈8		40	70						
			ø18.0	≈7		40	70						
ø20	13	ø35	ø19.5	≈10	39	Without shims	Without shims	8	245.5	275.5	7	7	ø40
			ø19.7	≈9		40±0.05	70±0.05						
			ø19.8	≈8		With shims	With shims						
			ø19.9	≈8		40	70						
			ø20.0	≈7		40	70						
ø25	16	ø40	ø24.5	≈10	39	Without shims	Without shims	8	245.5	275.5	9.5	7	ø47
			ø24.7	≈9		40±0.05	70±0.05						
			ø24.8	≈8		With shims	With shims						
			ø24.9	≈8		40	70						
			ø25.0	≈7		40	70						
ø30	18	ø40	ø29.5	≈10	39	Without shims	Without shims	8	245.5	275.5	11	9	ø47
			ø29.7	≈9		40±0.05	70±0.05						
			ø29.8	≈8		With shims	With shims						
			ø29.9	≈8		40	70						
			ø30.0	≈7		40	70						

P			P ₁		
Nil	TN	TF	Nil	TN	TF
Rc 1/4	NPT 1/4	G 1/4	Rc 1/8	NPT 1/8	G 1/8

Auto Switch Mounting

For D-P4DW□□, D-P7□ and P79WSE models

1. Mount the auto switch mounting bracket onto the auto switch mounting nut by tightening bracket fixing screw lightly through the mounting hole on the top of bracket.
2. Insert the auto switch mounting bracket assembly (bracket + nut) into the mounting groove and set it at the auto switch mounting position.
3. Push the auto switch mounting screw lightly into the auto switch through the mounting hole to secure.
4. After reconfirming the detecting position, tighten the auto switch mounting screw to secure the auto switch mounting bracket and the auto switch. (Tightening torque should be 0.5 to 0.7 N·m.) (See Fig. 1 and Fig. 2.)

* Be aware that the D-P79WSE should be installed in the specified direction shown when installed to the auto switch mounting bracket. Be sure to mount it so that the soft resin mold surface is in contact with the auto switch mounting bracket. (See Fig. 2.)

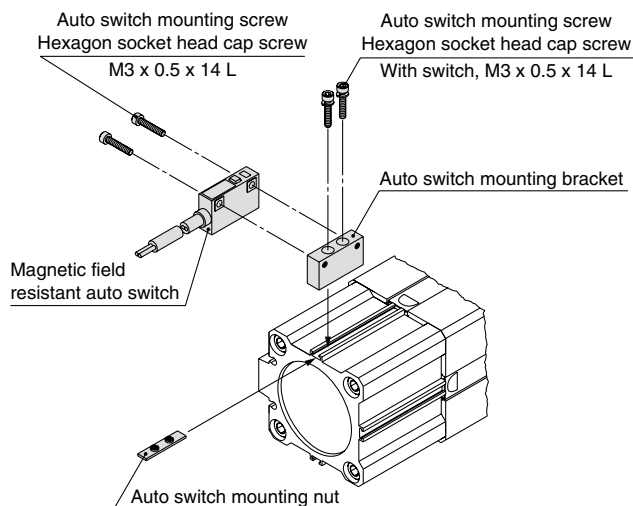


Figure 1

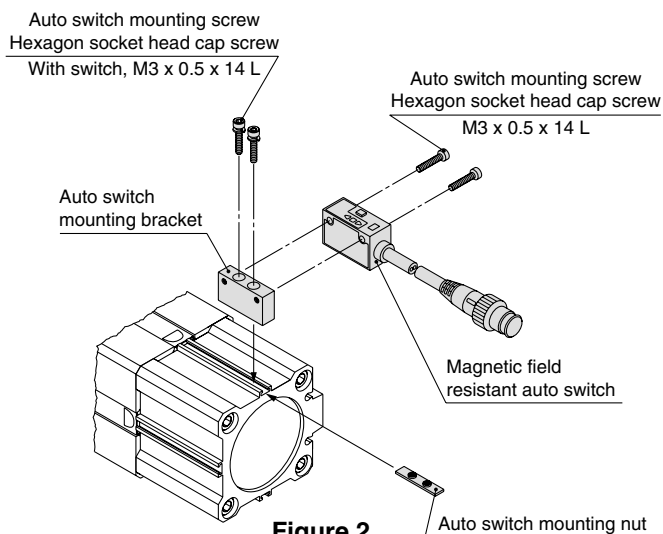


Figure 2

Auto switch mounting bracket part number	Items and number of each item
BQP1T-050	<ul style="list-style-type: none"> • Switch mounting bracket x 1 • Switch mounting nut x 1 • Hexagon socket head cap screw x 2 • Hexagon socket head cap screw x 2 (with switch)

Besides the models listed in "How to Order," the following auto switches are applicable.

* For magnetic field resistant 2-color indication solid state auto switches, auto switches with pre-wired connector (D-P4DW□DPC type) are also available. Refer to pages 1784 and 1785.

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□

Individual
-X□

Series CKQG_P□/CLKQG_P□

Auto Switch Proper Mounting Position and Its Mounting Height

Auto Switch Proper Mounting Position

Environment	Welding			
Mounting	Rail mounting			
Model	D-P4DWSE D-P4DWSC D-P4DWL D-P4DWZ		D-P74L D-P74Z D-P79WSE	
	A	B	A	B
CKQG	7	17 or more	—	—
CLKQG	42	52 or more	—	—
CKQP	—	—	5.5	20.5 or more
CLKQP	—	—	40.5	55.5 or more

Note) Adjust the auto switch after confirming the operation to set actually.


Auto Switch Proper Mounting Height

Environment	Welding	
Mounting	Rail mounting	
Model	D-P4DWSE D-P4DWSC D-P4DWL D-P4DWZ	
	≈U	
C(L)KQG	50	—
C(L)KQP	—	50


Rail mounting type (Different-surface mounting)

• Applicable auto switch: D-P4DW□□

[CKQG]

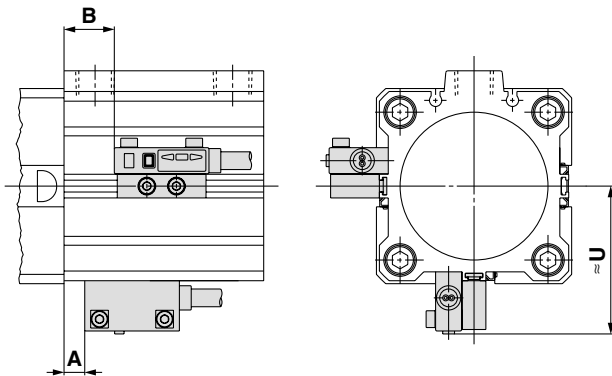


[CLKQG]

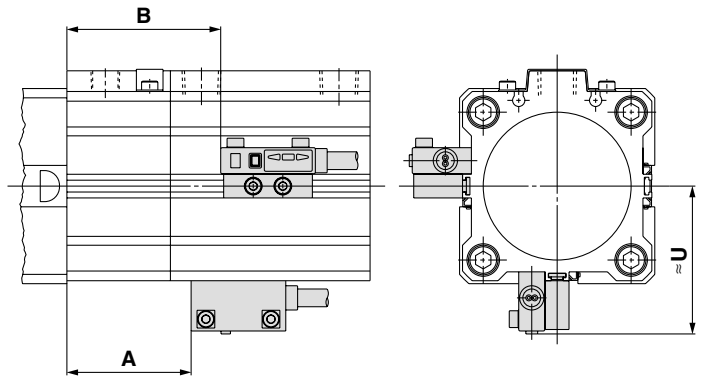


• Applicable auto switch: D-P74□/D-P79WSE

[CKQP]

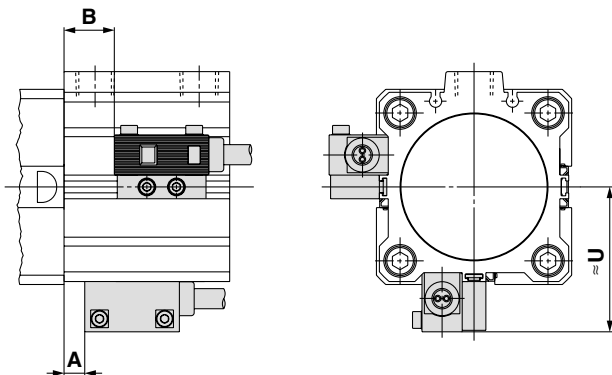

[CLKQP]

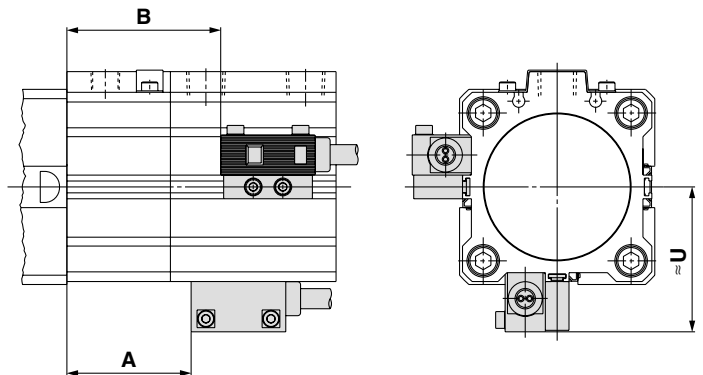

Operating Range

Cylinder model	Auto switch model	Operating range
C(L)KQG	D-P4DWS□ D-P4DW□	6.5
C(L)KQP	D-P74□ D-P79WSE	10

* Since this is a guideline including hysteresis, not meant to be guaranteed.
(Assuming approximately ±30% dispersion.)
There may be the case it will vary substantially depending on an ambient environment.



Series CKQ^G□/CLKQ^G□

Specific Product Precautions 1

Be sure to read before handling.

Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Design

Warning

- 1. There is a possibility of dangerous sudden action by cylinders if sliding parts of machinery are twisted due to external forces, etc.**

In such cases, human injury may occur; e.g., by catching hands or feet in the machinery, or damage to the machinery itself may occur. Therefore, the machine should be adjusted to operate smoothly and designed to avoid such dangers.

- 2. A protective cover is recommended to minimize the risk of personal injury.**

If a stationary object and moving parts of a cylinder are in close proximity, personal injury may occur. Design the structure to avoid contact with the human body.

- 3. Securely tighten all stationary parts and connected parts so that they will not become loose.**

Especially when a cylinder operates with high frequency or is installed where there is a lot of vibration, ensure that all parts remain secure.

- 4. Design the equipment so that the maximum theoretical force is not applied to the cylinder.**

If the cylinder becomes damaged there is a danger of human injury and or equipment damage.

- 5. Select the mounting base by taking into consideration its rigidity because the cylinder applies a large amount of force.**

Otherwise there is a danger of human injury and or equipment damage.

- 6. Consider the possibility of a decrease in circuit pressure when power is turned off.**

If the cylinder is used for a clamping application there is a danger of the workpiece being released since the circuit pressure decreases when the power is turned off. Install safety equipment to prevent human injury and damage to machine and or equipment. The same consideration should be given for hanging or lift applications to prevent dropping of a workpiece.

- 7. Consider a possible loss of power source.**

Measures should be taken to protect against bodily injury and equipment damage in the event that there is a loss of power to equipment controlled by pneumatics, electricity, or hydraulics.

- 8. Consider emergency stops.**

Design so that human injury and/or damage to machinery and equipment will not be caused when machinery is stopped by a safety device under abnormal conditions, a power outage or a manual emergency stop.

- 9. Consider the action when operation is restarted after an emergency stop or abnormal stop.**

Design the machinery so that human injury or equipment damage will not occur upon restart of operation.

When the cylinder has to be reset at the starting position, install manual safety equipment.

- 10. Intermediate stop**

In the case of 3-position closed center of a valve, it is difficult to make a piston stop at the required position as accurately and precisely as with hydraulic pressure due to compressibility of air. Furthermore, since valves and cylinders, etc. are not guaranteed for zero air leakage, it may not be possible to hold a stopped position for an extended period of time. Contact SMC in the case it is necessary to hold a stopped position for an extended period. Do not intermediately stop the CLKQ cylinder during a locking operation because it will shorten the life of the cylinder.

Selection

Warning

- 1. Confirm the specifications.**

The products featured in this catalog are designed for use in industrial compressed air systems. If the products are used in conditions where pressure and/or temperature are outside the range of specifications, damage and/or malfunctions may occur. Do not use in these conditions. (Refer to the specifications.)

Consult SMC if you use a fluid other than compressed air.

- 2. Do not use for applications other than clamping.**

Since the cylinder performs both positioning and clamping simultaneously, any other application may cause an accident or damage to the cylinder.

- 3. Do not modify the cylinder.**

Do not modify the cylinder because it may cause damage to it, shorten the protect life, and or cause an accident.

- 4. The following table shows the maximum thickness of workpieces that be clamped.**

Model	Without shims	With shims
CKQG	10 mm	10 to 13 mm
CLKQG	10 mm	10 to 13 mm
CKQP	10 mm	10 to 13 mm
CLKQP	10 mm	10 to 13 mm

Workpieces to be clamped should not be thicker than those shown in the table.

- 5. Clamp only the flat side of a workpiece.**

- 6. If a workpiece is transferred three dimensionally and at high speed by a robot after it is clamped, the work weight must be 1/10 or less of the theoretical thrust (clamping force), or stoppers should be installed as a preventive measure for the movement of the workpiece.**

- 7. Do not clamp without setting the workpiece on a work surface.**

If the clamp arm makes contact with the seat surface without clamping a workpiece, the surface flatness condition of the seat surface and the clamp arm (the clamping surface) will be adversely effected.

- 8. Do not apply an impact load, strong vibrations or rotating force to the product.**

Since the cylinder is composed of precisely manufactured parts, they may be damaged and the life may be shortened if a strong impact load, strong vibration or rotating force are applied.

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□

Individual
-X□



Series CKQG^G□/CLKQG^G□

Specific Product Precautions 2

Be sure to read before handling.

Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Selection

Warning

[For the CLKQG/P series only]

9. Do not use for intermediate cylinder stops.

This cylinder is designed to lock in a clamped condition to prevent unwanted movement. Do not perform any intermediate stops while the cylinder is operating, since it will shorten the product life.

10. Select the correct locking position since this cylinder does not generate a holding force opposite to the locking direction.

The forwarded lock type (F type) clamp does not generate a holding force in the opposite direction (clamping direction). In addition the locking direction can not be changed.

11. Even when locked, there may be a stroke movement of approximately 1 mm in the locking direction due to external forces, such as the weight of the workpiece.

Even when locked, if air pressure drops, a stroke movement of approximately 1 mm may occur in the locking direction. This is caused by external forces, such as, the workpiece weight due to the general characteristics of the locking mechanism.

Applicable Guide Pin Diameter

Model	Guide pin diameter (mm)														
	12.5	12.7	12.8	12.9	13.0	14.5	14.7	14.8	14.9	15.0	15.5	15.7	15.8	15.9	16.0
Applicable hole diameter of workpiece	For ø13					For ø15					For ø16				
Guide pin shape	Round type														

Model	Guide pin diameter (mm)																		
	17.5	17.7	17.8	17.9	18.0	19.5	19.7	19.8	19.9	20.0	24.5	24.7	24.8	24.9	25.0	29.5	29.7	29.8	29.9
Applicable hole diameter of workpiece	For ø18					For ø20					For ø25					For ø30			
Guide pin shape	Round type, Diamond type																		

Clamping Force

(N)

Model	Guide pin diameter (mm)	Operating pressure (MPa)								
		0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
CKQG CKQP	ø12.5 to ø13.0	164.9	329.8	494.7	659.6	824.5	989.4	1154	1319	1484
	ø14.5 to ø30.0	164.9	329.8	494.7	659.6	824.5	989.4	—	—	—
CLKQG CLKQP	ø12.5 to ø13.0	82.4	247.3	412.2	577.1	742.0	906.9	1071.8 ^{Note 1)}	1236.7 ^{Note 1)}	1401.6 ^{Note 1)}
	ø14.5 to ø30.0	82.4	247.3	412.2	577.1	742.0	906.9	—	—	—

Note 1) When designing a circuit with an operating pressure that exceeds 0.75 MPa, consider the holding force of the lock since the holding force for the CLKQG/P lock is 982 N. The cylinder should be used below the maximum theoretical holding force because damage, shortening of life, and or an accident may occur due to friction in the lock section or damage from a load which exceeds the lock holding force.

Note 2) Design a circuit taking into consideration that it takes approximately 0.3 seconds from the time an unclamped cylinder starts to operate to the time that the clamping force is generated.

Note 3) Take into consideration the durability of a workpiece because it may be damaged if the clamping force is too great.

Caution

1. To adjust the cylinder speed, attach a speed controller and begin to adjust the speed by setting it to a low speed first. Gradually increase the set speed till the required speed is reached.



Series CKQG^G□/CLKQG^G□

Specific Product Precautions 3

Be sure to read before handling.


Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Pneumatic Circuit

Warning

1. Recommended pneumatic circuit for the CKQG/P series


The following is an example of a basic meter-out control circuit for operating a cylinder using an air filter, a regulator, a solenoid valve and a speed controller.

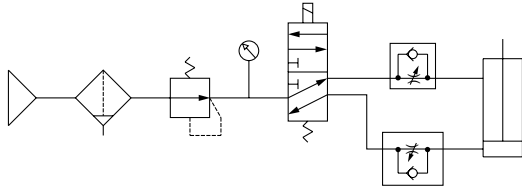

Recommended pneumatic circuit

2. Recommended pneumatic circuit for the CLKQG/P series

- 1) Do not use a 3-positioning valve (double check valve, exhaust center or pressure center types) for any application because the lock may fail due to unlocking pressure.
- 2) Install speed controllers for meter-out control. If it used in meter-in control, it may result in malfunction.
- 3) Be careful of reverse exhaust pressure flow from a common exhaust type manifold. Since the lock may be released due to reverse exhaust pressure flow, use an individual exhaust type manifold or single type valve.
- 4) Branch off of the compressed air piping for the lock unit between the cylinder and the speed controller. Branching off of another part may shorten the product life.
- 5) Construct piping so that the piping length from the branched point to the lock unit is short. If it is long, unlocking may not function well, and it may shorten product life of the lock.
- 6) SMC recommends a 2-position double solenoid valve is used.

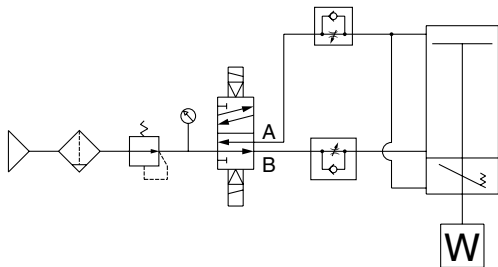


Recommended pneumatic circuit

- 7) It is possible to use the pneumatic circuit shown below. However, unlock the cylinder before operating. Also, unlock the cylinder first before operating the cylinder in any direction.

In the event that unlocking is initially delayed, it will cause product damage and drastic shortening of product life. It is also highly dangerous because there is possibility of the cylinder lurching at high speed. The cylinder must be unlocked before operating it in free direction, as well.

- 8) When the pneumatic circuit indicated below is used, please remember that the work displacement at the locked position of the cylinder to the direction that the stroke advances may be a large degree.

Depending on the piping length and the exhaust time, the activation of the locking function may be delayed, resulting in a large degree of work displacement in the direction of the advancing stroke.

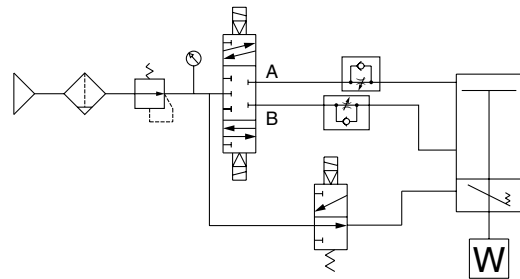

MK

CKQ
CLKQ

CK□1

CLK2

Mounting

Caution

1. Do not use the cylinder until it is confirmed that the equipment is operating correctly.

After installation, maintenance or replacement, connect the compressed air or electricity and verify that the installation is correct by performing appropriate function and/or leakage tests.

2. Do not dent the cylinder tube or the guide pin parts.

Slight deformation will cause a malfunction since the tube I.D. is manufactured with a tight tolerance. Excessive impact will cause damage to the guide pin because it is heat treated.

3. Prevent any foreign materials, such as machining chips, from entering into internal cylinder from the air supply port.

When the mounting holes for the cylinder are made, machined chips may enter the cylinder from the air supply port if the cylinder is left near the installation site. Prevent the machining chips from entering into the cylinder.

4. The opening part of a guide pin should not face in the same direction as oncoming spatter.

If the spatter enters the cylinder from the opening part of the guide pin, it will shorten the product life and cause a malfunction.

D-□

-X□

Individual
-X□



Series CKQG_P□/CLKQG_P□

Specific Product Precautions 4

Be sure to read before handling.


Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Mounting

⚠ Caution


5. Consider the welding point of the guide pin when determining the direction of the clamp arm setting.

The clamp arm will be damaged if clamping is performed at the welded point of the guide pin. Therefore, set the clamping direction as illustrated below, so that the welded point is not effected by clamping.

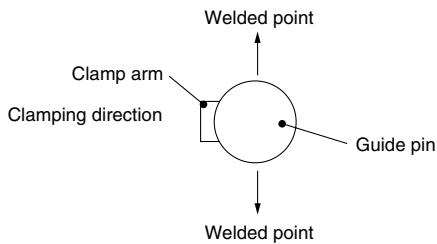

6. When assembling and adjusting the product, begin the task by applying pressure only to the unlocking port (for the CLKQG/P series only).

7. When attaching a cylinder to the equipment, use the tightening torque specified in the below table.



Thread size	Tightening torque (N·m)
M10	20 to 25
M12	35 to 42

8. Check the auto switch operation when the product is used where welding is performed.

9. When installing a cylinder with an auto switch, secure enough space on the bottom side of the cylinder providing the minimum bending radius for the lead wire to permit better serviceability (such as replacement of groove mounting auto switches).

10. Operating manual

Install the products and operate them only after reading the operating manual carefully and understanding its contents. Also, keep the manual where it can be referred to as necessary.

Piping


⚠ Caution

1. Before piping

Before piping, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil and other debris from inside the pipe.

2. Wrapping of pipe tape

When screwing piping or fittings into ports, ensure that chips from the pipe threads or sealing material do not get inside the piping. Also, when the pipe tape is used, leave 1.5 to 2 thread ridges exposed at the end of the threads.



3. Piping length should be short.

If the piping to the cylinder is too long, the volume of water vapor in the internal tubing increases beyond that of the internal cylinder due to the generation of water vapor by adiabatic expansion. Since the water vapor stays inside of the tubing without being released into the air, repeated operation results in the generation of water. Grease in the cylinder is drained out as it flows away with the water. This action lowers the smoothness in the cylinder, resulting in air leakage due to worn out seals, and or malfunction due to increased friction resistance. Please do the following to prevent this problem:

- 1) Tubing from a solenoid valve to a cylinder should be as short as possible to assure the evacuation of the generated water vapor into the air.
As a guide, the air capacity in the cylinder, which when converted to atmospheric pressure x 0.7 should be \geq the piped tubing capacity.
- 2) Pipe a speed exhaust controller ASV and a quick exhaust valve to a cylinder to exhaust the exhaust pressure directly to the air.
- 3) Piping port should face downward so that the generated moisture inside tubing does not easily return to the cylinder.



Series CKQG^G□/CLKQG^G□

Specific Product Precautions 5

Be sure to read before handling.

Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Lubrication

⚠ Caution

1. Lubrication for the CKQG/P cylinder

The cylinder is lubricated at the factory, and can be used without further lubrication.

In the event that lubricant is used, install a lubricator in the circuit and use Class 1 turbine oil (without additives) ISO VG-32. A malfunction can occur due to loss of the original lubricant if lubrication is stopped in the future. Therefore, once lubrication is applied, it must be used continuously.

2. Lubrication for the CLKQG/P cylinder

Do not lubricate because it may considerably lower the locking performance.

Maintenance

⚠ Caution


1. If spatter enters the cylinder body, remove it by first detaching the covers. Do not scratch or make dents on the sliding parts of the piston rod by striking it with other objects or grasping them with other objects.

Since the outside diameter of a piston rod is manufactured with a tight tolerance, even a slight deformation can cause an operation malfunction.

Any scratches and dents on the sliding parts of the piston rod can cause damage to the seals, resulting in air leakage.

2. To release the cover, insert a flat head screwdriver in the notch on the cover and apply force.

If a finger is used to remove the cover, the edge of the cover's notch may injure the finger.

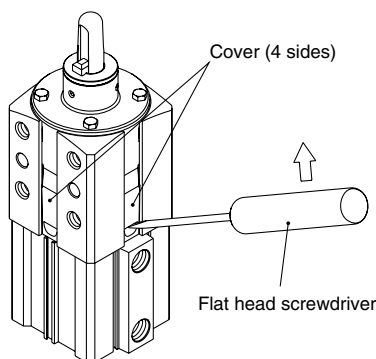

3. Drain flushing

Remove drainage from air filters regularly. (Refer to the specifications.)

Handling

Magnetic field resistant auto switches D-P79WSE/D-P74□ type are specifically for use with magnetic field resistant cylinders and are not compatible with general auto switches or cylinders. Magnetic field resistant cylinders are labeled as follows.

Magnetic field resistant cylinder with built-in magnet
(For use with auto switch D-P7 type)

Mounting

1. In order to fully use the capacity of magnetic field resistant auto switches, strictly observe the following precautions.

- 1) Do not allow the magnetic field to occur when the cylinder piston is moving.
- 2) When a welding cable or welding gun electrodes are near the cylinder, change the auto switch position to fall within the operational ranges shown in the graphs on the back of page 1314, or move the welding cable away from the cylinder.
- 3) Cannot be used in an environment where welding cables surround the cylinder.
- 4) Consult SMC when a welding cable and welding gun electrodes (something energized with secondary current) are near multiple switches.

2. In an environment where spatter directly hits the lead wire, cover the lead wire with protective tubing. Use protective tubing I.D. ø8 or more that has excellent heat resistance and flexibility.

Contact Capacity

Never operate a load that exceeds the maximum contact capacity of the auto switch.

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□

Individual
-X□



Series **CKQ_P^G□/CLKQ_P^G□**







Specific Product Precautions 6

Be sure to read before handling.







Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Data: Magnetic Field Resistant Reed Switch (D-P79WSE type, D-P74□ type) Safety Distance

Safety Distance from Side of Auto Switch

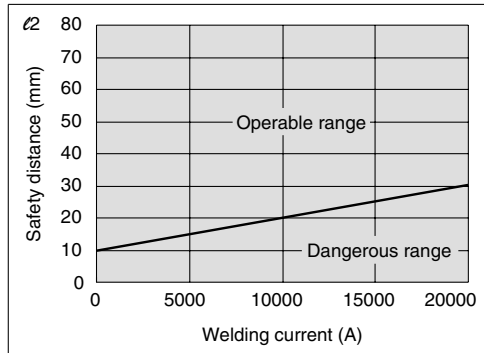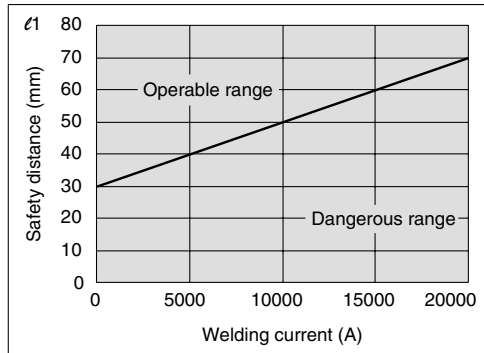

Safety Distance from Top of Auto Switch

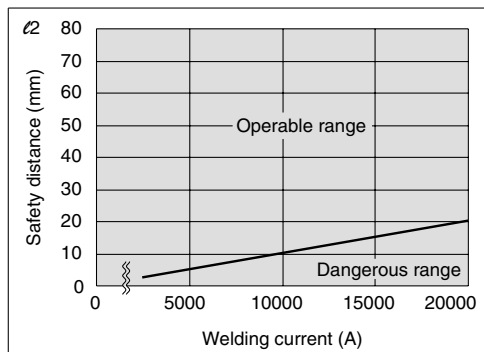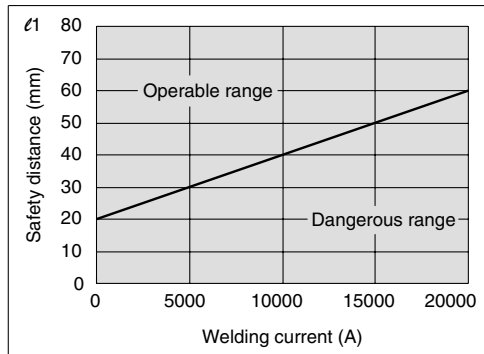



Series **CKQ_P^G□/CLKQ_P^G□**

Specific Product Precautions 7

Be sure to read before handling.

Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Operation

⚠ Warning


1. Do not unlock when an external force, such as a load or spring force is being applied.

This is very dangerous because the cylinder will move suddenly. Take the following steps.

- 1) Restore the air pressure in the B line of the pneumatic circuit to operating pressure. Once restored, gradually let the air pressure drop.
- 2) If air pressure cannot be used, prevent cylinder movement with a lifting device such as a jack, then release the lock.

2. After all safety precautions have been confirmed, perform the manual release by following the steps shown below.

Carefully confirm that no one is inside the load movement range, that there is no danger even if the load moves suddenly, etc.

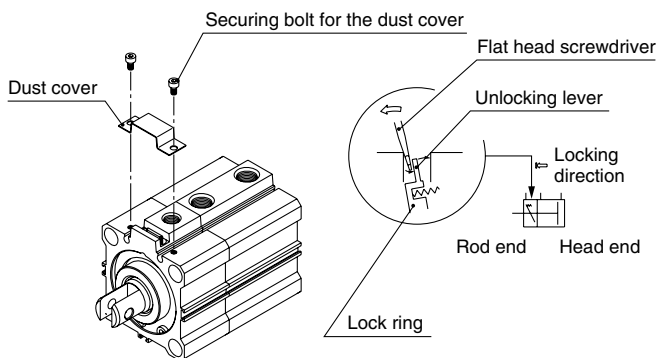

How to unlock manually

- 1) Remove the dust cover.
- 2) Insert a flat head screwdriver on the rod end of the manual unlocking lever as shown in the figure above, and lightly push the screwdriver in the direction of the arrow (rod end) to unlock.

MK

CKQ
CLKQ

CK□1

CLK2

D-□

-X□

Individual
-X□

Pin Clamp Cylinders

Compact Cylinder Type C(L)KQG32

Magnetic field resistant auto switch mounting type

LOW type (-X2081)
 HIGH type (-X2082)


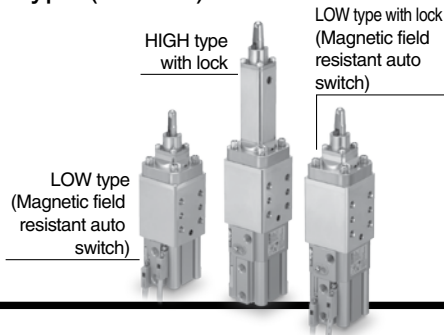


Plate Cylinder Type C(L)KU32


Magnetic field resistant auto switch mounting type

LOW type (-X2091)
 HIGH type (-X2092)

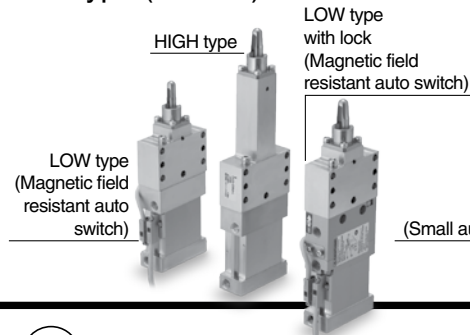

New Small auto switch mounting type


LOW type (-X2321)
 HIGH type (-X2322)

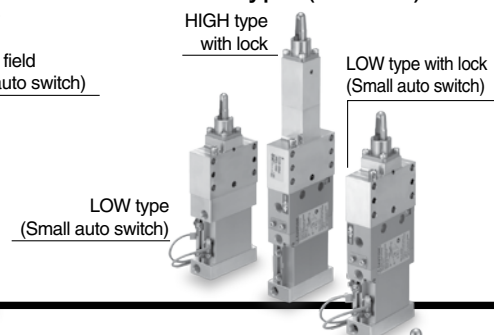

Added $\phi 32$ pin clamp cylinder

- Compact design makes it applicable to a broad range of workpieces
- Contributes to a lightweight jig

29 mm width




New All types with lock


- Holds a workpiece during emergency stops

New Plate cylinder type with small auto switch

New Newly added guide pins and a diamond shape option (available for $\phi 10$ or more) for workpieces with $\phi 9$, $\phi 11$ and $\phi 13$ hole diameters.



2 types of clamping heights can be selected Height: 30 mm (LOW type), 100 mm (HIGH type)

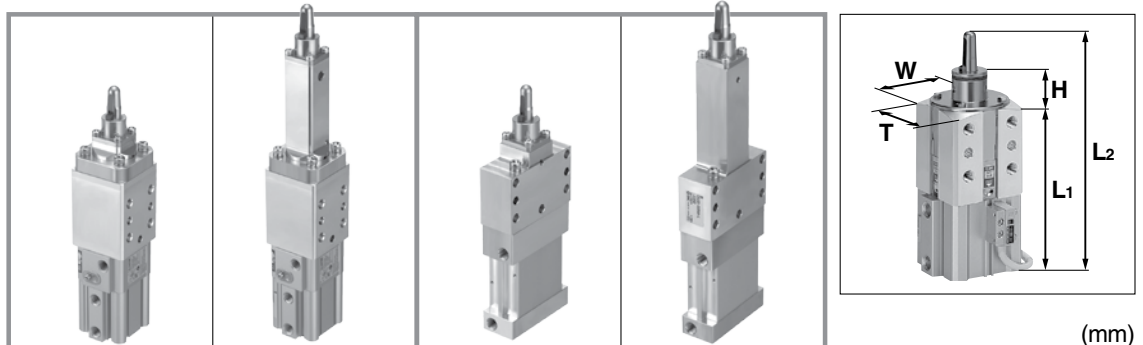

Model	C(L)KQG32 Compact cylinder type (Guide pin diameter: $\phi 12$)		C(L)KU32 Plate cylinder type (Guide pin diameter: $\phi 12$)		C(L)KQG50 (Guide pin diameter: $\phi 13$)	
	LOW type	HIGH type	LOW type	HIGH type	LOW type	HIGH type
Clamping height						
Clamping height	H					
	30	100	30	100	24	54
Body thickness	T	50		29		66
Body width	W	50		70		66
Body length	L1	127 (159)		132.5 (160)		147.5 (182.5)
Overall length	L2	183 (215)	253 (295)	118.5 (216)	258.5 (286)	204.5 (239.5) 234.5 (269.5)
Weight (g)		900 (1140)	1110 (1350)	740 (950)	910 (1120)	1670 (2190) 1840 (2350)

* Values in () for specification with lock

Pin Clamp Cylinders

Series C(L)KQG32/C(L)KU32

New

Added diamond type to guide pin shapes

- Applicable hole diameter of workpiece for $\varnothing 10$ to $\varnothing 20$

New

Magnetic field resistant auto switch and small auto switch available

- Magnetic field resistant auto switch: D-P3DW

Target model


C(L)KQG32 type (-X2081/-X2082)

C(L)KU32 type (-X2091/-X2092)

D-P4DW also available for C(L)KQG32 type only.

(Order separately)

Refer to page 25.

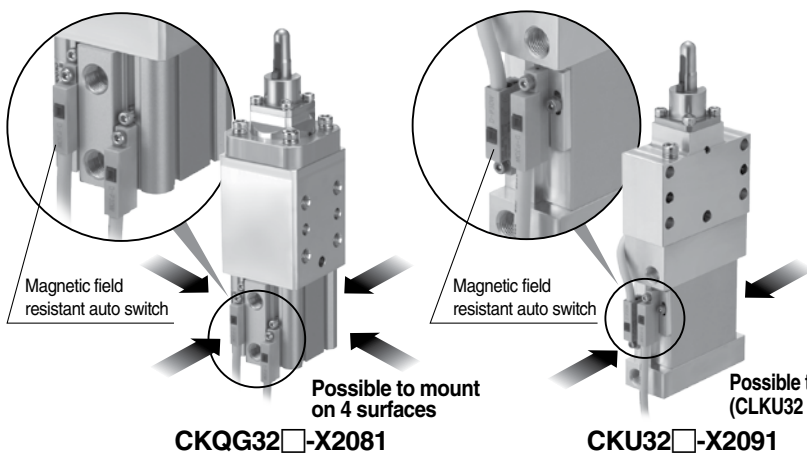

New

Lock mechanism to prevent dropping of workpiece during emergency stops

- Solid state auto switch:

D-M9□V/D-M9□WV


- Reed auto switch:

D-A73/D-A79W

Target model

C(L)KU32 type (-X2321/-X2322 only)


⚠ Cannot be used under strong magnetic field.

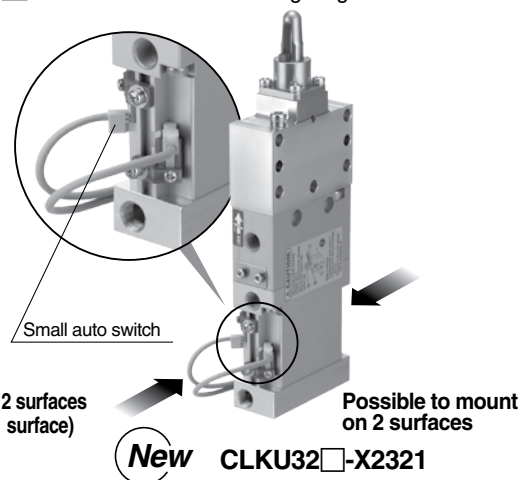

Application Examples


CKU32 (Plate cylinder type)

- Compatible with installing in narrow spaces
- For clamping small and lightweight workpiece, etc.

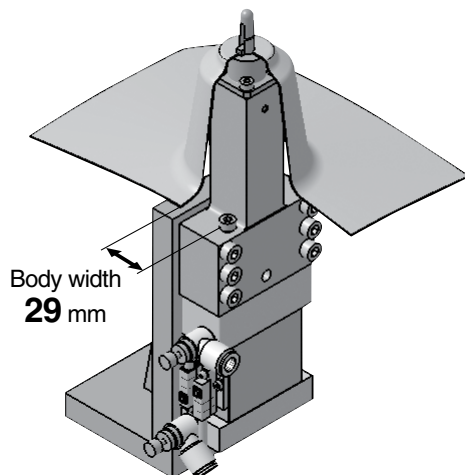

CLKU32 (Plate cylinder type with lock)

- Unclamp direction locking
- Drop prevention for workpiece during emergency stops

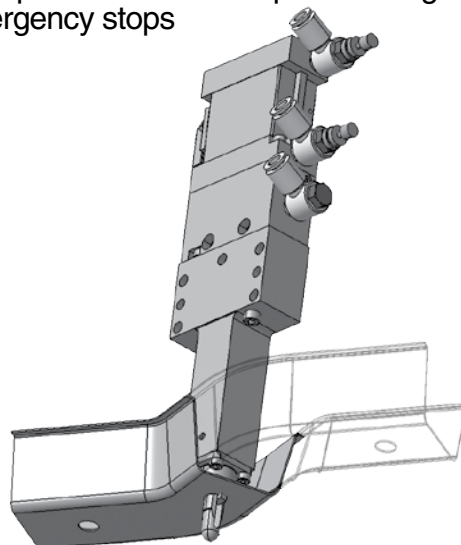

Pin Clamp Cylinder

Compact Cylinder Type

Series C(L)KQG32

How to Order

Clamping height
LOW type

C L KQG B 32-075 R A L-C -X2081

Clamping height
HIGH type

C L KQG B 32-075 R A H-C -X2082

With lock

Nil	Without lock
L	With lock





Bore size

32	32 mm
----	-------

Number of auto switches



Nil	2 pcs.
S	1 pc. (Unclamping side)

Mounting surface position
(viewed from top)

Symbol	Mounting surface position
A	
B	
C	
D	

Guide pin diameter
* For guide pin diameter, refer to Table 1 below.

Guide pin shape

R	Round type	D	Diamond type
			

Auto switch type

Nil	Without auto switch (Built-in magnet)
C	D-P3DWSC
E	D-P3DWSE
N	D-P3DW
L	D-P3DWL
Z	D-P3DWZ

* Auto switches and mounting brackets are shipped together, (but not assembled).

* Refer to the table below for the applicable auto switches.

* When the total thickness of clamped workpiece is over 2 mm, the auto switch may not be adjusted to the most sensitive position.

* Secure the minimum bending radius of the auto switch lead wire before use (Refer to page 24).

Clamp arm position (clockwise viewed from top)





Symbol	Clamp arm position	Symbol	Clamp arm position
A	Same as the port side 	C	180° from the port side 
B	90° from the port side 	D	270° from the port side 

Table 1. Guide Pin Diameter

Symbol	075	076	077	078	079	080	085	086	087	088	089	090	095	096	097	098	099	100	105	106	107	108	109	110
Guide pin diameter [mm]	7.5	7.6	7.7	7.8	7.9	8.0	8.5	8.6	8.7	8.8	8.9	9.0	9.5	9.6	9.7	9.8	9.9	10.0	10.5	10.6	10.7	10.8	10.9	11.0
Applicable hole diameter of workpiece [mm]	For ø8					For ø9					For ø10					For ø11								
Guide pin shape	Round type										Round type/Diamond type													
Symbol	115	116	117	118	119	120	125	126	127	128	129	130	135	136	137	138	139	140	145	146	147	148	149	150
Guide pin diameter [mm]	11.5	11.6	11.7	11.8	11.9	12.0	12.5	12.6	12.7	12.8	12.9	13.0	13.5	13.6	13.7	13.8	13.9	14.0	14.5	14.6	14.7	14.8	14.9	15.0
Applicable hole diameter of workpiece [mm]	For ø12					For ø13					For ø14					For ø15								
Guide pin shape	Round type/Diamond type																							
Symbol	155	156	157	158	159	160	175	176	177	178	179	180	195	196	197	198	199	200						
Guide pin diameter [mm]	15.5	15.6	15.7	15.8	15.9	16.0	17.5	17.6	17.7	17.8	17.9	18.0	19.5	19.6	19.7	19.8	19.9	20.0						
Applicable hole diameter of workpiece [mm]	For ø16						For ø18						For ø20											
Guide pin shape	Round type/Diamond type																							


Applicable Auto Switches/Refer to the D-P3DW□ series catalog (CAT.ES20-201) for further information on auto switches.

Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no. in use)	Load voltage	Lead wire length	Applicable load
Solid state auto switch	D-P3DWSC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color indication	2-wire (3-4)	24 VDC	0.3 m	Relay, PLC (Note 1)
	D-P3DWSE				2-wire (1-4)			
	D-P3DW		Grommet		2-wire		0.5 m	
	D-P3DWL						3 m	
D-P3DWZ		5 m						

Note 1) PLC: Programmable Logic Controller

Note 2) There are applicable auto switches other than the listed above. For details, refer to page 25.

Series C(L)KQG32

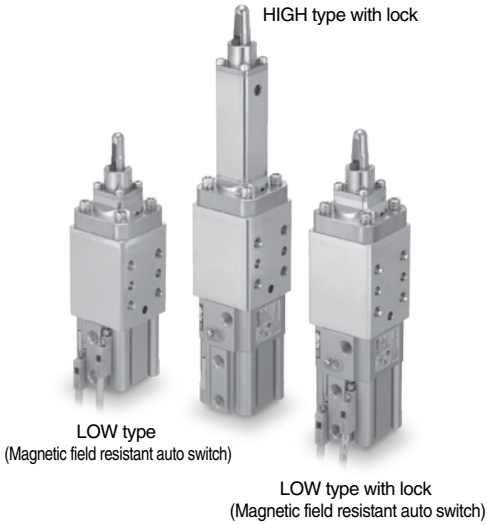

Basic Specifications

Model		C(L)KQG32	
Action		Double acting	
Bore size (mm)		32	
Cylinder stroke/Clamp stroke (mm)		12.5 (Without workpiece)/10	
Fluid		Air	
Minimum operating pressure psi (MPa)		CKQ□: 0.15 (0.1)	CLKQ□: 22 (0.15)*
Maximum operating pressure	Guide pin diameter (mm)	ø7.5 to ø13.0	102 psi (0.7 MPa)
		ø13.5 to ø20.0	145 psi (1.0 MPa)
Ambient and fluid temperature		14 to 140°F (-10 to 60°C) (No freezing)	
Cushion		None	
Lubrication		Non-lube	
Piston speed (Clamp speed)		50 to 150 mm/sec	
Port size (Cylinder port)		Rc1/8	

* Minimum operating pressure is 29 psi (0.2 MPa) when cylinder part and locking part use the same piping.

Lock Specifications

Locking action	Spring locking (Exhaust locking)
Unlocking pressure	29 psi (0.2 MPa)
Lock starting pressure	7.3 psi (0.05 MPa)
Locking direction	Unclamp direction locking
Port size (Lock release port)	Rc1/8
Holding force (Maximum static load)	90.4 lbf (402 N)

Clamping Force

Model	Guide pin diameter (mm)	Operating pressure psi (MPa)									lbf (N)
		29 (0.2)	44 (0.3)	58 (0.4)	73 (0.5)	87 (0.6)	102 (0.7)	116 (0.8)	131 (0.9)	145 (1.0)	
C(L)KQG32	ø7.5 to ø13.0	27.2 (121)	40.7 (181)	54.2 (241)	67.9 (302)	81.4 (362)	94.9 (422)	—	—	—	
	ø13.5 to ø20.0	27.2 (121)	40.7 (181)	54.2 (241)	67.9 (302)	81.4 (362)	94.9 (422)	108.6 (483)	122.1 (543)	135.6 (603)	

Note 1) It takes approximately 0.3 seconds for the cylinder to operate to generate clamping force from an unclamping state (when no speed controller is installed). Design circuit taking into consideration the time before the clamping force is generated.

Note 2) Determine the clamping force according to the strength of the workpiece. It can be damaged if the clamping force is too large.

Note 3) Guide pins and clamp arms are consumable items. Please prepare spare parts in case they are damaged. It is recommended to prepare spare parts for guide pins and clamp arms, especially for products used in workpieces with ø12 or less hole diameters.

Clamp Specifications


Model	C(L)KQG32
Clamp stroke	10 mm
Clamp arm	1 pc.
Guide pin shape	Round type/Diamond type

* Refer to the above "Clamping Force" for detailed specifications of the clamping force, etc.

Weight

Model		CKQG32		CLKQG32		Unit: g
		-X2081	-X2082	-X2081	-X2082	
Guide pin diameter (mm)	ø7.5 to ø8.0	900	1110	1140	1350	
	ø8.5 to ø9.0					
	ø9.5 to ø10.0					
	ø10.5 to ø11.0					
	ø11.5 to ø12.0	940	1150	1180	1390	
	ø12.5 to ø13.0					
	ø13.5 to ø14.0					
	ø14.5 to ø15.0					
ø15.5 to ø16.0	950	1160	1190	1400		
ø17.5 to ø18.0						
ø19.5 to ø20.0						

Replacement Parts

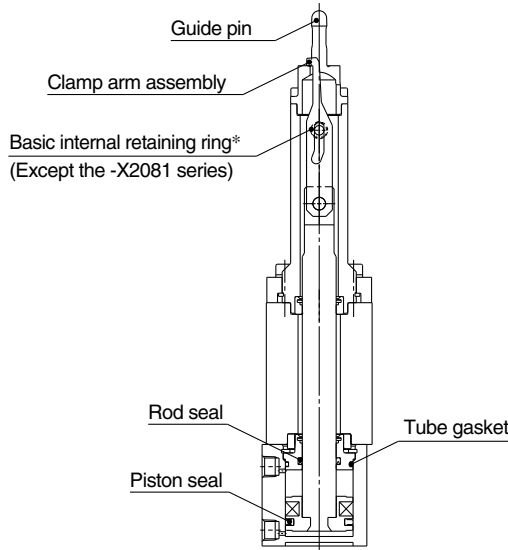

CKQG□32-100R□H-X2082


■ Guide Pin Order No.

CKQG32X - **075** **R**

Guide pin diameter ●

* Refer to Table 1 (Symbol 2) below

Guide pin shape ●



■ Clamp Arm Assembly Order No.

CKQG32X - **08** **B**

Applicable hole diameter of workpiece ●

* Refer to Table 1 (Symbol 1) below

Clamp arm assembly ●

* The clamp arm includes a basic internal retaining ring.

■ Seal Kit (For type without lock only)

Kit No.	Contents
CQ2B32-PS	① Piston seal ② Rod seal ③ Tube gasket


* Seal kit includes ①, ②, ③. Since the seal kit does not include a grease pack, order the "Grease Pack" below separately.

* CLKQ cannot be disassembled and therefore no seal kit is available.

■ Grease Pack

Kit No.	Contents
GR-S-010	Grease 10 g

* Consult with SMC when replacing the actuating cylinders.

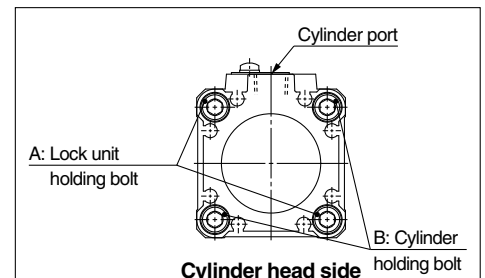

Warning

When replacing the arm for cylinders with lock (Series CLKQG32), never loosen A: Lock unit holding bolt shown above (2 places). (Cylinders are fixed in place with B: Cylinder holding bolt (2 places).)



Table 1. Guide Pin Diameter/Applicable Hole Diameter of Workpiece

Symbol 1	Applicable hole diameter of workpiece	Symbol 2	Guide pin diameter	Shape	Symbol 1	Applicable hole diameter of workpiece	Symbol 2	Guide pin diameter	Shape	Symbol 1	Applicable hole diameter of workpiece	Symbol 2	Guide pin diameter	Shape
08	8	075	7.5	Round type	12	12	115	11.5	Round type Diamond type	16	16	155	15.5	Round type Diamond type
		076	7.6				116	11.6				156	15.6	
		077	7.7				117	11.7				157	15.7	
		078	7.8				118	11.8				158	15.8	
		079	7.9				119	11.9				159	15.9	
		080	8.0				120	12.0				160	16.0	
09	9	085	8.5	Round type	13	13	125	12.5	Round type Diamond type	18	18	175	17.5	Round type Diamond type
		086	8.6				126	12.6				176	17.6	
		087	8.7				127	12.7				177	17.7	
		088	8.8				128	12.8				178	17.8	
		089	8.9				129	12.9				179	17.9	
		090	9.0				130	13.0				180	18.0	
10	10	095	9.5	Round type	14	14	135	13.5	Round type Diamond type	20	20	195	19.5	Round type Diamond type
		096	9.6				136	13.6				196	19.6	
		097	9.7				137	13.7				197	19.7	
		098	9.8				138	13.8				198	19.8	
		099	9.9				139	13.9				199	19.9	
		100	10.0				140	14.0				200	20.0	
11	11	105	10.5	Diamond type	15	15	145	14.5	Round type Diamond type	20	20	195	19.5	Round type Diamond type
		106	10.6				146	14.6				196	19.6	
		107	10.7				147	14.7				197	19.7	
		108	10.8				148	14.8				198	19.8	
		109	10.9				149	14.9				199	19.9	
		110	11.0				150	15.0				200	20.0	


Series C(L)KQG32

Dimensions


CKQG□32 (Clamping height LOW type) * The figures below indicate the CKQGB32-□RCL-X2081.

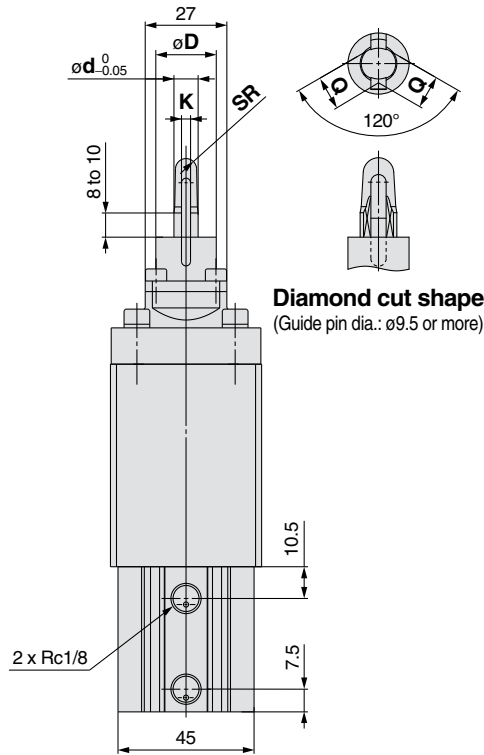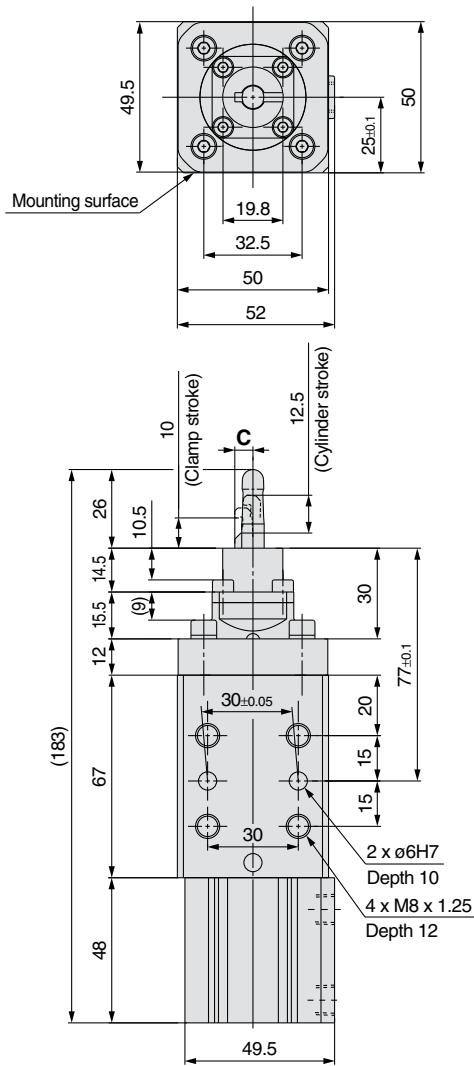

Mounting surface position

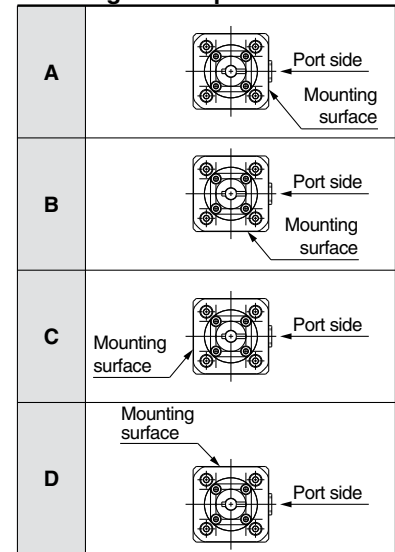

Clamp arm position

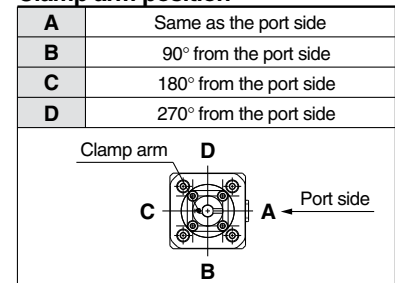




Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
			8.5				085
ø9	6.5	20	8.5	4	4	—	085
			8.6				086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
			9.5				095
ø10	7.5	20	9.5	4	4.5	9.2	095
			9.6				096
			9.7				097
			9.8				098
			9.9				099
			10.0				100
			10.5				105
ø11	7.5	20	10.5	4	4.5	9.8	105
			10.6				106
			10.7				107
			10.8				108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
			12.5				125
ø13	8.5	20	12.5	5	5.5	11.6	125
			12.6				126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
			13.5				135
ø14	10.5	25	13.5	6	5.5	12.6	135
			13.6				136
			13.7				137
			13.8				138
			13.9				139
			14.0				140
			14.5				145
ø15	10.5	25	14.5	6	6	13.3	145
			14.6				146
			14.7				147
			14.8				148
			14.9				149
			15.0				150


Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
			17.5				175
ø18	13	27	17.5	6	7.5	16.4	175
			17.6				176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
			19.5				195
ø20	13	27	19.5	6	8	17.2	195
			19.6				196
			19.7				197
			19.8				198
			19.9				199
			20.0				200

Dimensions


CKQG□32 (Clamping height HIGH type) * The figures below indicate the CKQGB32-□RCH-X2082.

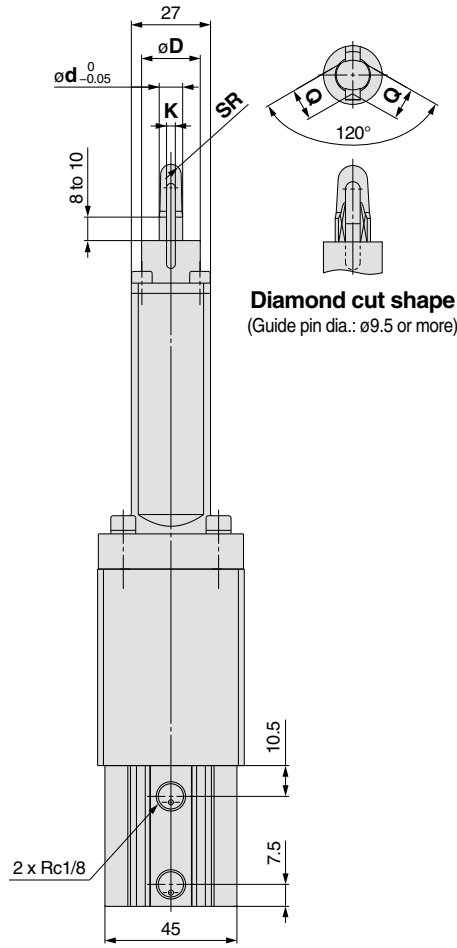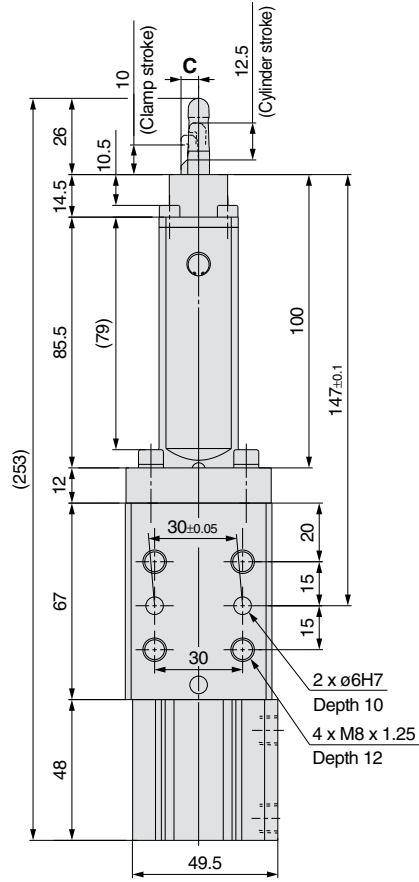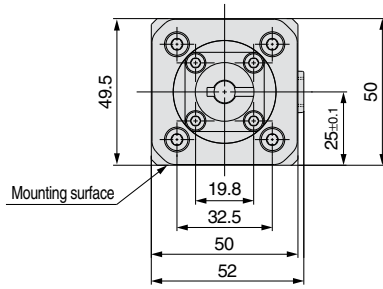

Mounting surface position

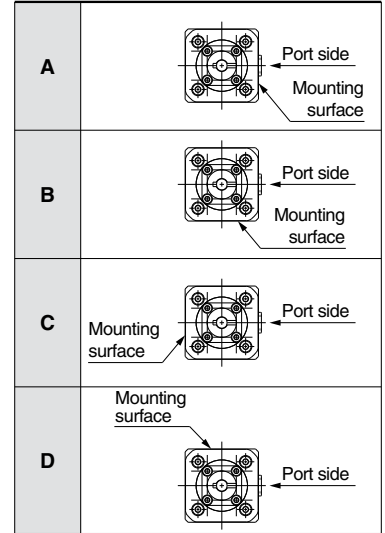

Clamp arm position

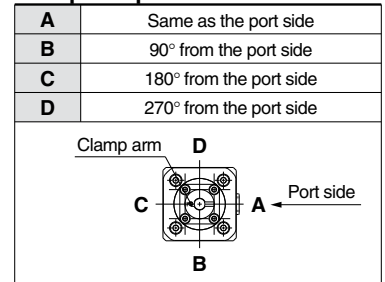

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
ø9	6.5	20	8.5	4	4	—	085
			8.6				086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
ø10	7.5	20	9.5	4	4.5	9.2	095
			9.6				096
			9.7				097
			9.8				098
			9.9				099
			10.0				100
ø11	7.5	20	10.5	4	4.5	9.8	105
			10.6				106
			10.7				107
			10.8				108
			10.9				109
			11.0				110


Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
ø13	8.5	20	12.5	5	5.5	11.6	125
			12.6				126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
ø14	10.5	25	13.5	6	5.5	12.6	135
			13.6				136
			13.7				137
			13.8				138
			13.9				139
			14.0				140
ø15	10.5	25	14.5	6	6	13.3	145
			14.6				146
			14.7				147
			14.8				148
			14.9				149
			15.0				150

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
ø18	13	27	17.5	6	7.5	16.4	175
			17.6				176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
ø20	13	27	19.5	6	8	17.2	195
			19.6				196
			19.7				197
			19.8				198
			19.9				199
			20.0				200

Series C(L)KQG32

Dimensions


CLKQG□32 (Clamping height LOW type) * The figures below indicate the CLKQGB32-□RCL-X2081.

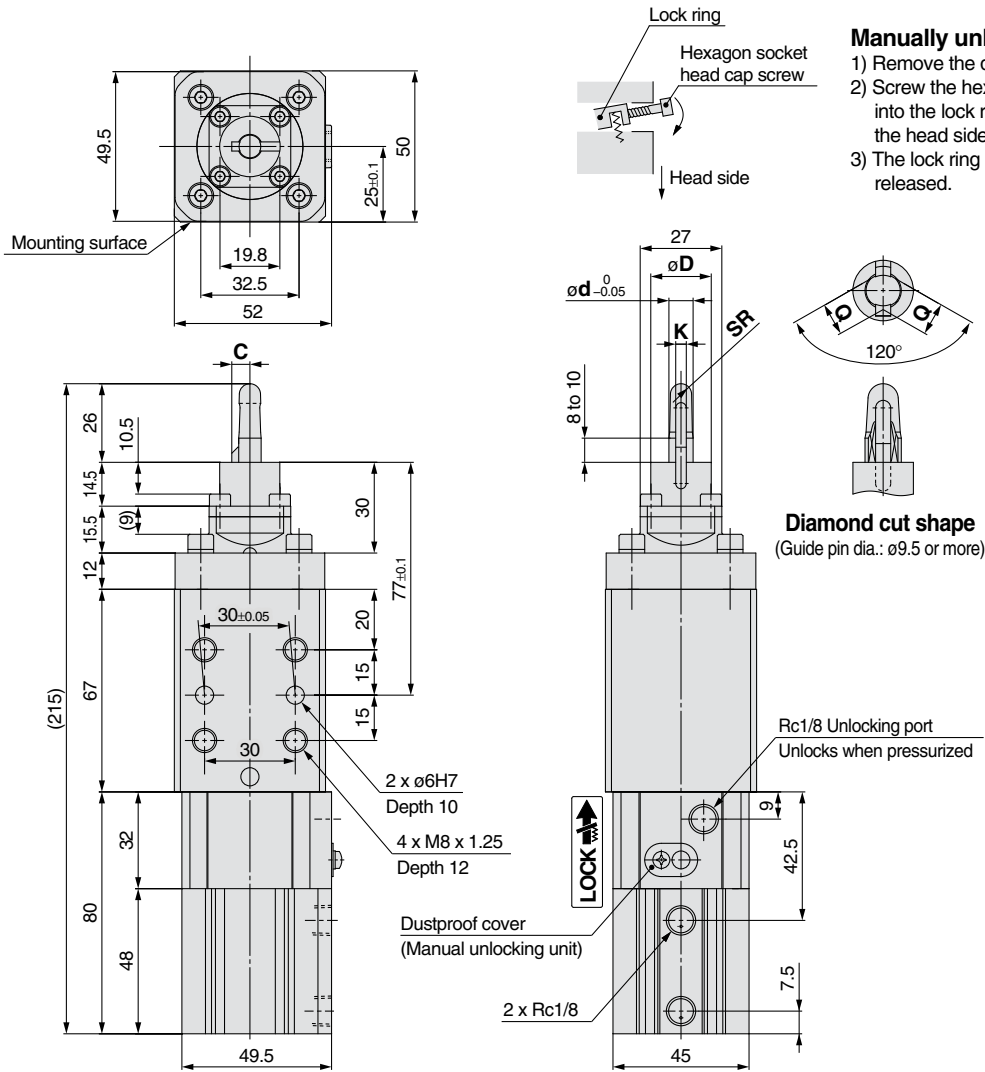


Manually unlocking

- 1) Remove the dustproof cover.
- 2) Screw the hexagon socket head cap screw (M3 x 15 L or more) into the lock ring shown on the left and raise the lock ring toward the head side.
- 3) The lock ring and piston rod form a right angle, and the lock is released.

Mounting surface position

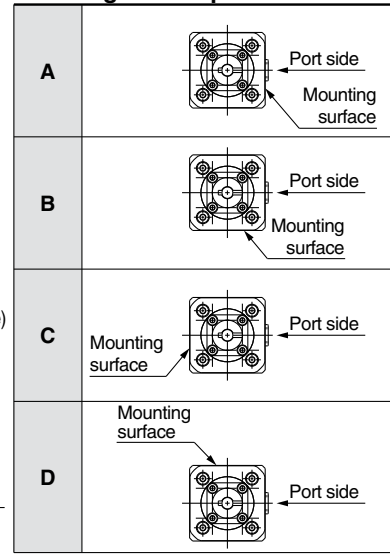

Clamp arm position

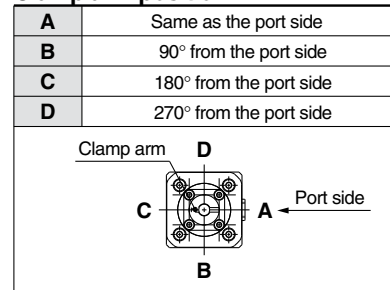






Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
ø9	6.5	20	8.5	4	4	—	085
			8.6				086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
ø10	7.5	20	9.5	4	4.5	9.2	095
			9.6				096
			9.7				097
			9.8				098
			9.9				099
			10.0				100
ø11	7.5	20	10.5	4	4.5	9.8	105
			10.6				106
			10.7				107
			10.8				108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
ø13	8.5	20	12.5	5	5.5	11.6	125
			12.6				126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
ø14	10.5	25	13.5	6	5.5	12.6	135
			13.6				136
			13.7				137
			13.8				138
			13.9				139
			14.0				140
ø15	10.5	25	14.5	6	6	13.3	145
			14.6				146
			14.7				147
			14.8				148
			14.9				149
			15.0				150

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
ø18	13	27	17.5	6	7.5	16.4	175
			17.6				176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
ø20	13	27	19.5	6	8	17.2	195
			19.6				196
			19.7				197
			19.8				198
			19.9				199
			20.0				200

Dimensions

CLKQG□32 (Clamping height HIGH type) * The figures below indicate the CLKQGB32-□RCH-X2082.

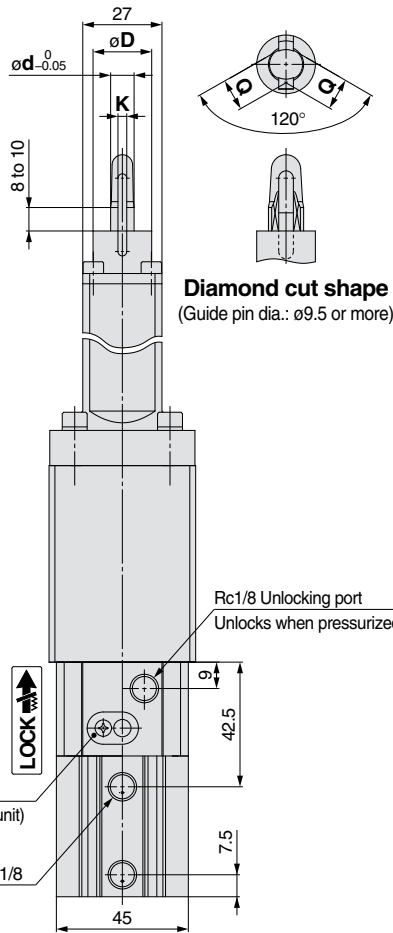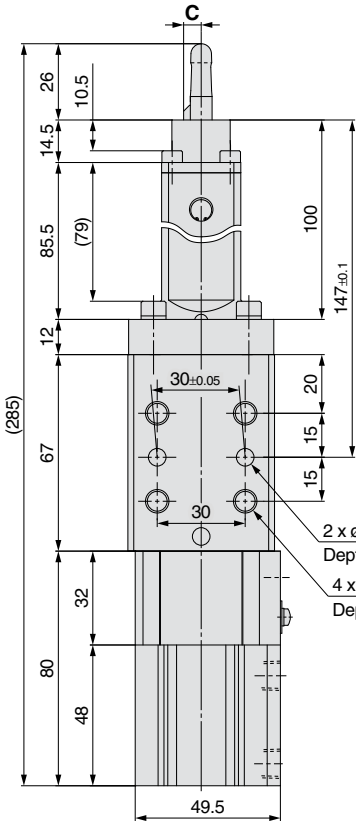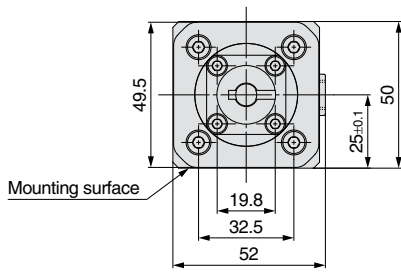


Diamond cut shape
(Guide pin dia.: ø9.5 or more)


Manually unlocking

- 1) Remove the dustproof cover.
- 2) Screw the hexagon socket head cap screw (M3 x 15 L or more) into the lock ring shown on the left and raise the lock ring toward the head side.
- 3) The lock ring and piston rod form a right angle, and the lock is released.

Mounting surface position

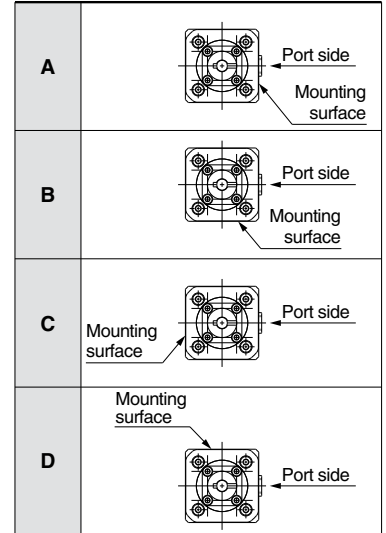

Clamp arm position

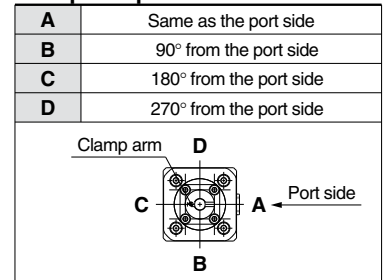

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
			8.5				085
ø9	6.5	20	8.6	4	4	—	086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
			9.5				095
			9.6				096
ø10	7.5	20	9.7	4	4.5	9.2	097
			9.8				098
			9.9				099
			10.0				100
			10.5				105
			10.6				106
			10.7				107
ø11	7.5	20	10.8	4	4.5	9.8	108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
			12.5				125
ø13	8.5	20	12.6	5	5.5	11.6	126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
			13.5				135
			13.6				136
ø14	10.5	25	13.7	6	5.5	12.6	137
			13.8				138
			13.9				139
			14.0				140
			14.5				145
			14.6				146
			14.7				147
ø15	10.5	25	14.8	6	6	13.3	148
			14.9				149
			15.0				150

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
			17.5				175
ø18	13	27	17.6	6	7.5	16.4	176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
			19.5				195
			19.6				196
ø20	13	27	19.7	6	8	17.2	197
			19.8				198
			19.9				199
			20.0				200

Series C(L)KU32

How to Order

Clamping height
LOW type

C L KU 32 - 075 R A L - C □ - X2091

Clamping height
HIGH type


C L KU 32 - 075 R A H - C □ - X2092

With lock ●

Nil	Without lock
L	With lock

Bore size ●
32 Equiv. ø32 piston area

Guide pin diameter ●
* For guide pin diameter, refer to Table 1 below.

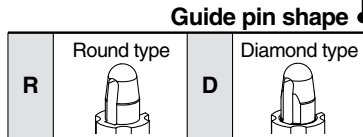

● Number of auto switches

Nil	2 pcs.
S	1 pc. (Unclamping side)

● Auto switch type

Nil	Without auto switch (Built-in magnet)
C	D-P3DWSC
E	D-P3DWSE
N	D-P3DW
L	D-P3DWL
Z	D-P3DWZ

* Auto switches and mounting brackets are shipped together, (but not assembled).

* Refer to the table below for the applicable auto switches.

* When the total thickness of clamped workpiece is over 2 mm, the auto switch may not be adjusted to the most sensitive position.

Clamp arm position (viewed from top) ●



Symbol	Clamp arm position	Symbol	Clamp arm position
A	Same direction as the port side 	B	Opposite direction of the port side 

Table 1. Guide Pin Diameter

Symbol	075	076	077	078	079	080	085	086	087	088	089	090	095	096	097	098	099	100	105	106	107	108	109	110
Guide pin diameter [mm]	7.5	7.6	7.7	7.8	7.9	8.0	8.5	8.6	8.7	8.8	8.9	9.0	9.5	9.6	9.7	9.8	9.9	10.0	10.5	10.6	10.7	10.8	10.9	11.0
Applicable hole diameter of workpiece [mm]	For ø8						For ø9						For ø10						For ø11					
Guide pin shape	Round type												Round type/Diamond type											

Symbol	115	116	117	118	119	120	125	126	127	128	129	130	135	136	137	138	139	140	145	146	147	148	149	150
Guide pin diameter [mm]	11.5	11.6	11.7	11.8	11.9	12.0	12.5	12.6	12.7	12.8	12.9	13.0	13.5	13.6	13.7	13.8	13.9	14.0	14.5	14.6	14.7	14.8	14.9	15.0
Applicable hole diameter of workpiece [mm]	For ø12						For ø13						For ø14						For ø15					
Guide pin shape	Round type/Diamond type																							


Symbol	155	156	157	158	159	160	175	176	177	178	179	180	195	196	197	198	199	200
Guide pin diameter [mm]	15.5	15.6	15.7	15.8	15.9	16.0	17.5	17.6	17.7	17.8	17.9	18.0	19.5	19.6	19.7	19.8	19.9	20.0
Applicable hole diameter of workpiece [mm]	For ø16						For ø18						For ø20					
Guide pin shape	Round type/Diamond type																	

Applicable Auto Switches/Refer to the D-P3DW□ series catalog (CAT.ES20-201) for further information on auto switches.

Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no. in use)	Load voltage	Lead wire length	Applicable load	
Solid state auto switch	D-P3DWSC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color indication	2-wire (3-4)	24 VDC	0.3 m	Relay, PLC ^(Note)	
	D-P3DWSE				2-wire (1-4)				
	D-P3DW		Grommet		2-wire				0.5 m
	D-P3DWL								3 m
	D-P3DWZ								5 m

Note) PLC: Programmable Logic Controller

Basic Specifications

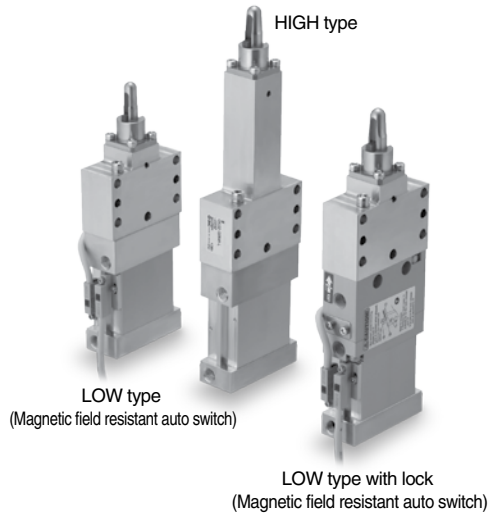

Model	C(L)KU32	
Action	Double acting	
Bore size (mm)	Equivalent to 32	
Cylinder stroke/Clamp stroke (mm)	12.5 (Without workpiece)/10	
Fluid	Air	
Minimum operating pressure	CKU□: 15 psi (0.1 MPa)	CLKU□: 22 psi (0.15 MPa [*])
Maximum operating pressure	102 psi (0.7 MPa)	
Ambient and fluid temperature	14 to 140°F (-10 to 60°C) (No freezing)	
Cushion	None	
Lubrication	Non-lube	
Piston speed (Clamp speed)	50 to 150 mm/sec	
Port size (Cylinder port)	Rc1/8	

* Minimum operating pressure is 0.2 MPa when cylinder part and locking part use the same piping.

Lock Specifications

Locking action	Spring locking (Exhaust locking)
Unlocking pressure	29 psi (0.2 MPa)
Locking pressure	7.3 psi (0.05 MPa)
Locking direction	Unclamp direction locking
Port size (Lock release port)	Rc1/8
Holding force (Maximum static load)	90.4 lbf (402 N)

Clamping Force

Model	Guide pin diameter (mm)	Operating pressure psi (MPa)					
		29 (0.2)	44 (0.3)	58 (0.4)	73 (0.5)	87 (0.6)	102 (0.7)
C(L)KU32	ø7.5 to ø20.0	29.2 (130)	43.8 (195)	58.5 (260)	73.0 (325)	87.6 (390)	102.3 (455)

Note 1) It takes approximately 0.3 seconds for the cylinder to operate to generate clamping force from an unclamping state (when no speed controller is installed). Design circuit taking into consideration the time before the clamping force is generated.

Note 2) Determine the clamping force according to the strength of the workpiece. It can be damaged if the clamping force is too large.

Note 3) Guide pins and clamp arms are consumable items. Please prepare spare parts in case they are damaged. It is recommended to prepare spare parts for guide pins and clamp arms, especially for products used in workpieces with ø12 or less hole diameters.

Clamp Specifications

Model	C(L)KU32
Clamp stroke	10 mm
Clamp arm	1 pc.
Guide pin shape	Round type, Diamond type


* Refer to the above "Clamping Force" for detailed specifications of the clamping force, etc.

Weight

Model		CKU32		CLKU32	
		-X2091	-X2092	-X2091	-X2092
Guide pin diameter (mm)	ø7.5 to ø8.0	740	910	950	1120
	ø8.5 to ø9.0				
	ø9.5 to ø10.0				
	ø10.5 to ø11.0				
	ø11.5 to ø12.0	780	950	990	1160
	ø12.5 to ø13.0				
	ø13.5 to ø14.0				
	ø14.5 to ø15.0				
ø15.5 to ø16.0	790	960	1000	1170	
ø17.5 to ø18.0					
ø19.5 to ø20.0					

Series C(L)KU32

Replacement Parts

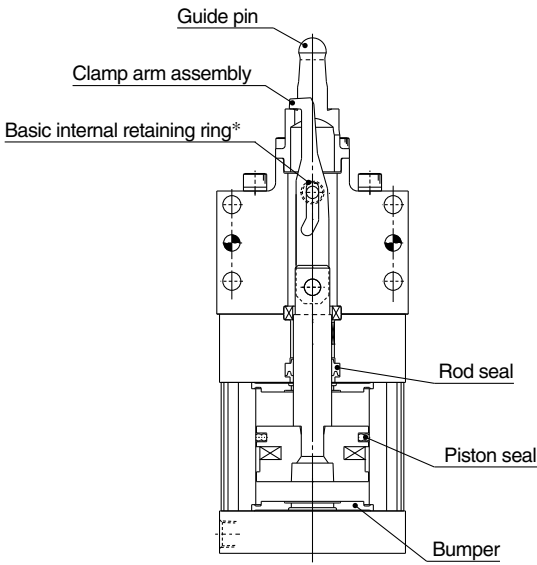

CKU32-120R□L-X2091

Seal Kit (For type without lock only)

Kit No.	Contents
MUB32-PS	① Piston seal ② Rod seal ③ Bumper

* Seal kit includes ①, ②, ③. Since the seal kit does not include a grease pack, order the "Grease Pack" below separately.
* CLKU cannot be disassembled and therefore no seal kit is available.

Grease Pack

Kit No.	Contents
GR-S-010	Grease 10 g

* Consult with SMC when replacing the actuating cylinders.

Guide Pin Order No.

CKQG32X - **075** **R**

Guide pin diameter ●

* Refer to Table 1 (Symbol 2) below

Guide pin shape ●

	Round type		Diamond type
R		D	

Clamp Arm Assembly Order No.

CKQG32X - **08** **B**

Applicable hole diameter of workpiece ●

* Refer to Table 1 (Symbol 1) below

Clamp arm assembly ●

* The clamp arm includes a basic internal retaining ring.



Table 1. Guide Pin Diameter/Applicable Hole Diameter of Workpiece

Symbol 1	Applicable hole diameter of workpiece	Symbol 2	Guide pin diameter	Shape		
08	8	075	7.5	Round type		
		076	7.6			
		077	7.7			
		078	7.8			
		079	7.9			
		080	8.0			
09	9	085	8.5			
		086	8.6			
		087	8.7			
		088	8.8			
		089	8.9			
		090	9.0			
10	10	095	9.5	Round type		
		096	9.6			
		097	9.7			
		098	9.8			
		099	9.9			
		100	10.0			
11	11	105	10.5		Diamond type	
		106	10.6			
		107	10.7			
		108	10.8			
		109	10.9			
		110	11.0			
12	12	115	11.5	Round type		
		116	11.6			
		117	11.7			
		118	11.8			
		119	11.9			
		120	12.0			
		13	13		125	12.5
					126	12.6
					127	12.7
					128	12.8
129	12.9					
130	13.0					
14	14	135	13.5		Diamond type	
		136	13.6			
		137	13.7			
		138	13.8			
		139	13.9			
		140	14.0			
15	15	145	14.5			
		146	14.6			
		147	14.7			
		148	14.8			
		149	14.9			
		150	15.0			
		16	16	155	15.5	Round type
				156	15.6	
				157	15.7	
				158	15.8	
159	15.9					
160	16.0					
18	18			175	17.5	
				176	17.6	
				177	17.7	
				178	17.8	
		179	17.9			
		180	18.0			
20	20	195	19.5	Diamond type		
		196	19.6			
		197	19.7			
		198	19.8			
		199	19.9			
		200	20.0			

Dimensions


CKU32 (Clamping height LOW type)

* Refer to "How to Order" for positional relationship of the mounting surface and port.
* The figures below indicate the CKU32-□RAL-X2091.

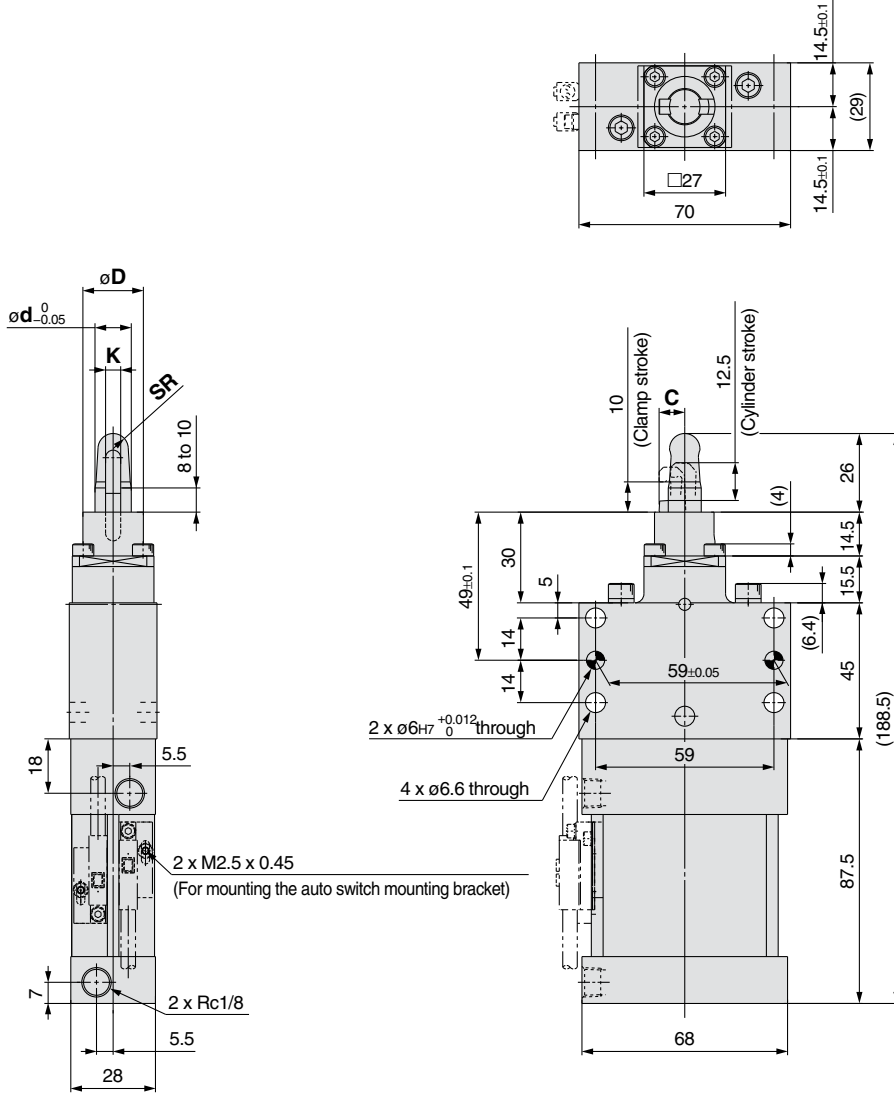

Diamond cut shape
(Guide pin dia.: ø9.5 or more)

Clamp arm position

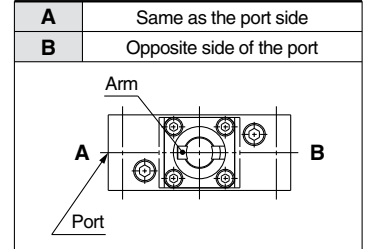

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
ø9	6.5	20	8.5	4	4	—	085
			8.6				086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
ø10	7.5	20	9.5	4	4.5	9.2	095
			9.6				096
			9.7				097
			9.8				098
			9.9				099
			10.0				100
ø11	7.5	20	10.5	4	4.5	9.8	105
			10.6				106
			10.7				107
			10.8				108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
ø13	8.5	20	12.5	5	5.5	11.6	125
			12.6				126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
ø14	10.5	25	13.5	6	5.5	12.6	135
			13.6				136
			13.7				137
			13.8				138
			13.9				139
			14.0				140
ø15	10.5	25	14.5	6	6	13.3	145
			14.6				146
			14.7				147
			14.8				148
			14.9				149
			15.0				150

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
ø18	13	27	17.5	6	7.5	16.4	175
			17.6				176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
ø20	13	27	19.5	6	8	17.2	195
			19.6				196
			19.7				197
			19.8				198
			19.9				199
			20.0				200



Series C(L)KU32

Dimensions

CKU32 (Clamping height HIGH type)

* Refer to "How to Order" for positional relationship of the mounting surface and port.

* The figures below indicate the CKU32-□RAH-X2092.

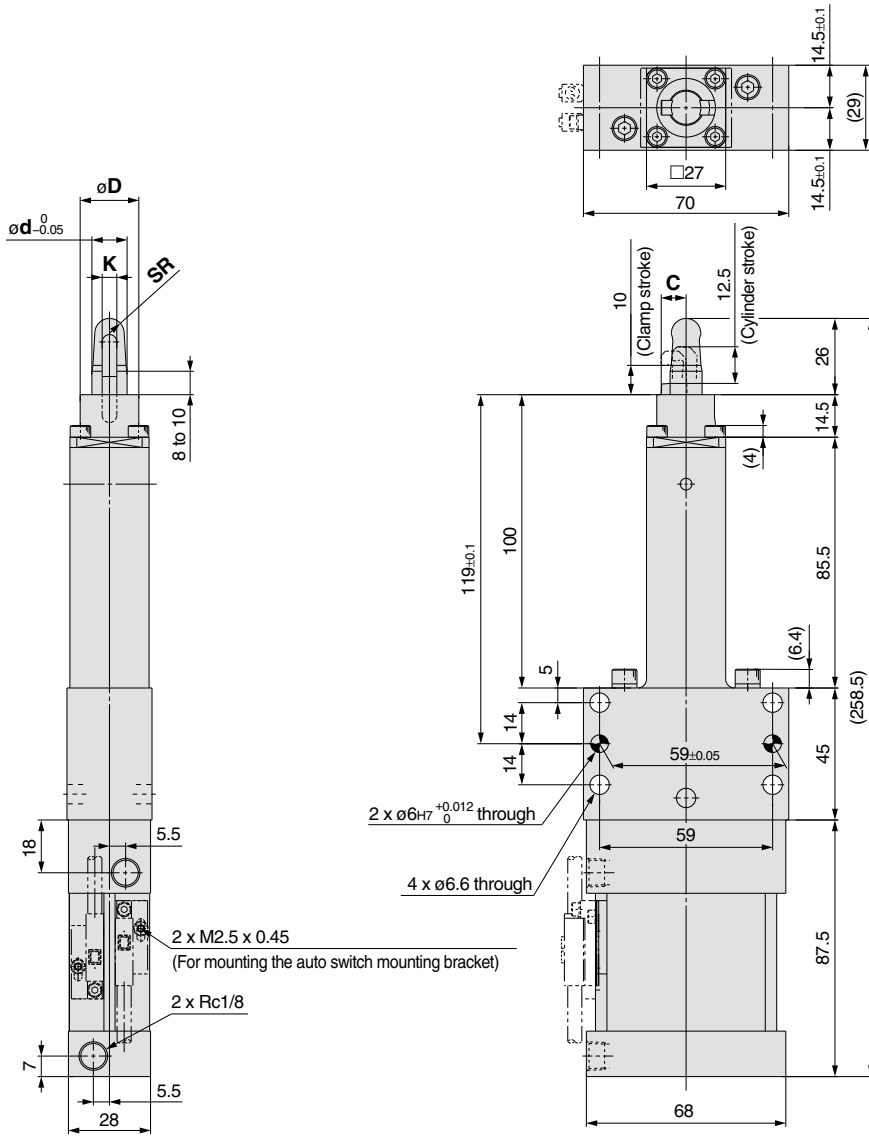

Diamond cut shape
(Guide pin dia.: ø9.5 or more)

Clamp arm position

A	Same as the port side
B	Opposite side of the port

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
			8.5				085
ø9	6.5	20	8.6	4	4	—	086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
			9.5				095
			9.6				096
ø10	7.5	20	9.7	4	4.5	9.2	097
			9.8				098
			9.9				099
			10.0				100
			10.5				105
			10.6				106
			10.7				107
ø11	7.5	20	10.8	4	4.5	9.8	108
			10.9				109
			11.0				110


Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
			12.5				125
ø13	8.5	20	12.6	5	5.5	11.6	126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
			13.5				135
			13.6				136
ø14	10.5	25	13.7	6	5.5	12.6	137
			13.8				138
			13.9				139
			14.0				140
			14.5				145
			14.6				146
			14.7				147
ø15	10.5	25	14.8	6	6	13.3	148
			14.9				149
			15.0				150

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
			17.5				175
ø18	13	27	17.6	6	7.5	16.4	176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
			19.5				195
			19.6				196
ø20	13	27	19.7	6	8	17.2	197
			19.8				198
			19.9				199
			20.0				200

Dimensions

CLKU32 (Clamping height LOW type)

* Refer to "How to Order" for positional relationship of the mounting surface and port.
* The figures below indicate the CLKU32-□RAL-X2091.

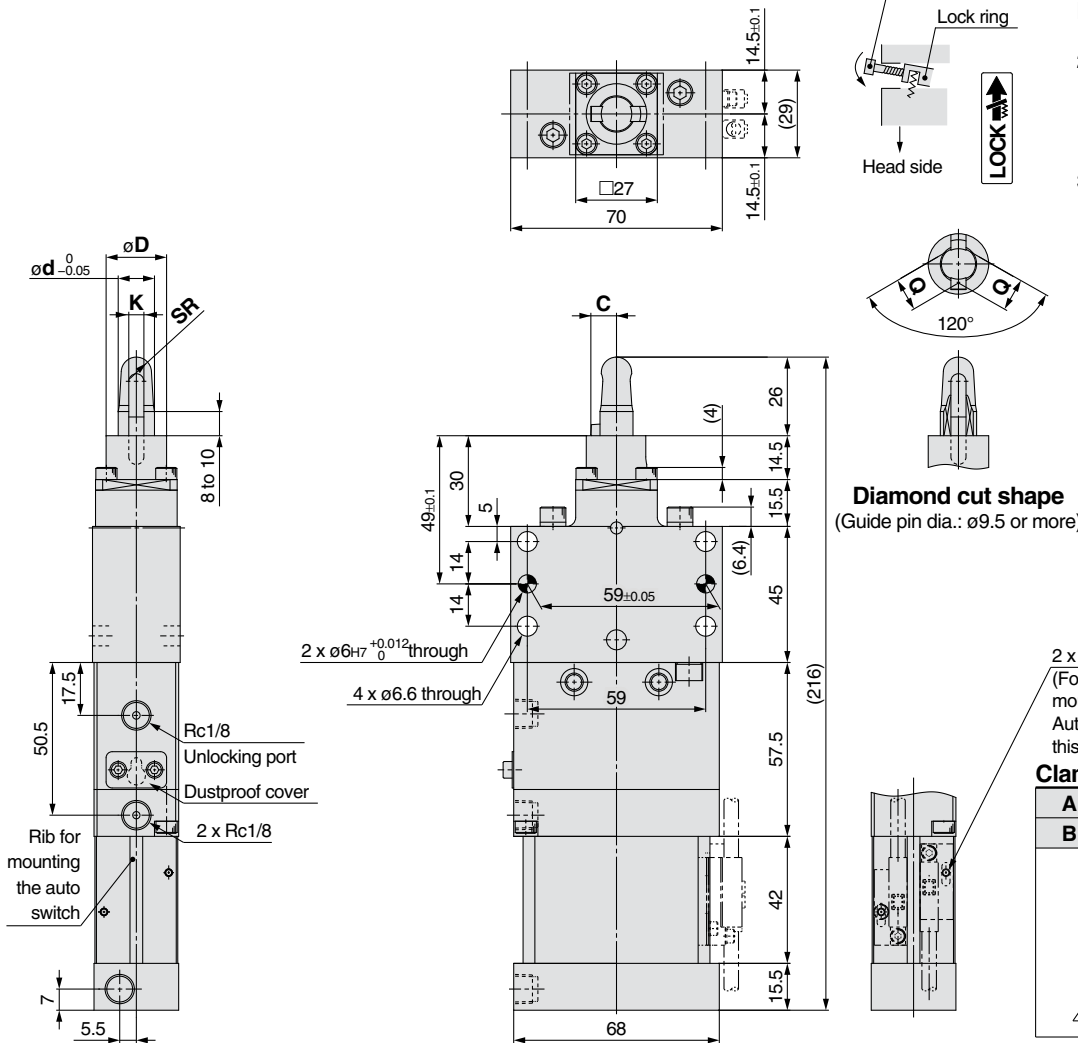

Manually unlocking

- 1) Remove the dustproof cover.
- 2) Screw the commercially available bolt (M3 x 25 L or more) into the lock ring shown on the left and raise the lock ring toward the head side.
- 3) The lock ring and piston rod form a right angle, and the lock is released.

Diamond cut shape
(Guide pin dia.: ø9.5 or more)

2 x M2.5 x 0.45
(For mounting the D-P3□ auto switch mounting bracket)
Auto switches can only be mounted on this surface

Clamp arm position

A	Same as the port side
B	Opposite side of the port

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
ø9	6.5	20	8.5	4	4	—	085
			8.6				086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
ø10	7.5	20	9.5	4	4.5	9.2	095
			9.6				096
			9.7				097
			9.8				098
			9.9				099
			10.0				100
ø11	7.5	20	10.5	4	4.5	9.8	105
			10.6				106
			10.7				107
			10.8				108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
ø13	8.5	20	12.5	5	5.5	11.6	125
			12.6				126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
ø14	10.5	25	13.5	6	5.5	12.6	135
			13.6				136
			13.7				137
			13.8				138
			13.9				139
			14.0				140
ø15	10.5	25	14.5	6	6	13.3	145
			14.6				146
			14.7				147
			14.8				148
			14.9				149
			15.0				150


Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
ø18	13	27	17.5	6	7.5	16.4	175
			17.6				176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
ø20	13	27	19.5	6	8	17.2	195
			19.6				196
			19.7				197
			19.8				198
			19.9				199
			20.0				200

Series C(L)KU32

Dimensions

CLKU32 (Clamping height HIGH type)

* Refer to "How to Order" for positional relationship of the mounting surface and port.
 * The figures below indicate the CLKU32-□RAH-X2092.

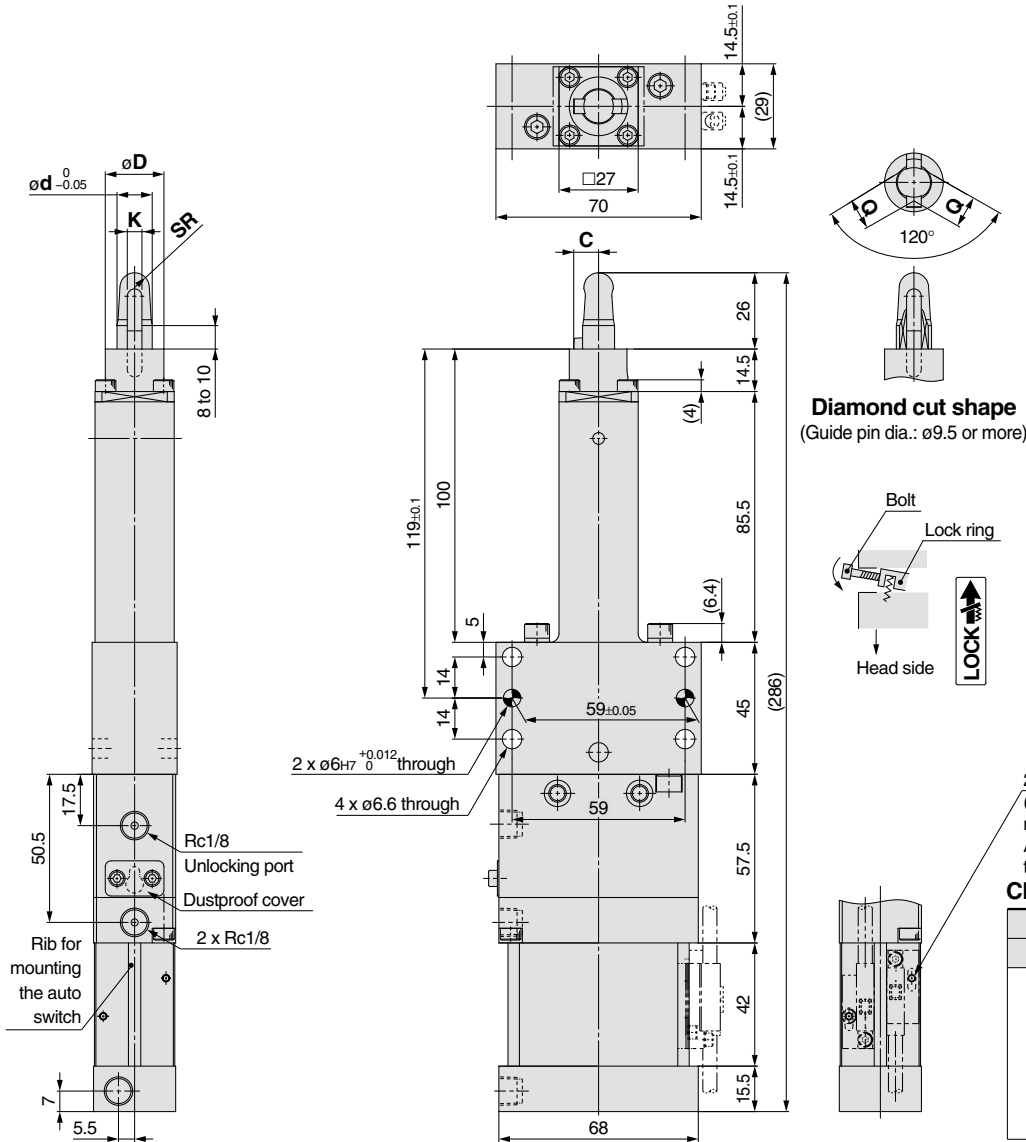

Manually unlocking

- 1) Remove the dustproof cover.
- 2) Screw the commercially available bolt (M3 x 25 L or more) into the lock ring shown on the left and raise the lock ring toward the head side.
- 3) The lock ring and piston rod form a right angle, and the lock is released.

2 x M2.5 x 0.45
 (For mounting the D-P3□ auto switch mounting bracket)
 Auto switches can only be mounted on this surface

Clamp arm position

A	Same as the port side
B	Opposite side of the port


Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
			8.5				085
ø9	6.5	20	8.6	4	4	—	086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
			9.5				095
			9.6				096
ø10	7.5	20	9.7	4	4.5	9.2	097
			9.8				098
			9.9				099
			10.0				100
			10.5				105
			10.6				106
			10.7				107
ø11	7.5	20	10.8	4	4.5	9.8	108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
			12.5				125
ø13	8.5	20	12.6	5	5.5	11.6	126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
			13.5				135
			13.6				136
ø14	10.5	25	13.7	6	5.5	12.6	137
			13.8				138
			13.9				139
			14.0				140
			14.5				145
			14.6				146
			14.7				147
ø15	10.5	25	14.8	6	6	13.3	148
			14.9				149
			15.0				150

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
			17.5				175
ø18	13	27	17.6	6	7.5	16.4	176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
			19.5				195
			19.6				196
ø20	13	27	19.7	6	8	17.2	197
			19.8				198
			19.9				199
			20.0				200

Pin Clamp Cylinder Small Auto Switch Mounting Series C(L)KU32

Plate Cylinder Type

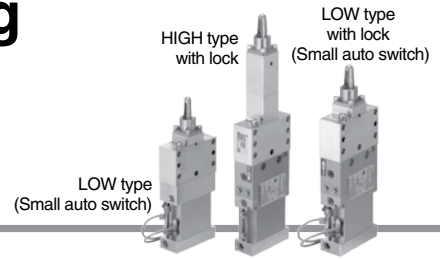

How to Order

Clamping height
LOW type

C L KU 32 - 075 R A L - M9BVL □ - X2321

Clamping height
HIGH type

C L KU 32 - 075 R A H - M9BVL □ - X2322

Nil	Without lock
L	With lock

With lock


32	Equiv. $\phi 32$ piston area
----	------------------------------

Bore size


Guide pin diameter

* For guide pin diameter, refer to Table 1 below.

Guide pin shape



Clamp arm position (viewed from top)

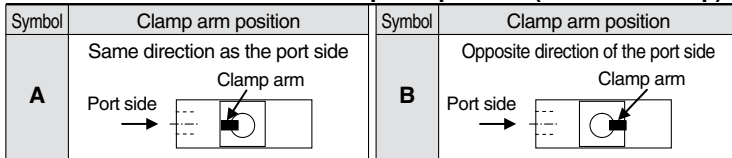

Auto switch type

Nil	Without auto switch
M9NV□	D-M9NV□
M9PV□	D-M9PV□
M9BV□	D-M9BV□
M9NWV□	D-M9NWV□
M9PWV□	D-M9PWV□
M9B WV□	D-M9B WV□
A73□	D-A73□
A79W□	D-A79W□

□ = Lead wire

Number of auto switches

Nil	2 pcs.
S	1 pc. (Unclamping side)

* Auto switches and mounting brackets are shipped together, (but not assembled).
* For the M9□WV, A73 and A79W, when the total thickness of clamped workpiece is over 2 mm, the auto switch may not be adjusted to the most sensitive position.

△ Small auto switches cannot be used under strong magnetic field.

Specifications and replacement parts are the same for C(L)KU32-X2091/X2092. For details, refer to pages 11 and 12.

Table 1. Guide Pin Diameter

Symbol	075	076	077	078	079	080	085	086	087	088	089	090	095	096	097	098	099	100	105	106	107	108	109	110
Guide pin diameter [mm]	7.5	7.6	7.7	7.8	7.9	8.0	8.5	8.6	8.7	8.8	8.9	9.0	9.5	9.6	9.7	9.8	9.9	10.0	10.5	10.6	10.7	10.8	10.9	11.0
Applicable hole diameter of workpiece [mm]	For $\phi 8$					For $\phi 9$					For $\phi 10$					For $\phi 11$								
Guide pin shape	Round type											Round type/Diamond type												

Symbol	115	116	117	118	119	120	125	126	127	128	129	130	135	136	137	138	139	140	145	146	147	148	149	150	
Guide pin diameter [mm]	11.5	11.6	11.7	11.8	11.9	12.0	12.5	12.6	12.7	12.8	12.9	13.0	13.5	13.6	13.7	13.8	13.9	14.0	14.5	14.6	14.7	14.8	14.9	15.0	
Applicable hole diameter of workpiece [mm]	For $\phi 12$					For $\phi 13$					For $\phi 14$					For $\phi 15$									
Guide pin shape	Round type/Diamond type																								

Symbol	155	156	157	158	159	160	175	176	177	178	179	180	195	196	197	198	199	200
Guide pin diameter [mm]	15.5	15.6	15.7	15.8	15.9	16.0	17.5	17.6	17.7	17.8	17.9	18.0	19.5	19.6	19.7	19.8	19.9	20.0
Applicable hole diameter of workpiece [mm]	For $\phi 16$					For $\phi 18$					For $\phi 20$							
Guide pin shape	Round type/Diamond type																	

Applicable Auto Switches/Refer to Best Pneumatics No. 3 for further information on auto switches.


Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model	Lead wire length (m)				Pre-wired connector	Applicable load		
					DC	AC		0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	●	●	●	○	○	IC circuit	
				3-wire (PNP)				M9PV	●	●	●	○			
				2-wire				M9BV	●	●	●	○			○
				3-wire (NPN)				M9NWV	●	●	●	○			
				3-wire (PNP)				M9PWV	●	●	●	○			
				2-wire				M9B WV	●	●	●	○			
Reed auto switch	Diagnostic indication (2-color indication)	Grommet	Yes	2-wire	24 V	12 V	100 V	A73	●	—	●	●	—	Relay, PLC	
								A79W	●	—	●	—			

* Solid state auto switches marked with "○" are produced upon receipt of order.
* Electrical entry direction is perpendicular only.
* The D-A9□ and A9□V cannot be mounted.
* For details about auto switches with pre-wired connector, refer to Best Pneumatics No. 3.
* Auto switches and mounting brackets are shipped together, (but not assembled).

Dimensions

CKU32 (Clamping height LOW type)

* Refer to "How to Order" for positional relationship of the mounting surface and port.
* The figures below indicate the CKU32-□RAL-X2321.

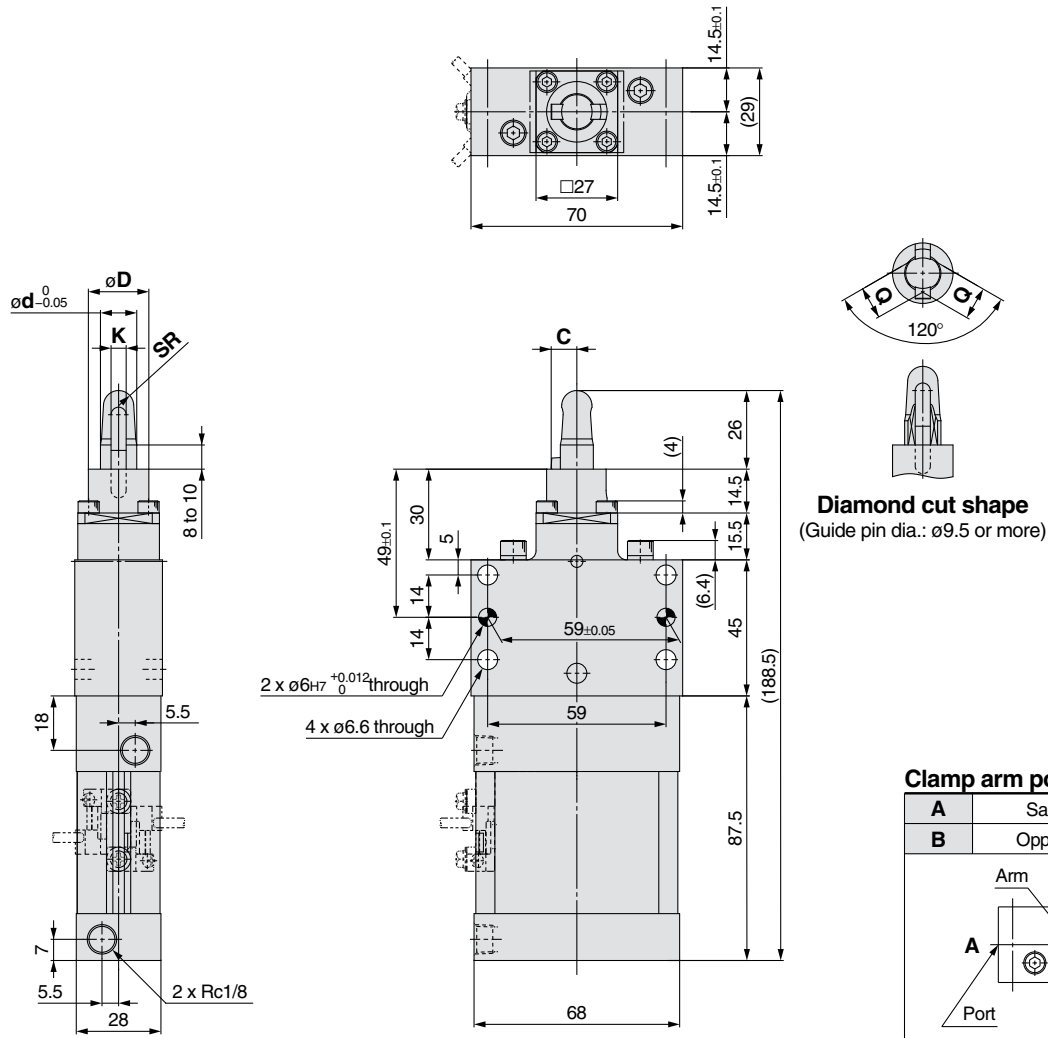

Diamond cut shape
(Guide pin dia.: ø9.5 or more)

Clamp arm position

A	Same as the port side
B	Opposite side of the port

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
ø9	6.5	20	8.5	4	4	—	085
			8.6				086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
ø10	7.5	20	9.5	4	4.5	9.2	095
			9.6				096
			9.7				097
			9.8				098
			9.9				099
			10.0				100
ø11	7.5	20	10.5	4	4.5	9.8	105
			10.6				106
			10.7				107
			10.8				108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
ø13	8.5	20	12.5	5	5.5	11.6	125
			12.6				126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
ø14	10.5	25	13.5	6	5.5	12.6	135
			13.6				136
			13.7				137
			13.8				138
			13.9				139
			14.0				140
ø15	10.5	25	14.5	6	6	13.3	145
			14.6				146
			14.7				147
			14.8				148
			14.9				149
			15.0				150


Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
ø18	13	27	17.5	6	7.5	16.4	175
			17.6				176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
ø20	13	27	19.5	6	8	17.2	195
			19.6				196
			19.7				197
			19.8				198
			19.9				199
			20.0				200

Series C(L)KU32


Dimensions

CKU32 (Clamping height HIGH type)

* Refer to "How to Order" for positional relationship of the mounting surface and port.
 * The figures below indicate the CKU32-□RAH-X2322.

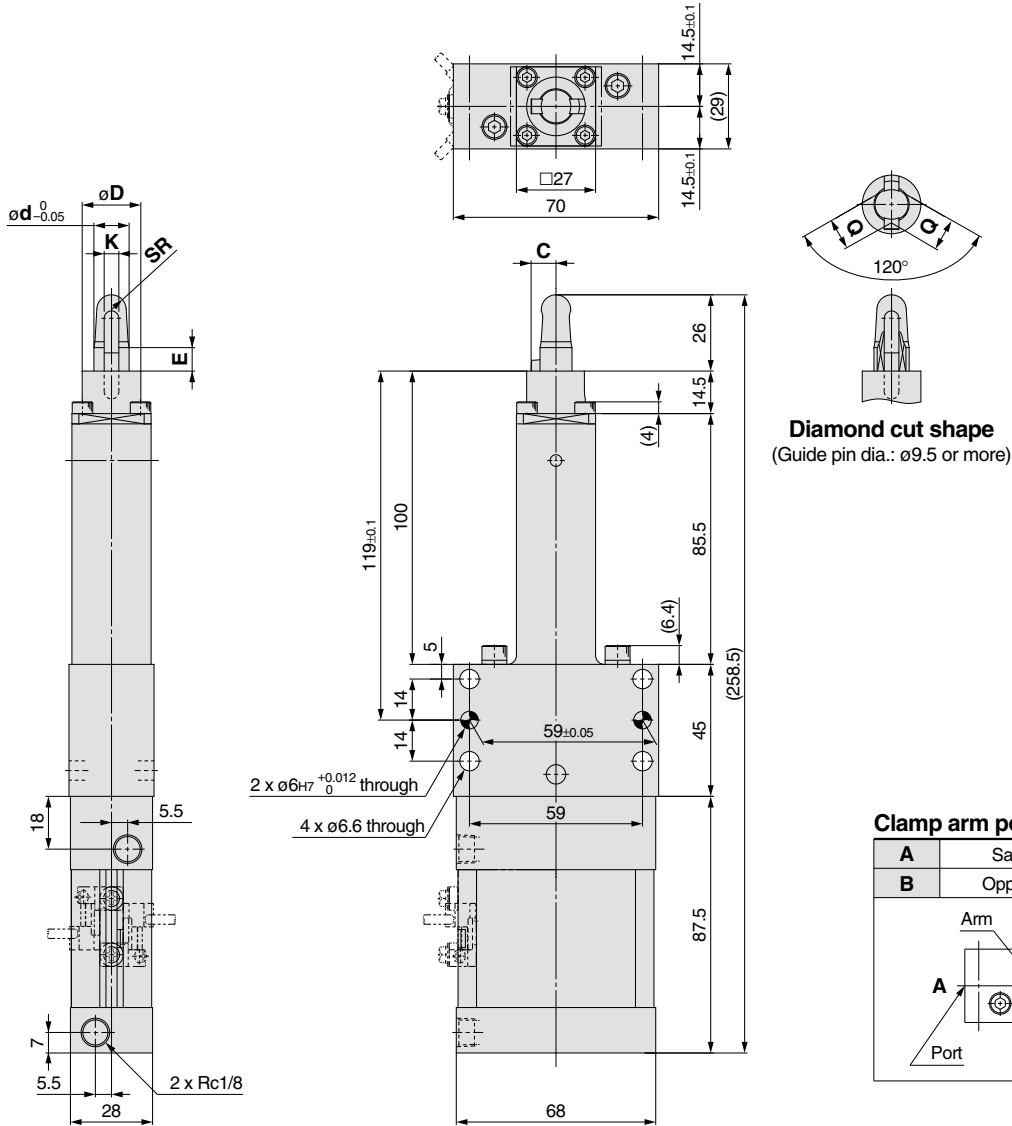

Clamp arm position





Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
			8.5				085
ø9	6.5	20	8.6	4	4	—	086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
			9.5				095
			9.6				096
ø10	7.5	20	9.7	4	4.5	9.2	097
			9.8				098
			9.9				099
			10.0				100
			10.5				105
			10.6				106
			10.7				107
ø11	7.5	20	10.8	4	4.5	9.8	108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
			12.5				125
ø13	8.5	20	12.6	5	5.5	11.6	126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
			13.5				135
			13.6				136
ø14	10.5	25	13.7	6	5.5	12.6	137
			13.8				138
			13.9				139
			14.0				140
			14.5				145
			14.6				146
			14.7				147
ø15	10.5	25	14.8	6	6	13.3	148
			14.9				149
			15.0				150

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
			17.5				175
ø18	13	27	17.6	6	7.5	16.4	176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
			19.5				195
			19.6				196
ø20	13	27	19.7	6	8	17.2	197
			19.8				198
			19.9				199
			20.0				200




Dimensions

CLKU32 (Clamping height LOW type) * Refer to "How to Order" for positional relationship of the mounting surface and port.
* The figures below indicate the CLKU32-□RAL-X2321.



Manually unlocking

- 1) Remove the dustproof cover.
- 2) Screw the commercially available bolt (M3 x 25 L or more) into the lock ring shown on the left and raise the lock ring toward the head side.
- 3) The lock ring and piston rod form a right angle, and the lock is released.

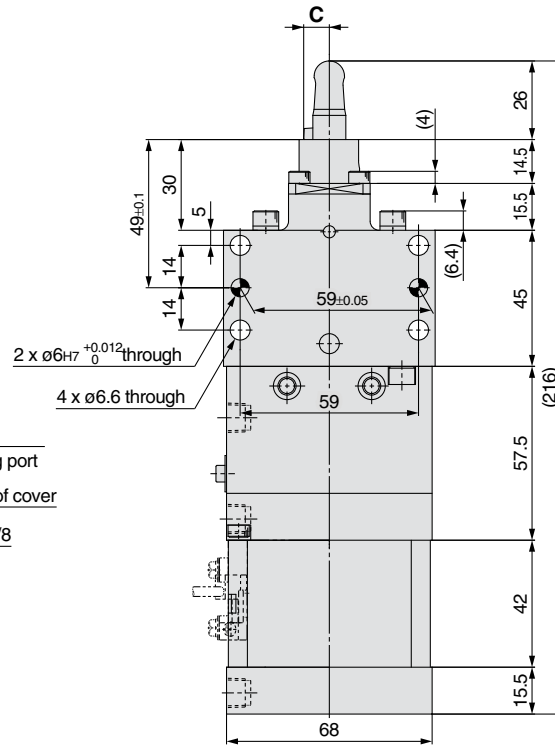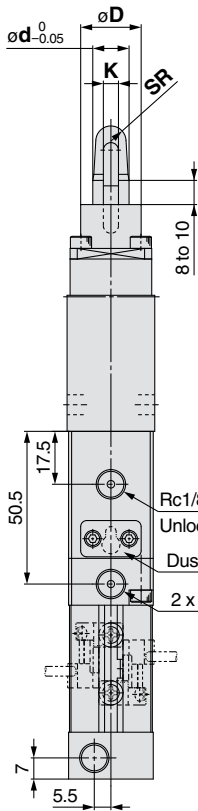

Diamond cut shape
(Guide pin dia.: ø11.5 or more)

Clamp arm position

A	Same as the port side
B	Opposite side of the port

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø8	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
ø9	6.5	20	8.5	4	4	—	085
			8.6				086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
ø10	7.5	20	9.5	4	4.5	9.2	095
			9.6				096
			9.7				097
			9.8				098
			9.9				099
			10.0				100
ø11	7.5	20	10.5	4	4.5	9.8	105
			10.6				106
			10.7				107
			10.8				108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø12	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
ø13	8.5	20	12.5	5	5.5	11.6	125
			12.6				126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
ø14	10.5	25	13.5	6	5.5	12.6	135
			13.6				136
			13.7				137
			13.8				138
			13.9				139
			14.0				140
ø15	10.5	25	14.5	6	6	13.3	145
			14.6				146
			14.7				147
			14.8				148
			14.9				149
			15.0				150




Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
ø16	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
ø18	13	27	17.5	6	7.5	16.4	175
			17.6				176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
ø20	13	27	19.5	6	8	17.2	195
			19.6				196
			19.7				197
			19.8				198
			19.9				199
			20.0				200

Series C(L)KU32


Dimensions

CLKU32 (Clamping height HIGH type)

* Refer to "How to Order" for positional relationship of the mounting surface and port.
 * The figures below indicate the CLKU32-□RAH-X2322.

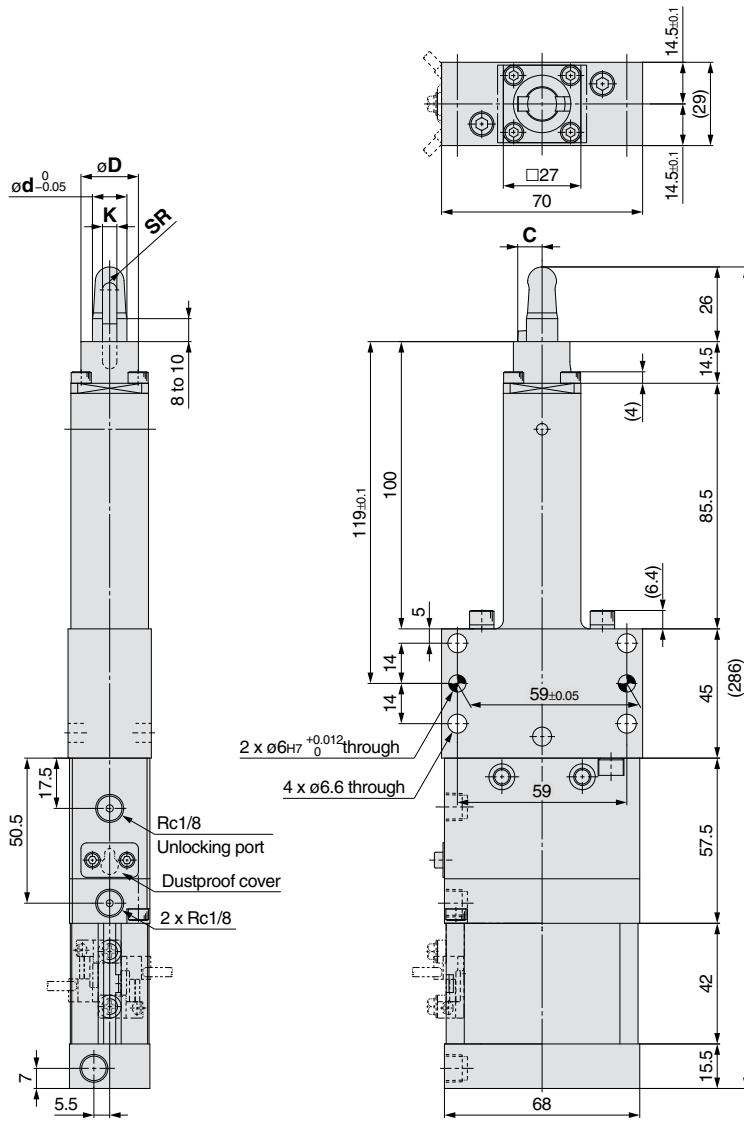

Diamond cut shape
 (Guide pin dia.: $\phi 9.5$ or more)



Manually unlocking

- 1) Remove the dustproof cover.
- 2) Screw the commercially available bolt (M3 x 25 L or more) into the lock ring shown on the left and raise the lock ring toward the head side.
- 3) The lock ring and piston rod form a right angle, and the lock is released.

Clamp arm position

A	Same as the port side
B	Opposite side of the port

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
$\phi 8$	6	20	7.5	3.5	3.5	—	075
			7.6				076
			7.7				077
			7.8				078
			7.9				079
			8.0				080
			8.5				085
$\phi 9$	6.5	20	8.6	4	4	—	086
			8.7				087
			8.8				088
			8.9				089
			9.0				090
			9.5				095
			9.6				096
$\phi 10$	7.5	20	9.7	4	4.5	9.2	097
			9.8				098
			9.9				099
			10.0				100
			10.5				105
			10.6				106
			10.7				107
$\phi 11$	7.5	20	10.8	4	4.5	9.8	108
			10.9				109
			11.0				110

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
$\phi 12$	8.5	20	11.5	5	5	10.9	115
			11.6				116
			11.7				117
			11.8				118
			11.9				119
			12.0				120
			12.5				125
$\phi 13$	8.5	20	12.6	5	5.5	11.6	126
			12.7				127
			12.8				128
			12.9				129
			13.0				130
			13.5				135
			13.6				136
$\phi 14$	10.5	25	13.7	6	5.5	12.6	137
			13.8				138
			13.9				139
			14.0				140
			14.5				145
			14.6				146
			14.7				147
$\phi 15$	10.5	25	14.8	6	6	13.3	148
			14.9				149
			15.0				150

Hole diameter of workpiece	C	D	d	K	SR	Q	Model number
$\phi 16$	11.5	25	15.5	6	6.5	14.3	155
			15.6				156
			15.7				157
			15.8				158
			15.9				159
			16.0				160
			17.5				175
$\phi 18$	13	27	17.6	6	7.5	16.4	176
			17.7				177
			17.8				178
			17.9				179
			18.0				180
			19.5				195
			19.6				196
$\phi 20$	13	27	19.7	6	8	17.2	197
			19.8				198
			19.9				199
			20.0				200

Series C(L)KQG32/C(L)KU32 Options

Dimensions

Shim

C(L)KQG32-X2081

C(L)KQG32-X2082

C(L)KU32-X2091
-X2321



C(L)KU32-X2092
-X2322

LOW type

HIGH type

LOW type

HIGH type

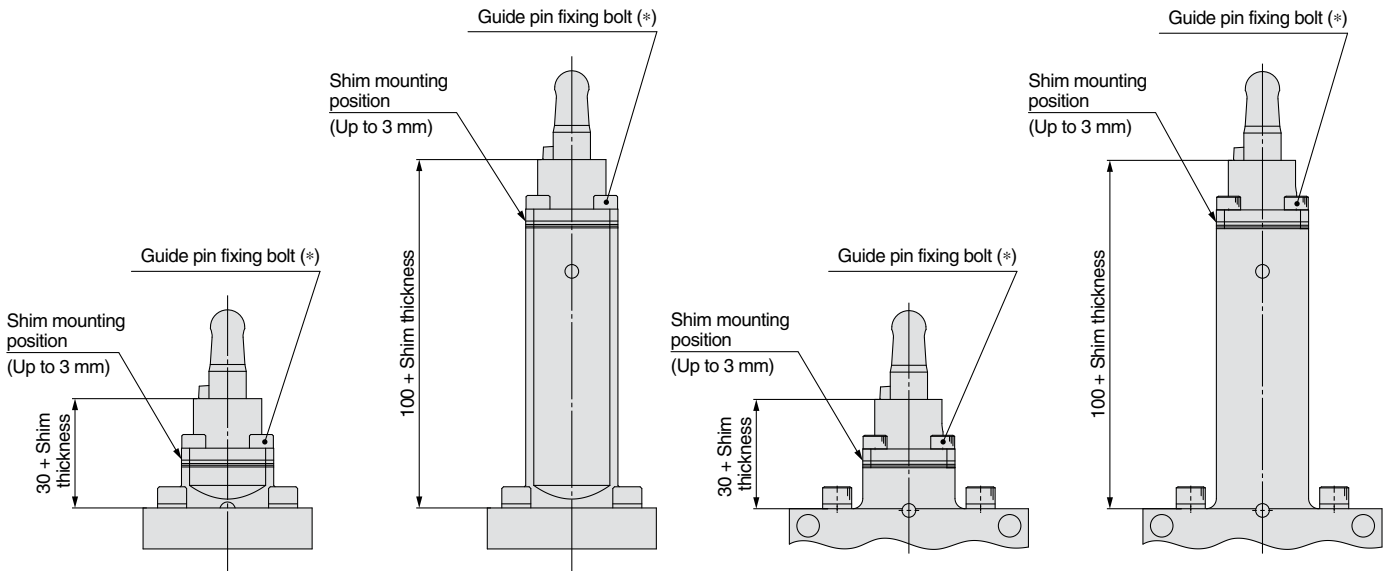

Shim dimensions

Description	Part No.	Note
Shim A	CKQ32-36A746MN	Plate thickness 1 (mm)
Shim B	CKQ32-36B746MN	Plate thickness 0.5 (mm)
Guide pin fixing long bolt	CA00644	Bolt size M4 x 12 L

- Shims can be mounted up to 3 mm.
However, when mounting 2 mm or more shims, use the above guide pin fixing long bolt instead of a guide pin fixing bolt (marked with *).
- For auto switches (except the M9□V), when the total thickness of shims and a workpiece is over 2 mm, the auto switch may not be adjusted to the most sensitive position.


Series C(L)KQG32

Auto Switch Mounting 1


Auto Switch Mounting Height

Applicable cylinder: C(L)KQG32-X2081
C(L)KQG32-X2082


D-P3DW□

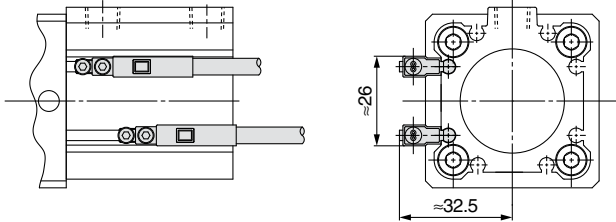


D-P4DW□

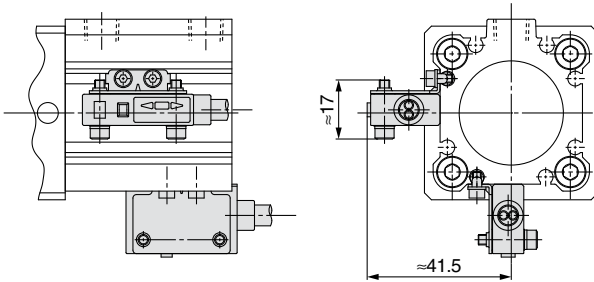


D-M9□
D-M9□W
D-A9□

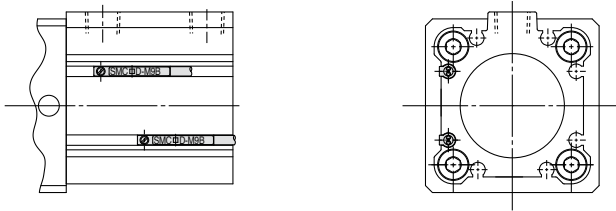

D-M9□V
D-M9□WV
D-A9□V

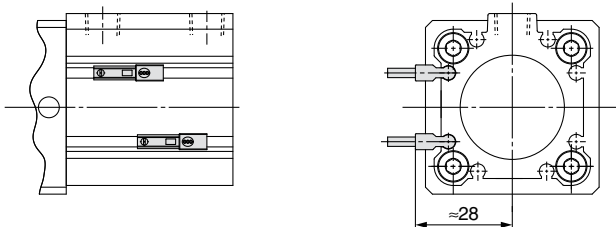


For D-P3DW□

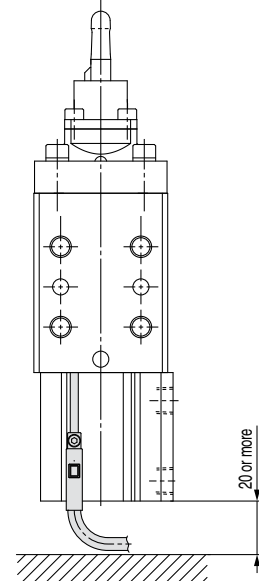





Note) Allow 20 mm or more space at the cylinder head side to secure the minimum bending radius of the auto switch lead wire.

For D-P4DW□

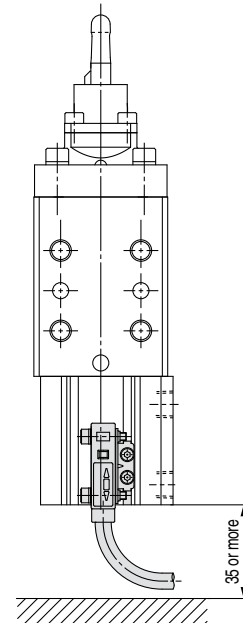

Note) Allow 35 mm or more space at the cylinder head side to secure the minimum bending radius of the auto switch lead wire.

Auto Switch Mounting Bracket Part No./Mounting Method

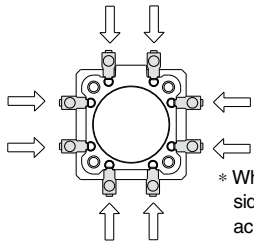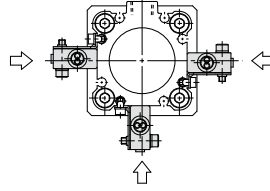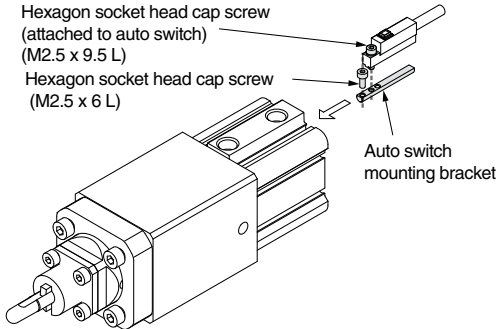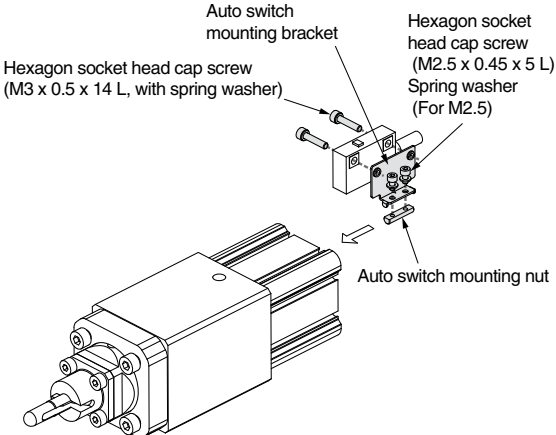Applicable cylinder	C(L)KQG32-X2081/-X2082	
Applicable auto switches	D-P3DW□	D-P4DW□
Bore size (mm)	φ32	
Auto switch mounting bracket part no.	BQ6-032S	C2Q32-42-880NN-R
Auto switch mounting bracket fitting parts lineup/Weight	<ul style="list-style-type: none"> • Hexagon socket head cap screw (M2.5 x 6 L) • Auto switch mounting bracket (Nut) Weight: 2.5 g	<ul style="list-style-type: none"> • Auto switch mounting bracket • Auto switch mounting nut • Hexagon socket head cap screw (M3 x 0.5 x 14 L, with spring washer) <ul style="list-style-type: none"> • Hexagon socket head cap screw (M2.5 x 0.45 x 5 L) • Spring washer (For M2.5) Weight: 8.5 g
Auto switch mounting surfaces	Surfaces with auto switch mounting slot  <p style="text-align: right; font-size: small;">* When mounting on the port side, select fittings with width across 12 mm or less.</p>	Surfaces with auto switch mounting slot 
Mounting of auto switch	<ol style="list-style-type: none"> ① Fix the auto switch and the auto switch mounting bracket temporarily by tightening the hexagon socket head cap screw (M2.5 x 9.5 L) 1 to 2 turns. ② Insert the temporarily tightened mounting bracket into the mating groove of the cylinder tube, and slide the auto switch onto the cylinder tube through the groove. Insert the auto switch onto the cylinder tube through the groove with the back part of the auto switch (lead wire side) and the back part of the auto switch mounting bracket. ③ Check the detecting position of the auto switch and fix the auto switch firmly with the hexagon socket head cap screw (M2.5 x 6 L, M2.5 x 9.5 L).* ④ If the detecting position is changed, go back to step ②. <p style="font-size: x-small;">* The hexagon socket head cap screw (M2.5 x 6 L) is used to fix the mounting bracket and cylinder tube. This enables the replacement of the auto switch without adjusting the auto switch position.</p> <p style="font-size: x-small;">Note 1) Ensure that the auto switch is covered with the mating groove to protect the auto switch.</p> <p style="font-size: x-small;">Note 2) The tightening torque for the hexagon socket head cap screw (M2.5 x 6 L, M2.5 x 9.5 L) is 0.2 to 0.3 N·m.</p> <p style="font-size: x-small;">Note 3) Tighten the hexagon socket head cap screws evenly.</p> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <p style="font-size: x-small;">Hexagon socket head cap screw (attached to auto switch) (M2.5 x 9.5 L)</p> <p style="font-size: x-small;">Hexagon socket head cap screw (M2.5 x 6 L)</p> </div>  </div>	<ol style="list-style-type: none"> ① Fix the auto switch and the auto switch mounting bracket temporarily with the hexagon socket head cap screws (M3 x 14 L). ② Insert the hexagon socket head cap screws (M2.5 x 5 L) into the spring washers (for M2.5), and tighten the auto switch mounting bracket and auto switch mounting nut temporarily. ③ Insert the temporarily fixed auto switch mounting nut into the mating groove of the cylinder tube. ④ Check the detecting position of the auto switch and fix the auto switch firmly with the hexagon socket head cap screw (M2.5 x 5 L, M3 x 14 L). <p style="font-size: x-small;">Note 1) The tightening torque for the hexagon socket head cap screw (M3 x 14 L) is 0.5 to 0.6 N·m.</p> <p style="font-size: x-small;">Note 2) The tightening torque for the hexagon socket head cap screw (M2.5 x 5 L) is 0.25 to 0.35 N·m.</p> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <p style="font-size: x-small;">Hexagon socket head cap screw (M3 x 0.5 x 14 L, with spring washer)</p> </div>  <div style="margin-left: 10px;"> <p style="font-size: x-small;">Auto switch mounting bracket</p> <p style="font-size: x-small;">Hexagon socket head cap screw (M2.5 x 0.45 x 5 L)</p> <p style="font-size: x-small;">Spring washer (For M2.5)</p> <p style="font-size: x-small;">Auto switch mounting nut</p> </div> </div>

Other than the applicable auto switches listed in “How to Order”, the following auto switches are mountable.

Refer to Best Pneumatics No. 3 for detailed specifications.

Applicable Cylinder: C(L)KQG32-X2081, C(L)KQG32-X2082

Type	Model	Electrical entry	Features	Type	Model	Electrical entry	Features
Solid state auto switch	D-M9□	Grommet (In-line)	—	Reed auto switch	D-A90	Grommet (In-line)	Without Indicator light
	D-M9□W		Diagnostic indication (2-color indication)		D-A93/A96		—
	D-M9□V	Grommet (Perpendicular)	—		D-A90V	Grommet (Perpendicular)	Without Indicator light
	D-M9□WV		Diagnostic indication (2-color indication)		D-A93V/A96V		—
	D-P4DW	Grommet (In-line)	Magnetic field resistant (2-color indication)				

* With pre-wired connector is also available for solid state auto switches. For details, refer to Best Pneumatics No. 3.

* When installing the D-P4DW□, use the C2Q32-42-880NN-R auto switch mounting bracket.



Series C(L)KU32

Auto Switch Mounting 2

Auto Switch Mounting Height



Applicable cylinder: C(L)KU32-X2091
C(L)KU32-X2092

D-P3DW□

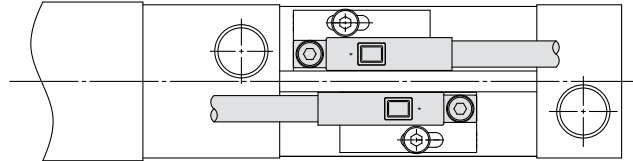



Applicable cylinder: C(L)KU32-X2321
C(L)KU32-X2322

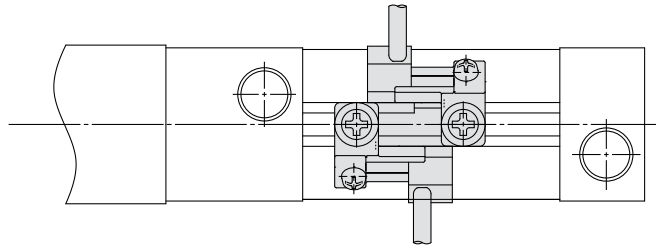






D-M9□V

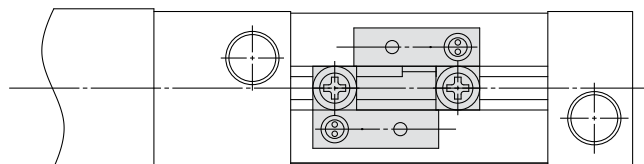

D-A7□



Auto Switch Mounting Bracket Part No./Mounting Method

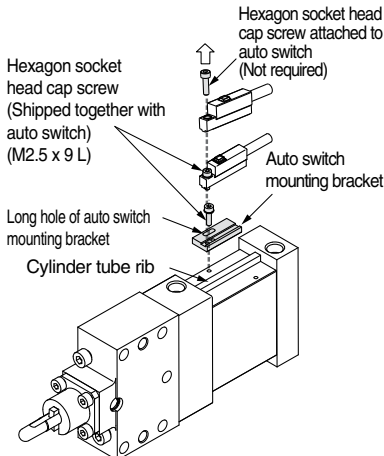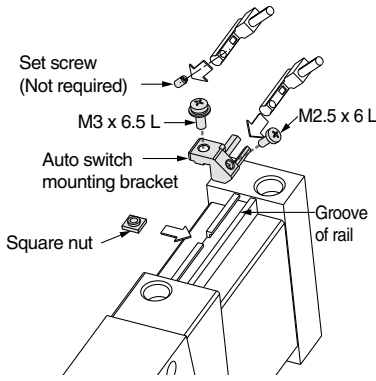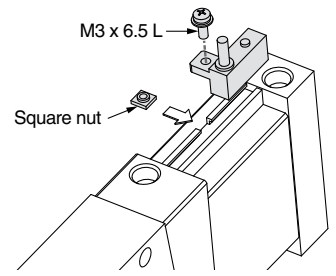Applicable cylinder	-X2091/-X2092	-X2321/-X2322	-X2321/-X2322
Applicable auto switches	D-P3DW□	D-M9□V/M9□WV	D-A73/A79W
Bore size (mm)	φ32	φ32	φ32
Auto switch mounting bracket part no.	CKU32-42-088EN-R	BMU1-025 (Below ①, ②) BQ2-012 (Below ③, ④)	BMU1-025
Auto switch mounting bracket fitting parts lineup/Weight	<ul style="list-style-type: none"> • Hexagon socket head cap screw (M2.5 x 9 L) • Auto switch mounting bracket Weight: 4 g	<ol style="list-style-type: none"> ① Cross recessed round head screw (M3 x 6.5 L) ② Square nut ③ Auto switch mounting bracket ④ Round head combination screw (M2.5 x 6 L) Weight: 5 g	<ul style="list-style-type: none"> • Cross recessed round head screw (M3 x 6.5 L) • Square nut Weight: 2 g
Auto switch mounting surfaces	Surfaces with auto switch mounting slot	Surfaces with auto switch mounting slot	Surfaces with auto switch mounting slot
	Without lock  With lock 		
Mounting of auto switch	<ol style="list-style-type: none"> ① The hexagon socket head cap screw attached to the auto switch is not required. Turn to loosen and remove. <p>* This procedure is only for auto switches that are ordered separately. Hexagon socket head cap screws are removed when auto switches are shipped together with cylinder.</p> <ol style="list-style-type: none"> ② Fix the auto switch and the auto switch mounting bracket with the hexagon socket head cap screw (M2.5 x 9 L) shipped together with the auto switch mounting bracket. ③ Check the detecting position of the auto switch by sliding it along the cylinder tube rib, before fixing the auto switch on the cylinder tube threaded portion by inserting the hexagon socket head cap screw (M2.5 x 9 L) into the long hole of the auto switch mounting bracket. <p>Note) The tightening torque for the hexagon socket head cap screw (M2.5 x 9 L) is 0.15 to 0.22 lbf-ft (0.2 to 0.3 N-m).</p> 	<ol style="list-style-type: none"> ① Remove the set screw attached to the auto switch. (The set screw is not required.) ② Fix the auto switch to the auto switch mounting bracket with the round head combination screw (M2.5 x 6 L). ③ Slide the square nut into the groove of the rail, and fix the auto switch mounting bracket on the cylinder with the cross recessed round head screw (M3 x 6.5 L). <p>Note) The tightening torque for the round head combination screw (M2.5 x 6 L) is 0.7 to 0.15 lbf-ft (0.1 to 0.2 N-m) and for the cross recessed round head screw (M3 x 6.5 L) is 0.37 to 0.52 lbf-ft (0.5 to 0.7 N-m).</p> 	<ol style="list-style-type: none"> ① Slide the square nut into the groove of the rail, and fix the auto switch on the cylinder with the cross recessed round head screw (M3 x 6.5 L). <p>Note) The tightening torque for the cross recessed round head screw (M3 x 6.5 L) is 0.37 to 0.52 lbf-ft (0.5 to 0.7 N-m).</p> 

Global Manufacturing, Distribution and Service Network

Worldwide Subsidiaries

North & South America

- U.S.A. SMC Corporation of America
- CANADA SMC Pneumatics (Canada) Ltd.
- MEXICO SMC Corporation(México), S.A. de C.V.
- BRAZIL SMC Pneumáticos do Brasil Ltda.
- CHILE SMC Pneumatics (Chile) S.A.
- COLOMBIA SMC Colombia Sucursal de SMC Chile S.A.
- ARGENTINA SMC Argentina S.A.
- BOLIVIA SMC Pneumatics Bolivia S.r.l.
- VENEZUELA SMC Neumatica Venezuela S.A.
- PERU (Distributor) IMPECO Automatización Industrial S.A.C.
- ECUADOR (Distributor) ASISTECH CIA. LTDA.

Asia/Oceania

- CHINA SMC(China)Co.,Ltd.
- CHINA SMC Pneumatics (Guangzhou) Ltd.
- HONG KONG SMC Pneumatics(Hong Kong)Ltd.
- TAIWAN SMC Pneumatics(Taiwan)Co.,Ltd.
- KOREA SMC Pneumatics Korea Co., Ltd.
- SINGAPORE SMC Pneumatics(S.E.A.)Pte.Ltd.
- MALAYSIA SMC Pneumatics(S.E.A.)Sdn.Bhd.
- THAILAND SMC (Thailand) Ltd.
- PHILIPPINES Shoketsu SMC Corporation
- INDIA SMC Pneumatics(India)Pvt.Ltd.
- ISRAEL (Distributor) Baccara Geva A.C.S. Ltd.
- INDONESIA (Distributor) PT. Sinar Mutiara Cemerlang
- VIETNAM (Distributor) Dy Dan Trading Co.,Ltd.
- PAKISTAN (Distributor) Jubilee Corporation

Asia/Oceania

- SRI LANKA (Distributor) Electro-Serv(Pvt.)Ltd.
- IRAN (Distributor) Abzarchian Co. Ltd.
- U.A.E. (Distributor) Machinery People Trading Co. L.L.C.
- KUWAIT (Distributor) Esco Kuwait Equip & Petroleum App. Est.
- SAUDI ARABIA (Distributor) Assaggaff Trading Est.
- BAHRAIN (Distributor) Mohammed Jalal & Sons W.L.L. Technical & Automotive Services
- SYRIA (Distributor) Miak Corporation
- JORDAN (Distributor) Atafawok Trading Est.
- BANGLADESH (Distributor) Chemie International
- AUSTRALIA SMC Pneumatics(Australia)Pty.Ltd.
- NEW ZEALAND SMC Pneumatics(N.Z.)Ltd.
- JAPAN SMC Corporation

Europe/Africa

- GERMANY SMC Pneumatik GmbH
- SWITZERLAND SMC Pneumatik AG
- U.K. SMC Pneumatics (U.K.) Ltd.
- FRANCE SMC Pneumatique SA
- SPAIN / PORTUGAL SMC España S.A.
- ITALY SMC Italia S.p.A.
- GREECE SMC HELLAS E.P.E
- IRELAND SMC Pneumatics (Ireland) Ltd.
- NETHERLANDS (Associated company) SMC Pneumatics BV
- BELGIUM (Associated company) SMC Pneumatics N.V./S.A.
- DENMARK SMC Pneumatik A/S
- AUSTRIA SMC Pneumatik GmbH (Austria)

Europe/Africa

- CZECH REPUBLIC SMC Industrial Automation CZ s.r.o.
- HUNGARY SMC Hungary Ipari Automatizálási Kft.
- POLAND SMC Industrial Automation Polska Sp. z o.o.
- SLOVAKIA SMC Priemyselna Automatizacia Spol s.r.o.
- SLOVENIA SMC Industrijska Avtomatika d.o.o.
- BULGARIA SMC Industrial Automation Bulgaria EOOD
- CROATIA SMC Industrijska Automatika d.o.o.
- BOSNIA AND HERZEGOVINA(Distributor) A.M. Pneumatik d.o.o.
- SERBIA(Distributor) Best Pneumatics d.o.o.
- UKRAINE(Distributor) PNEUMOTEC Corp.
- FINLAND SMC Pneumatics Finland Oy
- NORWAY SMC Pneumatics Norway AS
- SWEDEN SMC Pneumatics Sweden AB
- ESTONIA SMC Pneumatics Estonia Oü
- LATVIA SMC Pneumatics Latvia SIA
- LITHUANIA(LIETUVA) UAB "SMC Pneumatics"
- ROMANIA SMC Romania S.r.l.
- RUSSIA SMC Pneumatik LLC.
- KAZAKHSTAN SMC Kazakhstan, LLC.
- TURKEY (Distributor) Entek Pnömatik Sanayi ve Ticaret Şirketi
- MOROCCO (Distributor) Soraflex
- TUNISIA (Distributor) Bymys
- EGYPT (Distributor) Saadani Trading & Industrial Services
- NIGERIA (Distributor) Faraday Engineering Company Ltd.
- SOUTH AFRICA (Distributor) Hyflo Southern Africa (Pty.) Ltd.

U.S. & Canadian Sales Offices

WEST


- Austin
- Dallas
- Los Angeles
- Phoenix
- Portland
- San Francisco
- Vancouver

EAST

- Atlanta
- Birmingham
- Boston
- Charlotte
- Nashville
- New Jersey
- Richmond
- Rochester
- Tampa
- Montreal

CENTRAL

- Chicago
- Cincinnati
- Cleveland
- Detroit
- Indianapolis
- Milwaukee
- Minneapolis
- St. Louis
- Toronto
- Windsor

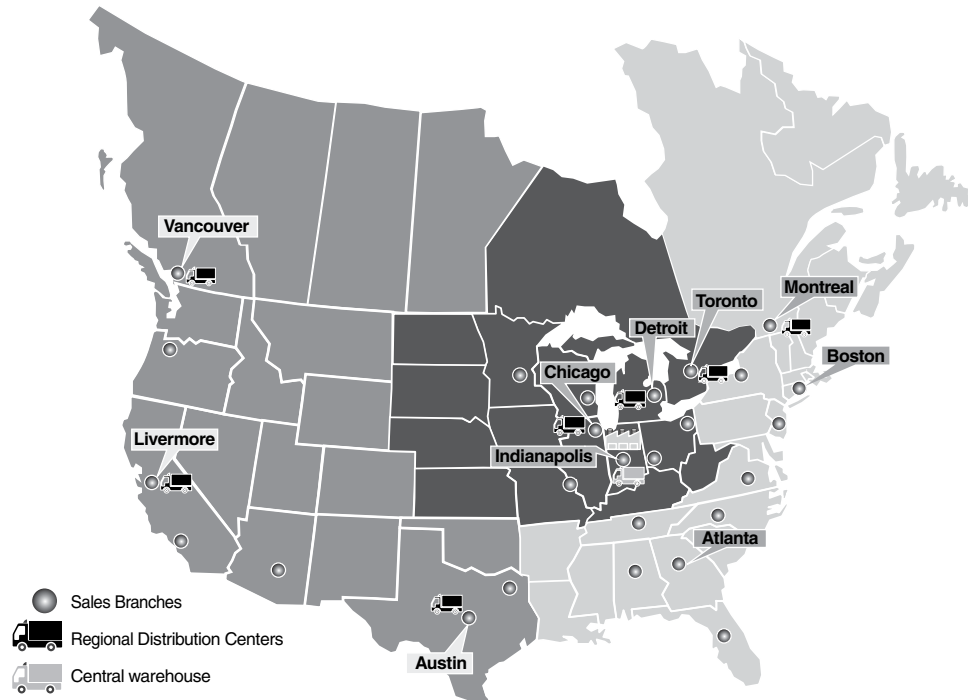

SMC Corporation of America
10100 SMC Blvd., Noblesville, IN 46060

www.smcusa.com
SMC Pneumatics (Canada) Ltd.
www.smcpcneumatics.ca

(800) SMC.SMC1 (762-7621)
e-mail: sales@smcusa.com
For International inquiries: www.smcworld.com

