

Slide Unit

Series CX2/CXWM/CXWL

Slide Bearing/CX2:ø10, ø15, ø25 CXWM:ø10, ø16, ø20, ø25, ø32

Ball Bushing Bearing/CXWL:ø10, ø16, ø20, ø25, ø32

Provided with shock absorbers to absorb impact and noise.

The slide unit can absorb energy in a wide range, in high speed, low-load applications to low speed, high-load applications, without requiring adjustments.

Ensures high positional accuracy.

A high level of positional accuracy can be attained because the two parallel piston rods prevent the rods from rotating, and the workpiece mounting surface and the parallelism of the piston rods are made highly precise.

Auto switches can be installed.


Smooth operation and high thrust.

Mountable on the housing or on the plate.


The slide unit can be mounted on the housing or on the plate, depending on the application. It can also be bolted from the bottom or from the top. The piping can be fitted to the port in any of the three positions, according to how the unit is mounted.

<Fixing the plate> The housing moves.

Housing Plate




Mounting from the bottom side




Mounting from the upper side

<Fixing the housing> The plate moves.




Mounting from the bottom side



Mounting from the upper side

Series Variations

	Bearing type	Model	Bore size	Stroke (mm)							Accessory	Auto switch mounting	Page				
				25	50	75	100	125	150	175				200			
Slide unit 	Slide bearing	Series CX2 □ Double rod type (Basic type, compact)	ø10	●	●	●	●					●	●	●	●	(1)	464
		ø15	●	●	●	●	●	●	●			●	●	●	●		
		ø25	●	●	●	●	●	●	●			●	●	●	●		
		ø10	(2)	●	●	●	●	●	●			●	●	●	●	(1)	473
		ø16	(2)	●	●	●	●	●	●			●	●	●	●		
		ø20	(3)	●	●	●	●	●	●			●	●	●	●		
	Ball bushing bearing	Series CXWM Built-in shock absorber type	ø25	(2)	●	●	●	●	●	●			●	●	●	●	
			ø32	(3)	(3)	●	●	●	●	●			●	●	●	●	
			ø10	●	●	●	●	●	●	●			●	●	●	●	(1)
		ø16	●	●	●	●	●	●	●			●	●	●	●		
		ø20	●	●	●	●	●	●	●			●	●	●	●		
		ø25	●	●	●	●	●	●	●			●	●	●	●		
ø32	(3)	●	●	●	●	●	●			●	●	●	●				



Note 1) Only type E (Reed switch) is applicable as an auto switch when mounting a housing of ø10.

Note 2) The shock absorbers are to be mounted on the both sides of the plate for the 25 stroke of Series CXWM10 to 25.

Note 3) The shock absorber is to be mounted on one side of the plate for the 25 stroke of Series CXWM20, CXWM32, CXWL32 and the 50 stroke of Series CXWM32.

With end lock
Shock absorber
Adjusting bolt
Housing mounting
Plate mounting

CX2

CXW

CXT

CXSJ

CXS

D-□

-X□

Individual

-X□




Series CX2/CXWM/CXWL

Prior to Use

Maximum Allowable Moment: CX2N, CXWM, CXWL

Operate within the operating range and under the allowable moment indicated in the table below.

- CX2N
- CXWM (Slide bearing)
- - - CXWL (Ball bushing bearing)

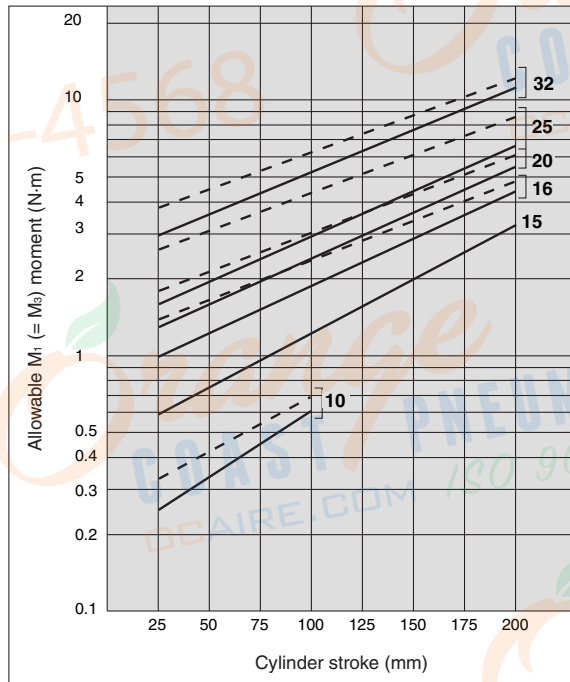


Allowable Moment (M_2) (N·m)

Bore size (mm)	10	15	16	20	25	32
CX2N	0.098	0.294	—	—	1.029	—
CXWM	0.108	—	0.549	0.809	1.029	2.695
CXWL	0.108	—	0.549	0.809	1.201	2.695

Note) M_2 is steady regardless of the strokes.

Allowable Kinetic Energy

Load mass and cylinder speed should be observed within the range given in the graph below.
To adjust the cylinder speed, use a speed controller.

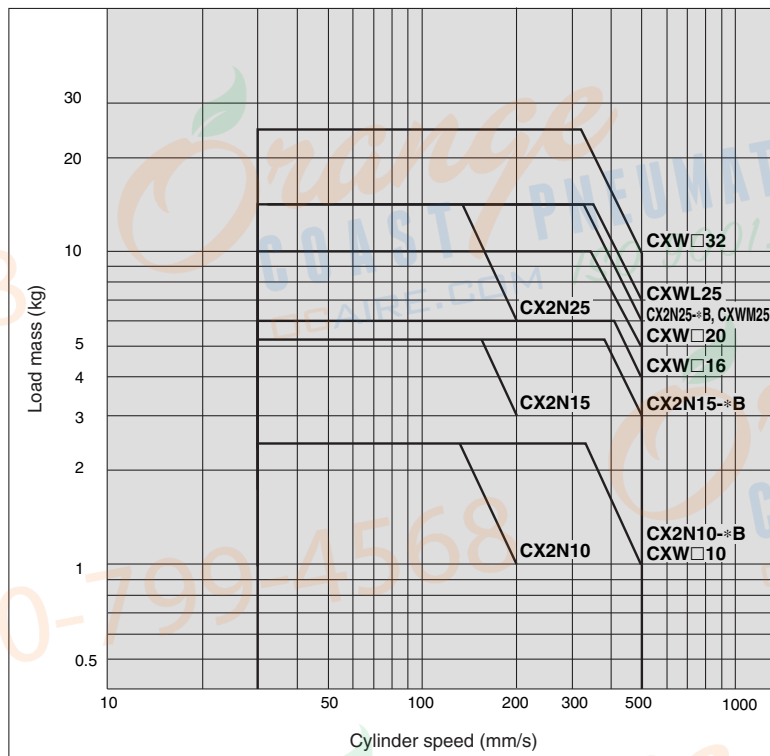

Series CX2

Prior to Use

1. Changing from the non-auto switch specifications to the auto switch specifications
2. Changing mounting style of the auto switch specifications

Series CX2

1. In Series CX2, to change from the specification without auto switch to the plate mounting style with auto switch or to the housing mounting style with auto switch, refer to tables (1) and (2) before ordering.

Without auto switch: CX2N□-□

Plate mounting style with auto switch: CDPX2N□S-□ Table (1)

Housing mounting style with auto switch: CDBX2N□M-□ Table (2)

2. In Series CX2, to change from the plate mounting style with an auto switch to the housing mounting style with an auto switch or vice versa, refer to tables (1) and (2) before ordering.

Plate mounting style with auto switch: CDPX2N□S-□ Table (1)

↑

Housing mounting style with auto switch: CDBX2N□M-□ Table (2)

Table (1) Plate Mounting Style with Auto Switch (CDPX2N□□-□)
Component Parts for Mounting Switches and No. of Component Parts

Component parts	Material	ø10	ø15	ø25
		Assembly model no. for mounting switch		
		CDPX2N 10S-□	CDPX2N 15S-□	CDPX2N 25S-□
Switch mounting block	Aluminum alloy	1	1	1
Block mounting screw	Chrome steel/Nickel plated	2	2	2
Switch mounting screw	Chrome steel/Nickel plated	2	2	2
Hexagon nut	Carbon steel/Nickel plated	2	2	2
Magnet	—	1(2) ⁽²⁾	—	—
Socket	Brass/Electroless nickel plated	2	—	—
Plug (M-5P)	Brass/Electroless nickel plated	2	2	—

Note 1) "□" mark indicates strokes.

Note 2) In the case of ø10, the 25 mm stroke has two magnets that are bonded in the holes on the side of the housing. Those with strokes of 50 mm to 100 mm have one magnet. Those with other bore sizes have a built-in magnet in their housings.

Table (2) Housing Mounting Style with Auto Switch (CDBX2N□□-□)
Component Parts for Mounting Switches and No. of Component Parts

Component parts	Material	ø10	ø15	ø25
		Assembly model no. for mounting switch		
		CDBX2N 10M-□	CDBX2N 15M-□	CDBX2N 25M-□
Magnet mounting block ass'y	Aluminum alloy	1	1	1
Switch mounting rail	Aluminum alloy	—	1	1
Spacer	Aluminum alloy/Anodized	2	—	—
Block mounting screw	Chrome steel/Nickel plated	2	2	2
Screw for mounting rail	Chrome steel/Nickel plated	—	2	2
Switch mounting screw	Chrome steel/Nickel plated	2	2	2
Hexagon nut	Carbon steel/Nickel plated	2	2	2
Hexagon socket head plug	Chrome steel/Nickel plated	2	2	—

Note 1) "□" mark indicates strokes.

Note 2) For ø10, CX2N10□ can be changed to CDBX2N10□, but note that CDPX2N10□ cannot be changed to CDBX2N10□.

CX2

CXW

CXT

CXSJ

CXS

D-□

-X□

Individual
-X□

Slide Unit/Double Rod Type

Series CX2

Slide Bearing: ø10, ø15, ø25

How to Order

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø10, ø15
	Rc 1/8	
TN	NPT 1/8	ø25
TF	G 1/8	

CX2 N 15 - 100 B -

With auto switch

C DB X2 N 15 - 100 B - J79W -

Cylinder with auto switch

Symbol	Specifications/Mounting
DB	With auto switch/ Housing mounting
DP	With auto switch/ Plate mounting

Type

N	Non-lube type
H	Air-hydro type (Except ø10)

Bore size/Stroke (mm)

ø10	25, 50, 75, 100
ø15	25, 50, 75, 100, 125, 150, 175, 200
ø25	25, 50, 75, 100, 125, 150, 175, 200

For ø15 and ø25, strokes up to 300 are available as made-to-order. (-XB11)

Made to Order

* Refer to page 465 for Made to Order specifications.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* For the applicable auto switch model, refer to the table below.

Cushion (Option)

Nil	With adjusting bolt (2 pcs.)
B	With shock absorber (2 pcs.)
BS	With shock absorber (1 pc.)

Applicable Auto Switch/Refer to pages 1719 to 1827 for further information on auto switches.


Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch part no.		Applicable cylinder size		Lead wire length (m)				Pre-wired connector	Applicable load					
					DC	AC	Electrical entry Perpendicular	In-line	Housing mounting	Plate mounting	0.5 (Nil)	3 (L)	5 (Z)	None (N)		IC circuit	Relay, PLC				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24V	5V, 12V	—	F7NV	F79	ø15 ø25	ø10 ø15 ø25	●	●	○	—			○	IC circuit		
		3-wire (PNP)		F7PV				F7P	●			●	○	—	○	—					
	Connector	2-wire		12V				F7BV	J79			●	●	○	—		○				
		3-wire (NPN)		5V, 12V				F7NWV	F79W			●	●	○	—		○	IC circuit			
	3-wire (PNP)	5V, 12V		—	F7PW	●	●	○	—			○	—								
	Grommet	2-wire		12V	F7BWV	J79W	●	●	○			—		○	IC circuit						
		4-wire (NPN)		5V, 12V	F7BAV	F7BA	—	●	○			—	○	—							
	Water resistant (2-color indication)	Grommet		4-wire (NPN)	5V, 12V	—	F79F	●	●			○	—		○	IC circuit	—				
With diagnostic output (2-color indication)	4-wire (NPN)		5V, 12V	—	F79F	●	●	○	—	○	IC circuit										
Reed switch	—	Grommet	Yes No Yes No Yes No	3-wire	—	5V	—	—	A76H	ø15 ø25	ø10 ø15 ø25	●	●	—	—	—	IC circuit	Relay, PLC			
				—	—	200V	A72	A72H	●			●	—	—	—	—					
		Connector		2-wire	24V	12V	100V	A73	A73H			●	●	●	—	—	—		—	IC circuit	
						5V, 12V	100 V or less	A80	A80H			●	●	—	—	—	—				
		Connector		2-wire	24V	12V	—	A73C	—			●	●	●	●	—	—		—	IC circuit	
						5V, 12V	24 V or less	A80C	—			●	●	●	●	—	—		—		
		Grommet		3-wire	24V	5V	—	—	E76A			ø10	—	●	●	—	—		—	—	—
						12V	100V	—	E73A					●	●	—	—		—	—	—
Grommet	2-wire	24V	5V, 12V	100 V or less	—	E80A	●	●	—	—	—	—	—	—	IC circuit						
			5V, 12V	100 V or less	—	E80A	●	●	—	—	—	—	—	IC circuit							

* Lead wire length symbols: 0.5 m Nil (Example) F79W
3 m L (Example) F79WL
5 m Z (Example) F79WZ
None N (Example) J79CN

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Refer to pages 1784 and 1785 for details of auto switches with a pre-wired connector.

* Auto switches are shipped together (not assembled).

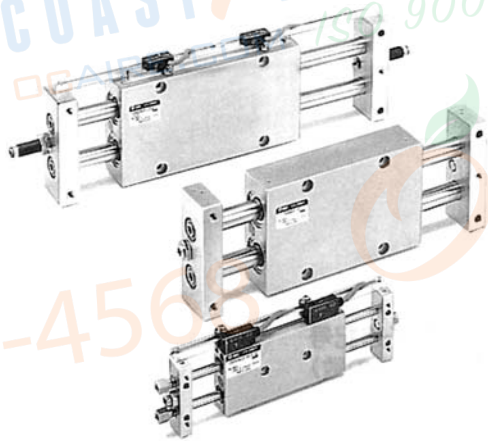Specifications

Type		Non-lube	Air-hydro type
Fluid		Air	Hydraulic fluid
Proof pressure		1.5 MPa	
Max. operating pressure		1.0 MPa	
Min. operating pressure	CX2N10	0.15 MPa	—
	CX2□15	0.15 MPa	
	CX2□25	0.10 MPa	
Ambient and fluid temperature		-10°C to +60°C	
Piston speed (Non-lube)	With adjusting bolt	30 to 200 mm/s	Refer to Table (1).
	With shock absorber	30 to 500 mm/s	
Cushion		With shock absorber (Option)	
Stroke adjustable range		Standard stroke: ±2 mm	
Max. load mass ⁽¹⁾	CX2N10	9.8 N	
	CX2□15	29.4 N	
	CX2□25	58.8 N	
Non-rotating accuracy (Except piston rod) deflection	CX2N10	±0.1°	
	CX2□15	±0.04°	
	CX2□25	±0.02°	
Accessory (Option)		Straight knock pin (2 pcs.), Adjusting bolt (-X138) ⁽²⁾ Shock absorber	

Note 1) Place the center of gravity of the load as close to the center of the slide unit as possible during operation. If they are placed far apart, consult with SMC.

Note 2) “-X138” has a stroke adjustable range of 12.5 mm on one side.

Table (1) Air-hydro/Piston Speed

Model	Plate mounting	Housing mounting
CX2H15	Refer to the below. ^{Note 1)}	5 to 50 mm/s
CX2H25	5 to 40 mm/s	5 to 100 mm/s

Note 1) Consult with SMC when the air-hydro type is mounted on a plate.

Note 2) Consult with SMC when units are used at a low speed (10 mm/s or faster) (when intermediate stops are not required) since -XB13 (Low speed specification) is available.

Note 3) When using the air-hydro type, use the double side hydro unit.

Shock Absorber Specifications

Shock absorber		RB0805	RB1006
Applicable slide unit		CX2N10, CX2□15	CX2□25
Maximum energy absorption (J)		0.98	3.92
Stroke absorption (mm)		5	6
Max. collision speed (m/sec)		0.05 to 5	
Max. operating frequency (cycle/min)		80	70
Max. allowable thrust (N)		147	353
Ambient temperature range (°C)		-10 to 80	
Spring force (N)	Extended	1.96	4.22
	Retracted	3.83	6.18
Mass (g)		15	25

*The above shows the maximum absorption energy per cycle. Accordingly, the operating frequency can be increased in accordance with the absorption energy.

*The shock absorber service life is different from that of the cylinder body depending on the operating conditions. Refer to the RB Series Specific Product Precautions for the replacement period.

Theoretical Output

Model	Rod size (mm)	Piston area (mm ²)	Operating pressure (MPa)								
			0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	(N)
CX2N10	6	101	20	30	40	51	61	71	81	91	
CX2□15	8	207	41	62	83	104	124	145	166	186	
CX2□25	14	597	119	179	239	299	358	418	478	537	

Note) Theoretical output (N) = Pressure (MPa) x Piston area (mm²)



Made to Order Specifications
(For details, refer to pages 1851 to 2021.)

Symbol	Specifications
—XB11	Long stroke type
—XB13	Low speed cylinder (5 to 50 mm/s)
—X146	Hollow piston rod
—X138	Adjustable stroke
—X168	CX helical insert thread
—X169	2 built-in magnets
—XC22	Fluororubber seals

CX2**CXW****CXT****CXSJ****CXS****D-□****-X□**Individual
-X□

Series CX2

Standard Stroke Table


Model	Basic stroke (mm)							
	25	50	75	100	125	150	175	200
CX2N10	●	●	●	●	—	—	—	—
CX2□15	●	●	●	●	●	●	●	●
CX2□25	●	●	●	●	●	●	●	●

Mass

Model	Basic stroke (mm)								(kg)
	25	50	75	100	125	150	175	200	
CX2N10	0.17	0.22	0.27	0.32	—	—	—	—	—
CX2□15	0.23	0.34	0.45	0.56	0.67	0.78	0.89	1.00	—
CX2□25	0.93	1.15	1.36	1.58	1.80	2.01	2.29	2.45	—

Operating Direction with Different Pressure Ports

Operating direction of housing when the plate is fixed

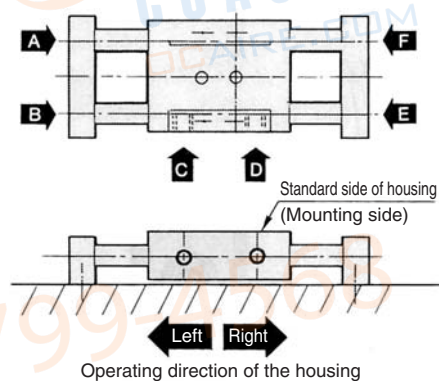

Pressure port	A	B	C	D	E	F
Operating direction	Right	Left	Left	Right	Left	Right

* There are 9 possible reciprocating piping methods.

Deflection of Piston Rod by Center Loading (Reference)

When center loading is added to the center of the housing

Model	Stroke Load (N)	Stroke (mm)	
		100	200
CX2N10	9.8	0.07	—
CX2□15	29.4	0.08	0.28
CX2□25	58.8	0.02	0.08

When center loading is added to the center of the plate



Model	Stroke Load (N)	Stroke (mm)			
		50	100	150	200
CX2N10	2.94	0.06	0.30	—	—
CX2□15	4.90	0.09	0.22	0.50	1.0
CX2□25	9.81	0.03	0.09	0.16	0.25

Note) The values denote the total width of the deflections in the upward/downward direction.

Accessory Straight Knock Pin (Option)

Model	L	øD	Part no.*
CX2N10	10	4	MS4-10
CX2□15	10	5	MS5-10
CX2□25	15	6	MS6-15

* Manufactured by Misumi Trading Ltd.

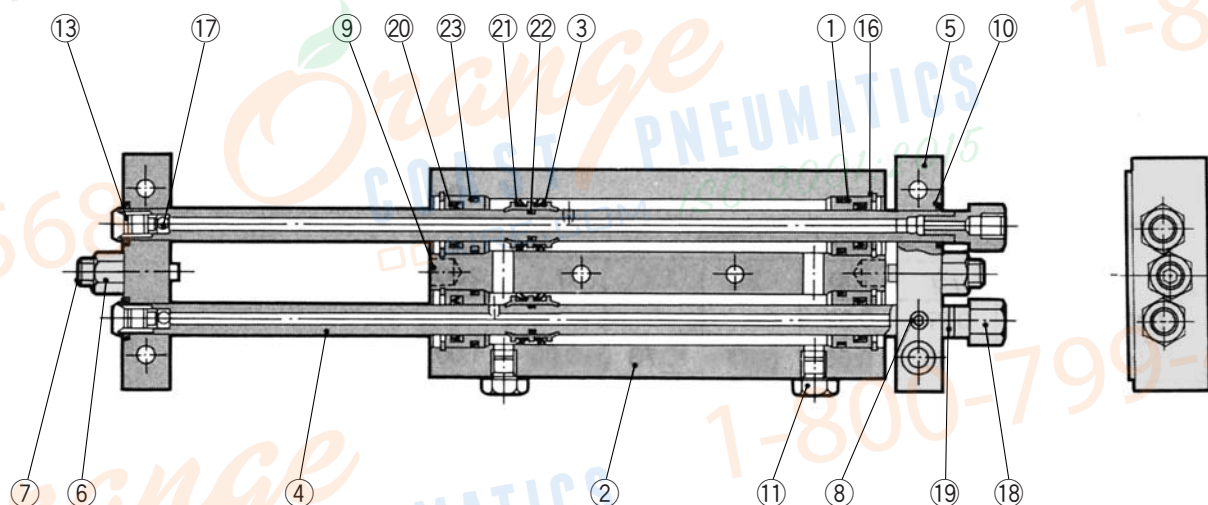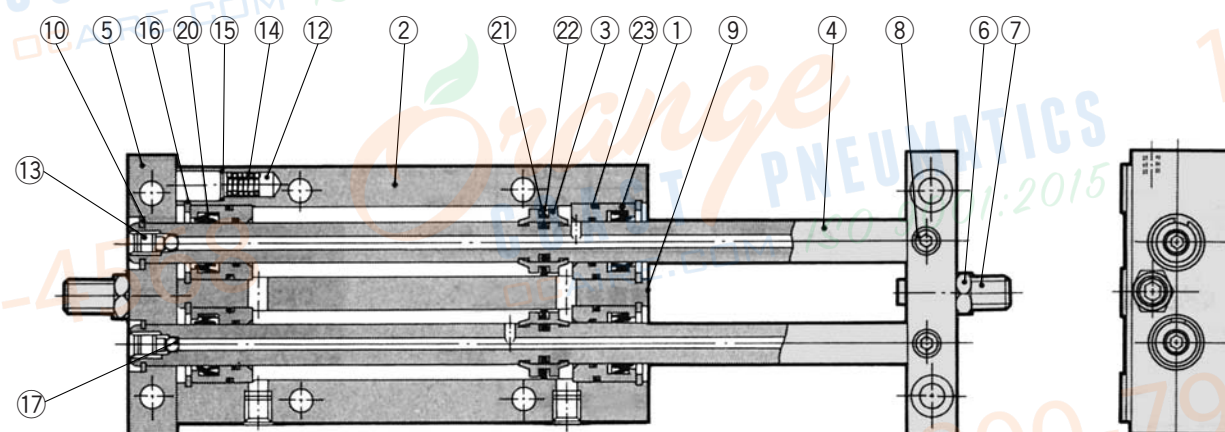Construction/Parts List, Seal List**CX2N10****CX2N15, 25****Parts List**

No.	Description	Material	Note
1	Rod cover	Aluminum bearing alloy	
2	Housing	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	
4	Piston rod	Carbon steel piping for machine constructions	Hard chrome plated
5	Plate	Aluminum alloy	Anodized
6	Lock nut	Carbon steel	Nickel plated
7	Adjusting bolt	Chromium steel	Nickel plated
8	Set screw (For fixing rods)	Chromium steel	Nickel plated
9	Pin	Carbon steel	Quenched
10	Retaining ring	Carbon tool steel	Nickel plated
11	Plug (M-5P)	Brass	Nickel plated
12	Magnet	—	
13	Ball fixing screw	Chromium steel	Nickel plated
14	Spring	Stainless steel	
15	Type CR retaining ring	Carbon tool steel	
16	Round type R retaining ring	Carbon tool steel	Nickel plated

Parts List

No.	Description	Material	Note
17	Steel ball	High carbon chrome bearing steel	Heat treated
18	Socket	Brass	Electroless nickel plated
19	Gasket	NBR	
20	Rod seal		
21	Piston seal		
22	Piston gasket		
23	Cylinder tube gasket		

Replacement Parts: Seal Kit

Model	Kit no.	Contents
CX2N10	CX2N10-PS	A set of 20, 21, 23 listed above
CX2N15	CX2N15-PS	
CX2N25	CX2N25-PS	

* Seal kit includes 20, 21, 23. Order the seal kit, based on each bore size.
(The piston gasket 22 is not replaceable.)

* Since the seal kit does not include a grease pack, order it separately.
Grease pack part no.: GR-S-010 (10 g)

CX2**CXW****CXT****CXSJ****CXS****D-□****-X□**Individual
-X□


Technical drawing of a mechanical assembly, showing a side view and a cross-section.

Side View Dimensions and Features:

- Overall length: S
- Distance from left face to center of first hole: F
- Distance between centers of first two holes: G
- Distance between centers of last two holes: R
- Distance from center of last hole to right face: $P \pm 0.01$
- Left face thickness: 2
- Left face features: $4 \times M4 \times 0.7$ (thread depth 8), $2 \times M4 \times 0.7$ (thread depth 8), $2 \times M8 \times 1.0$ Adjusting bolt, $2 \times \text{Socket}$
- Central shaft: $\text{Ø}6$, length 42 , 3 (from left face), $2 \times \text{Ø}4 \text{ H7/0}$ depth 5
- Right face features: $4 \times \text{Ø}6.5$ counterbore depth 3.5 , $4 \times \text{Ø}3.3$ through, $2 \times M5 \times 0.8$ Cylinder port
- Right face dimensions: 7.5 , 9 , 20 , 32

Cross-Section Dimensions and Features:

- Central shaft: $\text{Ø}6$, length 42
- Central hole: $\text{Ø}3.3$ through
- Socket connection port (2 positions of hexagon socket head cap screws)

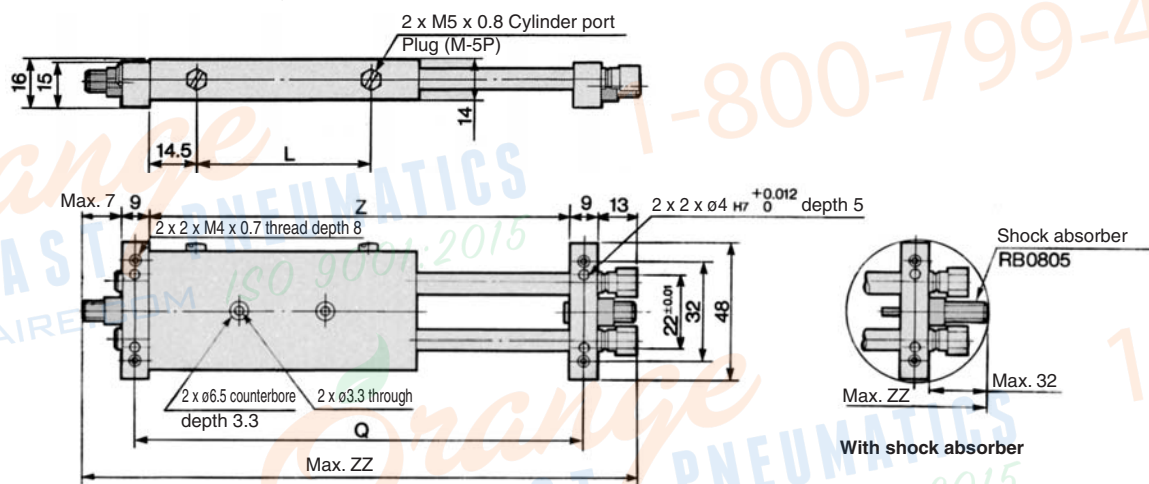

Model	F	G	L	P	Q	R	S	SS	Z	With adjusting bolt	With shock absorber
										ZZ	ZZ
CX2N10-25	9.5	19.5	38	48	103	28	27	67	94	132	176
CX2N10-50	20	30	63	52	153	32	52	92	144	182	226
CX2N10-75	25	35	88	67	203	47	77	117	194	232	276
CX2N10-100	25	35	113	92	253	72	102	142	244	282	326

Auto switch

Hw

Ht

Hv


5

Plugs (2 pcs.)

Auto switch model	Hw	Ht	Hv
D-A7, D-A8	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7PW, D-F79F, D-F7BAL, D-F7NTL	23	15	11.5
D-A7□H, D-A80H	22	15	11.5
D-A73C, D-A80C	23	17.5	17.5
D-F7□V	23	15	14
D-J79C	24	17.5	17
D-F7LF	30	15	11.5

468


ø15 Basic Type: CX2□15- Strokes: 25 to 200 □

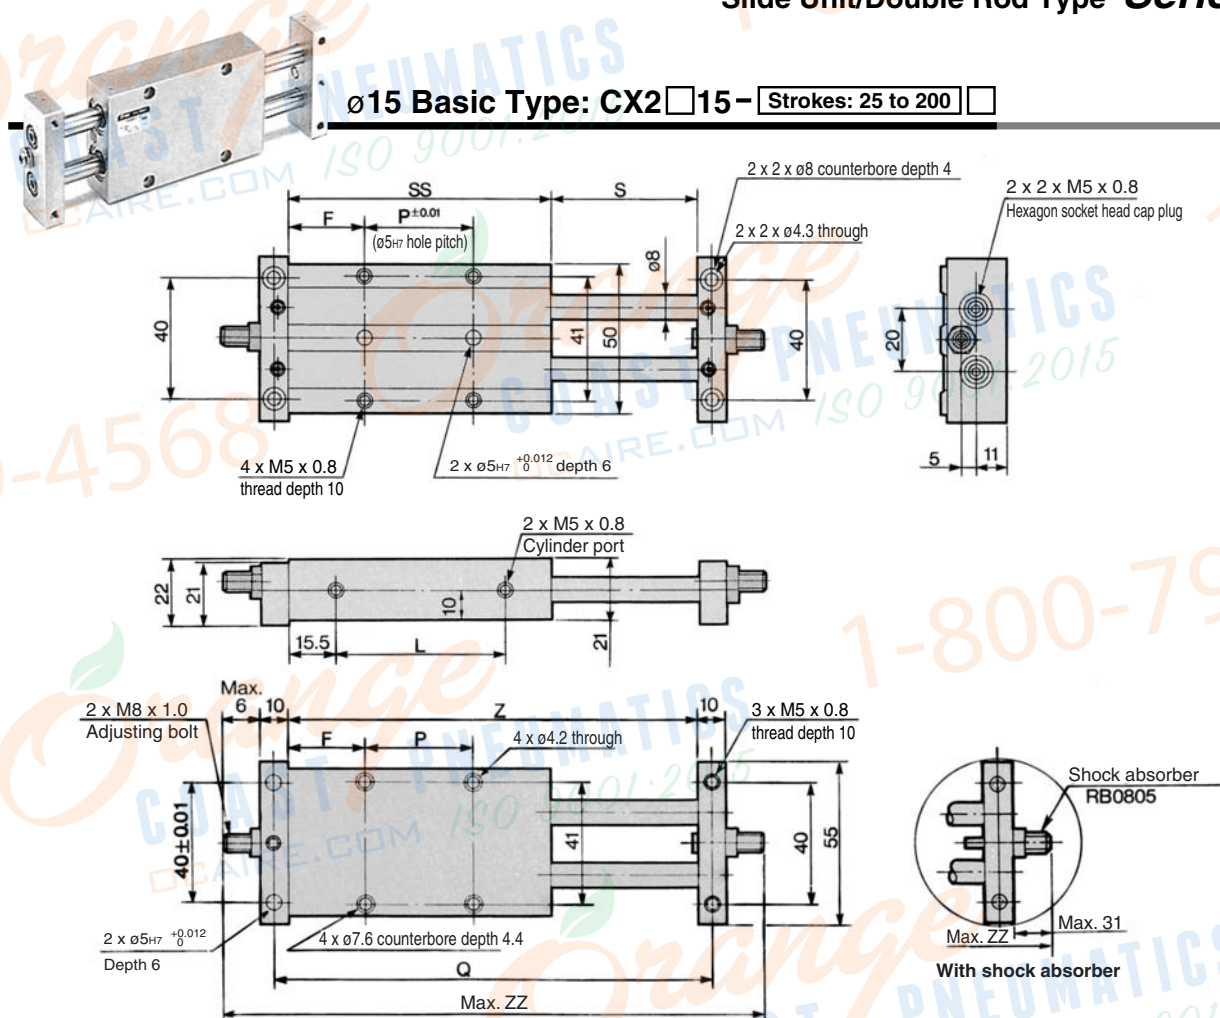

Model	F	L	P	Q	S	SS	Z	(mm)	
								With adjusting bolt ZZ	With shock absorber ZZ
CX2□15-25□	24.5	38	20	106	27	69	96	128	178
CX2□15-50□	24.5	63	45	156	52	94	146	178	228
CX2□15-75□	27	88	65	206	77	119	196	228	278
CX2□15-100□	27	113	90	256	102	144	246	278	328
CX2□15-125□	39.5	138	90	306	127	169	296	328	378
CX2□15-150□	52	163	90	356	152	194	346	278	428
CX2□15-175□	64.5	188	90	406	177	219	396	428	478
CX2□15-200□	77	213	90	456	202	244	446	478	528

Housing mounting style with auto switch

CDBX2□15- Stroke

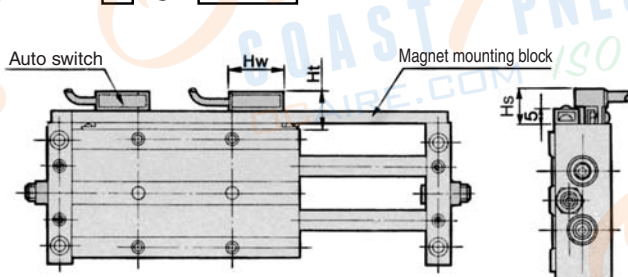


Note 1) The dimensions show D-A7 and D-A8.

Auto switch model	Hw	Hs	Ht
D-A7, D-A8	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7PW, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For only 25 strokes, two magnets for auto switches are installed to the magnet mounting block.

Plate mounting style with auto switch

CDPX2□15- Stroke

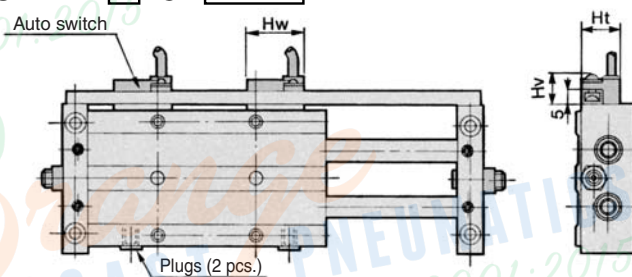

Note 1) The dimensions show D-A7 and D-A8.

Auto switch model	Hw	Ht	Hv
D-A7, D-A8	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7PW, D-F79F, D-F7BAL, D-F7NTL	23	15	11.5
D-A7□H, D-A80H	22	15	11.5
D-A73C, D-A80C	23	17.5	17.5
D-F7□V	23	15	14
D-J79C	24	17.5	17
D-F7LF	30	15	11.5

Note 2) For only 25 strokes, two magnets for auto switches are installed in the housing.

CX2

CXW

CXT

CXSJ


CXS

D-□


-X□

Individual
-X□

Series CX2

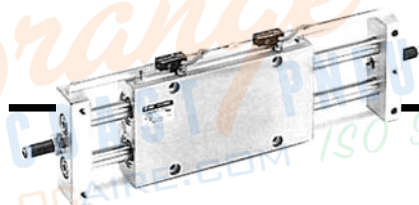


ø25 Basic Type: CX2□25 – Strokes: 25 to 200 □

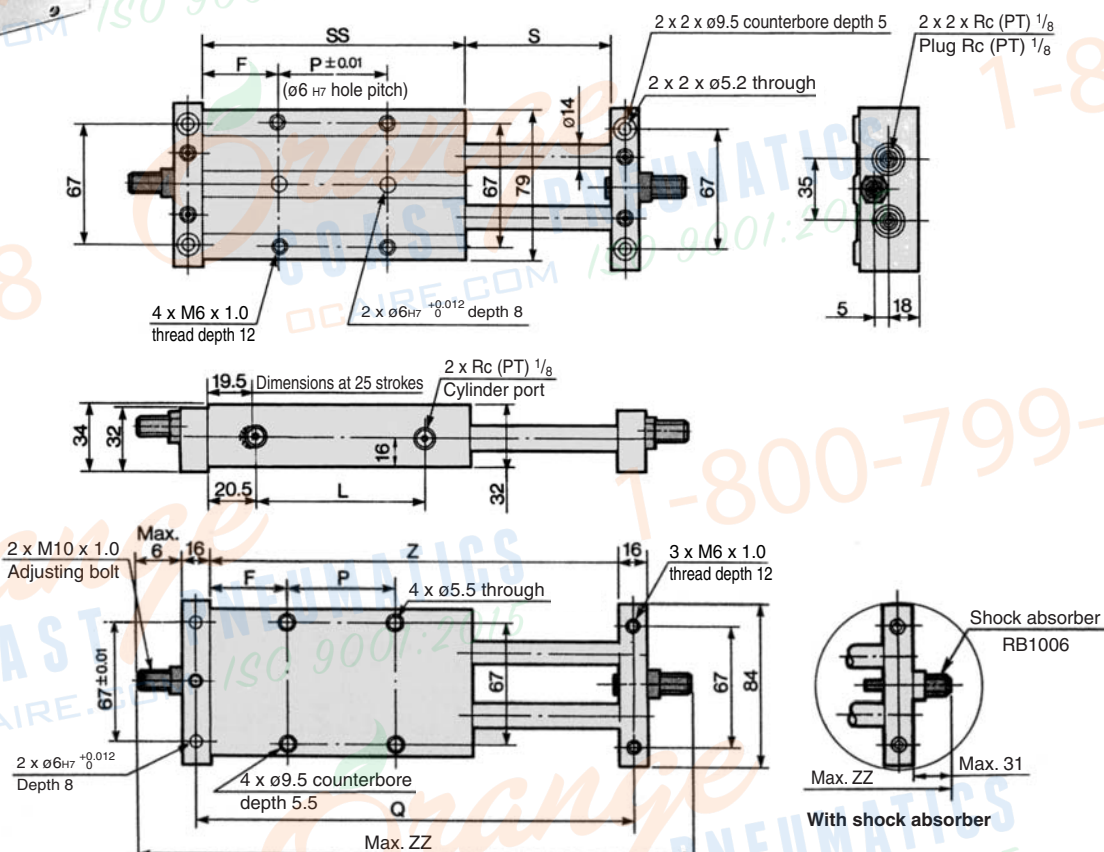

Model	F	L	P	Q	S	SS	Z	(mm)	
								With adjusting bolt ZZ	With shock absorber ZZ
CX2□25-25□	28.5	43	25	125	27	82	109	153	203
CX2□25-50□	31	66	45	175	52	107	159	203	253
CX2□25-75□	33.5	91	65	225	77	132	209	253	303
CX2□25-100□	33.5	116	90	275	102	157	259	303	353
CX2□25-125□	46	141	90	325	127	182	309	353	403
CX2□25-150□	58.5	166	90	375	152	207	359	403	453
CX2□25-175□	71	191	90	425	177	232	409	453	503
CX2□25-200□	83.5	216	90	475	202	257	459	503	553

Housing mounting style with auto switch

CDBX2□25 – Stroke

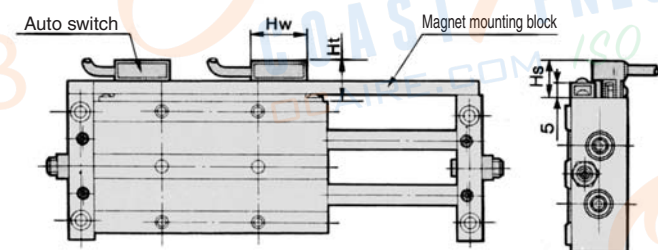


Note 1) The dimensions show D-A7 and D-A8.

Auto switch model	Hw	Hs	Ht
D-A7, D-A8	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7PW, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For only 25 strokes, two magnets for auto switches are installed to the magnet mounting block.

Plate mounting style with auto switch

CDPX2□25 – Stroke

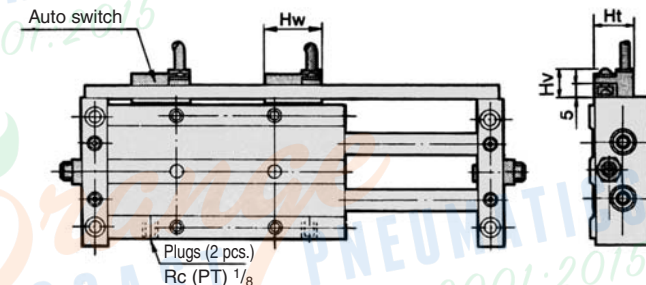

Note 1) The dimensions show D-A7 and D-A8.

Auto switch model	Hw	Ht	Hv
D-A7, D-A8	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7PW, D-F79F, D-F7BAL, D-F7NTL	23	15	11.5
D-A7□H, D-A80H	22	15	11.5
D-A73C, D-A80C	23	17.5	17.5
D-F7□V	23	15	14
D-J79C	24	17.5	17
D-F7LF	30	15	11.5

Note 2) For only 25 strokes, two magnets for auto switches are installed in the housing.

Operating Range

Auto switch model		(mm)		
		Applicable cylinder size		
		10	15	25
D-A7□/A80 D-A7□H/A80H D-A73C/A80C	Housing mounting	—	6	6
	Plate mounting	6	6	6
D-E7□A/E80A	Housing mounting	6	—	—
D-F7□/J79 D-F7□V/J79C D-F7□W/F7□WV D-F7BAL/F7BAVL D-F79F/F7NTL	Housing mounting	—	2.5	2.5
	Plate mounting	2.5	2.5	3

* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately $\pm 30\%$ dispersion). It may vary substantially depending on an ambient environment.

Besides the models listed in How to Order, the following auto switches are applicable. Refer to pages 1719 to 1827 for the detailed specifications.

Auto switch type	Model	Electrical entry (Fetching direction)	Features	Applicable cylinder size	
				Housing mounting	Plate mounting
Solid state	D-F7NTL	Grommet (In-line)	With timer	ø15, ø25	ø10, ø15, ø25

* With pre-wired connector is also available for D-F7NTL type. For details, refer to pages 1784 and 1785.

* It is impossible to mount solid state auto switches to the housing mounting ø10.

CX2**CXW****CXT****CXSJ****CXS****D-□****-X□**Individual
-X□

Series CXWM/CXWL Prior to Use

1. Changing from the non-auto switch specifications to the auto switch specifications
2. Changing mounting style of the auto switch specifications

Series CXW^M_L

1. In Series CXW^M_L, to change from the specification without auto switch to the plate mounting style with auto switch or to the housing mounting style with auto switch, refer to tables (3) and (4) before ordering.

Without auto switch: CXW^M_L□-□

Plate mounting style with auto switch: CDPXW^M_L□S-□ Table (3)

Housing mounting style with auto switch: CDBXW^M_L□M-□ Table (4)

2. In Series CXW^M_L, to change from the plate mounting style with an auto switch to the housing mounting style with an auto switch or vice versa, refer to tables (3) and (4) before ordering.

Plate mounting style with auto switch: CDPXW^M_L□S-□ Table (3)

↓

Housing mounting style with auto switch: CDBXW^M_L□M-□ Table (4)

Table (3) Plate Mounting Style with Auto Switch
(CDPXW^M_L□□-□) Component Parts for Mounting Switches and No. of Component Parts

Component parts	Material	ø10	ø16	ø20	ø25	ø32
		Assembly model no. for mounting switch ⁽³⁾				
		CDPXW ^M _L 10S-□	CDPXW ^M _L 16S-□	CDPXW ^M _L 20S-□	CDPXW ^M _L 25S-□	CDPXW ^M _L 32S-□
Switch mounting block	Aluminum alloy	1	1	1	1	1
Block mounting screw	Chrome steel/Nickel plated	2	2	2	2	2
Switch mounting screw	Chrome steel/Nickel plated	2	2	2	2	2
Hexagon nut	Carbon steel/Nickel plated	2	2	2	2	2
Magnet	—	1 (2) ⁽²⁾	—	—	—	—
Socket	Brass/Electroless nickel plated	2	—	—	—	—
Plug (M-5P)	Brass/Electroless nickel plated	2	2	2	—	—

Note 1) "□" mark indicates strokes.

Note 2) In the case of ø10, the 25 mm stroke has two magnets that are bonded in the holes on the side of the housing. Those with strokes of 50 mm to 100 mm have one magnet. Those with other bore sizes have a built-in magnet in their housings.

Note 3) For the assembly model no. for mounting switch, order with CDPXWM□□-□ for Series CXWM and order with CDPXWL□□-□ for Series CXWL respectively.

Table (4) Housing Mounting Style with Auto Switch
(CDBXW^M_L□□-□) Component Parts for Mounting Switches and No. of Component Parts

Component parts	Material	ø10	ø16	ø20	ø25	ø32
		Assembly model no. for mounting switch				
		CDBXW ^M _L 10M-□	CDBXW ^M _L 16M-□	CDBXW ^M _L 20M-□	CDBXW ^M _L 25M-□	CDBXW ^M _L 32M-□
Magnet mounting block assembly	Aluminum alloy	1	1	1	1	1
Switch mounting rail	Aluminum alloy	—	1	1	1	1
Spacer	Aluminum alloy/Anodized	2	—	—	—	—
Block mounting screw	Chrome steel/Nickel plated	2	2	2	2	2
Screw for mounting rail	Chrome steel/Nickel plated	—	2	2	2	2
Switch mounting screw	Chrome steel/Nickel plated	2	2	2	2	2
Hexagon nut	Carbon steel/Nickel plated	2	2	2	2	2
Hexagon socket head plug	Chrome steel/Nickel plated	2	2	2	—	—

Note 1) "□" mark indicates strokes.

Note 2) In the case of ø10, CDPXW^M_L10-□ can NOT be changed to CDBXW^M_L10-□. (CXW^M_L10-□ can be changed to CDBXW^M_L10-□)

Note 3) For the assembly model no. for mounting switch, order with CDBXWM□□-□ for Series CXWM and order with CDBXWL□□-□ for Series CXWL respectively.


Slide Unit: Built-in Shock Absorber

Slide Bearing Type

Series CXWM

ø10, ø16, ø20, ø25, ø32

How to Order

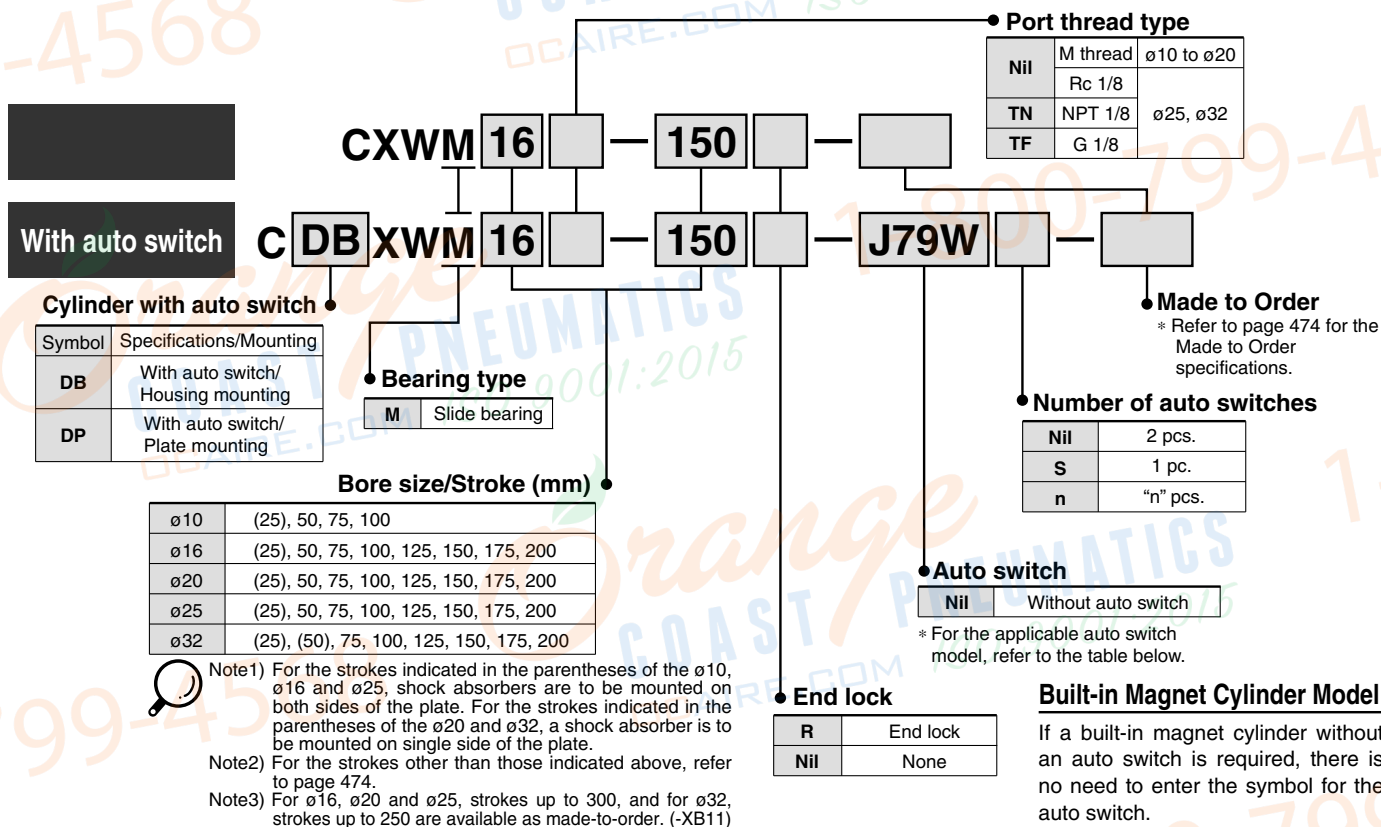

Applicable Auto Switch/Refer to pages 1719 to 1827 for further information on auto switches.

Type	Special function	Electrical entry	Indicator/light	Wiring (Output)	Load voltage		Rail mounting		Applicable cylinder size		Lead wire length (m) *				Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	Housing mounting	Plate mounting	0.5 (Nil)	3 (L)	5 (Z)	None (N)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	F7NV	F79	ø16 ø20 ø25 ø32	ø10 ø16 ø20 ø25 ø32	●	●	○	—	○	IC circuit	Relay, PLC	
		3-wire (PNP)		F7PV			F7P	●			●	○	—	○				
	Connector	2-wire		12 V	F7BV		J79	●			●	○	—	○	—			
		3-wire (NPN)		5 V, 12 V	J79C		—	●			●	●	—	—				
	Grommet	3-wire (PNP)			F7NWW		F79W	●			●	○	—	○	IC circuit			
		2-wire		12 V	—		F7PW	●			●	○	—	○				
	Diagnostic indication (2-color indication)	—		Grommet	2-wire		12 V	F7BWV			J79W	●	●	○	—	○		—
	Water resistant (2-color indication)				2-wire		12 V	F7BAV			F7BA	—	●	○	—	○		
With diagnostic output (2-color indication)	—	—	4-wire (NPN)	5 V, 12 V	—	F79F	●	●	○	—	○	IC circuit	—					
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	5 V	—	A76H	ø16 ø20 ø25 ø32	ø10 ø16 ø20 ø25 ø32	●	●	—		—	—	IC circuit		
				—	—	200 V	A72			A72H	●	●		—	—	—	IC circuit	
				2-wire	24 V	12 V	100 V			A73	A73H	●		●	—	—	—	—
						5 V, 12 V	100 V or less			A80	A80H	●		●	—	—	—	
		Connector	No	12 V	—	A73C	—			●	●	—		—	—	—		
				5 V, 12 V	24 V or less	A80C	—			●	●	●		—	—			
		Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—			E76A	ø10	—		●	●	—	—	—
				2-wire	24 V	12 V	100 V			—			E73A	●	●	—	—	—
—	—	Grommet	No	5 V, 12 V	100 V or less	E80A	●	●	—	—			—	—				
				—	—	—	—	—	—	—			—		—	—		

- * Lead wire length symbols: 0.5 m Nil (Example) F79W
3 m L (Example) F79WL
5 m Z (Example) F79WZ
None N (Example) J79CN
- * Solid state auto switches marked with "○" are produced upon receipt of order.
** It is impossible to mount solid state switches to the housing mounting ø10.
- Since there are other applicable auto switches than listed, refer to page 517 for details.
 - For details about auto switches with pre-wired connector, refer to pages 1784 and 1785.
 - * Auto switches are shipped together (not assembled).

Series CXWM

Built-in shock absorber


This is a built-in shock absorber style in which the shock absorber is enclosed in the housing. Compared to Series CX2 with shock absorber, this style achieves space savings in the longitudinal direction (except 25 mm stroke).

Dramatically reduced installation labor

The machining precision required for positioning during the installation of the cylinder has been reduced through the adoption of a special pin hole machining process, thus decreasing the amount of labor involved in adjustment.

Provided with an end lock mechanism

An end lock is also available, which maintains the cylinder's original position even if the air supply is interrupted.

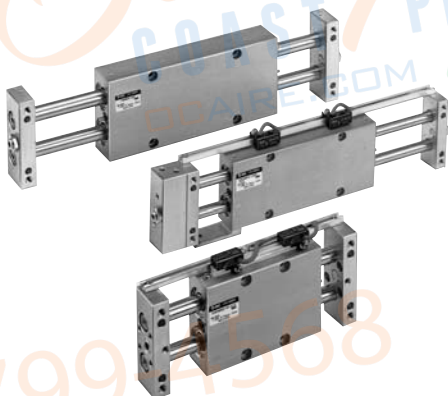

Made to Order Specifications

(For details, refer to pages 1851 to 2021.)

Symbol	Specifications
—XB11	Long stroke type
—XB13	Low speed cylinder (5 to 50 mm/s)
—XC22	Fluororubber seal
—X146	Hollow piston rod
—X138	Adjustable stroke
—X168	Helical insert thread
—X169	2 built-in magnets

Standard Stroke

Model	Standard stroke (mm)							
	25	50	75	100	125	150	175	200
CXWM10-□□	(1) (*)	●	●	●	—	—	—	—
CXWM16-□□	(1) (*)	●	●	●	●	●	●	●
CXWM20-□□	(2) (*)	●	●	●	●	●	●	●
CXWM25-□□	(1) (*)	●	●	●	●	●	●	●
CXWM32-□□	(2) (*)	(2) (*)	●	●	●	●	●	●



Note 1) The strokes marked with "(*)" has an absorber of double side plate mounting style.

Note 2) The strokes marked with "(*)" has an absorber of single side plate mounting style.

Specifications

Type	Non-lube
Fluid	Air
Proof pressure	1.5 MPa
Max. operating pressure	1.0 MPa
Min. operating pressure	CXWM10/16 0.15 MPa CXWM20/25/32 0.1 MPa
Ambient & fluid temperature	−10 to 60°C (No freezing)
Piston speed (Non-lube)	30 to 500 mm/s
Cushion	Shock absorber
Stroke adjustable range	Standard stroke: ±2 mm
Accessory (Option)	Straight knock pin (2 pcs.), Adjusting bolt* (−X138)

* −X138" has a stroke adjustable range of −12.5 mm on one side.

Maximum Load Mass/Non-rotating Accuracy/Maximum Holding Force

Model	CXWM10	CXWM16	CXWM20	CXWM25	CXWM32
Maximum load mass*	1 kg	4 kg	5 kg	6 kg	10 kg
Non-rotating accuracy (Deflection of a piston rod is not included.)	±0.09°	±0.03°	±0.03°	±0.02°	±0.01°
Maximum holding force (End lock model)	39.2 N	98.1 N	147.1 N	245.2 N	392.3 N

* Place the center of gravity of the load and center of the slide unit close during operation. If they are placed far apart from each other, please consult with SMC.

Shock Absorber Specifications

Shock absorber (1)	RB0805-X552	RB0805	RB1006-X552	RB1006	RB1411-X552	RB1411
Applicable slide unit	CXWM10/16-□□		CXWM20/25-□□		CXWM32-□□	
Maximum energy absorption (J)	0.98		3.92		14.7	
Stroke absorption (mm)	5		6		11	
Max. collision speed (m/sec)	0.05 to 5					
Max. operating frequency (cycle/min) (2)	80		70		45	
Max. allowable thrust (N)	147		353		667	
Ambient temperature range (°C)	−10 to 80					
Spring force (N)	Extended	1.96	4.22	6.86		
	Retracted	3.83	6.18	15.30		
Mass (g)	15		25		65	



Note 1) "X552" is an exclusive shock absorber installed in the housing, and is the screw not attached specification of the outer part of the outer tube. The shock absorber plate mounting style of 25 and 50 strokes have the screw attached specification.

Note 2) It denotes the values at the maximum energy absorption per one cycle. Therefore, the operating frequency can be increased according to the energy absorption.

* The shock absorber service life is different from that of the cylinder depending on the operating conditions. Refer to the Series RB Specific Product Precautions for the replacement period.

Theoretical Output

Model	Rod size (mm)	Piston area (mm²)	Operating pressure (MPa)							
			0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
CXWM10-□□	6	101	20	30	40	51	61	71	81	91
CXWM16-□□	10	245	49	74	98	123	147	172	196	221
CXWM20-□□	12	402	80	121	161	201	241	281	322	362
CXWM25-□□	14	597	119	179	239	299	358	418	478	537
CXWM32-□□	20	980	196	294	392	490	588	686	784	882

Note) Theoretical output (N) = Pressure (MPa) x Piston area (mm²)

Mass

Model	Stroke (mm)							
	25	50	75	100	125	150	175	200
CXWM10	0.28	0.35	0.42	0.49	—	—	—	—
CXWM16	0.46	0.59	0.72	0.85	0.98	1.11	1.24	1.37
CXWM20	0.69	0.87	1.03	1.22	1.40	1.58	1.75	1.93
CXWM25	0.95	1.17	1.38	1.60	1.82	2.03	2.31	2.47
CXWM32	2.01	2.38	2.77	3.16	3.56	3.94	4.34	4.72


Additional Mass with End Lock (CXWM□-□R)

Applicable model	Additional mass
CXWM10	0.08
CXWM16	0.14
CXWM20	0.15
CXWM25	0.20
CXWM32	0.43

Accessory Straight Knock Pin (Option)

Operating Direction with Different Pressure Ports

Operating direction of housing when the plate is fixed

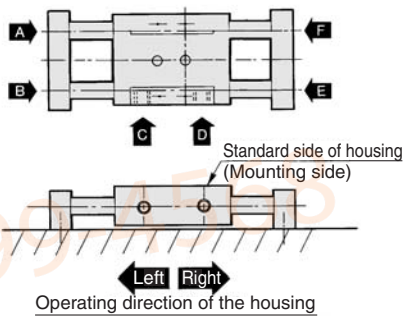


Pressure port	A	B	C	D	E	F
Operating direction	Right	Left	Left	Right	Left	Right

* There are 9 possible reciprocating piping methods.


With end lock (CXWM□-□R)

Operating direction of housing when the plate is fixed

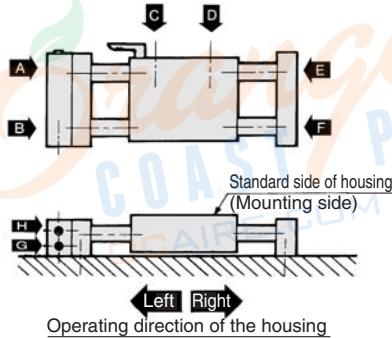

Pressure port	A	B	C	D	E	F	G	H
Operating direction	Right	Left	Left	Right	Right	Left	Left	Right

* There are 16 possible reciprocating piping methods.




Model	L	øD	Model*
CXWM10	10	4	MS4-10
CXWM16	10	5	MS5-10
CXWM20	15	6	MS6-15
CXWM25	15	6	MS6-15
CXWM32	20	8	MS8-20

* Manufactured by Misumi Trading Ltd.


Deflection of Piston Rod by Center Loading (Reference)

When center loading is added to the center of the housing



Model	Stroke		
	Load (N)	100	200
CXWM10	9.81	0.07	—
CXWM16	39.2	0.05	0.20
CXWM20	49	0.04	0.15
CXWM25	58.8	0.02	0.08
CXWM32	98.1	0.02	0.07

When center loading is added to the center of the plate



Model	Stroke	50	100	150	200
	Load (N)				
CXWM10	2.94	0.06	0.30	—	—
CXWM16	4.90	0.03	0.10	0.25	0.45
CXWM20	7.84	0.03	0.09	0.18	0.35
CXWM25	9.81	0.03	0.09	0.16	0.25
CXWM32	29.42	0.02	0.05	0.10	0.15

Note) The values denote the total width of the deflections in the upward/downward direction.

CX2

CXW

CXT

CXSJ

CXS

D-□


-X□

Individual
-X□



Series CXWM

Construction: $\varnothing 10$, $\varnothing 16$, $\varnothing 25$


CXWM10

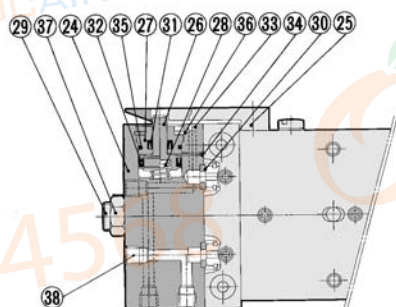


With end lock

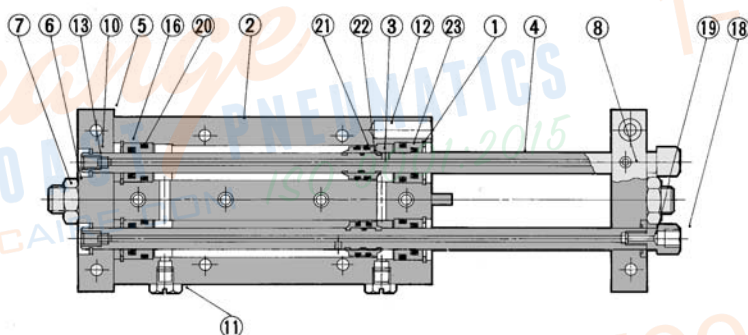


CXWM16, 25

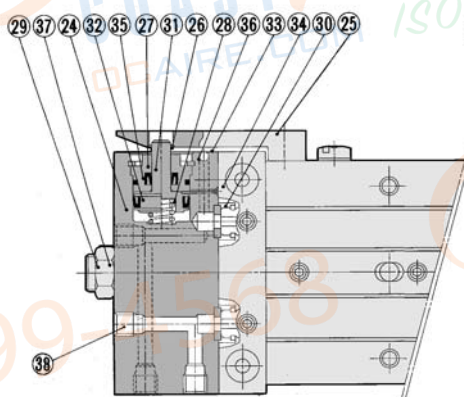

$\varnothing 16$ /With end lock

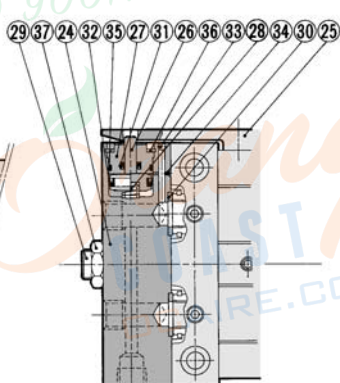

$\varnothing 25$ /With end lock

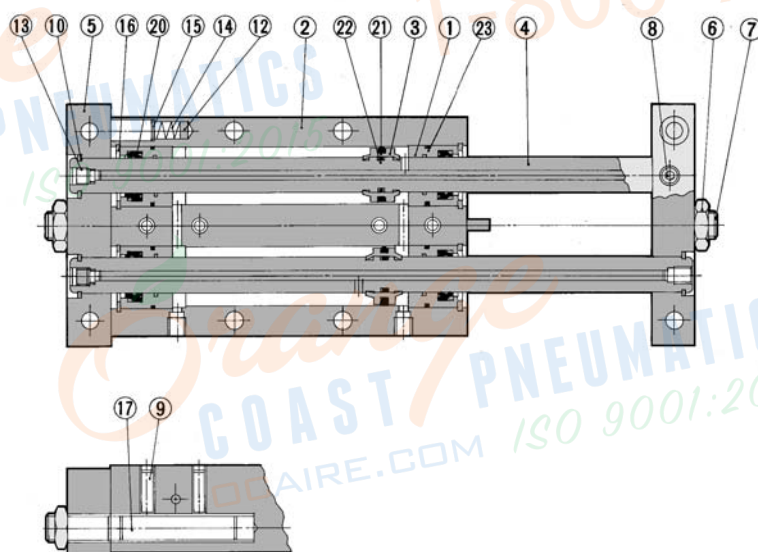

Construction: ø10, ø16, ø25

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum bearing alloy	
2	Housing	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	Chromated
4	Piston rod	Carbon steel piping for machine constructions	Hard chrome plated
5	Plate	Aluminum alloy	Hard anodized
6	Lock nut	Carbon steel	Nickel plated
7	Adjusting bolt	Chromium steel	Nickel plated
8	Set screw (For fixing rods)	Chromium steel	Nickel plated
9	Set screw (For fixing shock absorbers)	Stainless steel	
10	Retaining ring	Carbon tool steel	Nickel plated
11	Plug	Brass	Nickel plated
12	Magnet	—	ø5
13	Set screw for seal	Chromium steel	Nickel plated
14	Spring	Stainless steel	
15	Type CR retaining ring	Carbon tool steel	
16	Round type R retaining ring	Carbon tool steel	Nickel plated
17	Shock absorber	—	(RB0805-X552 or RB1006-X552)
18	Socket	Brass	Electroless nickel plated
19	Gasket	NBR	
20	Rod seal	NBR	
21	Piston seal	NBR	
22	Piston gasket	NBR	
23	Cylinder tube gasket	NBR	

Replacement Parts: Seal Kit Cylinder Body

Model	Kit no.	Contents
CXWM10	CXWM10-PS	Set of nos. above ⑳, ㉑, ㉓
CXWM16	CXWM16-PS	
CXWM25	CXWM25-PS	

- * Seal kit includes ㉑, ㉑, ㉓. Order the seal kit, based on each bore size.
(The piston gasket ㉒ is not replaceable.)
* Since the seal kit does not include a grease pack, order it separately.
Grease pack part no.: GR-S-010 (10 g)

Component Parts: With End Lock

No.	Description	Material	Note
24	Locking body	Aluminum alloy	Hard anodized
25	Lock finger	Alloy tool steel	Nickel plated after quenched
26	Lock piston	Carbon tool steel	Electroless nickel plated after quenched
27	Rod cover	Aluminum alloy	
28	Return spring	Spring steel	Zinc chromated
29	Adjusting bolt	Chromium steel	Nickel plated
30	Body gasket	NBR	
31	Rod seal	NBR	
32	Piston seal	NBR	
33	Steel ball	High carbon chrome bearing steel	
34	Steel ball	High carbon chrome bearing steel	
35	O-ring	NBR	
36	Round type R retaining ring	Carbon tool steel	Nickel plated
37	Lock nut	Carbon steel	Nickel plated
38	Plug	Chromium steel	Nickel plated

Replacement Parts: Seal Kit End Lock

Model	Kit no.	Contents
CXWM10	CXWM10R-PS	Set of nos. above ㉑, ㉑, ㉓, ㉓
CXWM16	CXWM16R-PS	
CXWM25	CXWM25R-PS	

- * Seal kit includes ㉑, ㉑, ㉓, ㉓. Order the seal kit, based on each bore size.
* Since the seal kit does not include a grease pack, order it separately.
Grease pack part no.: GR-S-010 (10 g)

CX2

CXW

CXT

CXSJ

CXS


D-□

-X□

Individual
-X□

Series CXWM

Construction: ø20, ø32

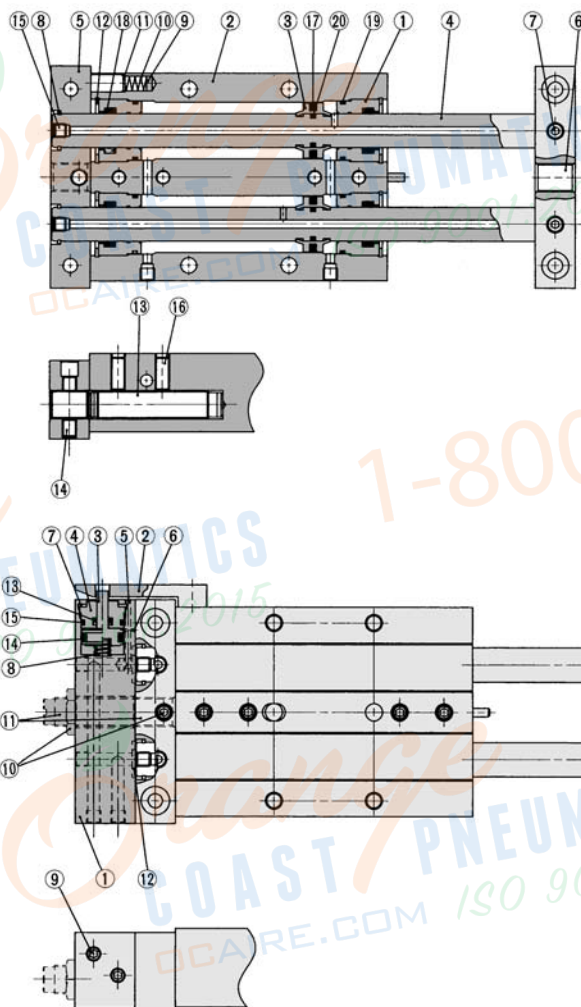

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum bearing alloy	—
2	Housing	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	Chromated
4	Piston rod	Carbon steel for machines	Hard chrome plated
5	Plate	Aluminum alloy	Hard anodized
6	Adjusting bolt	Chromium steel	Nickel plated
7	Hexagon socket head set screw	Chromium steel	Nickel plated
8	Retaining ring	Tool steel	Nickel plated
9	Magnet	—	—
10	Spring	Stainless steel	—
11	Type CR retaining ring	Carbon tool steel	—
12	Round type R retaining ring	Carbon tool steel	Nickel plated
13	Shock absorber	—	RB1006-X552, RB1411-X552
14	Hexagon socket head set screw	Chromium steel	Nickel plated
15	Hexagon socket head plug	Chromium steel	Nickel plated
16	Hexagon socket head set screw	Chromium steel	Nickel plated
17	Piston seal	NBR	—
18	Rod seal	NBR	—
19	Cylinder tube gasket	NBR	—
20	Piston gasket	NBR	—

Replacement Parts: Seal Kit Cylinder Body

Model	Kit no.	Contents
CXWM20	CXWM20-PS	Set of nos. above 17, 18, 19
CXWM32	CXWM32-PS	

* Seal kit includes 17, 18, 19. Order the seal kit, based on each bore size.
(The piston gasket 20 is not replaceable.)

* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

Component Parts: With End Lock

No.	Description	Material	Note
1	Locking body	Aluminum alloy	Hard anodized
2	Lock finger	Alloy tool steel	Nickel plated after quenched
3	Lock piston	Tool steel	Electroless nickel plated after quenched
4	Rod cover	Aluminum bearing alloy	—
5	Steel ball	High carbon chrome bearing steel	—
6	Steel ball	High carbon chrome bearing steel	—
7	Round type R retaining ring	Carbon tool steel	Nickel plated
8	Return spring	Spring steel	Zinc chromated
9	Plug	Chromium steel	Nickel plated
Note) 10	(50, 75 to (200) ST Hexagon socket head set screw	Chromium steel	Nickel plated
(25), 50 ST	Hexagon nut	Carbon steel	Nickel plated
Note) 11	(50, 75 to (200) ST Adjusting bolt	Chromium steel	Nickel plated
(25), 50 ST	Shock absorber	—	RB1006 or RB1411
12	Body gasket	NBR	—
13	Rod seal	NBR	—
14	Piston seal	NBR	—
15	O-ring	NBR	—

Note) The strokes indicated in the parentheses are of CXWM20, and CXWM32 includes the strokes indicated in the parentheses.

Replacement Parts: Seal Kit End Lock


Model	Kit no.	Contents
CXWM20	CXWM20R-PS	Set of nos. above 12, 13, 14, 15
CXWM32	CXWM32R-PS	

* Seal kit includes 12, 13, 14, 15. Order the seal kit, based on each bore size.

* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

ø10 Basic Type: CXWM10-Stroke/50 to 100

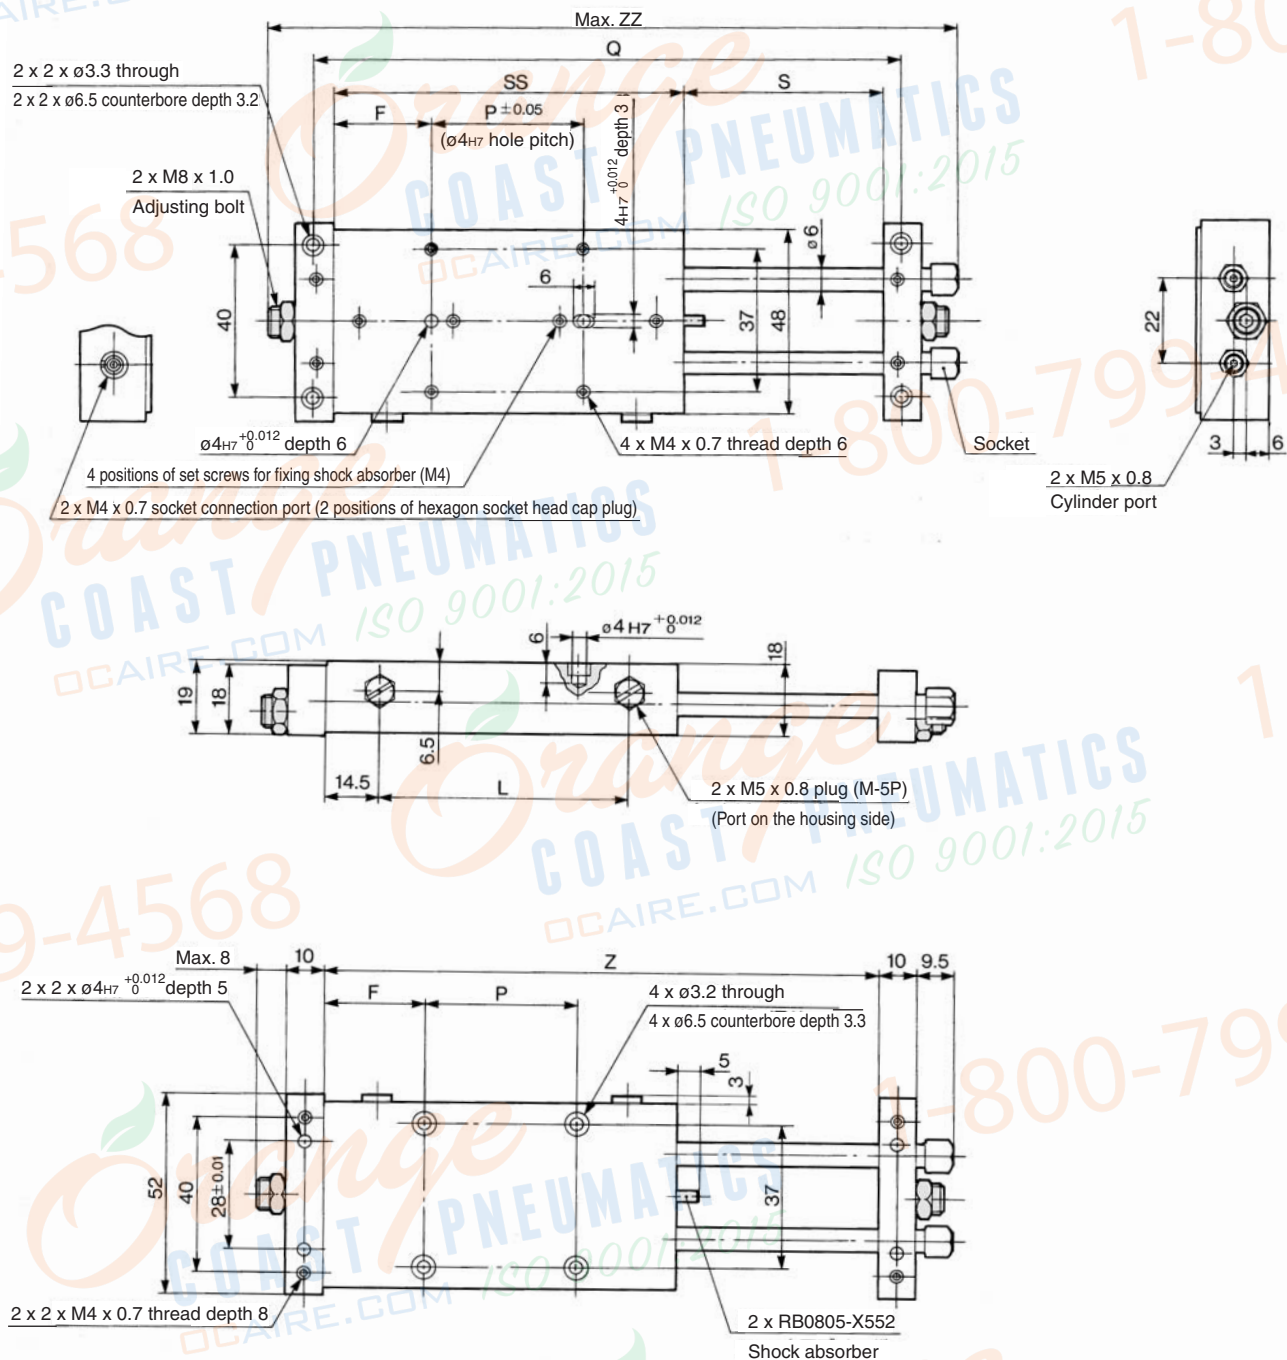

Note) For 25 stroke, the shock absorber is mounted on a plate. For dimensions of the 25 stroke, refer to page 480.

Model	F	L	P	Q	S	SS	Z	ZZ (mm)
CXWM10-50	26	63	40	154	52	92	144	181.5
CXWM10-75	26	88	65	204	77	117	194	231.5
CXWM10-100	26	113	90	254	102	142	244	281.5

CX2

CXW

CXT

CXSJ

CXS

D-□


-X□

Individual
-X□

ø10 Basic Type: CXWM10-25 stroke



ø10 With End Lock: CXWM10-Stroke/50 to 100 R

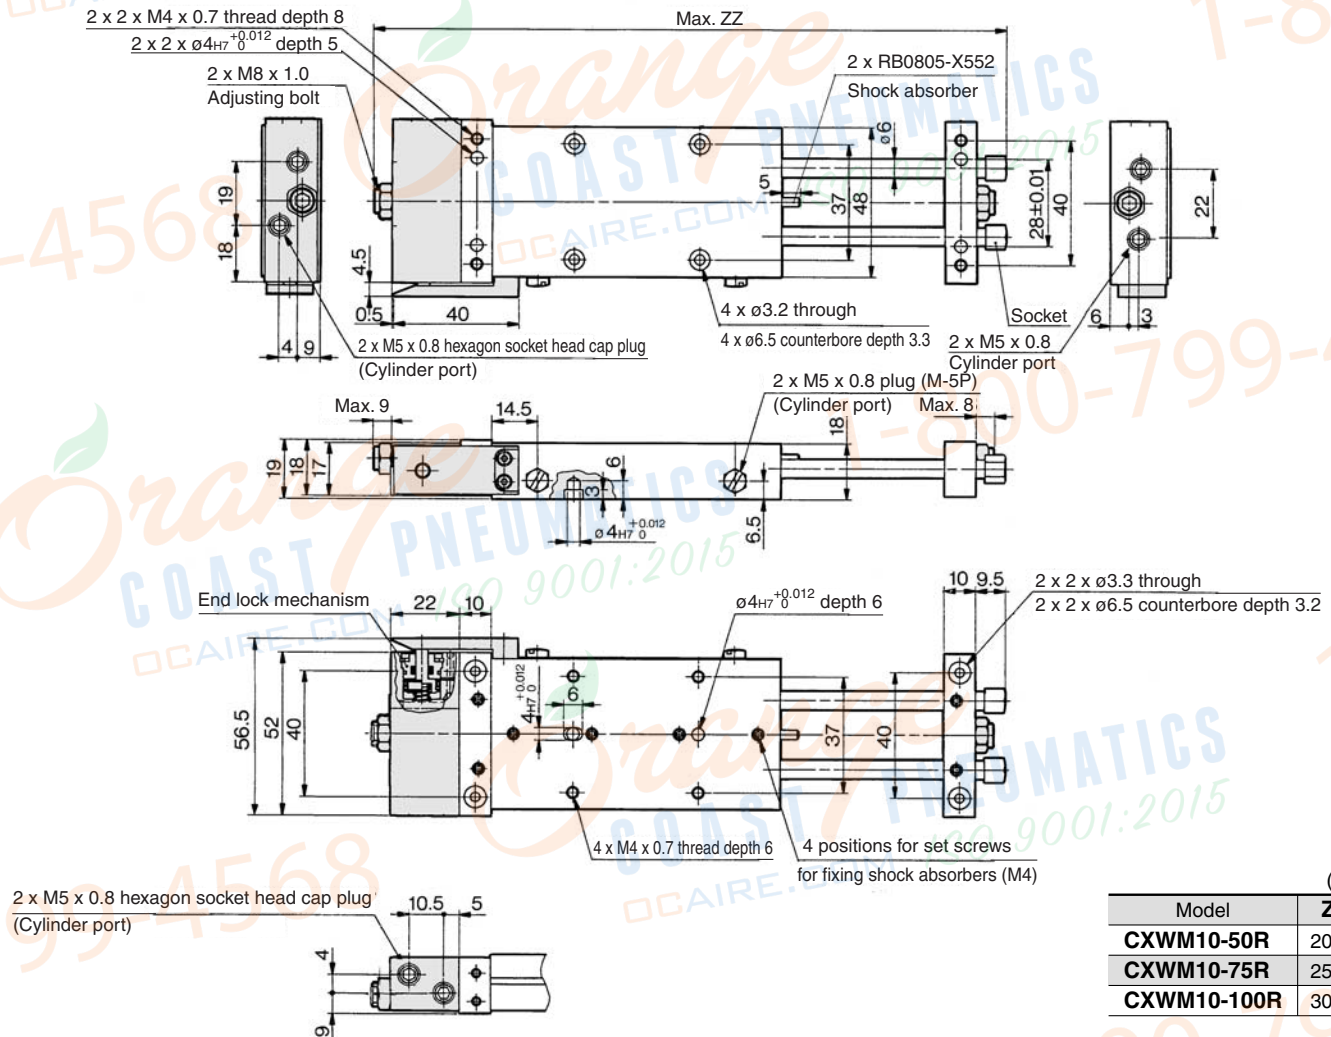

(mm)	
Model	ZZ
CXWM10-50R	204.5
CXWM10-75R	254.5
CXWM10-100R	304.5

Housing mounting style with auto switch
CDBXWM10-Stroke, CDBXWM10-Stroke R


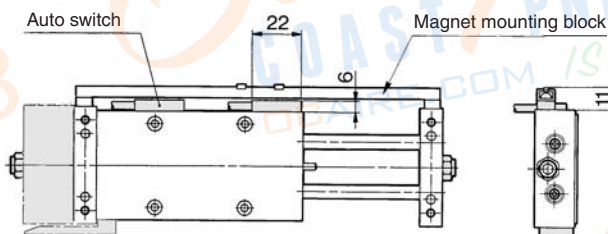


Plate mounting style with auto switch
CDPXWM10-Stroke, CDPXWM10-Stroke R

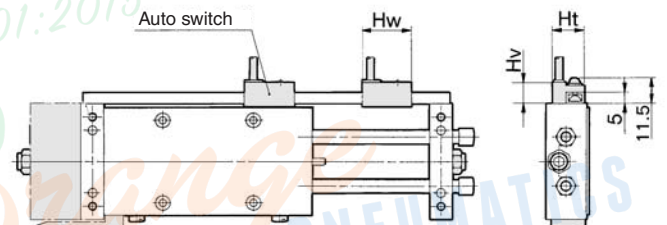

- Note 1) The dimensions show D-E7□A and D-E80A.
Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of the 25 stroke, refer to page 482.

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 482.

CX2
CXW
CXT
CXSJ
CXS


D-□

-X□

Individual
-X□

Series CXWM

ø10 With End Lock: CXWM10-25 Stroke R

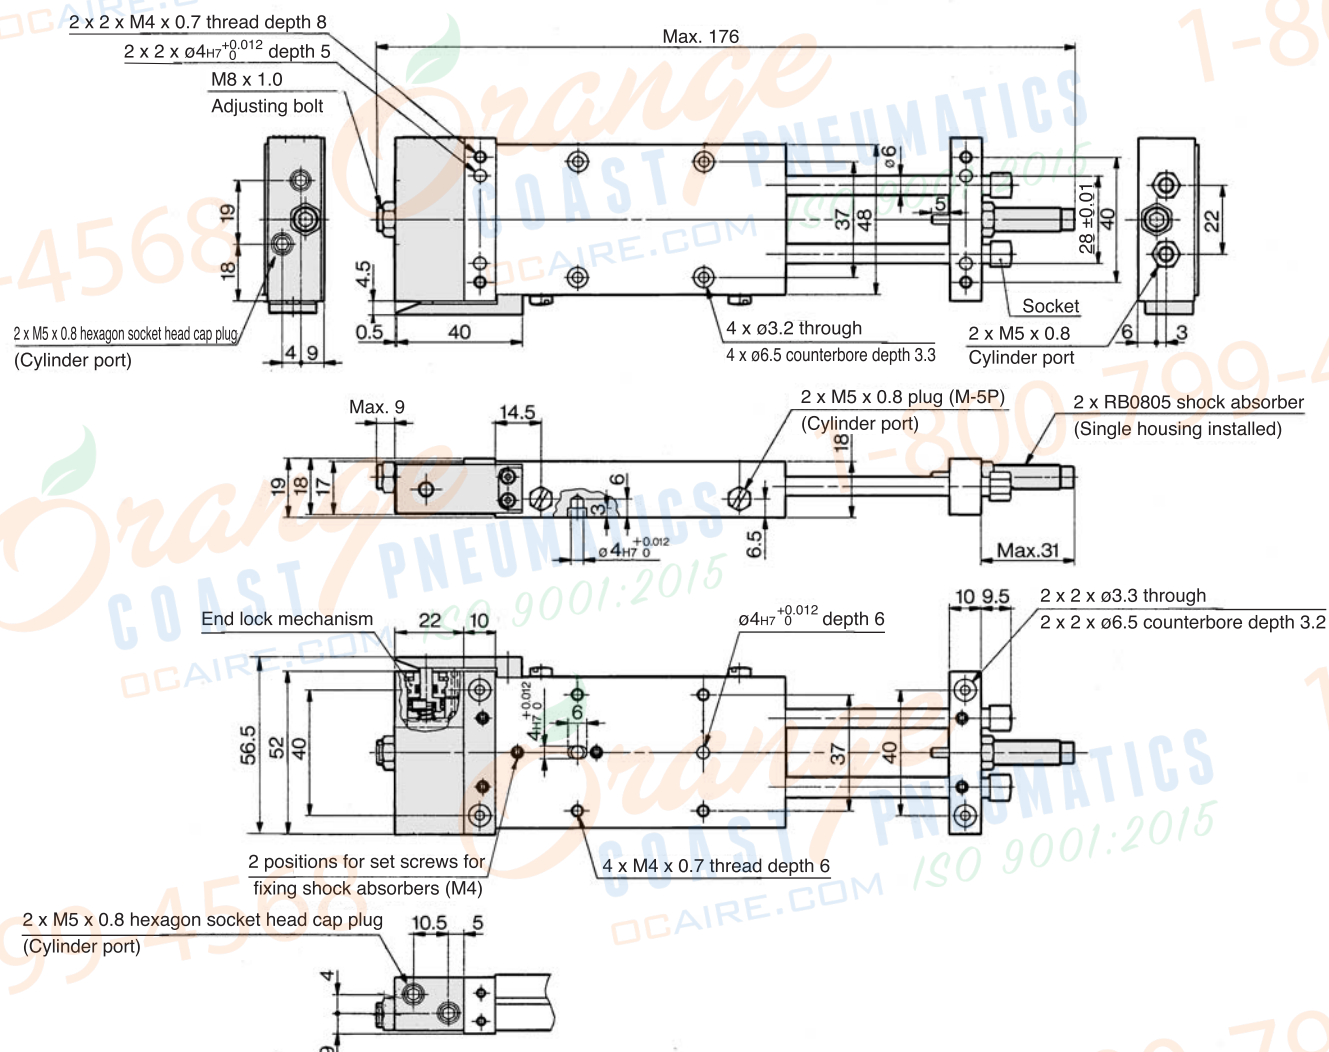

Housing mounting style with auto switch CDBXWM10-25, CDBXWM10-25R


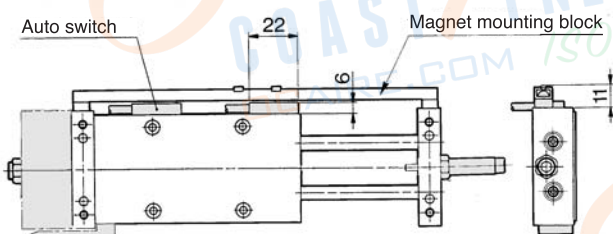


Plate mounting style with auto switch CDPXWM10-25, CDPXWM10-25R

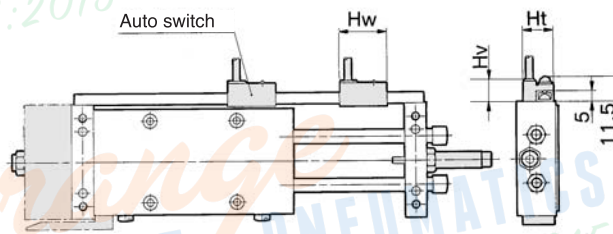

Note 1) The dimensions show D-E7□A and D-E80A.
Note 2) 2 magnets for auto switches are equipped to the magnet mounting block.


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) 2 magnets for auto switches are installed in the housing.

Slide Unit: Built-in Shock Absorber Slide Bearing Type **Series CXWM**

ø16 Basic Type: CXWM16-Stroke/50 to 200

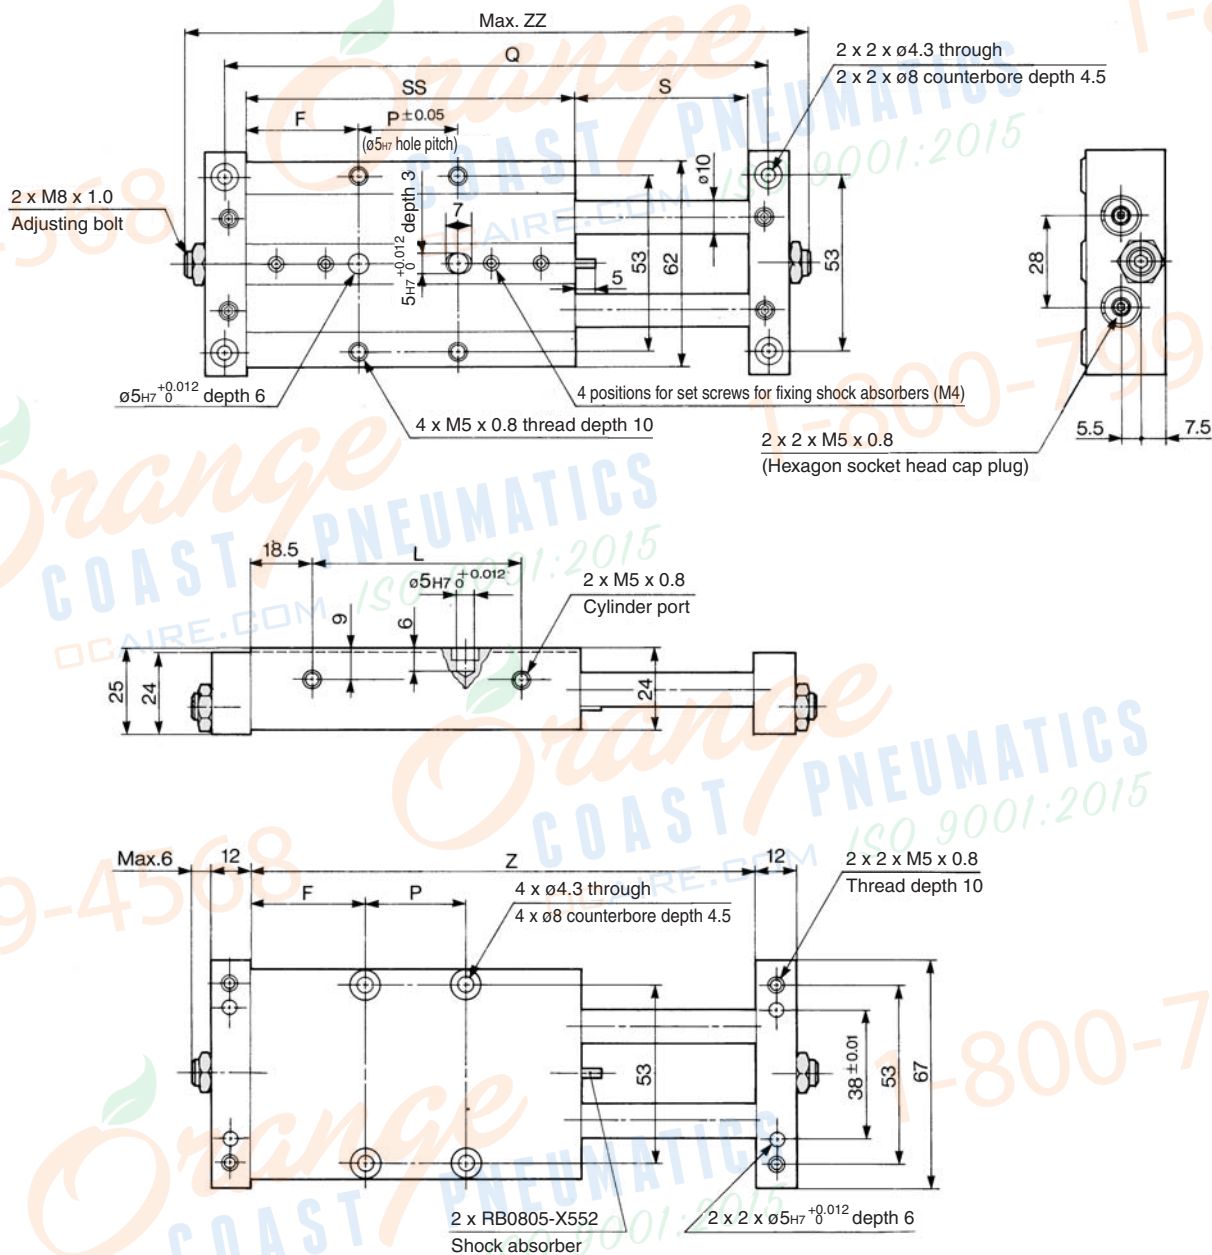

Note) For 25 stroke, the shock absorber is mounted on a plate.
Refer to page 484 for the dimensions of the 25 stroke.

Model	F	L	P	Q	S	SS	Z	ZZ (mm)
CXWM16-50	35	63	30	164	52	100	152	188
CXWM16-75	32.5	88	60	214	77	125	202	238
CXWM16-100	37.5	113	75	264	102	150	252	288
CXWM16-125	42.5	138	90	314	127	175	302	338
CXWM16-150	55	163	90	364	152	200	352	388
CXWM16-175	67.5	188	90	414	177	225	402	438
CXWM16-200	80	213	90	464	202	250	452	488

CX2

CXW

CXT

CXSJ

CXS


D-□

-X□


Individual
-X□

Series CXWM

ø16 Basic Type: CXWM16-25 stroke

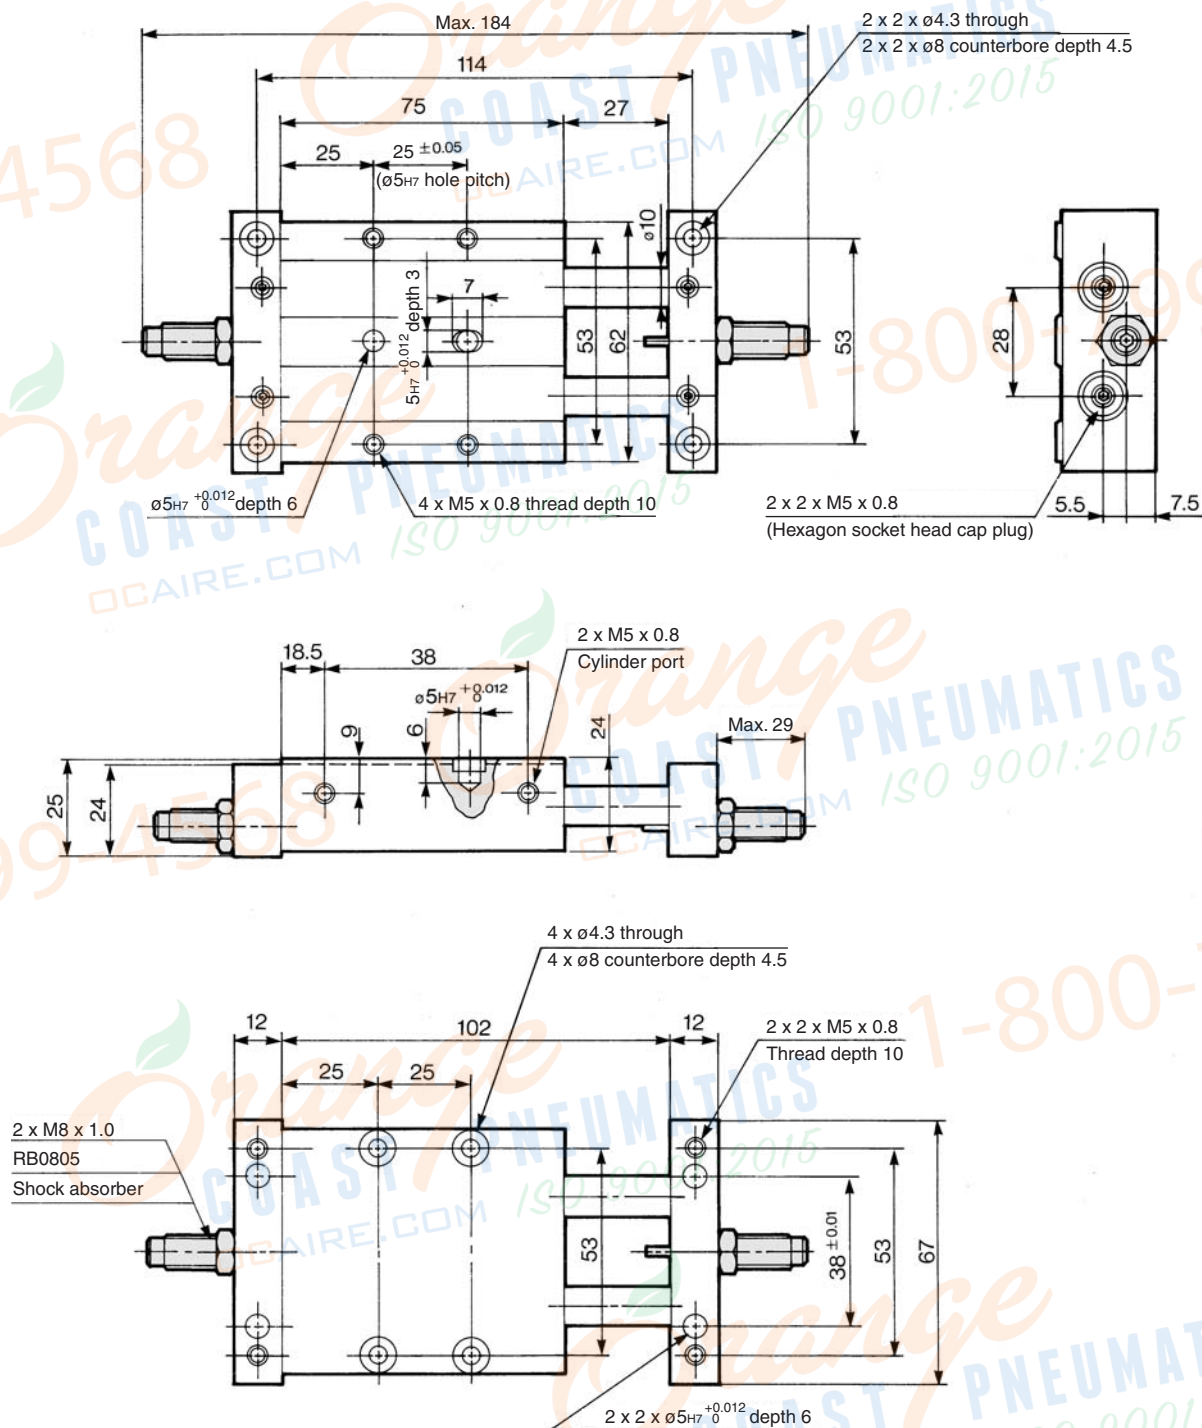


ø16 With End Lock: CXWM16-Stroke/50 to 200 R

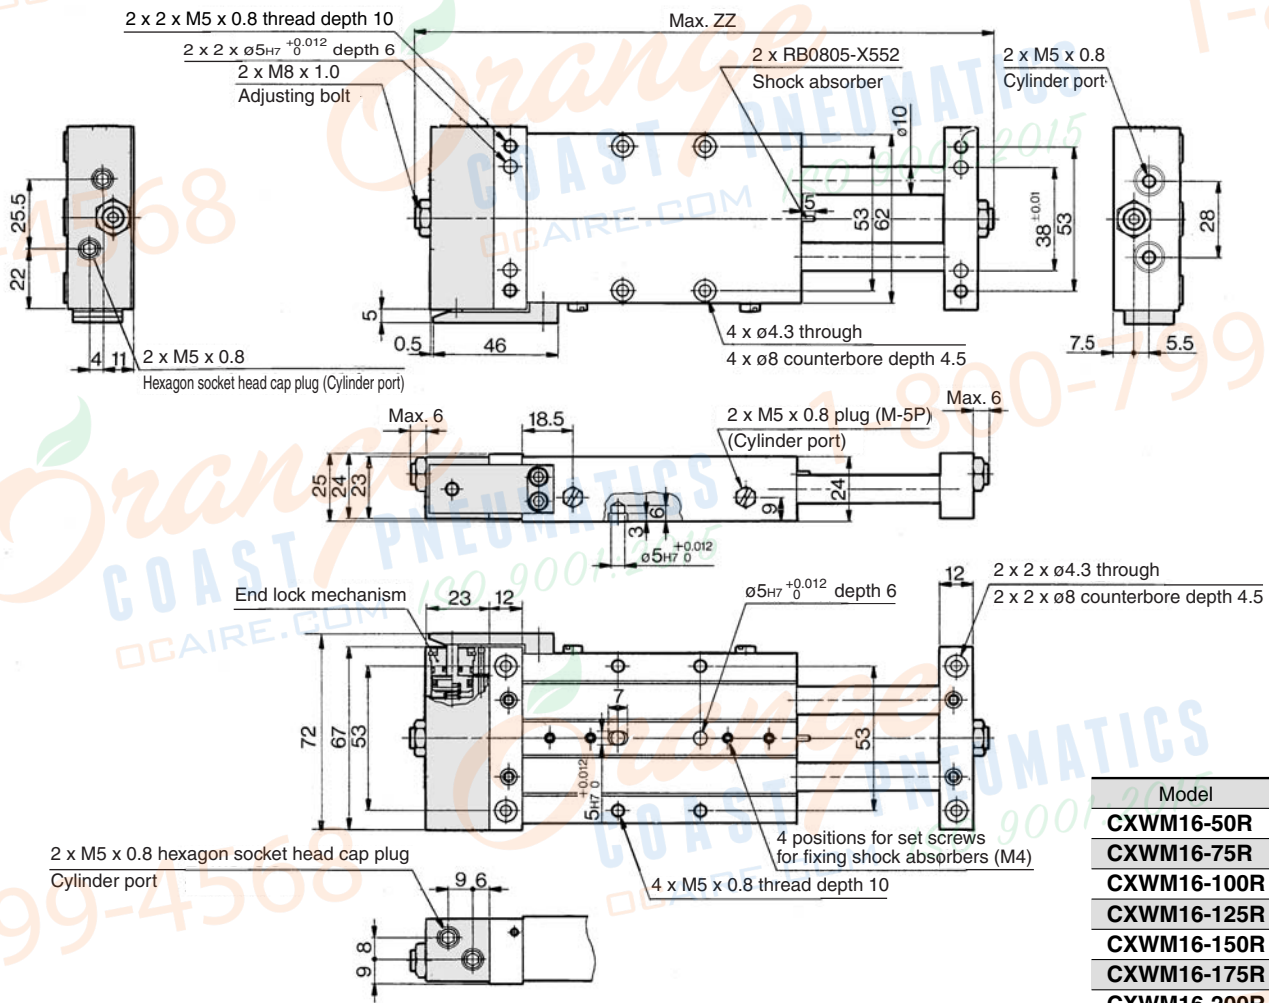

(mm)	
Model	ZZ
CXWM16-50R	211
CXWM16-75R	261
CXWM16-100R	311
CXWM16-125R	361
CXWM16-150R	411
CXWM16-175R	461
CXWM16-200R	511

Housing mounting style with auto switch
CDBXWM16-Stroke , **CDBXWM16-Stroke R**

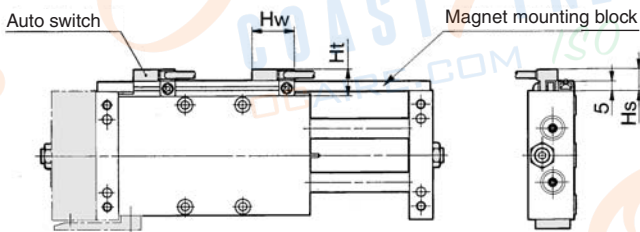


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 486.

Plate mounting style with auto switch
CDPXWM16-Stroke , **CDPXWM16-Stroke R**

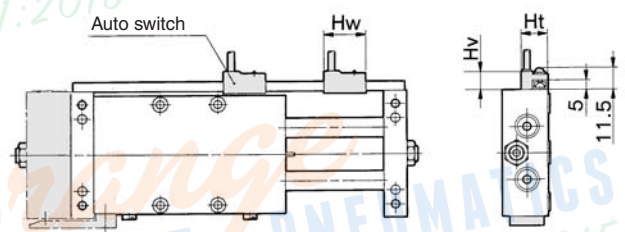

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 486.

ø16 With End Lock: CXWM16-25 stroke R




ø20 Basic Type: CXWM20-Stroke/50 to 200

Note) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 488.

ø20 Basic Type: CXWM20-25 stroke




ø20 With End Lock: CXWM20-Stroke/50 to 200 R

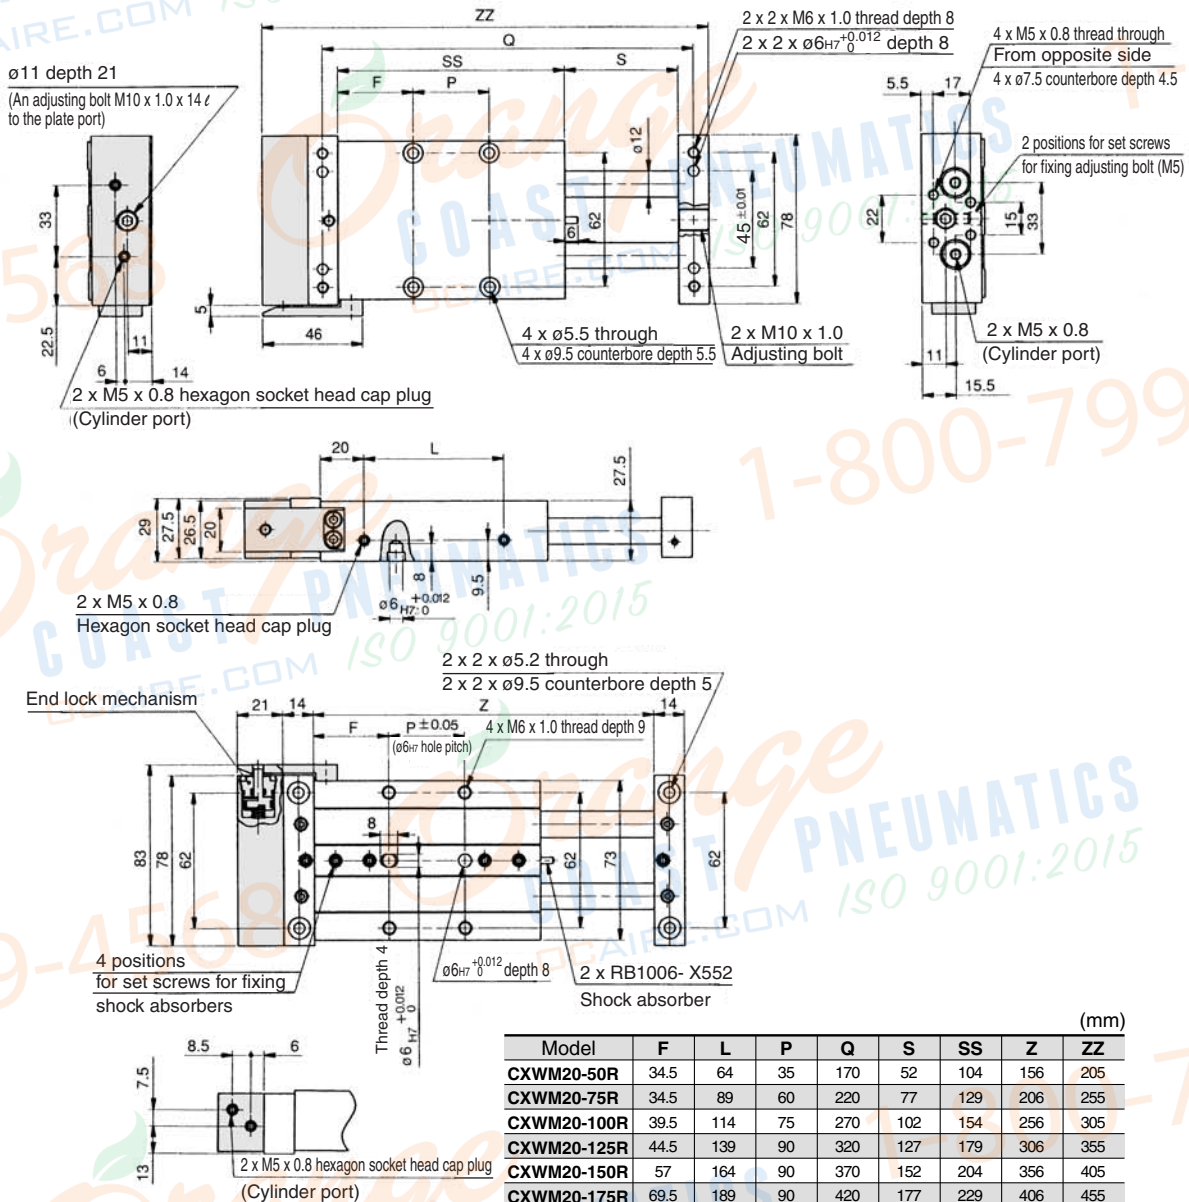

	(mm)							
Model	F	L	P	Q	S	SS	Z	ZZ
CXWM20-50R	34.5	64	35	170	52	104	156	205
CXWM20-75R	34.5	89	60	220	77	129	206	255
CXWM20-100R	39.5	114	75	270	102	154	256	305
CXWM20-125R	44.5	139	90	320	127	179	306	355
CXWM20-150R	57	164	90	370	152	204	356	405
CXWM20-175R	69.5	189	90	420	177	229	406	455
CXWM20-200R	82	214	90	470	202	254	456	505

Housing mounting style with auto switch
CDBXWM20-Stroke , CDBXWM20-Stroke R

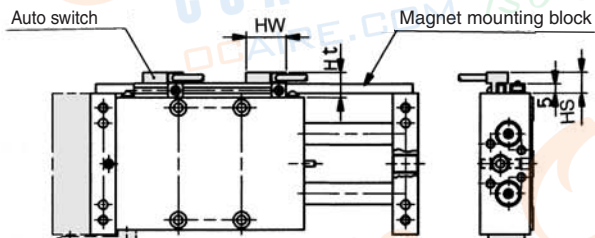


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL, D-A7□H, D-A80H	23	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 490.

Plate mounting style with auto switch
CDPXWM20-Stroke , CDPXWM20-Stroke R

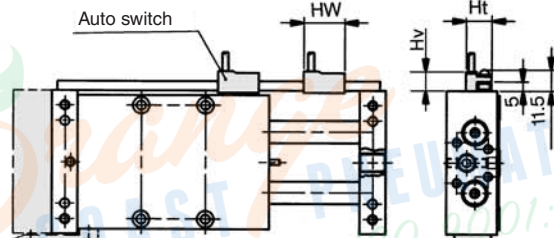

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL, D-A7□H, D-A80H	23	15	10
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 490.

CX2

CXW

CXT

CXSJ

CXS

D-□


-X□

Individual

-X□

Series CXWM

ø20 With End Lock: CXWM20-25 stroke R

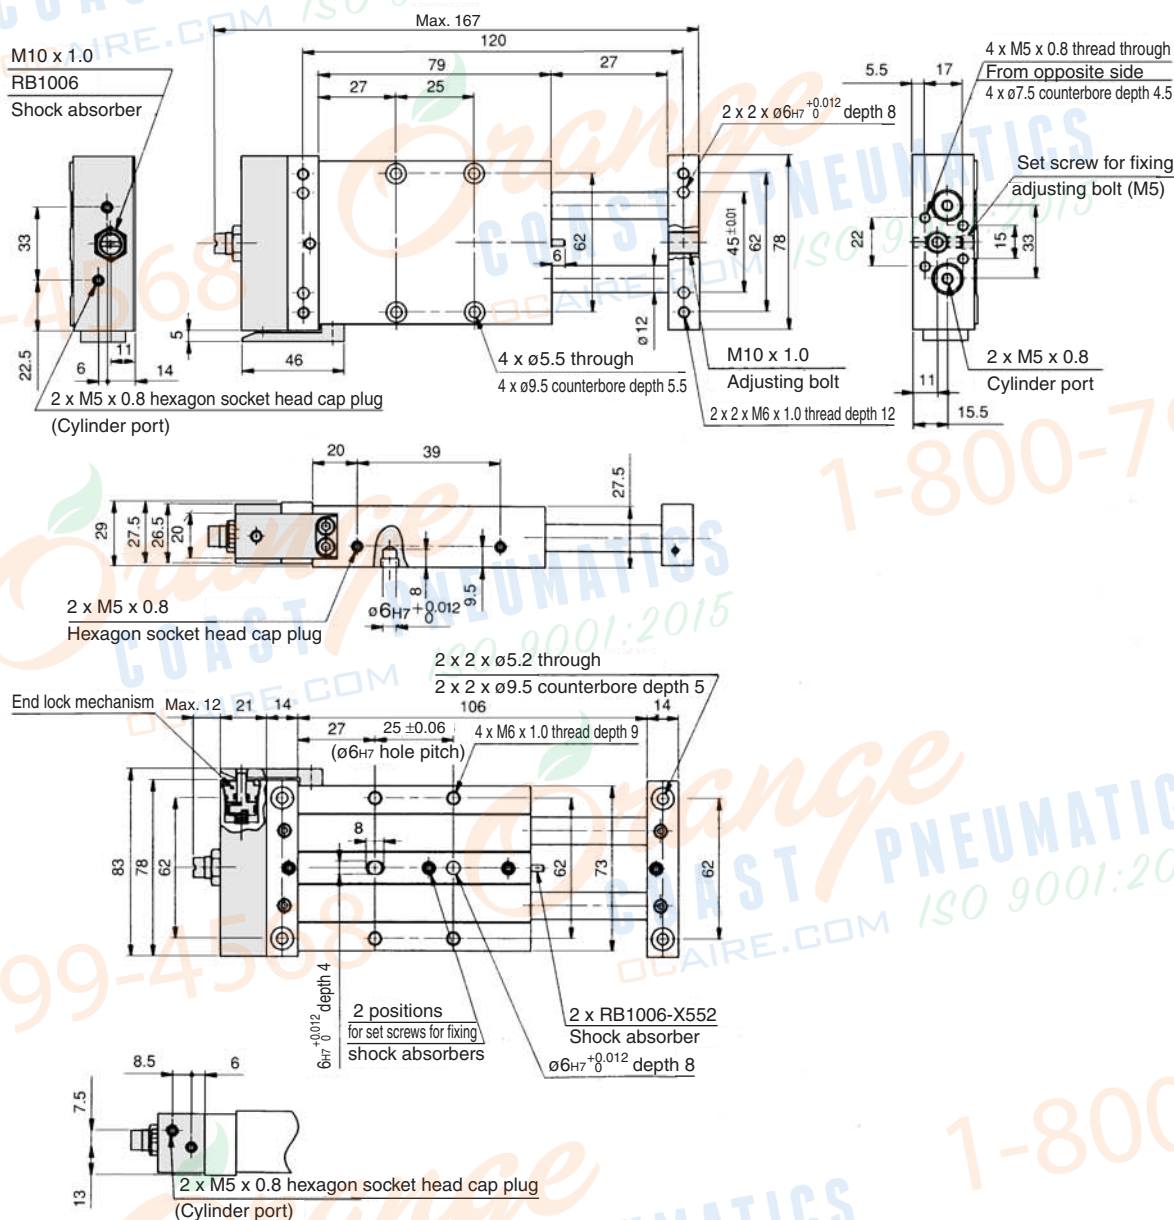

Housing mounting style with auto switch CDBXWM20-25, CDBXWM20-25R


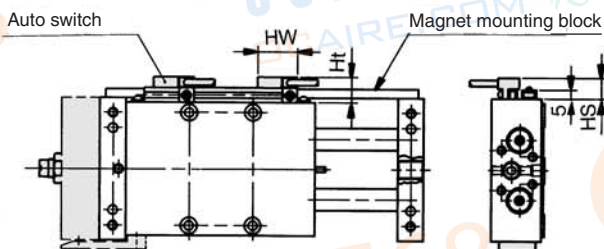


Plate mounting style with auto switch CDPXWM20-25, CDPXWM20-25R

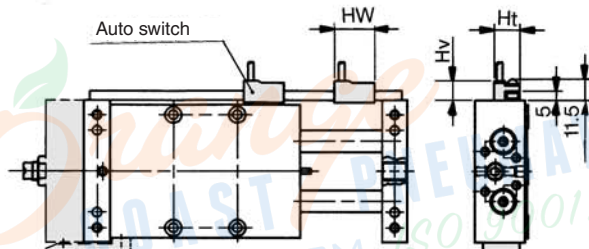

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) 2 magnets for auto switches are equipped to the magnet mounting block.


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) 2 magnets for auto switches are installed in the housing.

Slide Unit: Built-in Shock Absorber Slide Bearing Type **Series CXWM**

ø25 Basic Type: CXWM25-Stroke/50 to 200

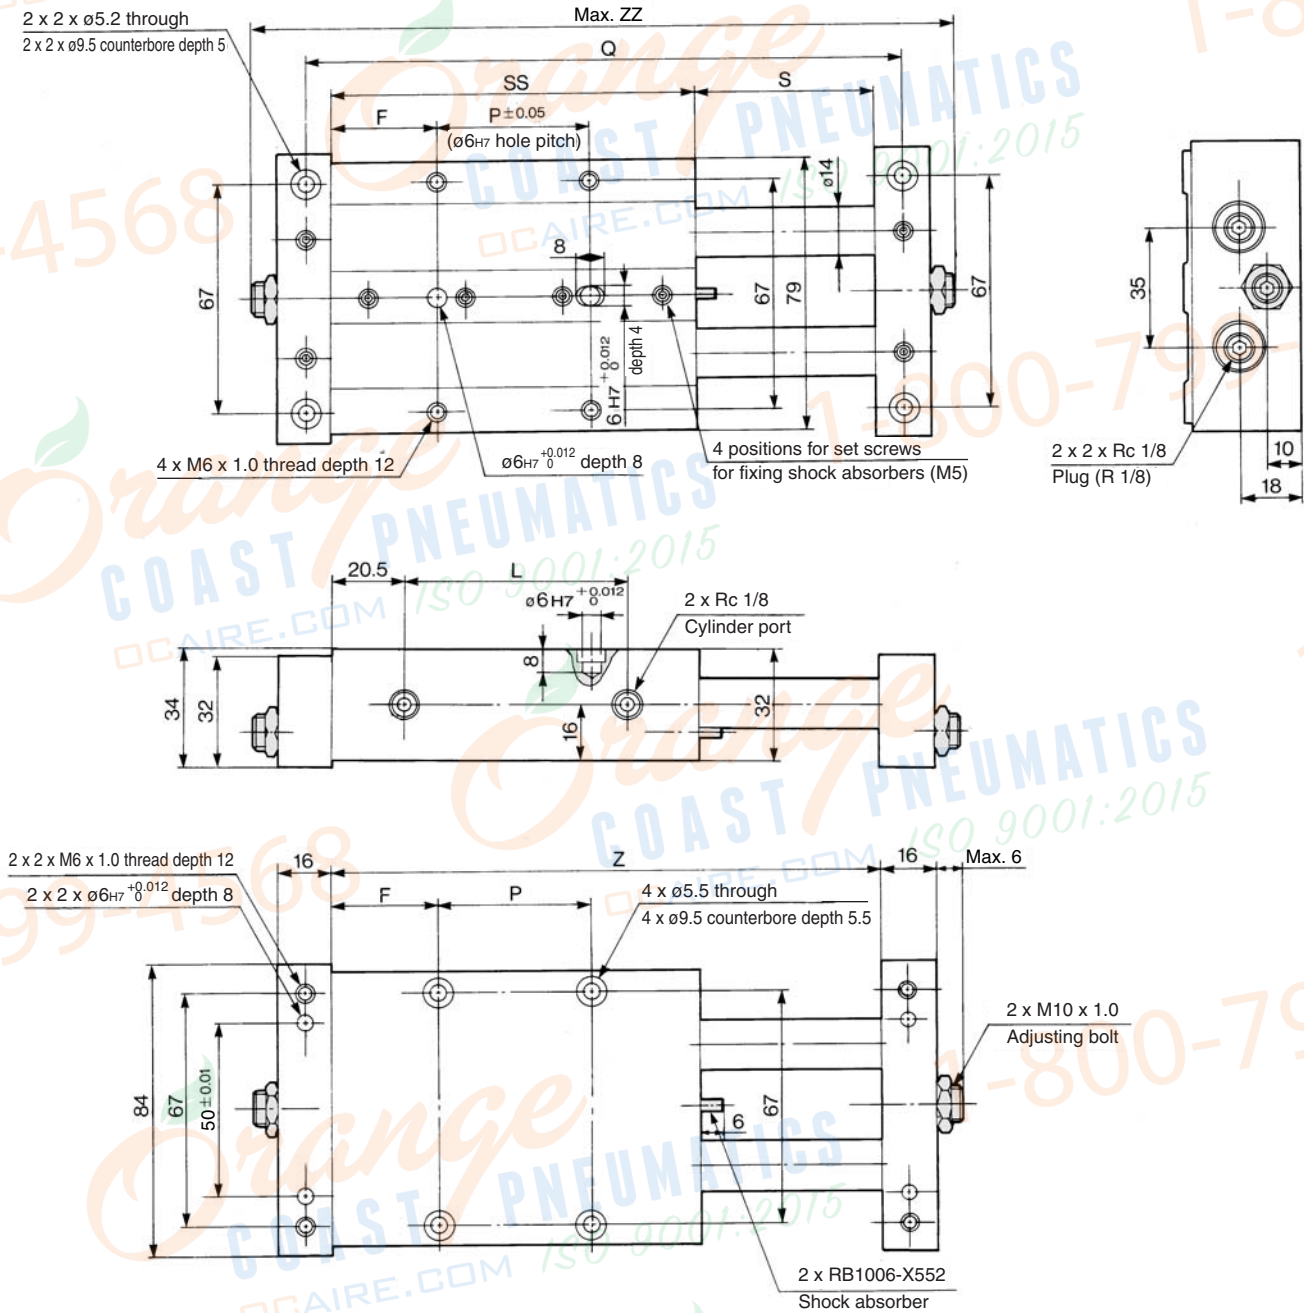

Note) For 25 stroke, the shock absorber is mounted on a plate.
For dimensions of 25 stroke, refer to page 492.

Model	F	L	P	Q	S	SS	Z	ZZ (mm)
CXWM25-50	31	66	45	175	52	107	159	203
CXWM25-75	33.5	91	65	225	77	132	209	253
CXWM25-100	33.5	116	90	275	102	157	259	303
CXWM25-125	46	141	90	325	127	182	309	353
CXWM25-150	58.5	166	90	375	152	207	359	403
CXWM25-175	71	191	90	425	177	232	409	453
CXWM25-200	83.5	216	90	475	202	257	459	503

CX2

CXW

CXT

CXSJ

CXS

D-□


-X□

Individual
-X□

ø25 Basic Type: CXWM25-25 stroke




ø25 With End Lock: CXWM25-Stroke/50 to 200 R

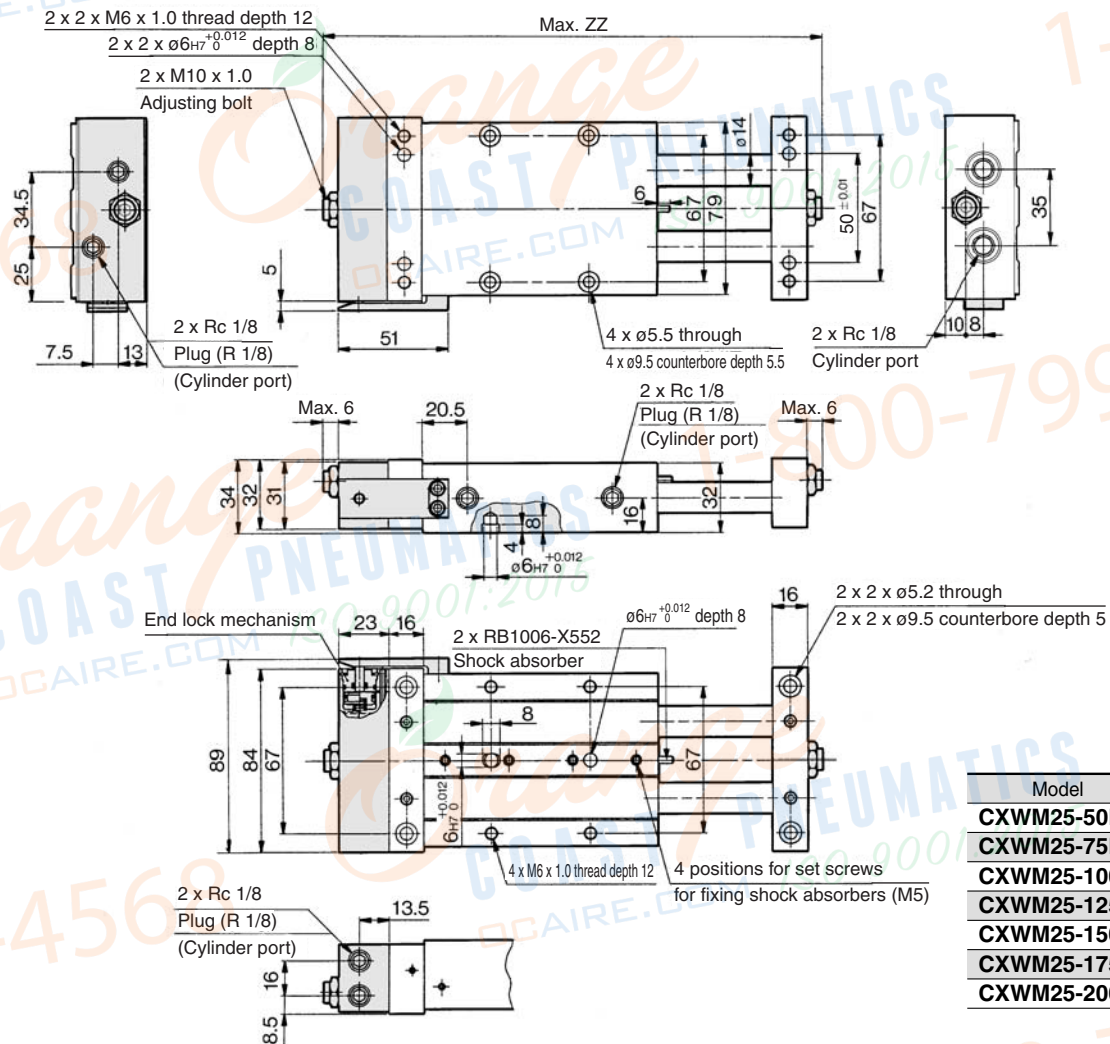

Model	ZZ (mm)
CXWM25-50R	226
CXWM25-75R	276
CXWM25-100R	326
CXWM25-125R	376
CXWM25-150R	426
CXWM25-175R	476
CXWM25-200R	526

Housing mounting style with auto switch
CDBXWM25-Stroke , **CDBXWM25-Stroke** R

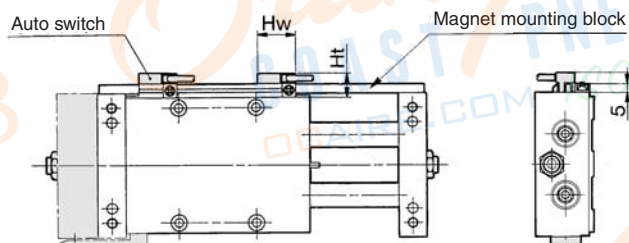


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 494.

Plate mounting style with auto switch
CDPXWM25-Stroke , **CDPXWM25-Stroke** R

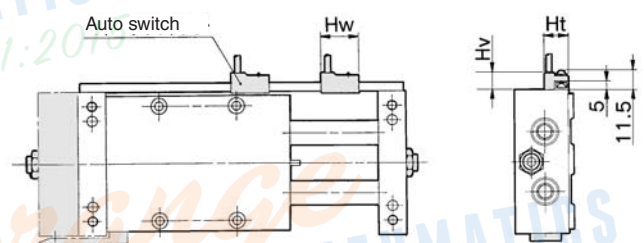

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 494.

CX2

CXW

CXT

CXSJ


CXS

D-☐

-X ☐


Individual

-X ☐

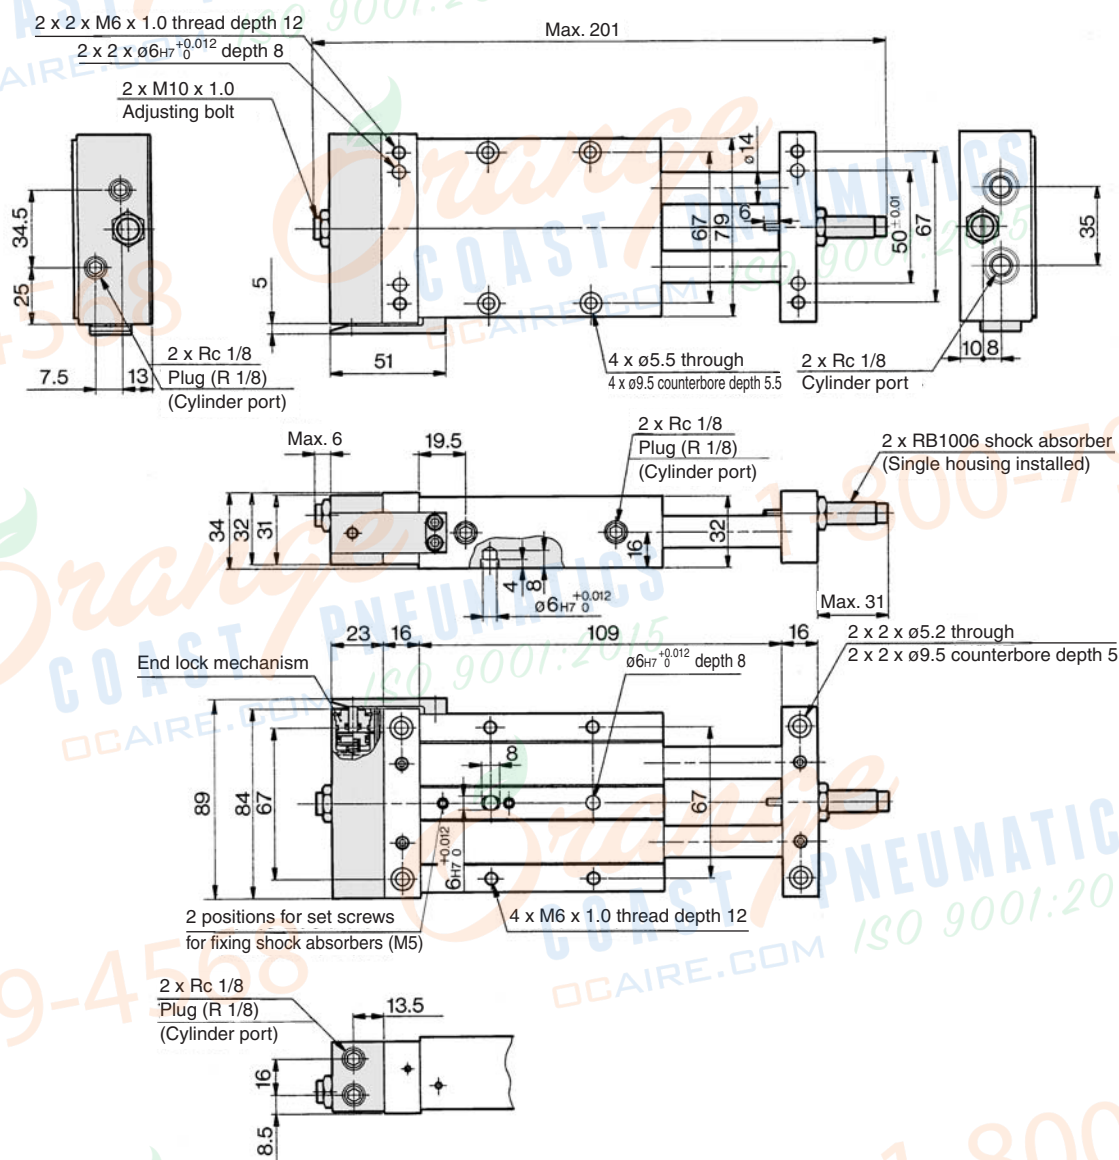

Slide Unit: Built-in Shock Absorber Slide Bearing Type **Series CXWM**

ø32 Basic Type: CXWM32-Stroke/75 to 200

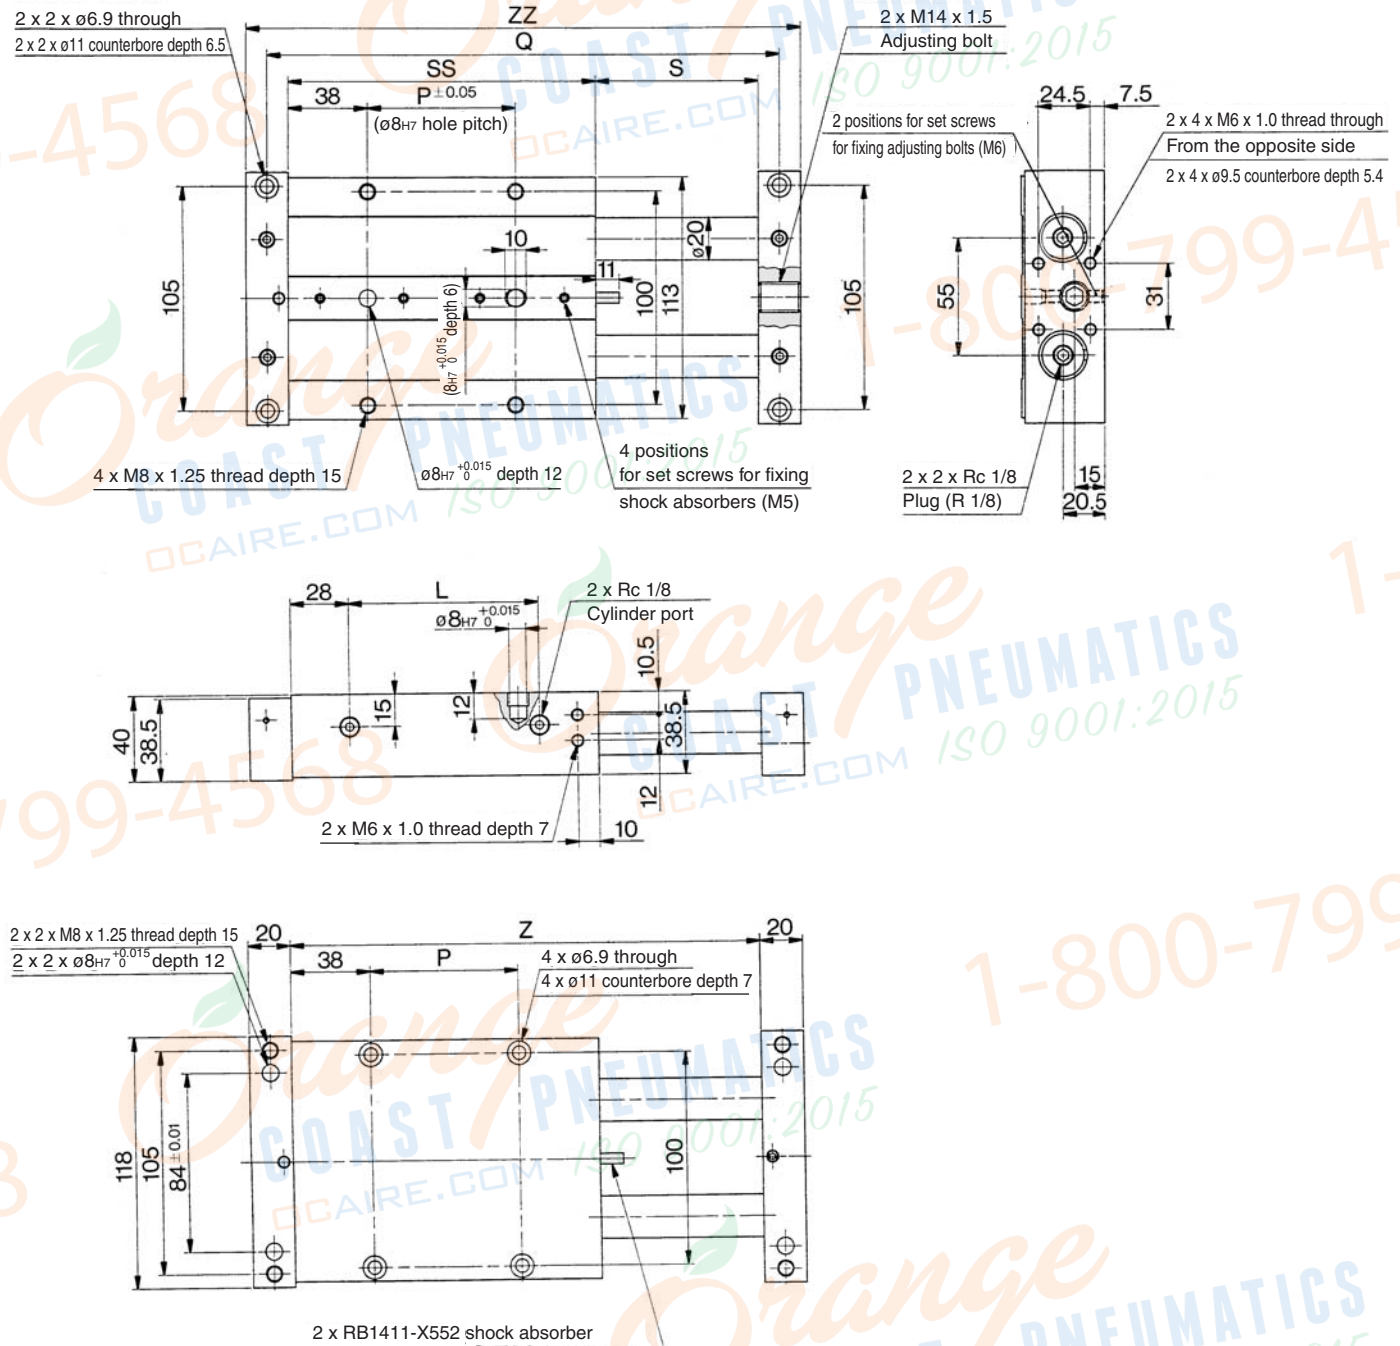

Model	L	P	Q	S	SS	Z	ZZ
CXWM32-75	90	70	243	77	146	223	263
CXWM32-100	115	95	293	102	171	273	313
CXWM32-125	140	120	343	127	196	323	363
CXWM32-150	165	145	393	152	221	373	413
CXWM32-175	190	170	443	177	246	423	463
CXWM32-200	215	195	493	202	271	473	513

Note) For 25 and 50 strokes, the shock absorber is mounted on a single side of the plate. For dimensions of 25 and 50 strokes, refer to page 496.

CX2

CXW

CXT

CXSJ

CXS


D-☐

-X☐

Individual
-X☐

Series CXWM


ø32 Basic Type: CXWM32- Stroke/25, 50

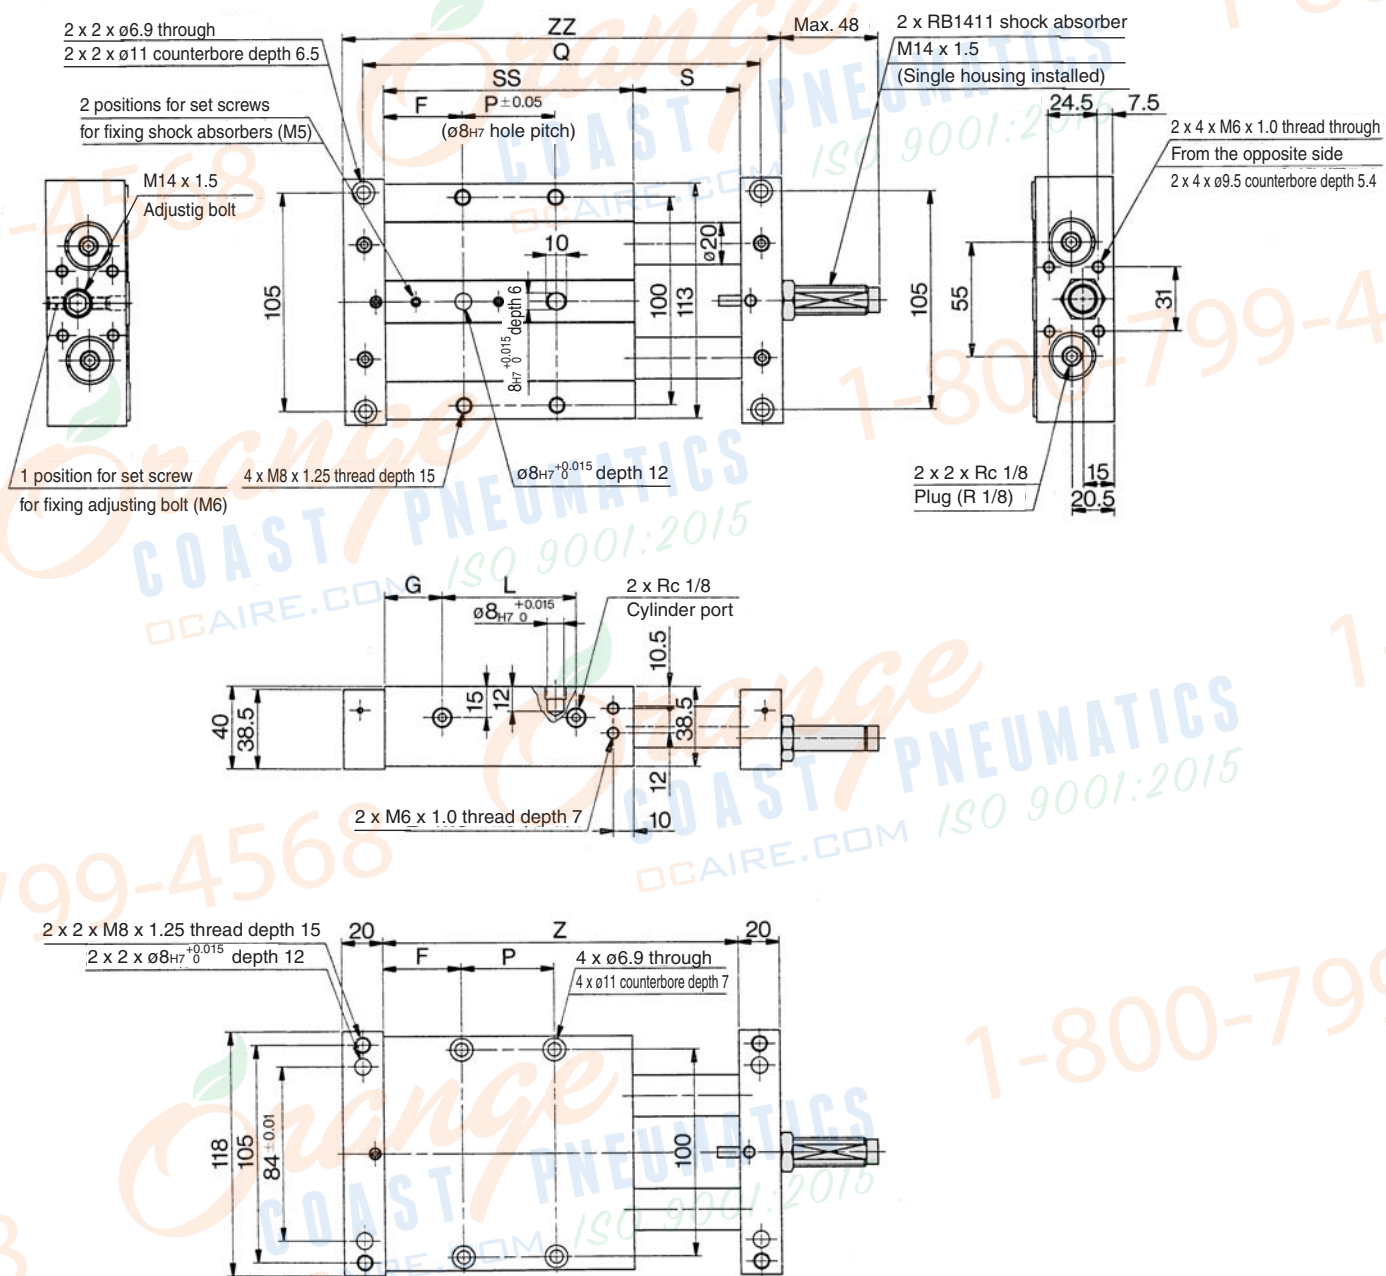

Model	F	L	P	Q	S	SS	G	Z	ZZ
CXWM32-25	37	41	22	143	27	96	27.5	123	163
CXWM32-50	38	65	45	193	52	121	28	173	213


(mm)

ø32 With End Lock: CXWM32-Stroke/75 to 200 R

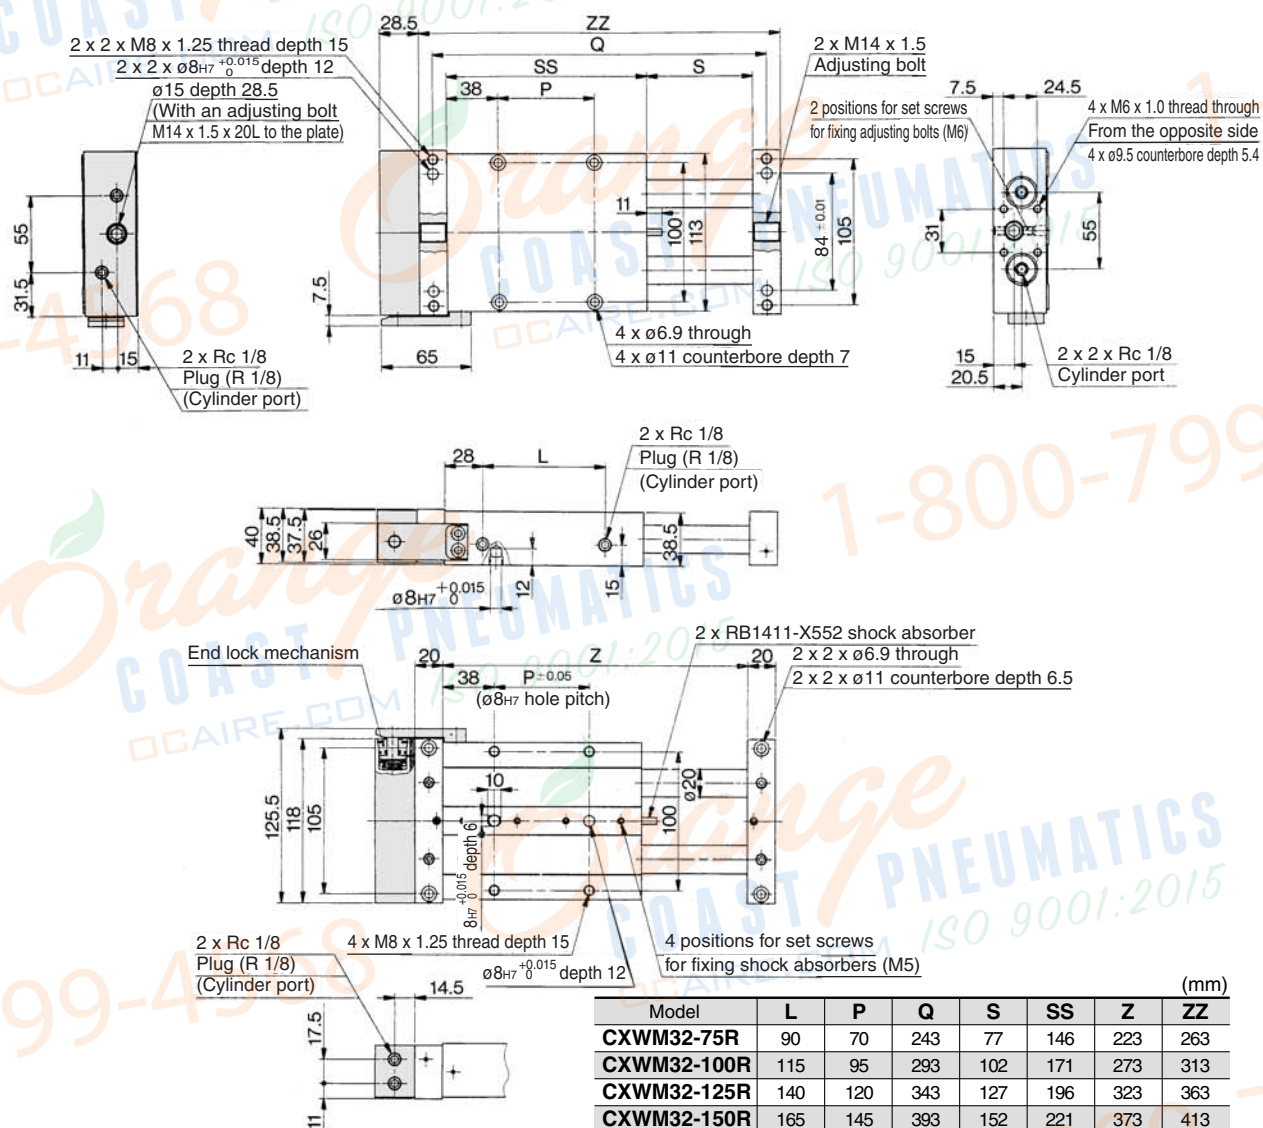

Model	L	P	Q	S	SS	Z	ZZ
CXWM32-75R	90	70	243	77	146	223	263
CXWM32-100R	115	95	293	102	171	273	313
CXWM32-125R	140	120	343	127	196	323	363
CXWM32-150R	165	145	393	152	221	373	413
CXWM32-175R	190	170	443	177	246	423	463
CXWM32-200R	215	195	493	202	271	473	513

Housing mounting style with auto switch
CDBXWM32-Stroke , **CDBXWM32-Stroke R**

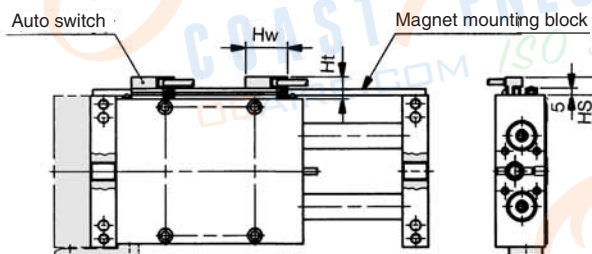


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For 25 and 50 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 and 50 strokes, refer to page 498.

Plate mounting style with auto switch
CDPXWM32-Stroke, **CDPXWM32-Stroke R**

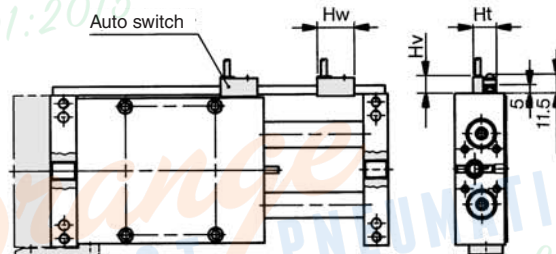

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For 25 and 50 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 and 50 strokes, refer to page 498.


ø32 With End Lock: CXWM32-Stroke/25, 50 R



Slide Unit: Built-in Shock Absorber Ball Bushing Bearing Type Series CXWL

ø10, ø16, ø20, ø25, ø32

How to Order

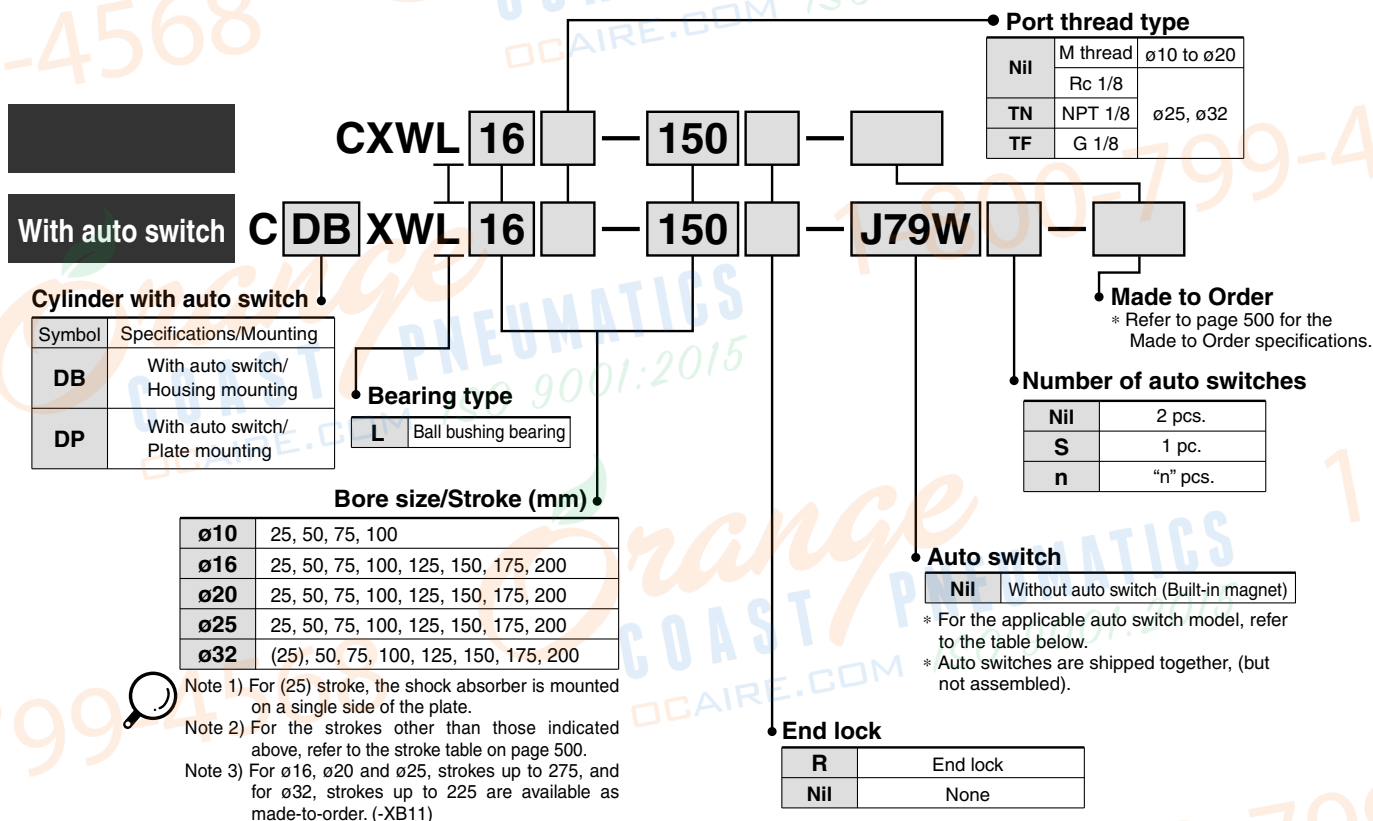

Applicable Auto Switch/Refer to pages 1719 to 1827 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Rail mounting		Applicable cylinder size		Lead wire length (m)*				Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	Housing mounting	Plate mounting	0.5 (Nil)	3 (L)	5 (Z)	None (N)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	F7NV	F79	ø16 ø20 ø25 ø32	ø10 ø16 ø20 ø25 ø32	●	●	○	—	○	IC circuit	Relay, PLC
		3-wire (PNP)		F7PV				F7P	●			●	○	—	○			
	Diagnostic indication (2-color indication)	Connector		2-wire	12 V	F7BV	J79	●	●			○	—	○	—	IC circuit		
		Grommet		3-wire (NPN)	5 V, 12 V	F7NC	—	●	●			○	—	○	—			
				3-wire (PNP)		F7NWX	F79W	●	●			○	—	○	—			
				2-wire		F7BWV	J79W	●	●			○	—	○	—			
						F7BAV	F7BA	—	●			○	—	○	—			
		Water resistant (2-color indication)		Grommet	4-wire (NPN)	5 V, 12 V	—	F79F	●			●	○	—	○		—	
	With diagnostic output (2-color indication)	3-wire (NPN equivalent)			5 V	—	A76H	●	●			—	—	—	—	IC circuit		
	Reed switch	—		Grommet	Yes	2-wire	24 V	12 V	100 V			A72	A72H	ø16 ø20 ø25 ø32	ø10 ø16 ø20 ø25 ø32	●	●	
5 V, 12 V			100 V or less							A80	A80H	●	●			—	—	—
Connector			No	2-wire	12 V	—	5 V, 12 V	24 V or less	A73C	—	●	●	●	●	—	—	—	IC circuit
									A80C	—	●	●	●	●	—	—	—	
Grommet			Yes	3-wire (NPN equivalent)	—	5 V	—	—	E76A	ø10	—	●	●	—	—	—	—	Relay, PLC
				2-wire	24 V	12 V	100 V		E73A			●	●	—	—	—		
					No	2-wire	24 V	5 V, 12 V	100 V or less	E80A			●	●	—	—	—	IC circuit

* Lead wire length symbols: 0.5 m Nil (Example) F79W
3 m L (Example) F79WL
5 m Z (Example) F79WZ
None N (Example) J79CW

* Solid state auto switches marked with "○" are produced upon receipt of order.
** It is impossible to mount solid state switches to the housing mounting ø10.

- Since there are other applicable auto switches than listed, refer to page 517 for details.
- For details about auto switches with pre-wired connector, refer to pages 1784 and 1785.

Series CXWL

Built-in shock absorber

This is built-in shock absorber style in which the shock absorber is enclosed in the housing.

Dramatically reduced installation labor

The machining precision required for positioning during the installation of the cylinder has been reduced through the adoption of a special pin hole machining process, thus decreasing the amount of labor involved in adjustment.


High-precision ball bushing

The bearings made of ball bushings decrease the rise in starting pressure that could be caused by a load imbalance.

This also enables smooth operation by ensuring stable travel resistance.

Provided with an end lock mechanism

An end lock is also available, which maintains the cylinder's original position even if the air supply is interrupted.

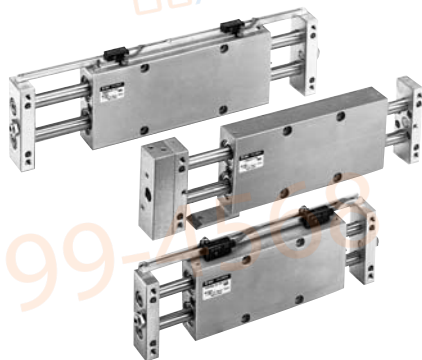

Made to Order Specifications
(For details, refer to pages 1851 to 2021.)

Symbol	Specifications
—XB11	Long stroke type
—XB13	Low speed cylinder (5 to 50 mm/s)
—XC22	Fluororubber seal
—X146	Hollow piston rod
—X138	Adjustable stroke
—X168	Helical insert thread
—X169	2 built-in magnets

Standard Stroke

Model	Standard stroke (mm)							
	25	50	75	100	125	150	175	200
CXWL10-□□	●	●	●	●	—	—	—	—
CXWL16-□□	●	●	●	●	●	●	●	●
CXWL20-□□	●	●	●	●	●	●	●	●
CXWL25-□□	●	●	●	●	●	●	●	●
CXWL32-□□	(*)	●	●	●	●	●	●	●

Note) The strokes marked with "(*)" has an absorber of single side plate mounting style.

Specifications

Type	Non-lube	
Fluid	Air	
Proof pressure	1.5 MPa	
Max. operating pressure	1.0 MPa	
Min. operating pressure	CXWL10/16	0.15 MPa
	CXWL20/25/32	0.10 MPa
Ambient & fluid temperature	-10 to 60°C (No freezing)	
Piston speed (Non-lube)	30 to 500 mm/s	
Cushion	Shock absorber	
Stroke adjustable range	Standard stroke: ±2 mm	
Accessory (Option)	Straight knock pin (2 pcs.), Adjusting bolt* (-X138)	

* "-X138" has a stroke adjustable range of -12.5 mm on one side.

Maximum Load Mass/Non-rotating Accuracy/Maximum Holding Force

Model	CXWL10	CXWL16	CXWL20	CXWL25	CXWL32
Max. movable mass ⁽¹⁾	1 kg	4 kg	5 kg	7 kg	10 kg
Non-rotating accuracy ⁽²⁾ (Deflection of a piston rod is not included.)	± 0.09°	± 0.03°	± 0.03°	± 0.02°	± 0.01°
Max. holding force (End lock model)	39.2 N	98.1 N	147.1 N	245.2 N	392.3 N

Note 1) Place the center of gravity of the load and center of the slide unit close during operation. If they are placed far apart from each other, please consult with SMC.

Note 2) The factors are obtained under the conditions of a 25 strokes plate is pushed out.

Shock Absorber Specifications

Shock absorber ⁽¹⁾		RB0805-X552	RB1006-X552	RB1411 RB1411-X552
Applicable slide unit		CXWL10/16-□□	CXWL20/25-□□	CXWL32-□□
Maximum energy absorption (J)		0.98	3.92	14.7
Stroke absorption (mm)		5	6	11
Max. collision speed (m/sec)		0.05 to 5		
Max. operating frequency (cycle/min) ⁽²⁾		80	70	45
Max. allowable thrust (N)		147	353	667
Ambient temperature range (°C)		-10 to 80		
Spring force (N)	Extended	1.96	4.22	6.86
	Retracted	3.83	6.18	15.30
Mass (g)		15	25	65

Note 1) "-X552" is an exclusive shock absorber installed in the housing, and is the screw not attached specification of the outer part of the outer tube. "CXWL32-25" is mounted on a single side of the plate and of the screw attached specification.

Note 2) It denotes the values at the maximum energy absorption per one cycle. Therefore, the operating frequency can be increased according to the energy absorption.

* The shock absorber service life is different from that of the cylinder depending on the operating conditions. Refer to the Series RB Specific Product Precautions for the replacement period.

Theoretical Output

(N)

Model	Rod size (mm)	Piston area (mm ²)	Operating pressure (MPa)							
			0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
CXWL10-□□	6	101	20	30	40	51	61	71	81	91
CXWL16-□□	10	245	49	74	98	123	147	172	196	221
CXWL20-□□	12	402	80	121	161	201	241	281	322	362
CXWL25-□□	14	597	119	179	239	299	358	418	478	537
CXWL32-□□	20	980	196	294	392	490	588	686	784	882

Note) Theoretical output (N) = Pressure (MPa) x Piston area (mm²)

Slide Unit: Built-in Shock Absorber Ball Bushing Bearing Type **Series CXWL**

Mass

Model	Stroke (mm)							
	25	50	75	100	125	150	175	200
CXWL10	0.33	0.40	0.46	0.53	—	—	—	—
CXWL16	0.72	0.85	0.98	1.11	1.23	1.36	1.49	1.62
CXWL20	1.0	1.18	1.35	1.53	1.71	1.89	2.06	2.24
CXWL25	1.32	1.54	1.76	1.97	2.19	2.43	2.63	2.86
CXWL32	2.56	2.96	3.37	3.75	4.19	4.56	4.98	5.39


Additional Mass with End Lock (CXWL□-R)

Applicable model	Additional mass
CXWL10	0.08
CXWL16	0.14
CXWL20	0.15
CXWL25	0.20
CXWL32	0.43


Accessory Straight Knock Pin (Option)

Operating Direction with Different Pressure Ports

Operating direction of housing when the plate is fixed

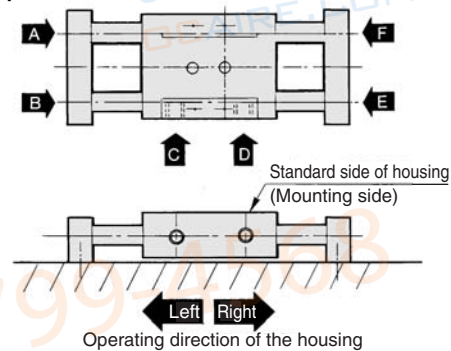

With end lock (CXWL□-R)
Operating direction of housing when the plate is fixed

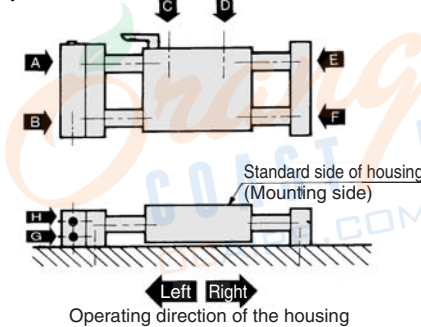

Pressure port	A	B	C	D	E	F
Operating direction	Right	Left	Left	Right	Left	Right


* There are 9 possible reciprocating piping methods.

Pressure port	A	B	C	D	E	F	G	H
Operating direction	Right	Left	Left	Right	Right	Left	Left	Right

* There are 16 possible reciprocating piping methods.


Deflection of Piston Rod by Center Loading (Reference)

When center loading is added to the center of the housing



Model	Stroke Load (N)	Stroke	
		100	200
CXWL10	9.81	0.07	—
CXWL16	39.2	0.05	0.20
CXWL20	49	0.04	0.15
CXWL25	68.6	0.03	0.10
CXWL32	98.1	0.02	0.07

When center loading is added to the center of the plate



Model	Stroke Load (N)	Stroke			
		50	100	150	200
CXWL10	2.94	0.06	0.30	—	—
CXWL16	4.90	0.03	0.10	0.25	0.45
CXWL20	7.84	0.03	0.09	0.18	0.35
CXWL25	9.81	0.03	0.09	0.16	0.25
CXWL32	29.42	0.02	0.05	0.10	0.15

Note) The values denote the total width of the deflections in the upward/downward direction.

Model	L	øD	Model*
CXWL10	10	4	MS4-10
CXWL16	10	5	MS5-10
CXWL20	15	6	MS6-15
CXWL25	15	6	MS6-15
CXWL32	20	8	MS8-20

* Manufactured by Misumi Trading Ltd.

CX2

CXW

CXT

CXSJ

CXS

D-□


-X□

Individual
-X□


Series CXWL

Construction: $\varnothing 10$, $\varnothing 16$, $\varnothing 25$


CXWL10

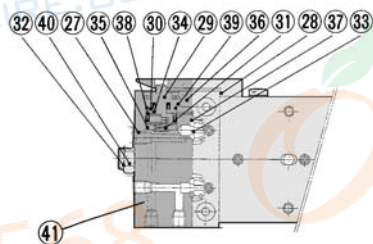


With end lock

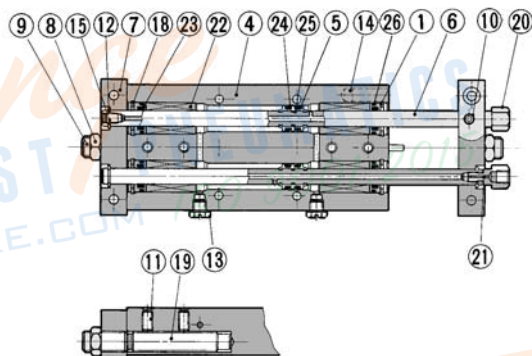


CXWL16

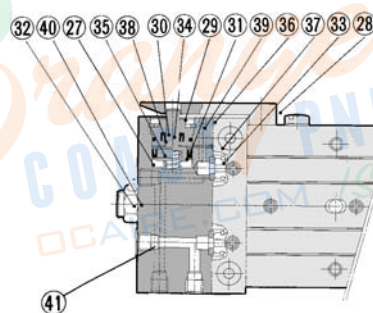


With end lock

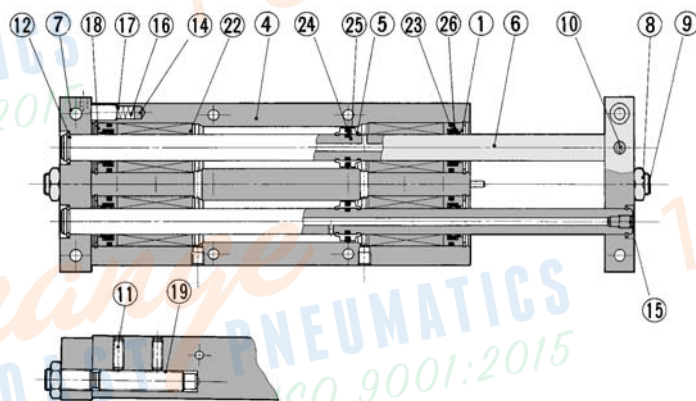

CXWL25

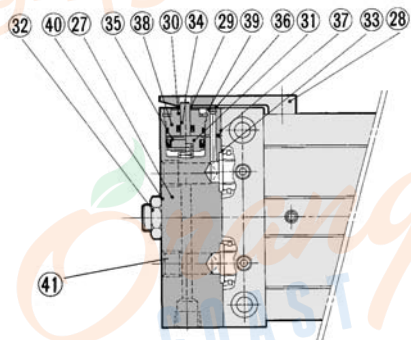

With end lock

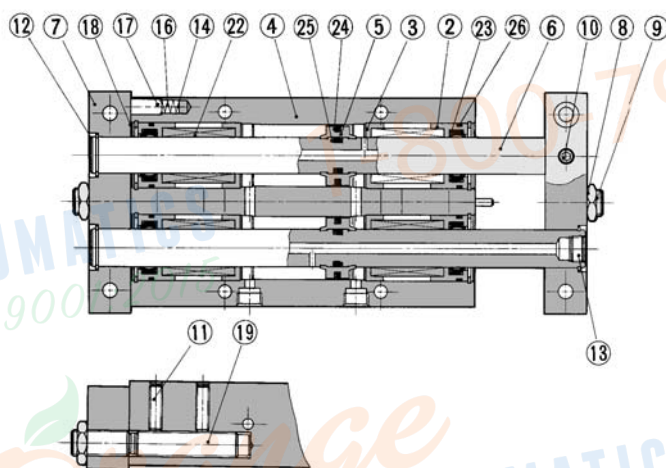

Construction: $\phi 10$, $\phi 16$, $\phi 25$

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Rod cover A	Aluminum alloy	Anodized
3	Rod cover B	Aluminum alloy	Anodized
4	Housing	Aluminum alloy	Hard anodized
5	Piston	Aluminum alloy	Chromated
6	Piston rod	High carbonate chrome bearing steel pipe	Quenched, Hard chrome plated
7	Plate	Aluminum alloy	Hard anodized
8	Lock nut	Carbon steel	Nickel plated
9	Adjusting bolt	Chromium steel	Nickel plated
10	Set screw (For fixing rods)	Chromium steel	Nickel plated
11	Set screw (For fixing shock absorbers)	Stainless steel	
12	Retaining ring	Carbon tool steel	Nickel plated
13	Plug	Brass	Nickel plated
14	Magnet	—	$\phi 5$
15	Set screw for seal	Chromium steel	Nickel plated
16	Spring	Stainless steel	
17	Type CR retaining ring	Carbon tool steel	
18	Round type R retaining ring	Carbon tool steel	Nickel plated
19	Shock absorber	—	(RB0805-X552 or RB1006-X552)
20	Socket	Brass	Electroless nickel plated
21	Gasket	NBR	
22	Ball bushing	—	
23	Rod seal	NBR	
24	Piston seal	NBR	
25	Piston gasket	NBR	
26	Cylinder tube gasket	NBR	

Replacement Parts: Seal Kit Cylinder Body

Model	Kit no.	Contents
CXWL10	CXWL10-PS	A set of 23, 24 and 26 listed above
CXWL16	CXWL16-PS	
CXWL25	CXWL25-PS	

- * Seal kit includes 23, 24 and 26. Order the seal kit with the part number for each model.
- * 25 is not replaceable.
- * Since the seal kit does not include a grease pack, order it separately.
Grease pack part no.: GR-S-010 (10 g)

Component Parts: With End Lock

No.	Description	Material	Note
27	Locking body	Aluminum alloy	Hard anodized
28	Lock finger	Alloy tool steel	Nickel plated after quenched
29	Lock piston	Carbon tool steel	Electroless nickel plated after quenched
30	Rod cover	Aluminum alloy	
31	Return spring	Spring steel	Zinc chromated
32	Adjusting bolt	Chromium steel	Nickel plated
33	Body gasket	NBR	
34	Rod seal	NBR	
35	Piston seal	NBR	
36	Steel ball	High carbon chrome bearing steel	
37	Steel ball	High carbon chrome bearing steel	
38	O-ring	NBR	
39	Round type R retaining ring	Carbon tool steel	Nickel plated
40	Lock nut	Carbon steel	Nickel plated
41	Plug	Chromium steel	Nickel plated

Replacement Parts: Seal Kit End Lock

Model	Kit no.	Contents
CXWL10	CXWL10R-PS	A set of 33, 34, 35 and 38 listed above
CXWL16	CXWL16R-PS	
CXWL25	CXWL25R-PS	

- * Seal kit includes 33, 34, 35 and 38. Order the seal kit with the part number for each model.
- * Since the seal kit does not include a grease pack, order it separately.
Grease pack part no.: GR-S-010 (10 g)

CX2

CXW

CXT

CXSJ

CXS

D-☐


-X☐

Individual
-X☐

Series CXWL


Construction: $\varnothing 20$, $\varnothing 32$

CXWL20

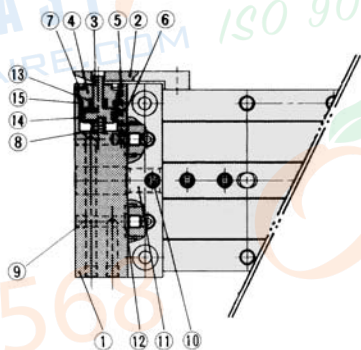

With end lock

CXWL32

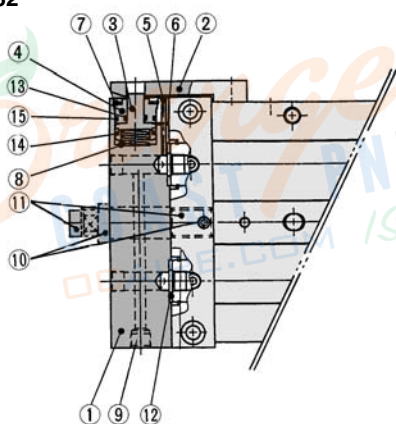

With end lock

Component Parts





No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Rod cover A	Aluminum alloy	Anodized
3	Rod cover B	Aluminum alloy	Anodized
4	Housing	Aluminum alloy	Hard anodized
5	Piston	Aluminum alloy	Chromated
6	Piston rod	High carbon chrome bearing steel	—
7	Plate	Aluminum alloy	Hard anodized
8	Adjusting bolt	Chromium steel	Nickel plated
9	Hex. socket head set screw	Chromium steel	Nickel plated
10	Hex. socket head set screw	Chromium steel	Nickel plated
11	Retaining ring	Tool steel	Nickel plated
12	Magnet	—	$\varnothing 5$
13	Spring	Stainless steel	—
14	Type CR retaining ring	Carbon tool steel	—
15	Round type R retaining ring	Carbon tool steel	Nickel plated
16	Ball bushing	—	—
17	Shock absorber	—	RB1006-X552 or RB1411-X552
18	Plug	Chromium steel	Nickel plated
19	Hex. socket head set screw	Stainless steel	—
21	Piston seal	NBR	—
22	Rod seal	NBR	—
23	Piston gasket	NBR	—
24	Cylinder tube gasket	NBR	—

Replacement Parts: Seal Kit Cylinder Body

Model	Kit no.	Contents
CXWL20	CXWL20-PS	A set of ②①, ②② and ②④ listed above
CXWL32	CXWL32-PS	

- * Seal kit includes ②①, ②② and ②④. Order the seal kit with the part number for each model.
- * ②③ is not replaceable.
- * Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

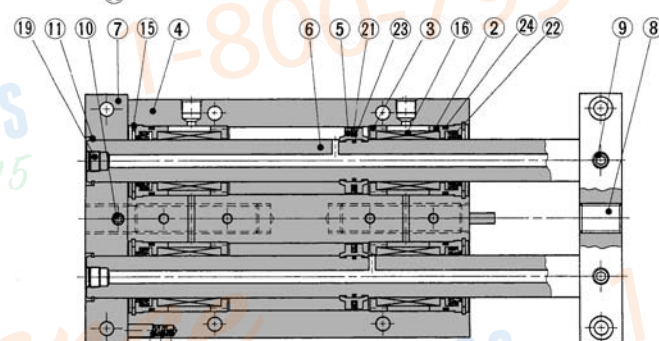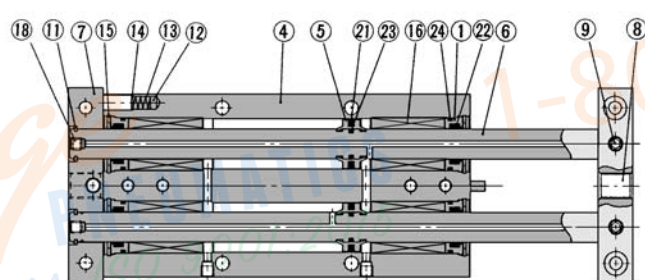

Component Parts: With End Lock

No.	Description	Material	Note
1	Locking body	Aluminum alloy	Hard anodized
2	Lock finger	Alloy tool steel	Nickel plating after quenched
3	Lock piston	Tool steel	Electroless nickel plated after quenched
4	Rod cover	Aluminum bearing alloy	—
5	Steel ball	High carbon chrome bearing steel	—
6	Steel ball	High carbon chrome bearing steel	—
7	Round type R retaining ring	Carbon tool steel	Nickel plated
8	Return spring	Spring steel	Zinc chromated
9	Plug	Chromium steel	Nickel plated
10	25, (50) to 200 ST (25) ST	Hexagon socket head set screw	Chromium steel
11	25, (50) to 200 ST (25) ST	Hexagon nut	Chromium steel
12	Body gasket	NBR	—
13	Rod seal	NBR	—
14	Piston seal	NBR	—
15	O-ring	NBR	—

Note) Figures in parentheses denote the case of CXWM32.

Replacement Parts: Seal Kit End Lock


Model	Kit no.	Contents
CXWL20	CXWL20R-PS	A set of ①②, ①③, ①④ and ①⑤ listed above
CXWL32	CXWL32R-PS	

- * Seal kit includes ①②, ①③, ①④ and ①⑤. Order the seal kit with the part number for each model.
- * Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

Slide Unit: Built-in Shock Absorber Ball Bushing Bearing Type **Series CXWL**

ø10 Basic Type: CXWL10-Stroke/25 to 100

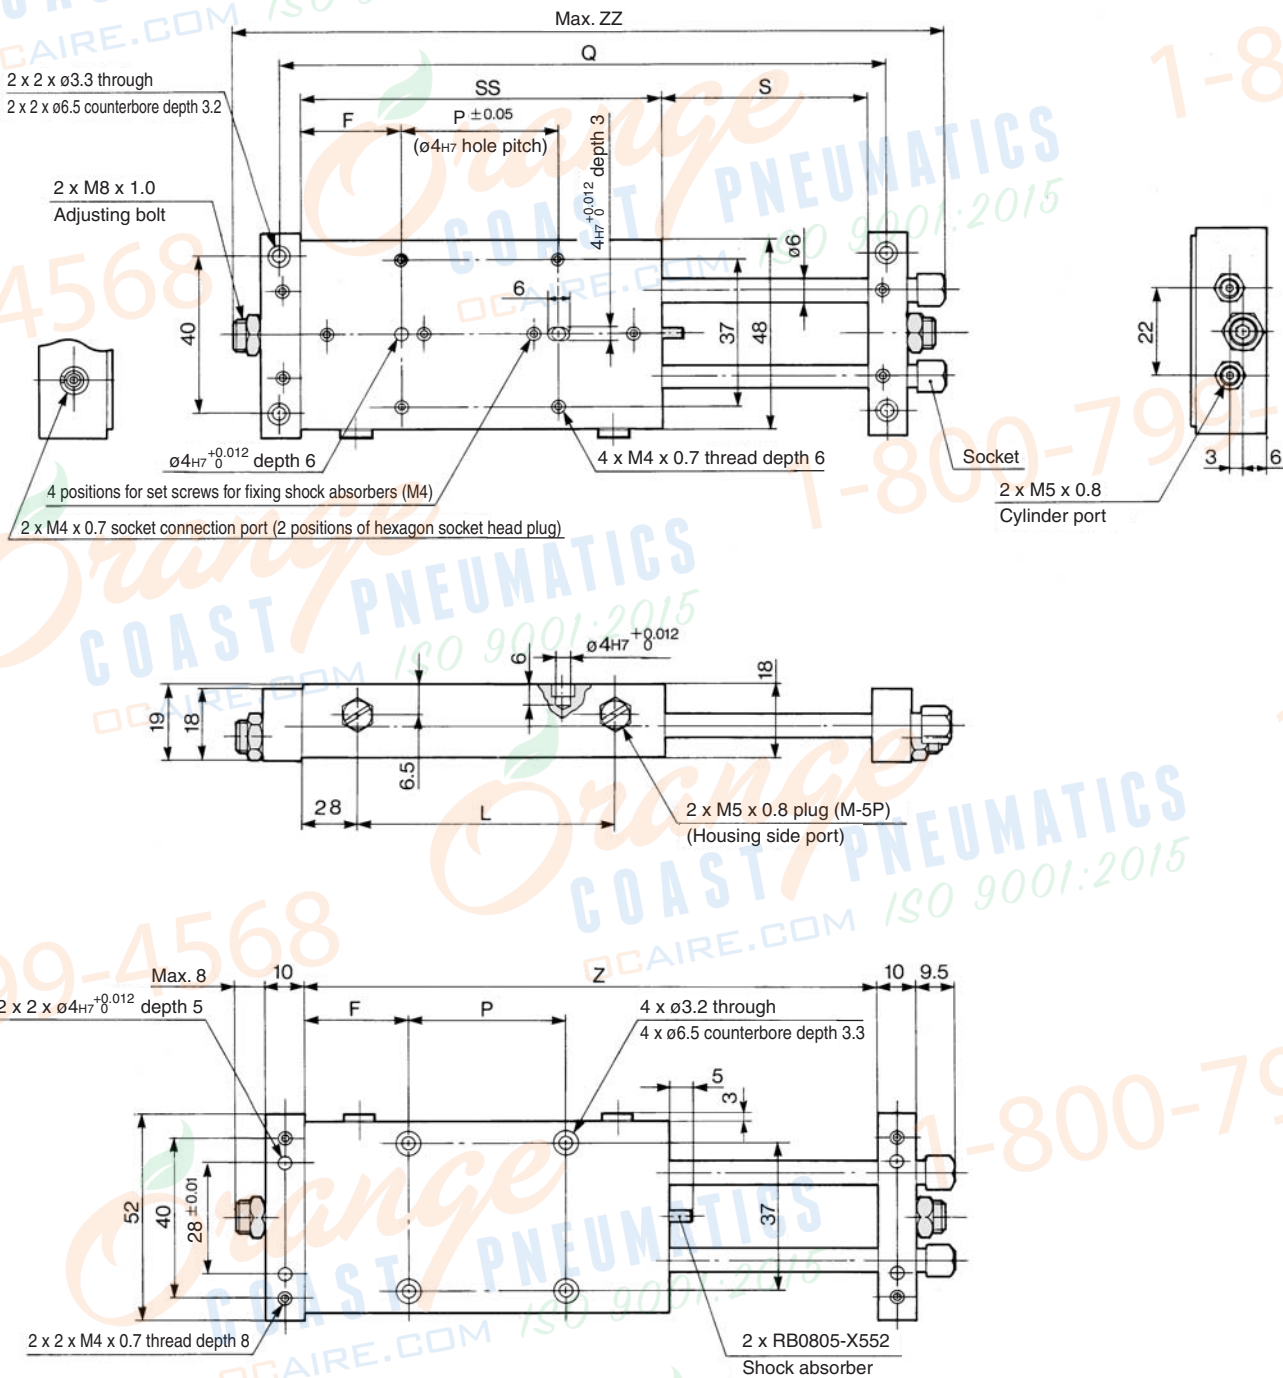

Model	F	L	P	Q	S	SS	Z	ZZ
CXWL10-25	35.5	45	30	138	27	101	128	165.5
CXWL10-50	38	70	50	188	52	126	178	215.5
CXWL10-75	40.5	95	70	238	77	151	228	265.5
CXWL10-100	43	120	90	288	102	176	278	315.5

CX2

CXW

CXT

CXSJ

CXS


D-□

-X□

Individual
-X□

Series CXWL

ø10 With End Lock: CXWL10-Stroke/25 to 100 R

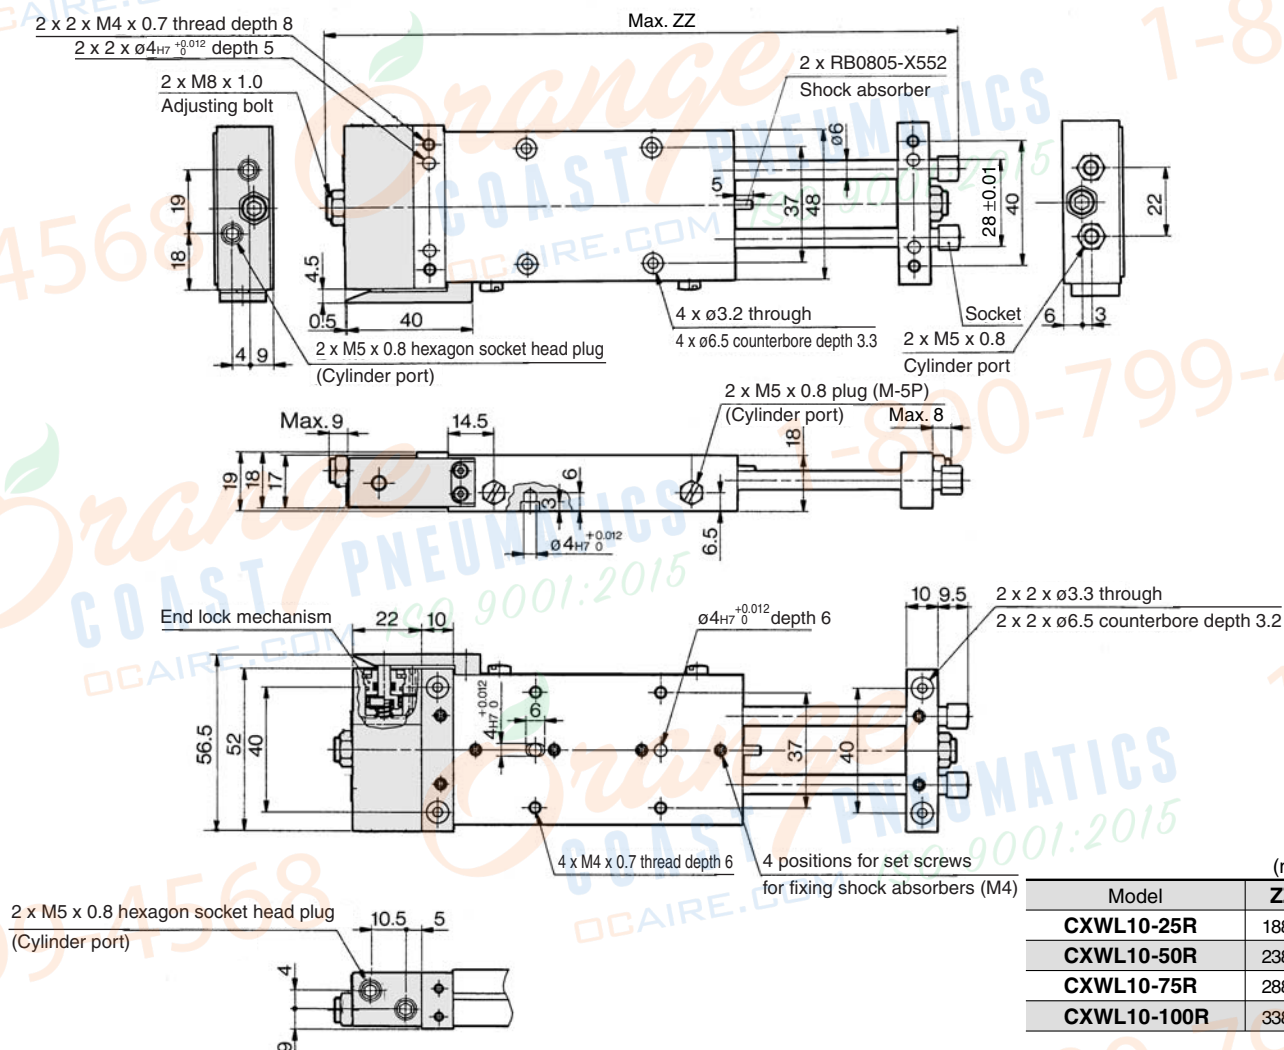

Housing mounting style with auto switch CDBXWL10-Stroke, CDBXWL10-Stroke R


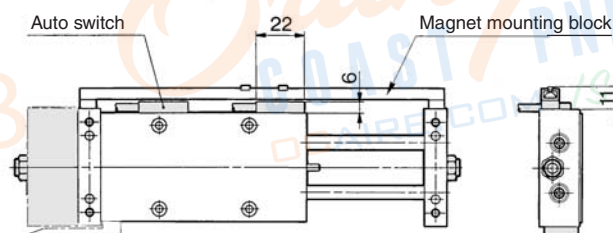


Plate mounting style with auto switch CDPXWL10-Stroke, CDPXWL10-Stroke R

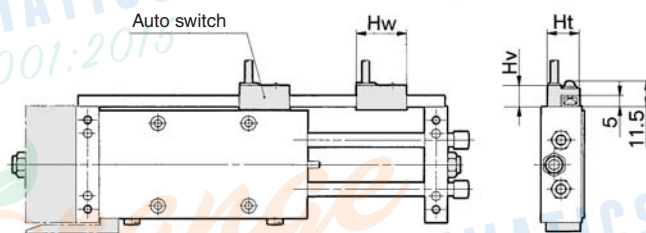

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For only 25 stroke, 2 magnets for auto switches are installed in the housing.




Note 1) The figure above is for D-E7□A/E80A.

Note 2) For only 25 stroke, 2 magnets for auto switches are equipped with the magnet mounting block.

Slide Unit: Built-in Shock Absorber Ball Bushing Bearing Type **Series CXWL**

ø16 Basic Type: CXWL16- Stroke/25 to 200

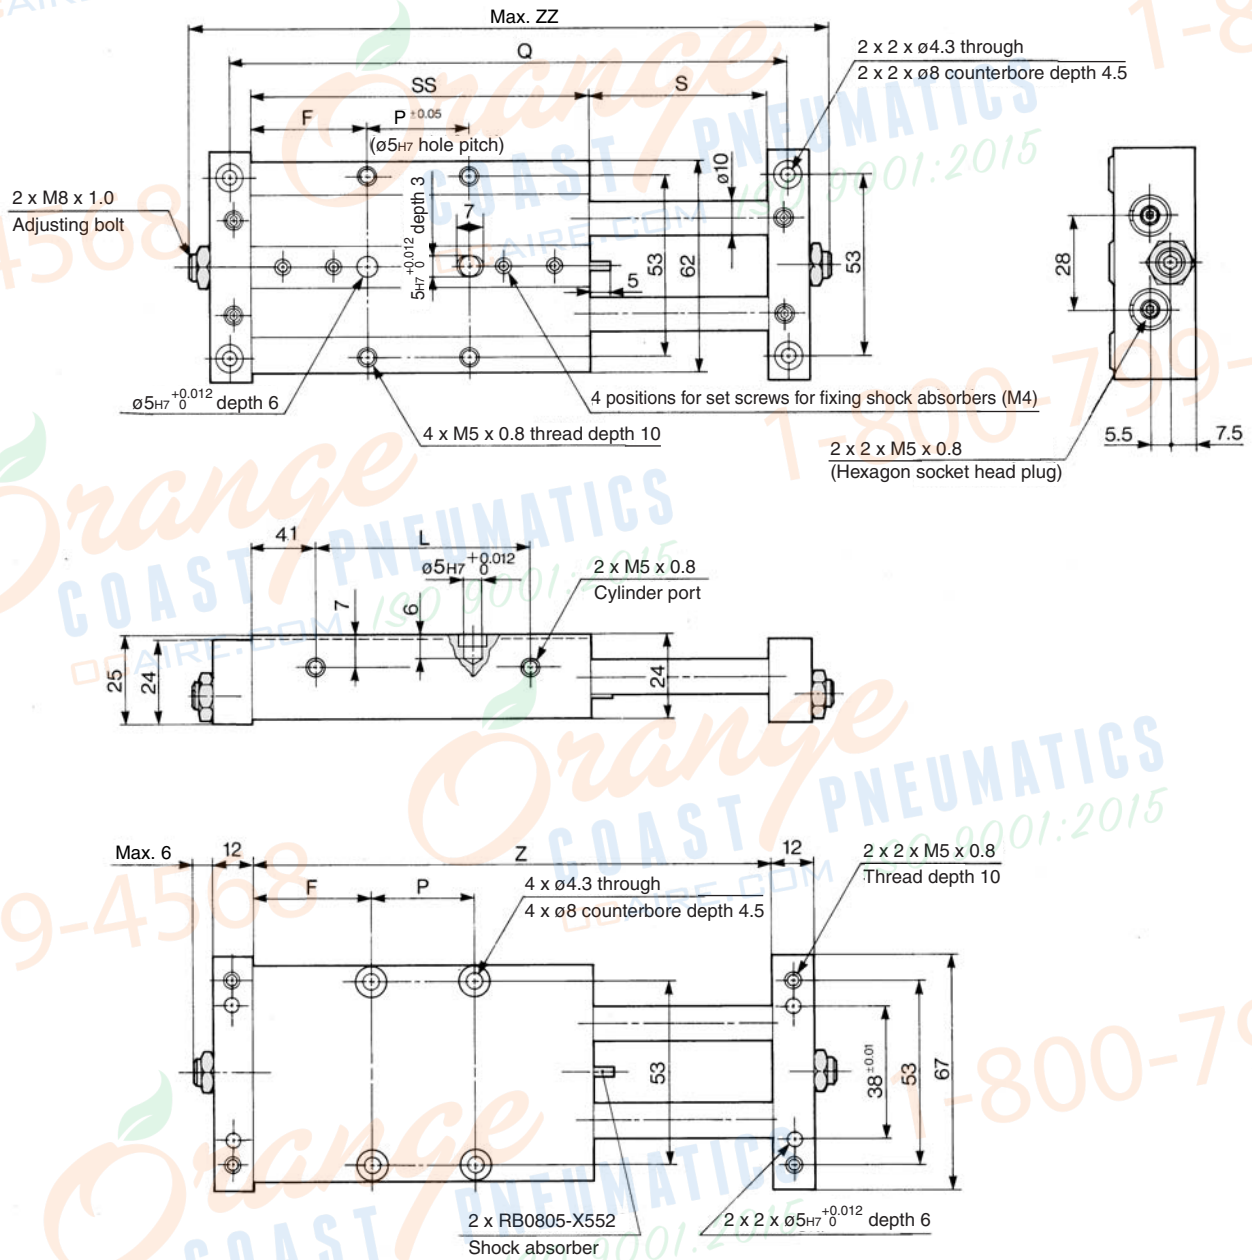

Model	F	L	P	Q	S	SS	Z	ZZ
CXWL16-25	34.5	39	52	160	27	121	148	184
CXWL16-50	47	64	52	210	52	146	198	234
CXWL16-75	53	89	65	260	77	171	248	284
CXWL16-100	53	114	90	310	102	196	298	334
CXWL16-125	65.5	139	90	360	127	221	348	384
CXWL16-150	78	164	90	410	152	246	398	434
CXWL16-175	90.5	189	90	460	177	271	448	484
CXWL16-200	103	214	90	510	202	296	498	534

CX2

CXW

CXT

CXSJ

CXS


D-□

-X□

Individual
-X□


Series CXWL

ø16 With End Lock: CXWL16-Stroke/25 to 200 R

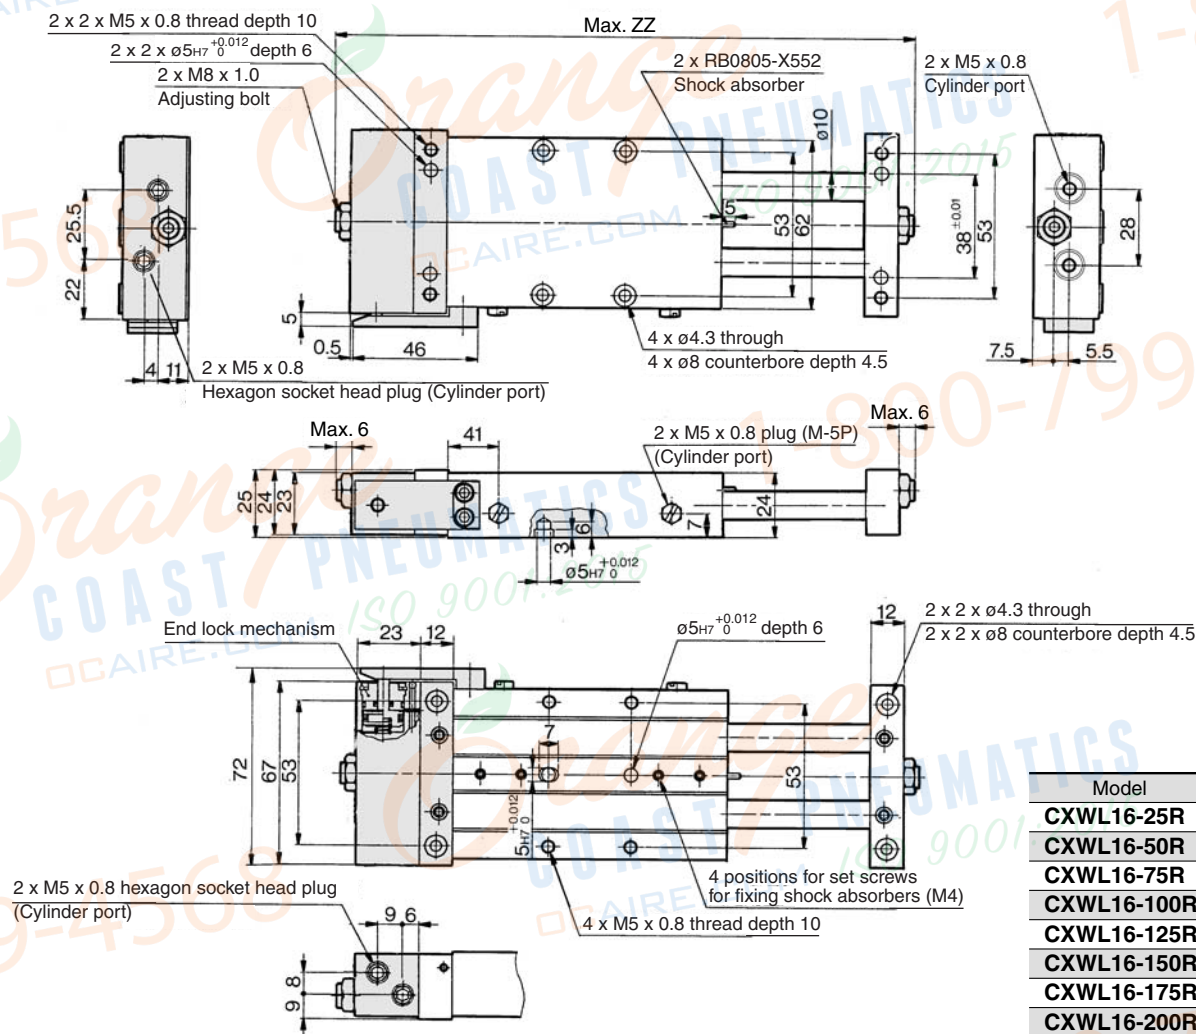

Model	ZZ (mm)
CXWL16-25R	207
CXWL16-50R	257
CXWL16-75R	307
CXWL16-100R	357
CXWL16-125R	407
CXWL16-150R	457
CXWL16-175R	507
CXWL16-200R	557

Housing mounting style with auto switch CDBXWL16-Stroke, CDBXWL16-Stroke R

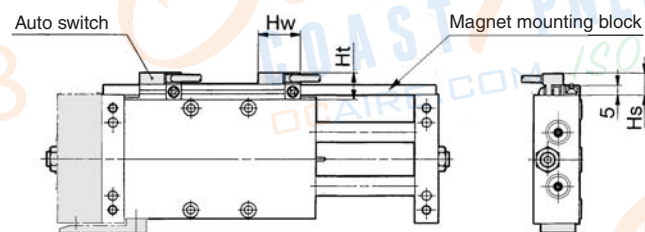


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For only 25 stroke, 2 magnets for auto switches are equipped with the magnet mounting block.

Plate mounting style with auto switch CDPXWL16-Stroke, CDPXWL16-Stroke R

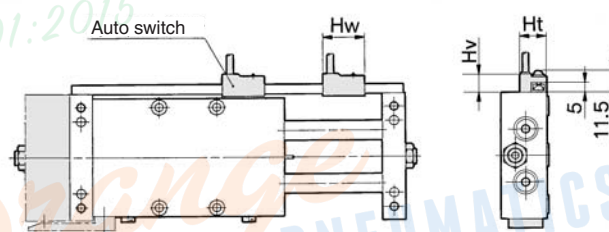

Note 1) The dimensions show D-A7 and D-A8. (mm)


Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For only 25 stroke, 2 magnets for auto switches are installed in the housing.

ø20 Basic Type: CXWL20-Stroke/25 to 200

509

ø20 With End Lock: CXWL20-Stroke/25 to 200 R




Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For 25 stroke, 2 magnets for auto switches are installed in the housing.

Slide Unit: Built-in Shock Absorber Ball Bushing Bearing Type **Series CXWL**

ø25 Basic Type: CXWL25- Stroke/25 to 200

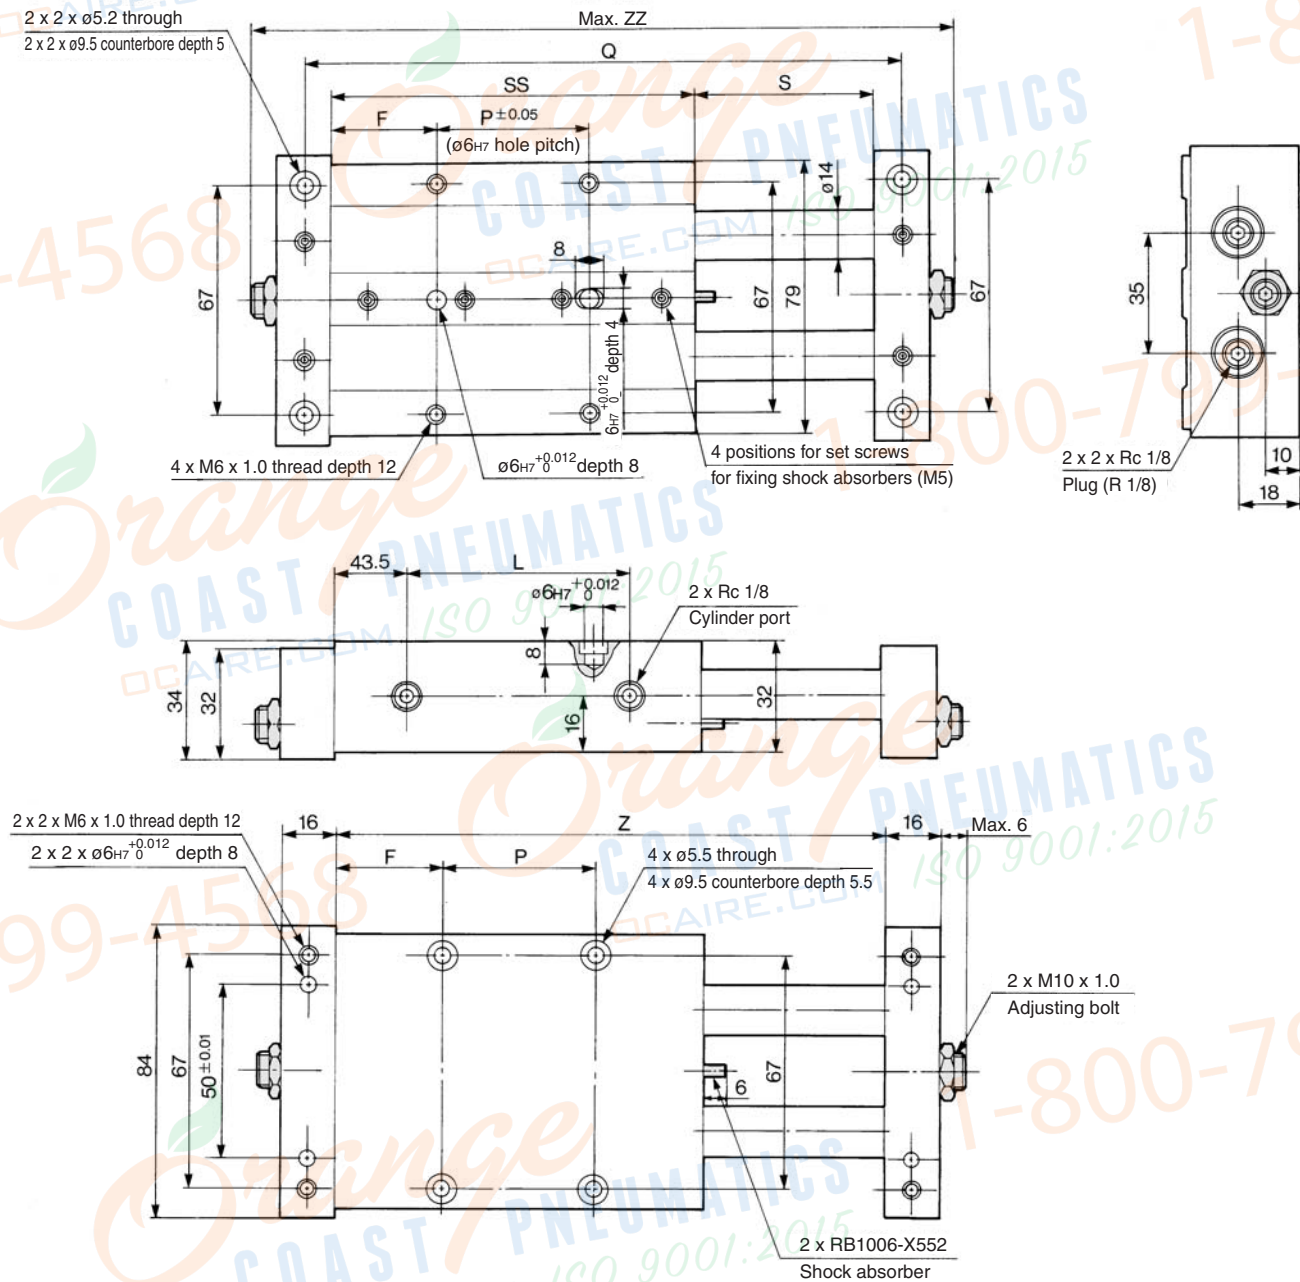

Model	F	L	P	Q	S	SS	Z	ZZ
CXWL25-25	31.5	41	65	171	27	128	155	199
CXWL25-50	31.5	66	90	221	52	153	205	249
CXWL25-75	56.5	91	65	271	77	178	255	299
CXWL25-100	56.5	116	90	321	102	203	305	349
CXWL25-125	69	141	90	371	127	228	355	399
CXWL25-150	81.5	166	90	421	152	253	405	449
CXWL25-175	94	191	90	471	177	278	455	499
CXWL25-200	106.5	216	90	521	202	303	505	549

CX2

CXW

CXT

CXSJ

CXS


D-□

-X□

Individual
-X□


Series CXWL

ø25 With End Lock: CXWL25-Stroke/25 to 200 R

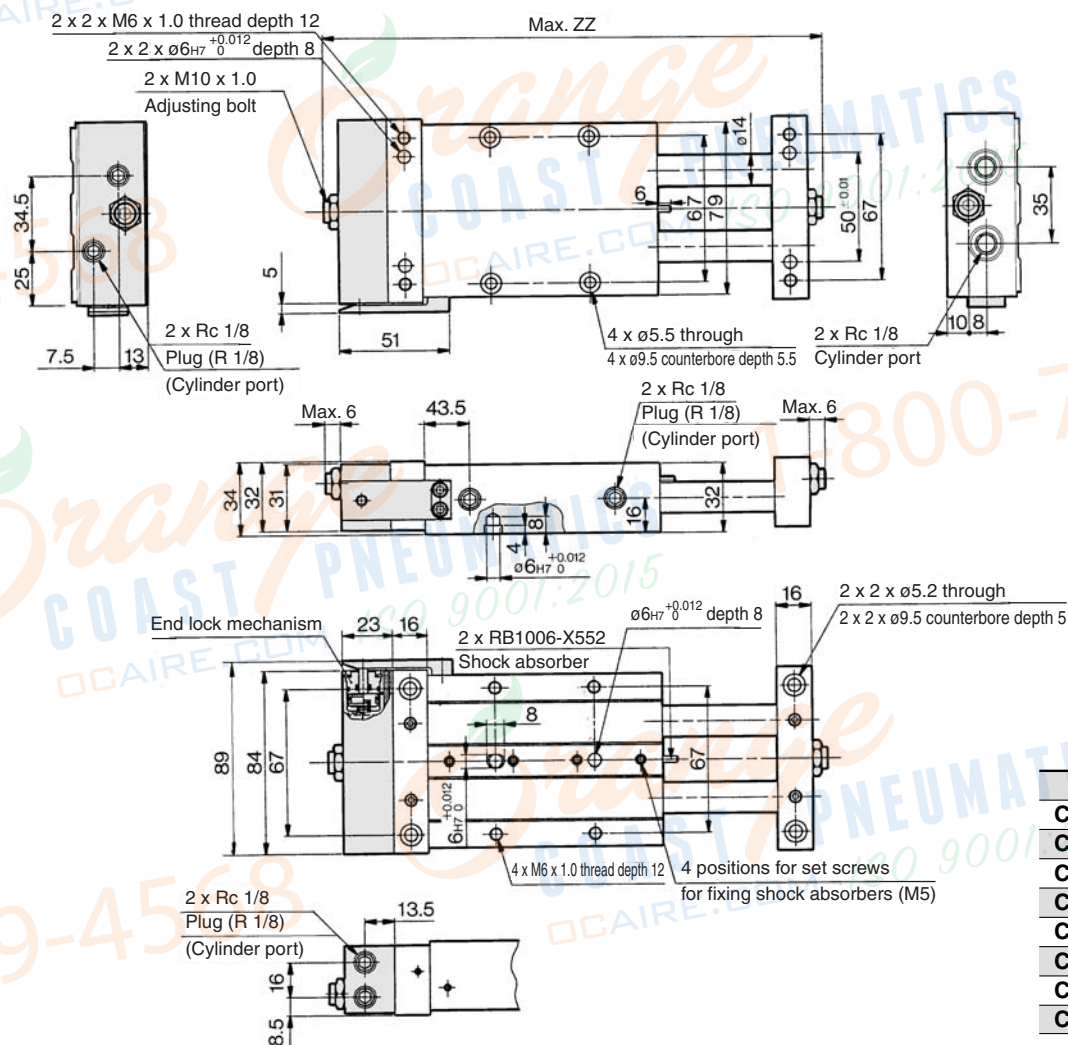

Model	ZZ (mm)
CXWL25-25R	222
CXWL25-50R	272
CXWL25-75R	322
CXWL25-100R	372
CXWL25-125R	422
CXWL25-150R	472
CXWL25-175R	522
CXWL25-200R	572

Housing mounting style with auto switch CDBXL25-Stroke, CDBXL25-Stroke R

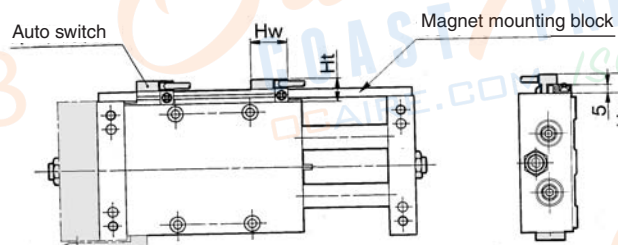


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For only 25 stroke, 2 magnets for auto switches are equipped to the magnet mounting block.

Plate mounting style with auto switch CDPXL25-Stroke, CDPXL25-Stroke R

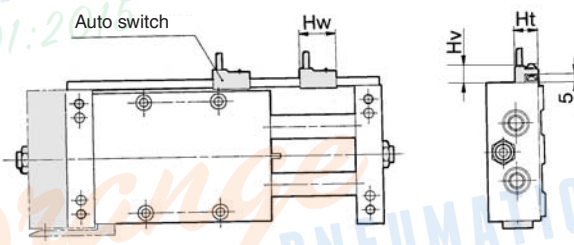


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For only 25 stroke, 2 magnets for auto switches are built into the housing.

Slide Unit: Built-in Shock Absorber
Ball Bushing Bearing Type **Series CXWL**

ø32 Basic Type: CXWL32- Stroke/50 to 200

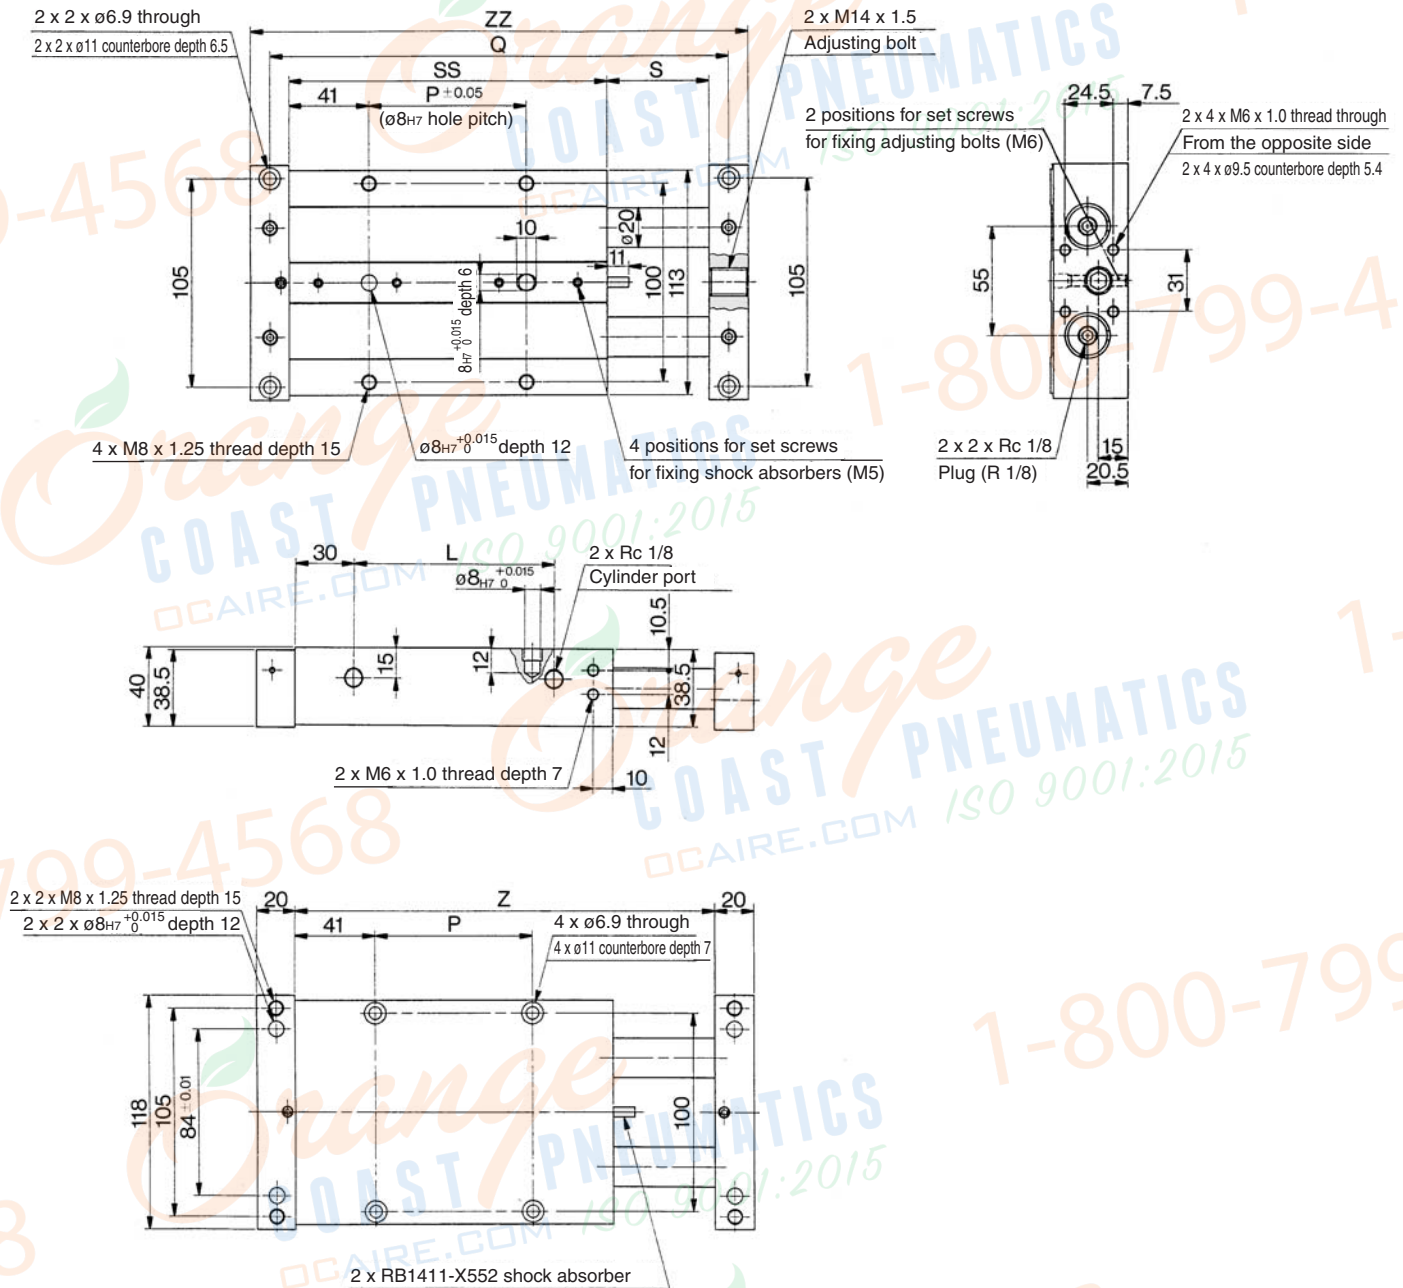


Model	L	P	Q	S	SS	Z	ZZ
CXWL32-50	102	80	234	52	162	214	254
CXWL32-75	127	105	284	77	187	264	304
CXWL32-100	152	130	334	102	212	314	354
CXWL32-125	177	155	384	127	237	364	404
CXWL32-150	202	180	434	152	262	414	454
CXWL32-175	227	205	484	177	287	464	504
CXWL32-200	252	230	534	202	312	514	554


ø32 Basic Type: CXWL32-25 stroke



ø32 With End Lock: CXWL32-Stroke/50 to 200 R

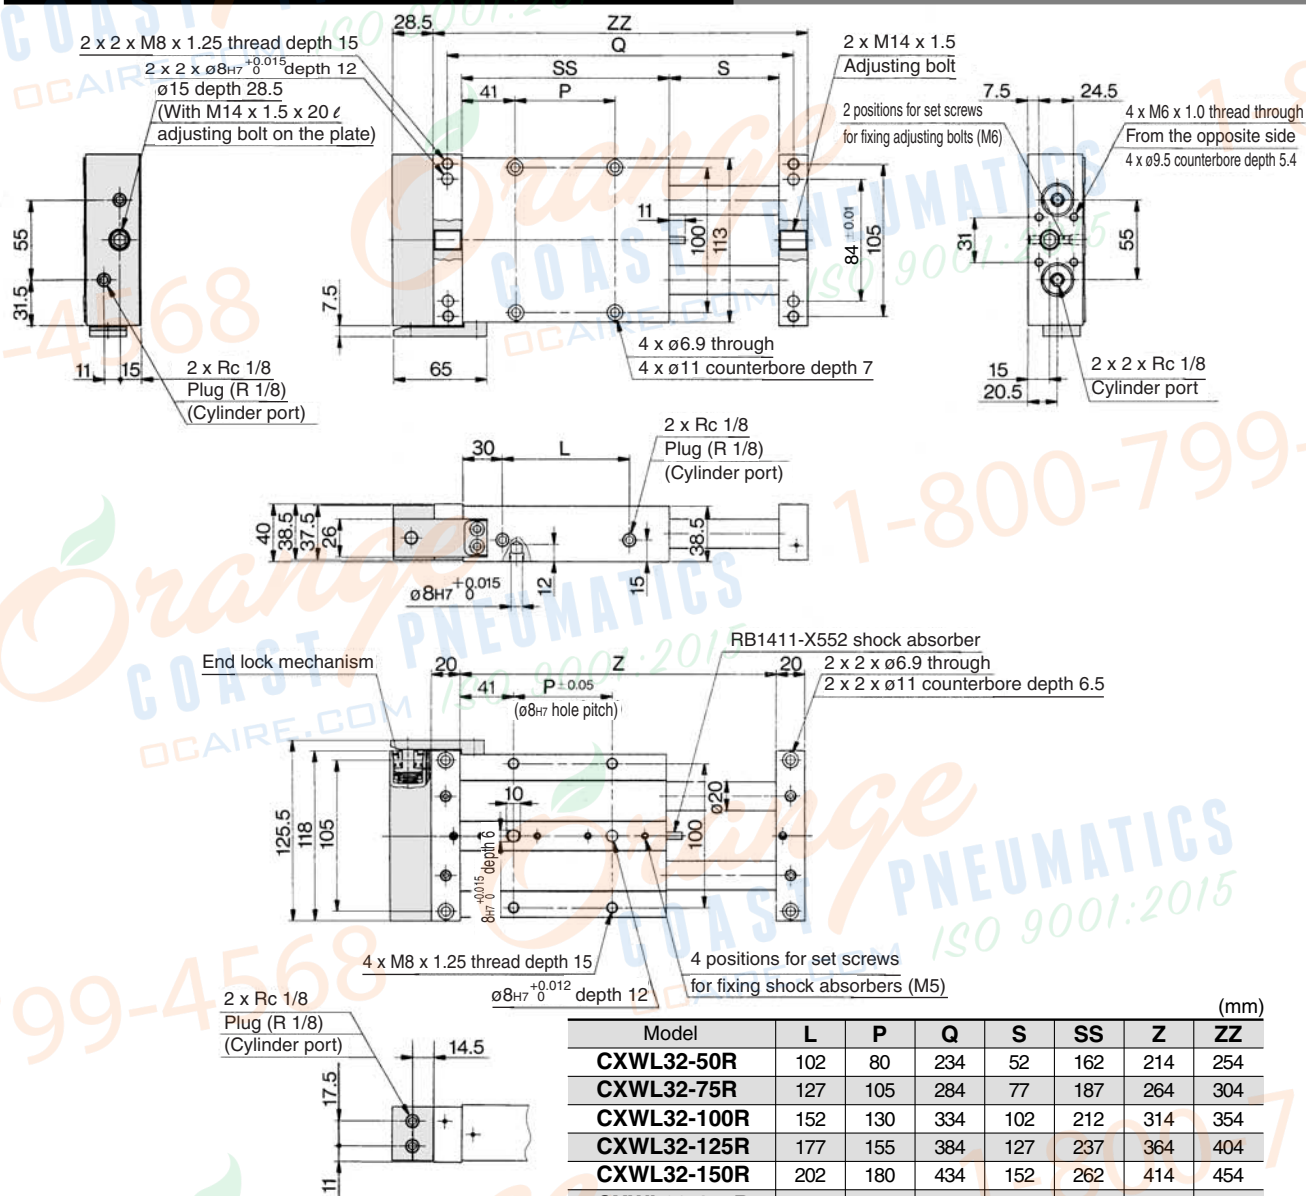

Housing mounting style with auto switch
CDBXWL32-Stroke , **CDBXWL32-Stroke R**

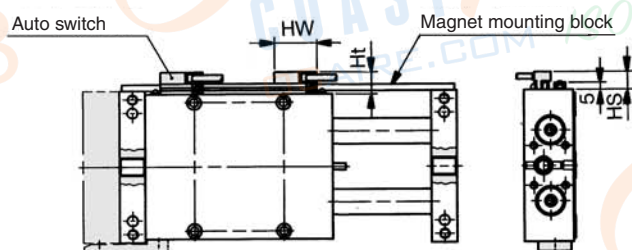


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 516.

Plate mounting style with auto switch

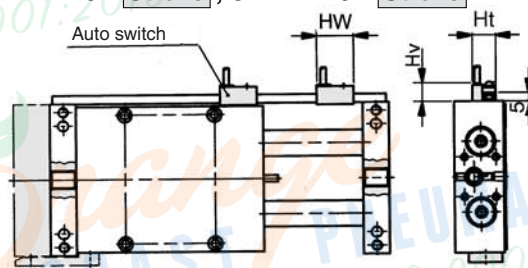

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) For 25 stroke, the shock absorber is mounted on a single side of the plate. For dimensions of 25 stroke, refer to page 516.

CX2**CXW**

CXT

CXSJ

CXS


D-☐ $-x \square$

Individual


☐ -X

Series CXWL

ø32 With End Lock: CXWL32-25 stroke R

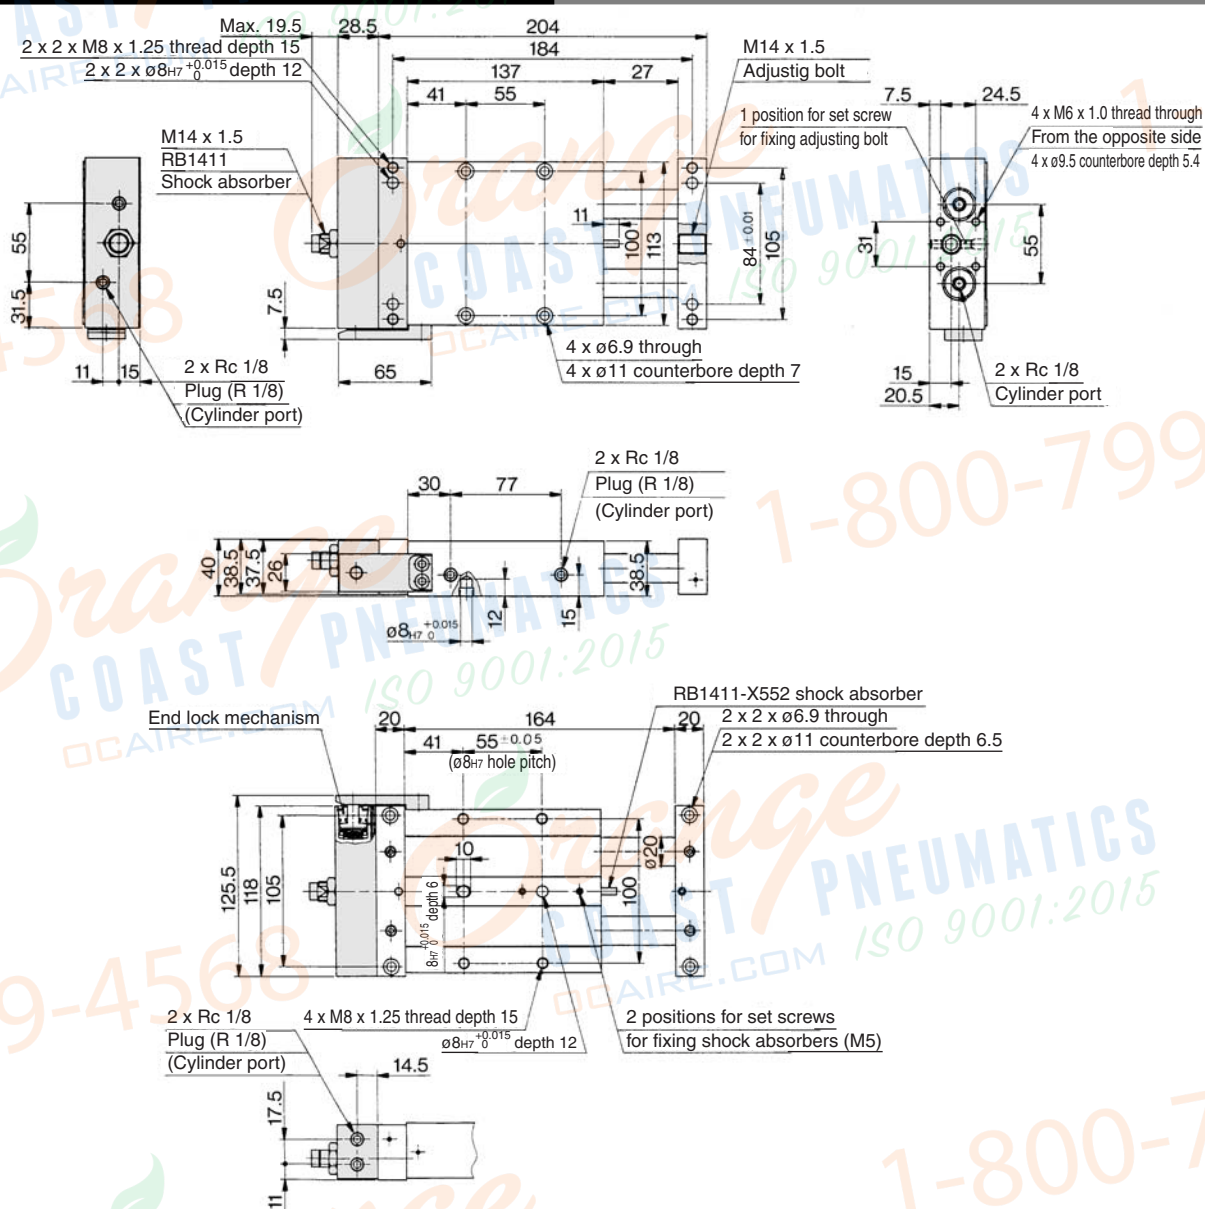

Housing mounting style with auto switch CDBXWL32-25, CDBXWL32-25R

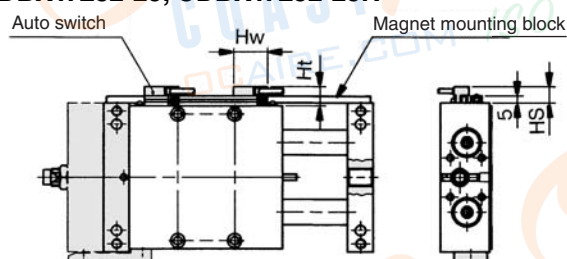


Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Hs	Ht
D-A7□, D-A80	23	12.5	15
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	12.5	15
D-A7□H, D-A80H	22	12.5	15
D-A73C, D-A80C	23	15	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	12.5	15
D-J79C	24	15	17.5
D-F7LF	30	12.5	15

Note 2) 2 magnets for auto switches are equipped to the magnet mounting block.

Plate mounting style with auto switch CDPXWL32-25, CDPXWL32-25R

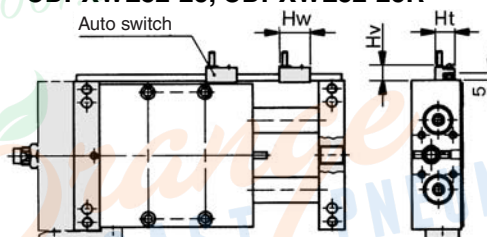

Note 1) The dimensions show D-A7 and D-A8. (mm)

Auto switch model	Hw	Ht	Hv
D-A7□, D-A80	23	15	10.5
D-F7□, D-J79, D-J79W, D-F7□W, D-F79F, D-F7BAL, D-F7NTL	23	15	10
D-A7□H, D-A80H	22	15	9
D-A73C, D-A80C	23	17.5	17.5
D-F7□V, D-F7□WV, D-F7BAV	23	15	14
D-J79C	24	17.5	16

Note 2) 2 magnets for auto switches are installed in the housing.

Operating Range

Auto switch model		(mm)				
		Applicable cylinder size				
D-A7□/A80 D-A7□H/A80H D-A73C/A80C	Housing mounting	—	6	6	6	6
	Plate mounting	6	—	—	—	—
	Housing mounting	6	—	—	—	—
D-F7□/J79 D-F7□V/J79C D-F7□W/F7□WV D-F7BAL/F7BAVL D-F79F/F7NTL	Housing mounting	—	4	2.5	3	3
	Plate mounting	3	3	—	—	2.5
	Housing mounting	—	—	—	—	—

* Since this is a guideline including hysteresis, not meant to be guaranteed.
(Assuming approximately $\pm 30\%$ dispersion)
There may be the case it will vary substantially depending on an ambient environment.

Other than the applicable auto switches listed in “How to Order”, the following auto switches can be mounted.
For detailed specifications, refer to pages 1719 to 1827.

Auto switch type	Model	Electrical entry (Fetching direction)	Features	Applicable cylinder size	
				Housing mounting	Plate mounting
Solid state	D-F7NTL	Grommet (In-line)	With timer	ø16, ø20 ø25, ø32	ø10, ø16 ø20, ø25 ø32

* With pre-wire connector is available for D-F7NTL type, too. For details, refer to pages 1784 and 1785.
* It is impossible to mount solid state auto switches to the housing mounting ø10.

CX2

CXW

CXT

CXSJ

CXS

D-□

-X□

Individual
-X□



Series CXW Specific Product Precautions 1

Be sure to read before handling. Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

⚠ Warning

1. Take precautions to prevent your fingers or hands from getting caught between the plate and the housing.
 - Take sufficient care to avoid getting your hands or fingers caught when the cylinder is operated.

⚠ Caution

1. Make sure that the cylinder mounting surface is flat (a flatness of 0.05 or less {reference value}). If it is not flat, it could lead to malfunction.
2. Make sure not to scratch or gouge the cylinder mounting surface.

Be aware that if the flatness of the housing mounting surface or the mounting surface of the plates on both sides is affected, it could lead to a malfunction.
3. Be careful not to twist the two piston rods.


If the piston rods are twisted or bent when mounting the housing, the operating resistance could become abnormally high or the bearings could wear prematurely, leading to reduced accuracy or air leakage.
4. Consider reinforcing the plates.

When the cylinder is mounted on the housing, and the plates are used for high-speed operation or used as a pusher, use a connector plate to bridge both plates. Failure to do so could cause the snap ring to become detached or the set screws to shift, causing the plates to fall off.

Recommended Pneumatic Circuit

⚠ Caution

1. This is necessary for the proper operation and release of the lock for cylinders with an end lock.

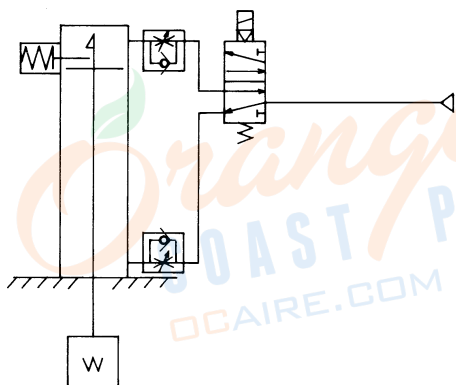

Precautions for Handling the End Lock Mechanism

⚠ Caution

1. Do not use 3 position solenoid valves.

Avoid using this cylinder in combination with a 3 position solenoid valve (particularly the closed center metal seal type). If air pressure becomes sealed inside the port of the side that contains the lock mechanism, the lock will not engage. Even if the lock is engaged at first, the air that leaks from the solenoid valve could enter the cylinder and cause the lock to disengage as time elapses.
2. Back pressure is required to release the end lock.

Be sure that air is supplied to the cylinder side without the locking mechanism (For cylinders with a double lock, the side with an unlocked piston rod) before starting operating, as shown in the drawing on the left. The lock may not be released. (Refer to the section on releasing the lock.)
3. Disengage the lock before installing or adjusting the cylinder.

The lock could become damaged if the cylinder is installed with its lock engaged.
4. Operate with a load ratio of 50% or less.

If the load ratio exceeds 50%, this may cause problems such as failure of the lock to release, or damage to the lock unit.
5. Do not operate multiple cylinders in synchronization.

Avoid applications in which two or more end lock cylinders are synchronized to move one workpiece, as one of the cylinder locks may not be able to release when required.
6. Use a speed controller with meter-out control.

Lock cannot be released occasionally by meter-in control.
7. Adjust the stroke within the range of the slotted hole of the lock finger.

As the hole for mounting the lock finger is slotted, the lock finger may be adjusted and mounted in accordance with the adjustment amount of the adjusting bolt. The adjustment amount of the adjusting bolt is ± 2 mm (± 1 mm for each side).
8. Regarding manual disengagement
Insert a Phillips screwdriver through the lock finger hole to push the lock piston down and slide it in the unlocking direction. When doing so, take precautions to prevent your fingers or hands from getting caught between the housing plate and the lock.

Operating Pressure

⚠ Caution

1. Apply a pressure more than the minimum operating pressure to the port on the side where the locking mechanism activates. The pressure is necessary to release the lock.

Releasing the Lock

⚠ Warning

1. Before releasing the lock, be sure to supply air to the side without the lock mechanism, so that there is no load applied to the lock mechanism when it is released. (Refer to the recommended pneumatic circuit.) If the lock is released when the port on the other side is in an exhaust state, and with a load applied to the lock unit, the lock unit may be subjected to an excessive force and be damaged. Furthermore, sudden movement of the piston rod is extremely dangerous.



Series CXW Specific Product Precautions 2

Be sure to read before handling. Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Handling on Shock Absorber

⚠ Caution

1. Use caution not to be exposed to cutting oil, water, or dust, etc.

The RB series cannot be used under conditions in which fluids such as cutting oil or water are present in atomized form or come in direct contact with the piston rod, or in which dust could adhere to the piston rod. Such conditions would cause malfunction.

2. Do not operate the shock absorber in an environment that poses the risk of corrosion.

The shock absorber could rust if used in an environment that poses the risk of corrosion.

Refer to the respective construction for type of material that is used in the shock absorber.

3. Abide by the table below for the tightening torque for a mounting nut.

Shock absorber model	RB0805	RB1006	RB1411
Applicable slide unit	CXWM ₁₈ ¹⁰ -25	CXWM ₂₅ ²⁰ -25	CXWM32-25, 50 CXWL32-25
Thread O.D. (mm)	M8 x 1.0	M10 x 1.0	M14 x 1.5
Thread prepared hole size (mm)	ø7.1 ^{+0.1} ₀	ø9.1 ^{+0.1} ₀	ø12.7 ^{+0.1} ₀
Tightening torque (N·m)	1.67	3.14	10.8

4. Do not scratch the sliding portion of the piston rod or the outside threads of the outer tube.

Do not scratch or gouge the sliding portion of the piston rod or the outside threads of the outer tube by striking it with an object, squeezing it, or by forcefully wedging a set screw in it. Failure to observe this precaution could damage the seals, which could lead to oil leakage and malfunction. Furthermore, scratches or gouges on the outside threads of the outer tube could prevent the shock absorber from being mounted onto the frame, or its internal components could deform, leading to a malfunction.

5. Never turn the screw on the bottom of the body.

(This is not an adjusting screw.)

Turning it could cause oil leakage.



6. Check the mounting nut is not loosen.

The shock absorber could become damaged if it is used in a loose state.

7. Pay attention to any abnormal impact sounds or vibrations.

If the impact sounds or vibrations have become abnormally high, the shock absorber may have reached the end of its service life. If this is the case, replace the shock absorber.

If use is continued in this state, it could damage the equipment to which the shock absorber is mounted.

8. Refer to the Instruction Manual for how to replace the built-in shock absorber for the CXW series.

Service Life and Replacement Period of Shock Absorber

⚠ Caution

1. Allowable operating cycle under the specifications set in this catalog is shown below.

1.2 million cycles RB08□□

2 million cycles RB10□□ to RB2725

Note) Specified service life (suitable replacement period) is the value at room temperature (20 to 25°C). The period may vary depending on the temperature and other conditions. In some cases the absorber may need to be replaced before the allowable operating cycle above.

Auto Switch Selection for the Adjustable Stroke Type (-X138)

⚠ Caution

1. When 50 stroke is adjusted to 40 stroke or less with the adjustable stroke type (-X138), auto switches may not be able to be mounted properly since they interfere with each other if the 2 in-line entry auto switches are used.

When strokes are adjusted to 40 stroke or less, select the perpendicular entry type or additionally select auto switches with 2 built-in magnets (-X169).

CX2

CXW

CXT

CXSJ

CXS

D-□

-X□

Individual
-X□