


Electric Actuator/Rod Type


INFORMATION

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

Enclosure: IP65 equivalent/IP67 equivalent

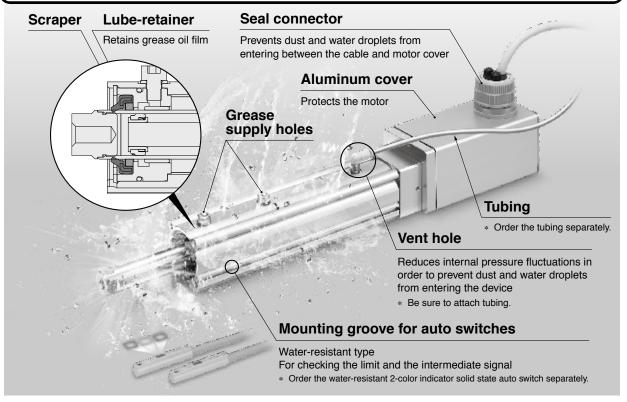

■ Max. stroke: 500 mm*1

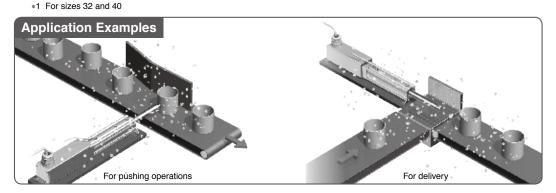

LEY-X7 Series

Electric Actuator/Rod Type

LEY-X7 Series Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

Model Selection



30

20

10

100

200


Speed-Work Load Graph (Guide)

For Step Motor (Servo/24 VDC) LECP6, LECP1, LECPMJ, JXC□1



Refer to page 2 for the LECPA, JXC \square_3^2 and page 3 for the LECA6.

Horizontal **LEY25**□-X7 for acceleration/deceleration: 2000 mm/s² Lead 3: LEY25C 70 Horizontal work load [kg] 60 55 50 Lead 6: LEY25B 40 30 20 Lead 12: LEY25A 10 0 100 400 600




Lead 16: LEY32A


300


400


500

600











Speed-Work Load Graph (Guide) For Step Motor (Servo/24 VDC) LECPA, JXC□²₃

Refer to page 1 for the LECP6, LECP1, LECPMJ, JXC□1 and page 3 for the LECA6.


Horizontal



LEY32□-X7 for acceleration/deceleration: 2000 mm/s²




LEY40□-X7




Vertical


LEY25□-X7



LEY32□-X7




LEY40□-X7




Speed-Work Load Graph (Guide) For Servo Motor (24 VDC) LECA6

Refer to page 1 for the LECP6, LECP1, LECPMJ, JXC□1 and page 2 for the LECPA, JXC□3.

Horizontal



Vertical



UNIT CONVERSIONS


	unit	conversion	result		unit	conversion	result
length	m	x 3.28	ft	pressure	MPa	x 145	psi
	mm	x 0.04	in		kPa	÷ 6.895	psi
mass	g	x 0.04	OZ	temperature	°C	x1.8 then add 32	°F
volume	cm ³	÷ 16.387	in ³	torque	N·m	x 0.738	ft-lb
	L	x 61.024	in ³	force	Ν	÷ 4.448	lbf
speed	mm/s	÷ 25.4	in/s	flow	L/min	÷ 28.317	cfm

Step Motor (Servo/24 VDC) Servo Motor (24 VDC) Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

Force Conversion Graph


Step Motor (Servo/24 VDC)

LEY25□-X7




Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	65 or less	100	_

LEY32□-X7



	Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
	25°C or less	85 or less	100	_
	40°C	65 or less	100	_
1	40°C	85	50	15


LEY40□-X7



Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	65 or less	100	_

Servo Motor (24 VDC)

LEY25□A-X7



Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less 95 or less		100	_

<Limit Values for Pushing Force and Trigger Level in Relation to Pushing Speed> Without Load

Model	Lead	Pushing speed [mm/s]	Pushing force (Setting input value)	Model	Lead	Pushing speed [mm/s]	Pushing force (Setting input value)
LEY25	A/B/C	21 to 35	50 to 65%	LEY25□A	A/B/C	21 to 35	80 to 95%
LEY32	Α	24 to 30	60 to 85%				
LE 132	B/C	21 to 30	60 10 85%				
LEY40	Α	24 to 30	50 to 65%				
LE 140	B/C	21 to 30	30 10 03%				

There is a limit to the pushing force in relation to the pushing speed. If the product is operated outside of the range (low pushing force), the completion signal [INP] may be output before the pushing operation has been completed (during the moving operation).

If operating with the pushing speed below the min. speed, please check for operating problems before using the product.


<Set Values for Vertical Upward Transfer Pushing Operations>

For vertical loads (upward), set the pushing force to the max. value shown below and operate at the work load or less.


Model	LE	EY25		LE	EY32		LE	EY40		LE	Y25 [□A
Lead	Α	В	С	Α	В	С	Α	В	С	Α	В	С
Work load [kg]	2.5	5	10	4.5	9	18	7	14	28	1.2	2.5	5
Pushing force	65%		85%		65%			95%				

*1 Set values for the controller.

Graph of Allowable Lateral Load on the Rod End (Guide)




[Stroke] = [Product stroke] + [Distance from the rod end to the center of gravity of the workpiece]




Rod Displacement: δ [mm]

Stroke	30	50	100	150	200	250	300	350	400	450	500
25	±0.3	±0.4	±0.7	±0.7	±0.9	±1.1	±1.3	±1.5	±1.7	_	_
32/40	±0.3	±0.4	±0.7	±0.6	±0.8	±1.0	±1.1	±1.3	±1.5	±1.7	±1.8



Non-rotating Accuracy of Rod




Size	Non-rotating accuracy θ
25	±0.8°
32/40	±0.7°
0 _, . 0	

* Avoid using the electric actuator in such a way that rotational torque would be applied to the piston rod.

This may cause the deformation of the non-rotating guide, abnormal auto switch responses, play in the internal guide, or an increase in the sliding resistance.

LEY-X7 Series Enclosure

Degrees of Protection



First I	First Digit: Degree of protection against solid foreign objects							
0	Not protected							
1	Protected against solid foreign objects of 50 mmø and larger							
2	Protected against solid foreign objects of 12 mmø and larger							
3	Protected against solid foreign objects of 2.5 mmø and larger							
4	Protected against solid foreign objects of 1.0 mmø and larger							
5	Dust protected							
6	Dust-tight							

Secor	Second Digit: Degree of protection against water									
0	Not protected	_								
1	Protected against vertically falling water droplets	Dripproof type 1								
2	Protected against vertically falling water droplets when enclosure is tilted up to 15°	Dripproof type 2								
3	Protected against rainfall when enclosure is tilted up to 60°	Rainproof type								
4	Protected against splashing water	Splashproof type								
5	Protected against water jets	Water-jet- proof type								
6	Protected against powerful water jets	Powerful water- jet-proof type								
7	Protected against the effects of temporary immersion in water	Immersible type								
8	Protected against the effects of continuous immersion in water type									

Example) Degrees of protection

D	egrees of prote	ection	Details
IP65	Solid foreign objects	Dust-tight	Dust particles are prevented from entering the device.
IPOS	Entry of Water-jet- water proof*1		The direct application of water jets to the device from any direction will not cause any damage.
	Solid foreign objects	Dust-tight	Dust particles are prevented from entering the device.
IP67	Entry of water	Immersible*1	The amount of water that enters the device when the actuator (in the stopped state) is submersed in up to 1 m of water for up to 30 mins will not cause any damage.

^{*1} Be sure to take appropriate protective measures if the product is to be used in an environment where it will be constantly exposed to water or fluids other than water splash. In particular, the product cannot be used in environments where oils, such as cutting oil or cutting fluid, are present.




Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent) Electric Actuator/Rod Type (€ ROHS)

LEY-X7 (Made to Order) Series LEY25, 32, 40

Refer to pages 1 to 5 for model selection.

How to Order

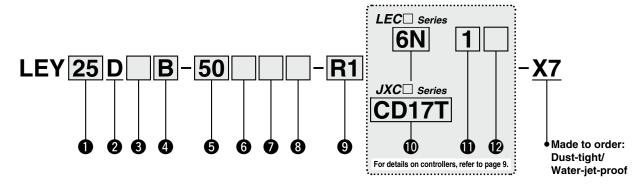

1 Size	
25	
32/40	

2 Mot	or mounting position
D	In-line

3 Motor type

Symbol	Timo	Si	ze	Compatible controller/		
Symbol	Туре	25	32/40	dri	ver	
Nil	Step motor (Servo/24 VDC)	•	•	LECP6 LECP1 LECPA LECPMJ	JXCE1 JXC91 JXCP1 JXCD1 JXCL1	
A	Servo motor (24 VDC)	•	_	LEC	CA6	

4 Lead [mm]

Symbol	LEY25	LEY32/40
Α	12	16
В	6	8
С	3	4

5 Stroke [mm]

30	30
to	to
500	500

^{*} For details, refer to the applicable stroke table

6 Motor option

Nil	Without option
В	With lock

7 Rod end thread

Nil	Rod end female thread
М	Rod end male thread (1 rod end nut is included.)

8 Mounting*2

<u> </u>							
Symbol	Type	Motor mounting position					
Symbol	туре	In-line					
Nil	Ends tapped/ Body bottom tapped*3	•					
F	Rod flange*3	•					

Actuator cable type/length

Robotic	cable		[m]
R1	1.5	RA	10* ⁵
R3	3	RB	15* ⁵
R5	5	RC	20*5
DΩ	Q *5		

Applicable Stroke Table*1

	Applicable Stroke Table Standard													
	Stroke	30	20	50	100	150	200	250	300	350	400	400 450	500	Manufacturable
	Model [mm]	30	30	100	130	200	230	300	330	400	430	300	stroke range	
LEY25		•	•	•	•	•	•	•	•	•	_	_	15 to 400	
LEY32/40		•	•	•	•	•	•	•	•	•	•	•	20 to 500	


^{*} For auto switches, refer to page 14.

[&]quot;-X7" is not added to an actuator model with a controller/driver part number suffix. Example) "LEY25DB-100" for the LEY25DB-100BMU-P16NID-X7



Step Motor (Servo/24 VDC) Servo Motor (24 VDC) Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

Series (For details, refer to page 9.



Controller/Driver type*6

Nil	Without controller/driver				
6N	LECP6/LECA6	NPN			
6P	(Step data input type)	PNP			
1N	LECP1*7				
1P	(Programless type)	PNP			
MJ	LECPMJ*7 *8 (CC-Link direct input type)	_			
AN	LECPA*7 *9	NPN			
AP	AP (Pulse input type)				

I/O cable length*10, Communication plug

Nil	Without cable
1	1.5 m
3	3 m* ¹¹
5	5 m*11
S	Straight type communication plug connector*12
T	T-branch type communication plug connector*12




12 Controller/Driver mounting

Nil	Screw mounting
D	DIN rail*13

JXC Series (For details, refer to page 1)





EtherCAT® EtherNet/IP™ P PROFINET D DeviceNet™ IO-Link

Screw mounting 8*13 DIN rail

For single axis

Communication plug connector for DeviceNet™*1

Nil	Without plug connector
S	Straight type
Т	T-branch type

- *1 Please consult with SMC for non-standard strokes as they are
- produced as special orders.
 *2 The mounting bracket is shipped together with the product but does not come assembled.
- *3 For the horizontal cantilever mounting of the rod flange or ends tapped types, use the actuator within the following stroke range. LEY25: 200 mm or less LEY32/40: 100 mm or less
- *4 The head flange type is not available for the LEY32/40.
- *5 Produced upon receipt of order (Robotic cable only)
- *6 For details on controllers/drivers and compatible motors, refer to the compatible controller/driver on the next page.
- *7 Only available for the motor type "Step motor"
- *8 Not compliant with CE
- *9 When pulse signals are open collector, order the current limiting resistor (LEC-PA-R
) separately after referring to the Web Catalog.
- *10 When "Without controller/driver" is selected for controller/driver types. I/O cable cannot be selected. If an I/O cable is required, refer to the Web Catalog of the controller/driver it is to be used with. (Cable for the LECP6/LECA6, LECP1, or LECPA)
- *11 When "Pulse input type" is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector
- *12 For the LECPMJ, only "Nil," "S," and "T" are selectable since I/O cable is not included.
- *13 The DIN rail is not included. Order it separately. *14 Select "Nii" for anything other than DeviceNet™.

⚠ Caution

[CE-compliant products]

1) EMC compliance was tested by combining the electric actuator LEY series and the controller LEC/JXC series.

The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.


- 2 For the servo motor (24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to the Web Catalog for the noise filter set. Refer to the LECA series Operation Manual for installation.
- ③ CC-Link direct input type (LECPMJ) is not CE-compliant.

The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and actuator is correct.

<Check the following before use.>

- 1) Check the actuator label for the model number. This number should match that of the controller/driver.
- 2 Check that the Parallel I/O configuration match es (NPN or PNP).



Refer to the Operation Manual for using the products. Please download it via our website.



Compatible Controller/Driver

LEC□ Series

Туре	Step data input type Step data input type		CC-Link direct input type	Programless type	Pulse input type	
Series	LECP6	LECA6	LECPMJ	LECP1	LECPA	
Features	Value (Step Standard	data) input controller	CC-Link direct input	Capable of setting up operation (step data) without using a PC or teaching box	Operation by pulse signals	
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)		Step motor (Servo/24 VDC)		
Max. number of step data		64 points		14 points	_	
Power supply voltage			24 VDC			

JXC□ Series

Туре	EtherCAT® direct input type	EtherNet/IP™ direct input type	PROFINET direct input type	DeviceNet™ direct input type	IO-Link direct input type	
Series	JXCE1	JXC91	JXCP1	JXCD1	JXCL1	
Features	EtherCAT® direct input	EtherNet/IP™ direct input	PROFINET direct input	DeviceNet™ direct input	IO-Link direct input	
Compatible motor			Step motor (Servo/24 VDC)			
Max. number of step data			64 points			
Power supply voltage			24 VDC			

Specifications

Step Motor (Servo/24 VDC)

			Model	•	L	.EY25□-X	7	L	EY32□-X	7	L	EY40□-X	7
			For LECP6 LECP1	(3000 [mm/s ²])	20	40	60	30	45	60	50	60	80
		Horizontal	LECPII JXC□1	(2000 [mm/s ²])	30	55	70	40	60	80	60	70	90
	Work load*1 [kg]	Horiz	For LECPA	(3000 [mm/s ²])	12	30	30	20	40	40	30	60	60
Suc			JXC□3	(2000 [mm/s ²])	18	50	50	30	60	60	_	_	_
specifications			Vertical	(3000 [mm/s ²])	7	15	29	10	21	42	12	26	52
sbe	Pushing for	Pushing force [N]*2 *3 *4			63 to 122	126 to 238	232 to 452	80 to 189	156 to 370	296 to 707	132 to 283	266 to 553	562 to 1058
호	Speed [mm/s]*4			18 to 300	9 to 150	5 to 75	24 to 300	12 to 150	6 to 75	24 to 300	12 to 210	6 to 105	
Actuator				ation [mm/s ²]					3000				
Pe	Pushing spe					35 or less			30 or less			30 or less	
	Positioning	•		mm]					±0.02				
		Lost motion [mm]*6						1	0.1 or less				
	Screw lead [12	6	3	16	8	4	16	8	4
	Impact/Vibra		n resistand	e [m/s²]*/					50/20				
	Actuation ty	ре			Ball screw (LEY□D)								
	Guide type				Sliding bushing (Piston rod)								
	Enclosure*8				IP65 equivalent/IP67 equivalent								
	Operating to	_			5 to 40								
	Operating h	umi	dity range	[%HH]		□42		90 or les	s (No conde	ensation)		□56.4	
ous	Motor type					□42		Cton me	otor (Servo/2	14 VDC)		□56.4	
specifications	Encoder						Incr		3 phase (800		tion)		
ecif	Rated voltage	ie [/	<i>/</i> 1				IIICI		4 VDC ±10°	·	tion)		
	Power cons					40			50			50	
Electric				en operating [W]*10		15			48			48	
음				onsumption [W]*11		48			104			106	
ions	Type*12					-		Non-	magnetizing	lock	1		
ock unit specifications		Holding force [N]			78	157	294	108	216	421	127	265	519
ınit sp	Power consumption [W]*13				5			5			5		
Lock	Rated voltage	je [\	/]		24 VDC ±10%								
*1	Horizontal: Th	0 m	avimum va	due of the work lo	ad. An external quide is necessary to support the load. (Friction coefficient of quide: 0.1 or less) The								

*1 Horizontal: The maximum value of the work load. An external guide is necessary to support the load. (Friction coefficient of guide: 0.1 or less) The actual work load and transfer speed change according to the condition of the external guide. Also, speed changes according to the work load. Check "Model Selection" on pages 1 and 2.

Vertical: Speed changes according to the work load. Check "Model Selection" on pages 1 and 2.

The values shown in () are the acceleration/deceleration. Set these values to be 3000 [mm/s²] or less.

- *2 Pushing force accuracy is ±20% (F.S.).
- *3 The thrust setting values for LEY25 is 38% to 65%, for LEY32 is 38% to 85%, and for LEY40 is 35% to 65%. The pushing force values change according to the duty ratio and pushing speed. Check "Model Selection" on page 4.
- *4 The speed and force may change depending on the cable length, load, and mounting conditions. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m. (At 15 m: Reduced by up to 20%)
- *5 The allowable speed for pushing operation. When push conveying a workpiece, operate at the vertical work load or less.
- *6 A reference value for correcting an error in reciprocal operation
- *7 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)
- Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

 *8 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water
- Take appropriate protective measures. For details on enclosure, refer to "Enclosure" on page 6.
- *9 The power consumption (including the controller) is for when the actuator is operating.
- *10 The standby power consumption when operating (including the controller) is for when the actuator is stopped in the set position during the operation. Except during the pushing operation
- *11 The maximum instantaneous power consumption (including the controller) is for when the actuator is operating. This value can be used for the selection of the power supply.
- *12 With lock only
- *13 For an actuator with lock, add the power consumption for the lock.





Specifications

Servo Motor (24 VDC)

		Model			LEY25□A-X7			
	Work load*1	Horizontal	(3000 [mm/s ²])	7	15	30		
	[kg]	Vertical	(3000 [mm/s ²])	2	5	11		
	Pushing force	e [N]*2 *3		18 to 35	37 to 72	66 to 130		
	Speed [mm/s	i]		2 to 300	1 to 150	1 to 75		
S	Max. acceler	ation/decelera	ation [mm/s²]	3000				
specifications	Pushing spe	ed [mm/s]*4		35 or less				
lica	Positioning r	epeatability [mm]		±0.02			
eci	Lost motion	[mm]* ⁵			0.1 or less			
ds	Screw lead [mm]		12	6	3		
ᅙ	Impact/Vibra	tion resistand	e [m/s²]*6		50/20			
Actuator	Actuation typ	oe .		Ball screw + Belt (LEY□) Ball screw (LEY□D)				
	Guide type			Slidin	ng bushing (Pistor	n rod)		
	Enclosure*7			IP65 ed	quivalent/IP67 eq	uivalent		
	Operating te	mperature rar	ige [°C]	5 to 40				
	Operating hu	ımidity range	[%RH]	90 or less (No condensation)				
ns	Motor size				□42			
Electric specifications	Motor type			Servo motor (24 VDC)				
iji	Encoder			Incremental A	/B (800 pulse/rota	ation)/Z phase		
bed	Rated voltag	e [V]		24 VDC ±10%				
ည	Power consu	ımption [W]*8			86			
ect			vhen operating [W]*9	4 (H	orizontal)/12 (Ver	tical)		
		neous power o	consumption [W]*10		96			
ock unit specifications	Type*11			No	on-magnetizing lo	ck		
pecific	Holding force			78	157	294		
units	Power consu	mption [W]*1	2	5				
Pec	Rated voltag	e [V]		24 VDC ±10%				

- *1 Horizontal: The maximum value of the work load. An external guide is necessary to support the load. (Friction coefficient of guide: 0.1 or less) The actual work load and transfer speed change according to the condition of the external guide.
- Vertical: Speed changes according to the work load. Check "Model Selection" on page 3.
- The values shown in () are the acceleration/deceleration. Set these values to be 3000 [mm/s²] or less.
- *2 Pushing force accuracy is ±20% (F.S.).
- *3 The thrust setting values for LEY25A□ is 75% to 95%. The pushing force values change according to the duty ratio and pushing speed. Check "Model Selection" on page 4.
- *4 The allowable speed for pushing operation When push conveying a workpiece, operate at the vertical work load or less.
- *5 A reference value for correcting an error in reciprocal operation
- *6 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.) Vibration resistance: No malfunction occurred in a test ranging
 - between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)
- *7 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water Take appropriate protective measures. For details on enclosure, refer to "Enclosure" on page 6.
- *8 The power consumption (including the controller) is for when the actuator is operating.
- *9 The standby power consumption when operating (including the controller) is for when the actuator is stopped in the set position during the operation with the maximum work load. Except during the pushing operation
- *10 The maximum instantaneous power consumption (including the controller) is for when the actuator is operating. This value can be used for the selection of the power supply.
- *11 With lock only
- *12 For an actuator with lock, add the power consumption for the lock.

Weight

Weight: In-line Motor Type

LEY25D										With lock	
St	30	50	100	150	200	250	300	350	400	WILLI IOCK	
Product	Step motor	1.49	1.56	1.73	1.98	2.16	2.33	2.51	2.68	2.86	0.33
weight [kg]	Servo motor	1.45	1.52	1.69	1.94	2.12	2.29	2.47	2.64	2.82	0.33

LEY32D									With lock				
St	30	50	100	150	200	250	300	350	400	450	500	WILLI TOCK	
Product weight [kg]	Step motor	2.59	2.70	2.99	3.37	3.66	3.95	4.23	4.52	4.81	5.09	5.38	0.63

LEY40D									With lock				
St	30	50	100	150	200	250	300	350	400	450	500	WILLI IOCK	
Product weight [kg]	Step motor	2.94	3.05	3.34	3.72	4.01	4.30	4.58	4.87	5.16	5.44	5.73	0.63


[kg] 40


Additional Weig	ht		
Siz	Size		
Lock		0.33	0.63
	Male thread	0.03	0.03

Lock		0.33	0.63	0.63
Rod end male thread	Male thread	0.03	0.03	0.03
nou enu maie urreau	Nut	0.02	0.02	0.02
Foot (2 sets includin	g mounting bolt)	0.08	0.14	0.14
Rod flange (including	0.17	0.00	0.20	
Head flange (includia	0.17	0.20		

Construction

In-line motor type: LEY $^{25}_{40}$ D

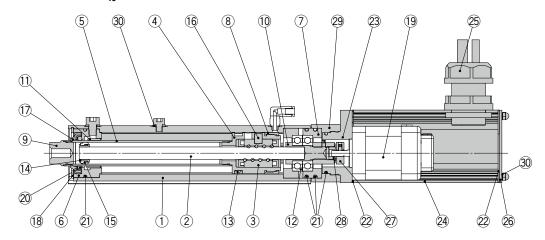



Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Ball screw	Alloy steel	
3	Ball screw nut	Synthetic resin/Alloy steel	
4	Piston	Aluminum alloy	
5	Piston rod	Stainless steel	Hard chrome plating
6	Rod cover	Aluminum alloy	Anodized
7	Bearing holder	Aluminum alloy	
8	Rotation stopper	Resin	
9	Socket	Stainless steel	
10	Connected shaft	Free cutting carbon steel	Nickel plating
11	Bushing	Bearing alloy	
12	Bearing	_	
13	Magnet	_	
14	Wear ring holder	Stainless steel	Stroke 101 mm or more
15	Wear ring	Resin	Stroke 101 mm or more
16	Parallel pin	Stainless steel	

No.	Description	Material	Note
17	Greater water resistant scraper	Stainless steel/NBR	
18	Retaining ring	Stainless steel	
19	Motor	_	
20	Lube-retainer	Felt	
21	O-ring	NBR	
22	Gasket	Chloroprene	
23	Motor adapter	Aluminum alloy	LEY25 only
24	Motor cover	Aluminum alloy	Anodized
25	Seal connector	_	
26	End cover	Aluminum alloy	Anodized
27	Hub	Aluminum alloy	
28	Spider	NBR	
29	Motor block	Aluminum alloy	Anodized
30	Seal washer	Stainless steel/NBR	
31	Socket (Male thread)	Stainless steel	
32	Nut	Stainless steel	

Replacement Parts/Grease Pack


Applied portion	Order no.
Piston rod	GR-S-010 (10 g)
Piston	GR-S-020 (20 g)

Apply grease on the piston rod periodically.

Grease should be applied at 1 million cycles or 200 km, whichever comes first.

Dimensions

In-line motor type

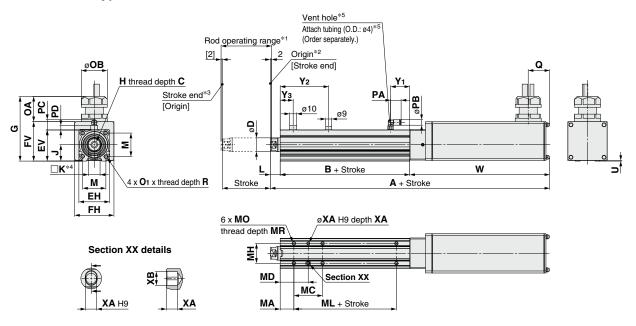

																[mm]
Size	Stroke range	L A	١	В	С	D	EH	EV	FH	FV	G	н		K		м
Size	[mm]	Without lock	With lock				LII	LV		. · ·	<u> </u>	••	J	,	_	141
25	20 to 100	259	309	89.5	13	20	44	45.5	57.6	57.7	94.7	M8 x 1.25	24	17	14.5	34
25	105 to 400	284	334	114.5	13	20	44	45.5	57.0	37.7	94.7	1010 X 1.25	24	'/	14.5	34
32	20 to 100	269.5	319.5	96	10	13 25	51	1 56.5	69.6	79.6	116.6	M8 x 1.25	31	22	18.5	40
32	105 to 500	299.5	349.5	126	13				09.0							40
40	20 to 100	291.5	341.5	96	13	O.E.	25 51	56.5	00.0	79.6	1100	M8 x 1.25	01	22	18.5	40
40	105 to 500	321.5	371.5	126	13	25		56.5	69.6	79.6	116.6	IVIO X 1.25	31	22	16.5	40

Size	Stroke range	O 1	R	OA	ОВ	PA	РВ	Q	U	PC	PD	V		Y 1	Y 2	Y 3											
	[mm]	,		_					_			Without lock	With lock														
25	20 to 100	MEVOO	8	37	38	15.4	8.2	28	0.9	15.9	6.5	155	205	28	71	19											
25	105 to 400	M5 x 0.8	°	37	30	15.4	0.2	0.2 20	0.9	15.9	0.5	100	203	20	96	19											
32	20 to 100	M6 x 1.0	10	37	38	15.4	8.2	28	4	15.9	7.1	155	205	30	75.5	16											
32	105 to 500	IVIO X 1.U	10	10	10	10	10	10	10	10	10	10	10	10	37	30	15.4	0.2	20	'	15.9	/.1	155	203	30	105.5	16
40	20 to 100	M6 x 1.0	10	37	20	15 /	0.0	28	4	15.0	7.1	177	227	20	75.5	16											
40	105 to 500	IVIO X 1.U	10	10	10	10	3/	38	15.4	8.2	∠8	'	15.9	7.1	1//	227	30	105.5	16								

Body	Bottom T	apped								[mm]
Size	Stroke range [mm]	MA	МС	MD	МН	ML	МО	MR	XA	ХВ
	15 to 39		24	32		50			4	
	40 to 100		42	41		50	M5 x 0.8	6.5		5
25	101 to 124	20			29	75				
	125 to 200		59	49.5						
	201 to 400		76	58						
	20 to 39		22	36		50		8.5		
	40 to 100		36	43		50			5	6
1	101 to 124	25	30		30		M6 x 1			
	125 to 200		53	51.5		80				
	201 to 500		70	60	60					

^{*1} This is the range within which the rod can move when it returns to origin.

Make sure workpieces mounted on the rod do not interfere with the workpieces and facilities around the rod.

*2 Position after return to origin

Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.

For the rod end male thread and the mounting bracket dimensions, refer to the Web Catalog.



^{*3 []} for when the direction of return to origin has changed

^{*4} The direction of rod end width across flats ($\square K$) differs depending on the products.

^{*5} The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole.

Water Resistant 2-Color Indicator Solid State Auto Switch: Direct Mounting Type D-M9NA(V)/D-M9PA(V)/D-M9BA(V) (RoHS)

Leakage current

Indicator light

Standard

Auto Switch Specifications

Grommet

- Water (coolant) resistant type
- 2-wire load current is reduced (2.5 to 40 mA).
- The proper operating range can be determined by the color of the light. (Red \rightarrow Green \leftarrow Red)
- Using flexible cable as standard



.↑Caution

Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.

Please consult with SMC if using coolant liquid other than water based solution.

Weight

Auto s	witch model	D-M9NA(V) D-M9PA(V)	D-M9BA(V)
	0.5 m (Nil)	8	7
Lead	1 m (M)	14	13
length	3 m (L)	41	38
July	5 m (Z)	68	63

					arrinable Ee	9.0 00.11.01101								
D-M9□A, D-M9	D-M9□A, D-M9□AV (With indicator light)													
Auto switch model	D-M9NA	D-M9NAV	D-M9PA	D-M9PAV	D-M9BA D-M9BA									
Electrical entry direction	In-line	Perpendicular	In-line	Perpendicular	In-line Perpendicu									
Wiring type		3-v	vire		2-wire									
Output type	N	PN	PI	NΡ	_									
Applicable load		IC circuit, I	Relay, PLC		24 VDC r	elay, PLC								
Power supply voltage	Ę	5, 12, 24 VDC	(4.5 to 28 V	')	-	_								
Current consumption		10 mA	or less		-	_								
Load voltage	28 VDC	or less		_	24 VDC (10	to 28 VDC)								
Load current		40 mA	or less 2.5 to 40 mA				40 mA or less		40 mA					
Internal voltage drop	0.8 V or l	ess at 10 mA	(2 V or less	at 40 m4)	4 V c	r less								

100 μA or less at 24 VDC

Operating range Red LED illuminates.

Proper operating range Green LED illuminates.

CE marking (EMC directive/RoHS directive)

PLC: Programmable Logic Controller

0.8 mA or less


Oilproof Flexible Heavy-duty Lead Wire Specifications

Auto swi	Auto switch model			D-M9PA□	D-M9PAV□	D-M9BA□	D-M9BAV□
Sheath	Outside diameter [mm]			2.	6		
	Number of cores	3 c	ores (Brown	n/Blue/Bla	ck)	2 cores (Br	own/Blue)
Insulator	Outside diameter [mm]			0.8	38		
Conductor	Effective area [mm²]			0.1	15		
Conductor	Strand diameter [mm]			0.0)5		
Minimum bend	ling radius [mm]			1	7		


- * Refer to the Web Catalog for solid state auto switch common specifications.
- * Refer to the Web Catalog for lead wire lengths.

Dimensions [mm]

D-M9□A



D-M9□AV



Global Manufacturing, Distribution and Service Network

Worldwide Subsidiaries

EUROPE

AUSTRIA

SMC Pneumatik GmbH (Austria)

BELGIUM

SMC Pneumatics N.V./S.A.

BULGARIA

SMC Industrial Automation Bulgaria EOOD

CROATIA

SMC Industriiska Automatika d.o.o.

CZECH REPUBLIC

SMC Industrial Automation CZ s.r.o.

DENMARK

SMC Pneumatik A/S

ESTONIA

SMC Pneumatics Estonia FINI AND

SMC Pneumatics Finland OY

FRANCE

SMC Pneumatique S.A. **GERMANY**

SMC Pneumatik GmbH

GREECE

SMC Hellas EPE HUNGARY

SMC Hungary Ipari Automatizálási Kft.

IRELAND

SMC Pneumatics (Ireland) Ltd.

ITALY

SMC Italia S.p.A.

KAZAKHSTAN LLP "SMC Kazakhstan"

LATVIA

SMC Pneumatics Latvia SIA

LITHUANIA **UAB "SMC Pneumatics"** NETHERLANDS

SMC Pneumatics B.V.

NORWAY

SMC Pneumatics Norway AS

POLAND

SMC Industrial Automation Polska Sp. z o.o.

ROMANIA SMC Romania S.r.I.

RUSSIA

SMC Pneumatik LLC

SLOVAKIA

SMC Priemyselná Automatizácia, Spol s.r.o.

SLOVENIA

SMC Industrijska Avtomatika d.o.o.

SPAIN / PORTUGAL SMC España, S.A.

SWEDEN

SMC Pneumatics Sweden AB

SWITZERLAND SMC Pneumatik AG

TURKEY

SMC Pnömatik Sanayi Ticaret ve Servis A.Ş.

SMC Pneumatics (U.K.) Ltd.

ASIA / OCEANIA

AUSTRALIA

SMC Pneumatics (Australia) Pty. Ltd.

CHINA

SMC (China) Co., Ltd.

SMC Pneumatics (Guangzhou) Ltd.

HONG KONG

SMC Pneumatics (Hong kong) Ltd. INDIA

SMC Pneumatics (India) Pvt. Ltd.

INDONESIA PT SMC Pneumatics Indonesia

JAPAN SMC Corporation

MALAYSIA

SMC Pneumatics (S.E.A.) Sdn. Bhd.

NEW ZEALAND

SMC Pneumatics (N.Z.) Ltd.

PHILIPPINES

Shoketsu SMC Corporation

SINGAPORE

SMC Pneumatics (S.E.A.) Pte. Ltd. SOUTH KOREA

SMC Pneumatics Korea Co., Ltd.

TAIWAN

SMC Pneumatics (Taiwan) Co., Ltd.

THAILAND

SMC (Thailand) Ltd.

UNITED ARAB EMIRATES SMC Pneumatics Middle East FZE

SMC Pneumatics (VN) Co., Ltd

AFRICA

SOUTH AFRICA

SMC Pneumatics (South Africa) Pty Ltd

NORTH, CENTRAL &

SOUTH AMERICA

ARGENTINA SMC Argentina S.A

BOLIVIA SMC Pneumatics Bolivia S.R.L.

BRAZIL

SMC Pneumáticos do Brasil Ltda.

CANADA SMC Pneumatics (Canada) Ltd.

CHILE

COLOMBIA SMC Colombia Sucursal de SMC Chile, S.A.

MEXICO SMC Corporation (Mexico) S.A. de C.V.

PFRU

SMC Corporation Peru S.A.C.

SMC Corporation of America

VENEZUELA SMC Neumatica Venezuela S.A.

U.S. & Canadian Sales Offices

WEST Austin **Albany Dallas Atlanta** Los Angeles Birmingham **Phoenix Boston Portland** Charlotte San Jose Knoxville Toronto **Nashville** CENTRAL **New Jersev** Chicago Rochester Cincinnati Tampa Cleveland CANADA Detroit **Des Moines** Vancouver **Toronto Grand Rapids** Windsor Sales Branches Indianapolis Montreal Regional Distribution Centers **Kansas City** 0 Milwaukee Central warehouse Minneapolis St. Louis

