

Non-rotating Double Power Cylinder


Series MGZ ø20, ø25, ø32, ø40, ø50, ø63, ø80

Double extension output power!!

Our unique construction doubles the extended piston area. An ideal cylinder for lifting and press applications.

ir pressure Extension)	supplied from	m A operates	s on both su	A B	and ②.
ir pressure Retraction)		rom B opera	ates on sur	faces ③. A B ≬ ↓	

Say goodbye to nonrotating guides!! (Series MGZ)




Series MGZ employs a slide bearing and a large bore tube rod that accounts for approximately 80% of the cylinder's external diameter. In addition, a built-in nonrotating mechanism using slide keys allows loads to be mounted directly.

SMC

Regulator with check valve is not required.

A regulator with check valve, normally required for a lifting circuit, is no longer necessary.

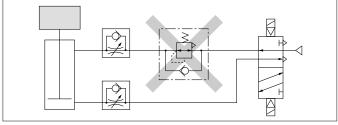




Improved workpiece mounting accuracy

Positioning holes on the workpiece mounting surface allow easy alignment.


Excellent strength delivered in a small package.

Although moment resistance is equivalent to that of a guided cylinder (cylinder + 2 guide shafts), the installation area has been reduced by approximately 40% (for Series MGZ).

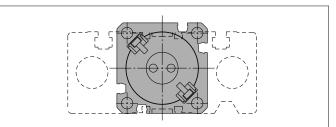

Double Power Cylinder Series MGZR (without non-rotating mechanism) ø20, ø25, ø32, ø40, ø50, ø63, ø80

Flush, unencumbered appearance

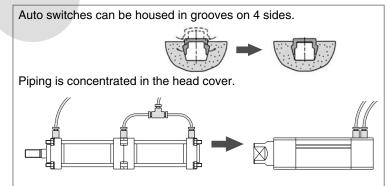

Application Example

Long stroke available Space-saving


 \boxtimes

 \bigcirc

0


(Approx. 30%)

reduction)



Note) Strokes up to 800 mm are available in bore sizes ø20 and ø25.

Series Variations

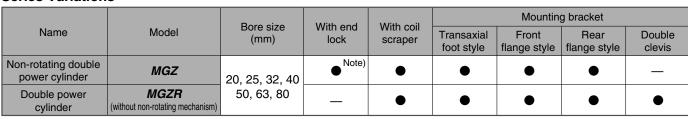

Note) Except ø20, ø25, ø32 and ø80.



Double clevis type For rotating applications. (MGZR only)

Pressing nucking Pushing Shooting Lifting

MGJ MGP MGQ MGG MGC MGF MGZ MGT

D-🗆 -X□ Individual

-X□

With coil scraper


Series MGZ/MGZR **Model Selection** A Caution Information Caution Information Confirmed separately. Refer to the theoretical output

Theoretical output must be table on page 429.

Series MGZ


1. Confirmation of Allowable Load Mass by Each Application


Selection conditions: Determine which of the conditions below matches your intended application, then choose one of the selection graphs that follow.

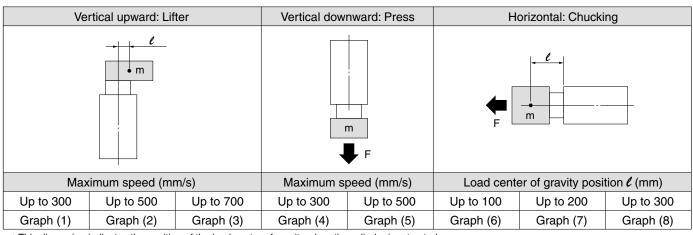

* C. This dimension indicates the position of the load center of gravity when the cylinder is retracted.

Selection Graph (1) to (3) (Vertical Upward Mounting)

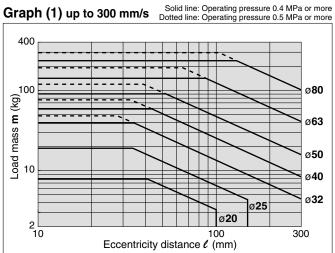


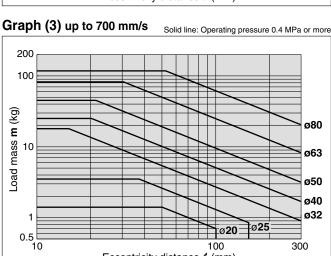


Eccentricity distance *l* (mm)

100

Graph (2) up to 500 mm/s



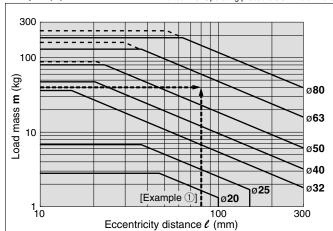

Selection Example: Vertical Upward Mounting

① Selection conditions (Mounting: Vertical upward (Lifter) Maximum speed: 500 mm/s

Load mass: 40 kg Eccentricity distance: 80 mm

Since the conditions are vertical upward mounting with a speed of 500 mm/s, use graph (2). In the graph, find where the lines representing a load mass of 40 kg and an eccentric distance of 80 mm intersect. From the graph, a ø63 bore size is selected.



300

Selection Graph (4) and (5) (Vertical Downward Mounting)

120

100

80


60

40

20

0 ∟ 0.3

-oad mass m (kg)

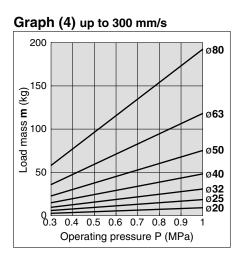

Graph (5) up to 500 mm/s

ø**80** ø**63** ø**50**

ø**40**

ø**32**

1

Selection Example: **Horizontal Mounting**

② Selection conditions

Mounting: Horizontal (Chucking)

Stroke: 300 mm

Load center of gravity position: 100 mm

Load mass: 10 kg


Operating pressure: 0.5 MPa

Refer to graph (6) based on the horizontal mounting and the load center of gravity position. In the graph, find where the lines representing a load mass of 10 kg and a stroke of 300 mm intersect. A ø50 bore size is selected.

The theoretical output for the extension stroke is 1924 N, from the theoretical output table on page 429.

Selection Graph (6) to (8) (Horizontal Mounting)

Graph (6) *l*: 100 mm or less




2. Confirmation of allowable rotating torque


Graph (7) *l*: 101 to 200 mm

0.4 0.5 0.6 0.7 0.8 0.9

Operating pressure P (MPa)



Graph (8) *l*: 201 to 300 mm

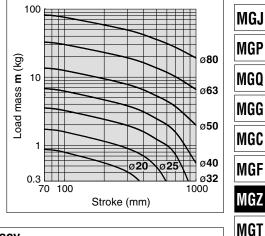

3. Confirmation of non-rotating accuracy

(


+θ⁶


-A'

(

С


3-1 Rolling direction





+θ^c

-A




С

С

Non-rotating Accuracy

Non rotating A	country							
Bore size (mm)	Non-rotating accuracy $(\pm \theta^{\circ})$							
20	+0.4° or less							
25	± 0.4 of less							
32								
40								
50	$\pm 0.3^{\circ}$ or less							
63]							
80								


Deflection Angle of Eccentric Load





425






Allowable Rotating Torque

Bore size (mm)	Allowable rotating torque T (N·m)
20	2.7
25	4
32	5
40	7
50	15
63	20
80	30


Series MGZR

Series MGZR (without non-rotation mechanism)


1. Find the Bore Size of the Cylinder Tube

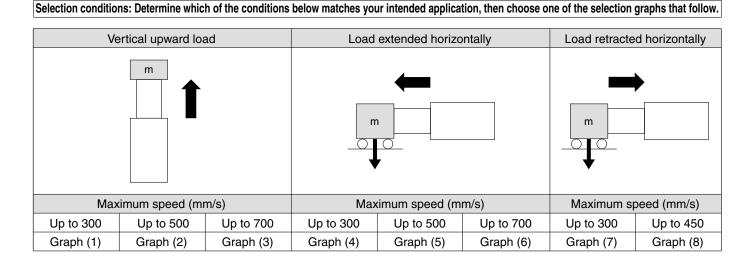


Selection Graph (1) to (3) (Vertical Upward Load)

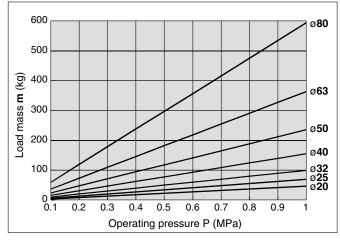



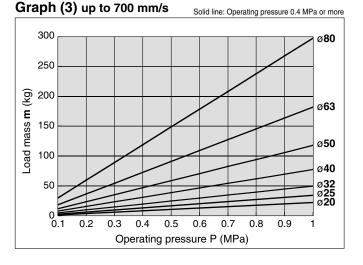

Graph (2) up to 500 mm/s

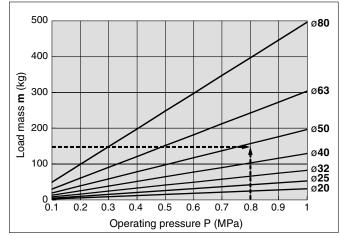

Selection Example: Vertical Upward Load

1 Selection conditions

Mounting: Vertical upward Maximum speed: 500 mm/s Operating pressure: 0.8 MPa Load mass: 150 kg


Since the conditions are vertical upward mounting with a speed of 500 mm/s, use graph (2). In the graph, find where the lines representing an operating pressure of 0.8 MPa and a load mass of 150 kg intersect. A ø50 bore size is selected.




Double Power Cylinder/ Without Non-rotating Mechanism Series MGZR

Selection Graph (4), (5), and (6) (Load Extended Horizontally)


Graph (4) up to 300 mm/s



Graph (5) up to 500 mm/s

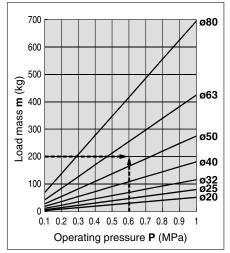


Graph (6) up to 700 mm/s

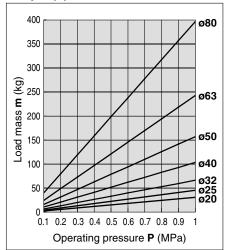


Selection Graph (7) and (8) (Load Retracted Horizontally)

Graph (7) up to 300 mm/s

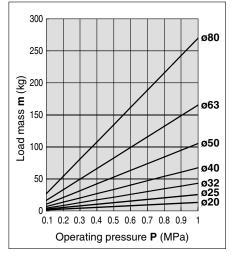

Graph (8) up to 450 mm/s

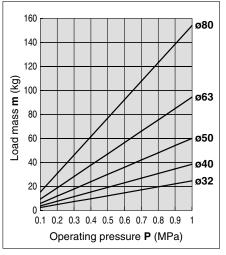

Selection Example: Load Extended Horizontally


2 Selection conditions


Mounting: Horizontal extension Maximum speed: 500 mm/s Operating pressure: 0.6 MPa Load mass: 200 kg

Since the conditions are horizontal extension with a speed of 500 mm/s, use graph (5). In the graph, find where the lines representing an operating pressure of 0.6 MPa and a load mass of 200 kg intersect. A ϕ 63 bore size is selected.

2. Confirmation of allowable kinetic energy Confirm the strength of the built-in stopper (rubber bumper) based on the correlation of load mass and the maximum speed. If the value is Below the line in the graph: A built-in stopper can be used.

Above the line in the graph: Either use a cylinder with a larger bore size or install an external stopper

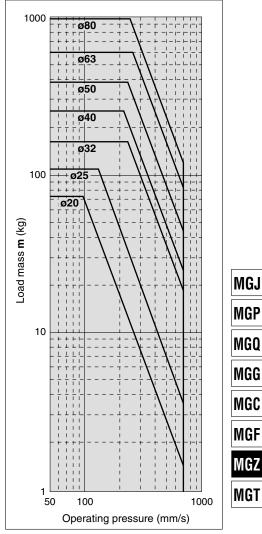



Non-rotating Double Power Cylinder Series MGZ ø20, ø25, ø32, ø40, ø50, ø63, ø80

How to Order MGZ 40 Z - 100 - M9BW Made to Order Mounting style For details, refer to page 429. Nil Basic style Number of auto switches Transaxial foot style L F Rod flange style Nil 2 pcs. G Head flange style s 1 pc. "n" pcs. n Bore size • Auto switch 20 20 mm Thread type Nil Without auto switch (Built-in magnet) 25 25 mm For the applicable auto switch model, refer to the M5 x 0.8 32 32 mm ø20 Nil table below. **40** 40 mm Rc ø25 50 50 mm ΤN NPT ø32 Cylinder stroke (mm) Refer to "Standard Stroke" on page 429. 63 63 mm ø40 80 mm ø50 TF Coil scraper G ø63 Nil None ø80 Ζ Yes

Applicable Auto Switch/Refer to pages 1719 to 1827 for detailed specifications of auto switches

	Special function	Electrical	tor		L	oad volta	ge	Auto swite	ch model	Lead	wire l	ength	(m)	Dus universit		
Туре		Electrical entry	Indicate	Wiring (Output)	DC		AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5	Pre-wired connector	Applical	ble load
				3-wire (NPN)	5 V 10 V		M9NV	M9N	•			0	0	IC circuit		
ء	_			3-wire (PNP)		5 V,12 V		M9PV	M9P				0	0	IC circuit	
switch				2-wire		12 V		M9BV	M9B				0	0	—	
	Dia mantin'ny fination			3-wire (NPN)		5 V,12 V	1	M9NWV	M9NW				0	0	IC circuit	Dalau
state	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (PNP)	24 V	5 V,12 V	—	M9PWV	M9PW				0	0		Relay, PLC
lst				2-wire		12 V		M9BWV	M9BW				0	0	—	FLO
Solid				3-wire (NPN)		5 V,12 V		M9NAV	M9NA	0	0		0	0	IC circuit	
Ś	Water resistant (2-color indication)			3-wire (PNP)	5 V, 12 V		M9PAV	M9PA	0	0		0	0	IC circuit		
				2-wire		12 V		M9BAV	M9BA	0	0		0	0	_	
Reed switch		Crommet	Yes	3-wire (NPN equiv.)	—	5 V	_	A96V	A96	•	-	•	_	_	IC circuit	_
Svi Švi	—	Grommet		0 unire	04.1/	12 V	100 V	A93V	A93	•	—		—	—	—	Relay,
,			No	2-wire 24 V		12 V	100 V or less	A90V	A90	•	—	•	—	—	IC circuit	PLC
* Lead	wire length symbols: 0.5 m ·	N	lil (E	Example) M9NW	*	Solid state	e auto switc	hes marked '	'O" are prod	uced up	on rec	eipt of	forde	r.		

1 m ------ M (Example) M9NWM 3 m ------ L (Example) M9NWL 5 m ----- Z (Example) M9NWZ

* Refer to page 445 for applicable auto switches other than listed above.

* Refer to pages 1784 and 1785 for details of auto switches with a pre-wired connector.


* Auto switches are shipped together (not assembled).

Non-rotating Double Power Cylinder Series MGZ

Specifications



Bore size (m	m)	20	25	32	40	50	63	80				
Action		Double acting, Single rod										
Fluid			Air									
Proof pressure					1.5 MPa							
Max. operating pre	essure				1.0 MPa							
Min energing pro				Standard	l stroke: C).08 MPa						
Min. operating pre	ssure		Long stroke: 0.12 MPa									
Ambient and fluid		Without auto switch: -10° to 70° C (With no freezing)										
temperature		With auto switch: -10° to 70°C (With no freezing)										
Lubrication		Non-lube										
Distan aroad	OUT			50	to 700 mr	n/s						
Piston speed	IN	50 to 39	50 mm/s		50	to 450 mr	n/s					
Stroke length toler	ance	Up to 250 ^{+1.0} / ₀ , 251 to 1000 ^{+1.4} / ₀										
Cushion		Rubber bumper										
Mounting		Basic style, Transaxial foot style, Rod flange style, Head flange style										



Standard Stroke

Bore sizes (mm)	Standard stroke (mm)	Long stroke (mm)					
20, 25	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500 600, 700, 800					
32, 40, 50 63, 80	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500, 600 700, 800, 900,1000					

Intermediate strokes and strokes shorter than 75 mm are also available.

Mass

Mass								(kg)	M
Bore size	20	25	32	40	50	63	80	M	
	Basic style	0.47	0.69	1.04	1.90	3.03	4.83	8.63	M
Standard mass	Foot style	0.63	0.86	1.34	2.39	3.92	6.08	10.61	IV
	Flange style	0.58	0.83	1.32	2.34	3.79	5.83	9.92	M
Mass per each 50 mm of stroke	All mounting brackets	0.18	0.21	0.28	0.39	0.59	0.78	1.17	

Theoretical Output

Theore	tical Ou	tput											(N)
Model	Bore size	Rod size	Operating	Piston area			Ope	erating	press	ure (N	1Pa)		
Model	(mm)	(mm)	direction	(mm²)	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
MGZ20	20 x 25	10	OUT	726	145	218	290	363	436	508	581	653	726
MGZ20	20		IN	236	47	71	94	118	141	165	189	212	236
MGZ25	25 x 30	12	OUT	1085	217	326	434	543	651	760	868	977	1085
WGZ25	25	12	IN	378	76	113	151	189	227	265	302	340	378
MGZ32	36 x 32	16	OUT	1621	324	486	648	811	973	1135	1297	1459	1621
WGZ3Z	32		IN	603	121	181	241	302	362	422	482	543	603
MGZ40	45 x 40	20	OUT	2533	507	760	1013	1267	1520	1773	2026	2280	2533
MGZ40	40	20	IN	942	188	283	377	471	565	659	754	848	942
MGZ50	55 x 50	25	OUT	3848	770	1154	1539	1924	2309	2694	3078	3463	3848
MGZ50	50	25	IN	1473	295	442	589	737	884	1031	1178	1326	1473
MGZ63	68 x 63	32	OUT	5945	1189	1784	2378	2973	3567	4162	4756	5351	5945
MGZ03	63	32	IN	2313	463	694	925	1157	1388	1619	1850	2082	2313
MG790	87 x 80	40	OUT	9715	1943	2915	3886	4858	5829	6801	7772	8744	9715
MGZ80	80	40	IN	3770	754	1131	1508	1885	2262	2639	3016	3393	3770



MGT


D-□

-X□ Individual -X□



Series MGZ

Construction

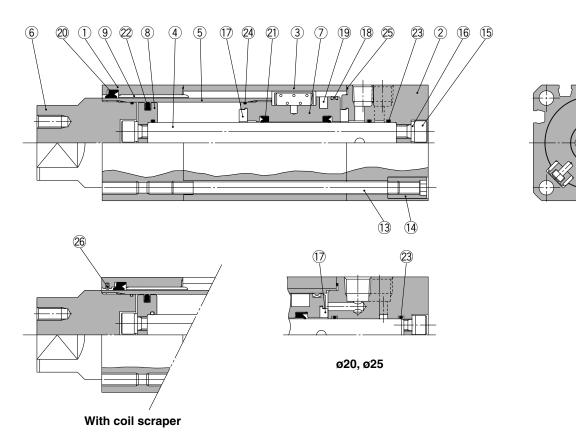



No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cylinder tube	Aluminum alloy	Hard anodized
4	Piston rod	Aluminum alloy	Hard anodized
5	Tube rod	Carbon steel tube	Hard chromium electronplated
6	Tube rod cover	Carbon steel	Electroless nickel plated
7	Piston	Aluminum alloy	Chromated
8	Stationary piston	Aluminum alloy	Chromated
9	Bushing	Lead-bronze casting	
10	Thrust plate	Lead-bronze casting	
11	Holder	Aluminum alloy	Chromated
12	Pin	Carbon steel	Zinc chromated
13	Tie-rod	Carbon steel	Corrosion resistant chromated

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents			
20	MGZ20-PS				
25	MGZ25-PS				
32	MGZ32-PS				
40	MGZ40-PS	Items 20 and 25 from the above chart			
50	MGZ50-PS	the above chart			
63	MGZ63-PS				
80	MGZ80-PS				

* Seal kits consist of items 20 and 25, and can be ordered by using the seal kit number corresponding to each here size

seal kit number corresponding to each bore size.
* Seal kit includes a grease pack (ø20 to ø50: 10 g, ø63, 80: 20 g).


Order with the following part number when only the grease pack is needed. Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)


No.	Description	Material	Note
14	Tie-rod nut	Carbon steel	Nickel plated
15	Hexagon socket head screw	Chrome molybdenum steel	Nickel plated
16	Spring washer	Steel wire	Nickel plated
17	Bumper	Urethane rubber	
18	Wear ring	Resin	
19	Magnet	_	
20 *	Rod seal A	NBR	
21	Rod seal B	NBR	
22	Piston seal	NBR	
23	Piston gasket	NBR	
24	Tube rod gasket	NBR	
25 *	Cylinder tube gasket	NBR	
26	Coil scraper	Metal	

11 12 10

Dimensions

Basic style



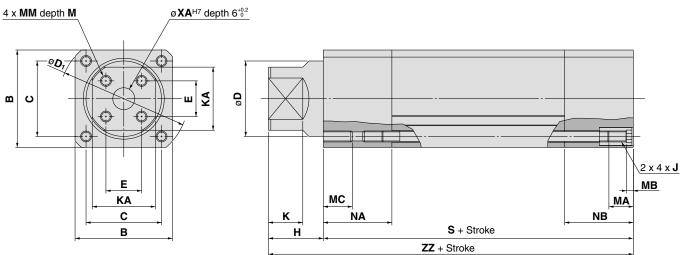

The allowable angle difference of $\Box E$ to $\Box B$ should be limited to $\pm 1.5^{\circ}$.

														(mm)	mao
Bore size (mm)	Stroke range	В	с	D	E	КА	GA	GB	н	D1		J	к	M	MGF
20	Up to 800	39	29	25	11	21	16	12.5	20	51	M5 :	< 0.8	11	8	MGZ
25	Up to 800	43	33	30	12	24	26	18	21	57	M5 x 0.8		12	8	maz
32	Up to 1000	49	38	36	16	30	28.5	19.5	35	66	M6	x 1	22	10	MGT
40	Up to 1000	59	46	45	21	36	34.5	23.5	40	78	M6 x 1		25	10	INGI
50	Up to 1000	71	55	55	26	46	40	28	45	92	M8 x 1.25		25	14	
63	Up to 1000	82	66	68	32	53	46.5	34.5	50	110	M8 x 1.25		25	14	
80	Up to 1000	106	86	87	36	65	54	36	50	144	M12	(1.75	25	20	
Bore size	Stroke									_	_	VA	V V		

(mm)	range	MA	MB	МС	MM	NA	NB	Р	S	XA	Y	ZZ
20	Up to 800	11	4	10	M5 x 0.8	19	21	M5 x 0.8	86	6	5	106
25	Up to 800	11	4	10	M5 x 0.8	26	34	1/8	107	6	6.5	128
32	Up to 1000	16	4	12	M6 x 1	3	7	1/8	120	12	8.5	155
40	Up to 1000	16	4	12	M6 x 1	4	4	1/4	138	12	9.5	178
50	Up to 1000	16	5	15	M8 x 1.25	5	0	1/4	150	16	12.5	195
63	Up to 1000	16	5	15	M8 x 1.25	5	6	1/4	171	16	15	221
80	Up to 1000	20	6	23	M12 x 1.75	6	6	3/8	198	20	20	248



MGJ

MGP


MGQ

MGG

MGC


Dimensions: With Mounting Bracket


Transaxial foot style: (L)

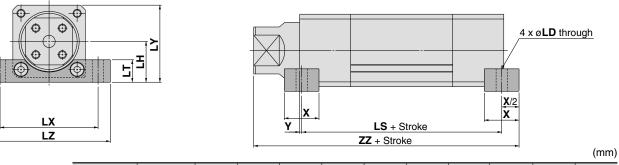

Bore size (mm)	Stroke range	х	Y	LD	LH	LT	LX	LY	LZ	LS	ZZ
20	Up to 800	16	0	6.6	22	13	58	41.5	72	86	114
25	Up to 800	16	0	6.6	24	14	62	45.5	75	107	136
32	Up to 1000	22	0	9	27.5	16	70	52	88	120	166
40	Up to 1000	24	0	9	34	19	80	63.5	100	138	190
50	Up to 1000	32	1	11	40	22	96	75.5	120	148	210
63	Up to 1000	36	3	13	47	24	110	88	140	165	236
80	Up to 1000	40	3	17	59	30	146	112	180	192	265

Rod flange style: (F)




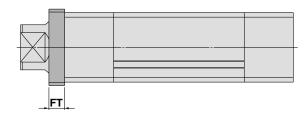


(mm)

Bore size (mm)	Stroke range	В	FD	FT	FX	FY	FZ
20	Up to 800	44	5.5	8	50	34	60
25	Up to 800	48	6.6	8	57	36	70
32	Up to 1000	60	9	12	64	46	78
40	Up to 1000	74	9	12	80	58	100
50	Up to 1000	78	9	16	100	61	125
63	Up to 1000	100	12	16	112	75	138
80	Up to 1000	120	14	16	132	95	155

Head flange style: (G)



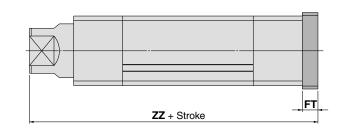

(mm)

Bore size (mm)	Stroke range	в	FD	FT	FX	FY	FZ	zz
20	Up to 800	44	5.5	8	50	34	60	114
25	Up to 800	48	6.6	8	57	36	70	136
32	Up to 1000	60	9	12	64	46	78	167
40	Up to 1000	74	9	12	80	58	100	190
50	Up to 1000	78	9	16	100	61	125	211
63	Up to 1000	100	12	16	112	75	138	237
80	Up to 1000	120	14	16	132	95	155	264

SMC



Non-rotating Double Power Cylinder With End Lock on Rod Side Series MGZ

How to Order 100 R-M9BW With end lock MGZ 40 Made to Order Mounting style For details, refer to page 434. Nil Basic style Transaxial foot style L Number of auto switches F Rod flange style Nil 2 pcs. G Head flange style S 1 pc. n "n" pcs. Bore size **40** 40 mm Auto switch 50 50 mm Without auto switch (Built-in magnet) Nil 63 63 mm * For the applicable auto switch model, refer to the table below. Thread type With end lock on rod side Nil Rc TΝ NPT Cylinder stroke (mm) TF G Refer to "Standard Stroke" on page 434. MGJ

Annlicable Auto Switch/Refer to pages 1719 to 1827 for detailed specifications of auto switches

ø40, ø50, ø63

<u> </u>	Load voltage Auto Switch / Refer to pages 1/19 to 1827 for detailed specifications of auto switches.																
		Electrical	tor	Wiring	L	oad volta	ge	Auto swit	ch model	Lead	wire le	ength	(m)	Pre-wired			MOD
Туре	Special function	entry	ndicator light	(Output)	Г	С	AC	Perpendicular	In-line	0.5	1	3	5	connector	Applicat	ole load	MGP
			<u>-</u>	(output)		<u> </u>	///	roponaloulai		(Nil)	(M)	(L)	(Z)				
				3-wire (NPN)		5 V,12 V		M9NV	M9N	\bullet	\bullet		0	0	IC circuit		MGQ
ء	—			3-wire (PNP)		5 V, 12 V		M9PV	M9P	\bullet			0	0			
switch				2-wire		12 V] [M9BV	M9B	•			0	0	_		MGG
SW	perform Diagnostic indication Gromm (2-color indication) Gromm Gromm			3-wire (NPN)	1	5 V 10 V	1 — L	M9NWV M9PWV	M9NW	•			0	0		<u> </u>	muu
ate		Grommet	Yes	3-wire (PNP)	24 V	5 V,12 V			M9PW	•			0	0	IC circuit	Relay,	MOO
				2-wire		12V		M9BWV	M9BW	۲			0	0	_	PLC	MGC
Solid	Mater a sister at			3-wire (NPN)	N)	E V 10 V] [M9NAV	M9NA	0	0		0	0			
Ň	Water resistant			3-wire (PNP)	1	5 V,12 V		M9PAV	M9PA	0	0		0	0	IC circuit	i	MGF
	(2-color indication)			2-wire		12 V] [M9BAV	M9BA	0	0		0	0	—		
고 두			V	3-wire	_	5 V	_	A96V	A96	•	_	•	_	_	IC circuit	_	MGZ
Reed switch	—	Grommet	res	(NPN equiv.)			100.1/	A 001/	4.00							D 1	
S S			2-wire	24 V	12 V	100 V	A93V	A93							Relay,	MGT	
			No				100 V or less	A90V	A90		—		-		IC circuit	PLC	

..... Nil (Example) M9NW * Lead wire length symbols: 0.5 m ·

* Solid state auto switches marked "O" are produced upon receipt of order.


1 m ······ M (Example) M9NWM 3 m ····· L (Example) M9NWL

5 m ······ Z (Example) M9NWZ

* Refer to page 445 for applicable auto switches other than listed above.

* Refer to pages 1784 and 1785 for details of auto switches with a pre-wired connector.

* Auto switches are shipped together (not assembled).





Bore size (mm)	40	50	63					
Action	Do	ouble acting, Single	rod					
Fluid	Air							
Proof pressure		1.5 MPa						
Max. operating pressure		1.0 MPa						
Min. operating pressure		0.2 MPa*						
Ambient and fluid temperature	Without auto switch: -10° to 70°C (With no freezing)							
	With auto switch: -10° to 60°C (With no freezing)							
Lubrication		Non-lube						
Piston speed	(OUT 50 to 700 mm/	's					
r istoli speed		IN 50 to 450 mm/s	i i					
Stroke length tolerance	Up	to 250 ^{+1.0} , 251 to 10	000 ^{+1.4}					
Cushion	Rubber bumper							
Mounting	Basic style, Transaxial	foot style, Rod flange	style, Head flange style					

 \ast 0.08 MPa (or 0.12 MPa for long strokes) except the lock part.

Lock Specifications

Made to Order M	(Refer to page 2002 for details.)						
Symbol	Specifications						
-X1247	Rod end female thread: 1 pc.						

End lock position	Rod side only						
Holding force (max)	ø40	ø50	ø63				
Ν	1770	1770 2690					
Backlash		2 mm or less					
Manual release	Non-locking type						
Manual release		Non-locking type					

Adjust the switch position so that it operates upon movement to both the stroke end and backlash (2 mm) position.

Standard Stroke

Bore sizes (mm) Standard strokes (mm) Long strokes (mm) 40, 50, 63 75, 100, 125, 150, 175 200, 250, 300 350, 400, 450, 500, 600 700, 800, 900,1000			
40, 50, 63	Bore sizes (mm)	Standard strokes (mm)	Long strokes (mm)
	40, 50, 63	, , , ,	

Intermediate strokes and strokes shorter than 75 mm are also available.


Mass

Mass				(kg)
Bore sizes (mi	n)	40	50	63
	Basic style	2.80	4.08	6.13
Standard mass	Foot style	3.29	4.97	7.39
	Flange style	3.24	4.84	7.13
Mass per each 50 mm of stroke	All mounting brackets	0.41	0.61	0.80

Theoretical Output

Theoretica	al Output												(N)	
Model	Bore size	Rod size	Operating	Piston area		Operating pressure (MPa)								
woder	(mm)	(mm)	direction	(mm²)	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	
MGZ40	45 x 40	20	OUT	2533	507	760	1013	1267	1520	1773	2026	2280	2533	
MGZ40	40	20	IN	942	188	283	377	471	565	659	754	848	942	
MGZ50	55 x 50	05	OUT	3848	770	1154	1539	1924	2309	2694	3078	3463	3848	
MG250	GZ50 50 25	25	IN	1473	295	442	589	737	884	1031	1178	1326	1473	
MG763	68 x 63	00	OUT	5945	1189	1784	2378	2973	3567	4162	4756	5351	5945	
MGZ63	63	32	IN	2313	463	694	925	1157	1388	1619	1850	2082	2313	

Construction

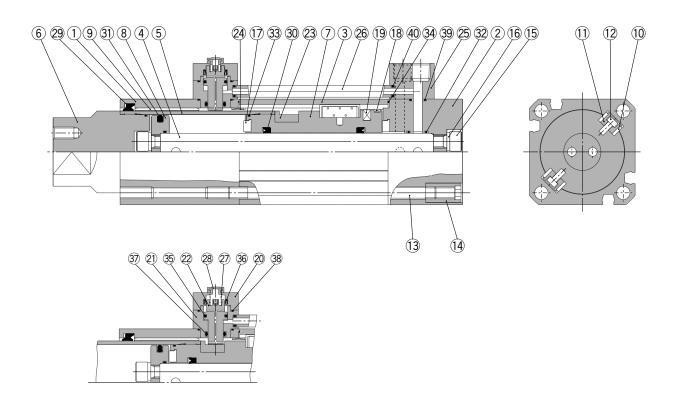

SMC

End lock

Component Parts

No.	Description	Material	Note		
1	Rod cover	Aluminum alloy	Clear anodized		
2	Head cover	Aluminum alloy	Clear anodized		
3	Cylinder tube	Aluminum alloy	Hard anodized		
4	Piston rod	Aluminum alloy	Hard anodized		
5	Tube rod	Carbon steel tube	Hard chromium electroplated		
6	Tube rod cover	Carbon steel	Electroless nickel plated		
7	Piston	Aluminum alloy	Chromated		
8	Stationary piston	Aluminum alloy	Chromated		
9	Bushing	Lead-bronze casted			
10	Thrust plate	Lead-bronze casted			
11	Holder	Aluminum alloy	Chromated		
12	Pin	Carbon steel	Zinc chromated		
13	Tie-rod	Carbon steel	Corrosion resistant chromated		
14	Tie-rod nut	Carbon steel	Nickel plated		
15	Hexagon socket head screw	Chrome molybdenum steel	Nickel plated		
16	Spring washer	Steel wire	Nickel plated		
17	Bumper	Urethane rubber			
18	Wear ring	Resin			
19	Magnet	_			
20	Сар	Bronze alloy	Electroless nickel plated		

No.	Description	Material	Note
21	Lock holder	Stainless steel	
22	Lock piston	Carbon steel	Quenched, hard chromium electroplated
23	Stopper	Carbon steel	Quenched
24	Collar	Steel piping	Zinc trivalent chromated
25	Port block	Bronze alloy	Electroless nickel plated
26	Pipe	Bronze alloy	
27	Lock spring	Steel wire	
28	Rubber cap	Synthetic rubber	
29 *	Rod seal A	NBR	
30	Rod seal B	NBR	
31	Piston seal	NBR	
32	Piston gasket	NBR	
33	Tube rod gasket	NBR	
34 [*]	Cylinder tube gasket	NBR	
35 [*]	Locking piston seal A	NBR	
36*	Locking piston seal B	NBR	
37*	Locking piston seal C	NBR	
38*	Lock holder gasket	NBR	
39 *	Port block gasket	NBR	
40 [*]	Pipe gasket	NBR	

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
40	MGZ40R-PS	
50	MGZ50R-PS	Items 29, and 34 to 40 from the above chart
63	MGZ63R-PS	from the above chart

 \ast Seal kits consist of items B and B to M, and can be ordered by using the seal kit number

corresponding to each bore size. * Seal kit includes a grease pack (10 g).

Order with the following part number when only the grease pack is needed. Grease pack part no.: GR-S-010 (10 g)



MGJ

MGP

MGQ

MGG

MGC

MGF


MGZ

MGT

Series MGZ

Dimensions

Basic style

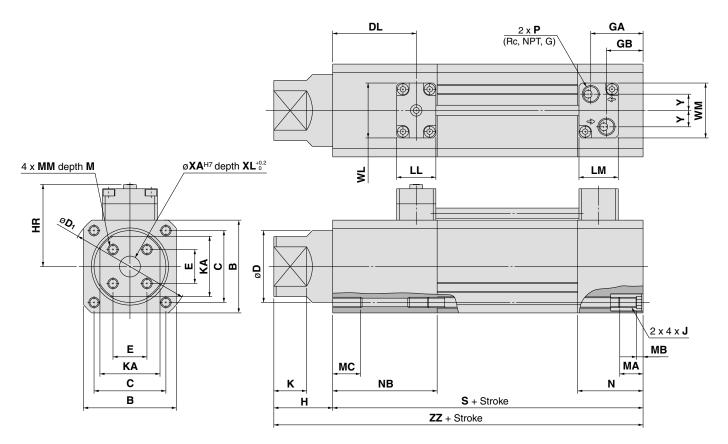


																	(mm)
Bore size (mm)	Stroke range	в	с	D	DL	E	GA	GB	н	HR	D1		J	к	KA	LL	LM
40	Up to 1000	59	46	45	58	21	34.5	23.5	40	57.5	78	M6 x	1	25	36	30	30
50	Up to 1000	71	55	55	67	26	40	28	45	63.5	92	M8 x	1.25	25	46	30	30
63	Up to 1000	82	66	68	73	32	46.5	34.5	50	69	110	M8 x	1.25	25	53	30	30
Bore size (mm)	Stroke range	М	МА	МВ	мс	М	м	N	NB	Р	s	ХА	XL	Y	WL	WМ	zz
40	Up to 1000	10	16	4	12	M6 x	1	44	74	1/4	168	12	6	9.5	42	39	208
50	Up to 1000	14	16	5	15	M8 x	1.25	50	83	1/4	183	16	6	12.5	42	42	228
63	Up to 1000	14	16	5	15	M8 x	1.25	56	89	1/4	204	16	6	15	52	52	254

Non-rotating Double Power Cylinder With End Lock on Rod Side Series MGZ

Dimensions: With Mounting Bracket

Transaxial foot style: (L)

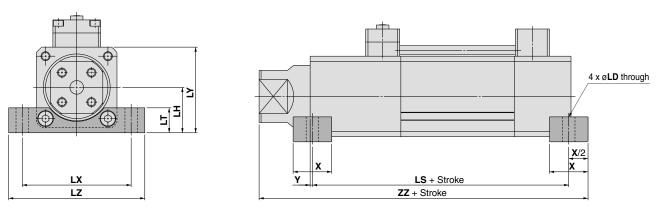

(mm)

MGJ

MGP


MGQ

MGG

MGC

Bore size (mm)	Stroke range	х	Y	LD	LH	LT	LX	LY	LZ	LS	zz
40	Up to 1000	24	0	9	34	19	80	63.5	100	168	220
50	Up to 1000	32	1	11	40	22	96	75.5	120	181	243
63	Up to 1000	36	3	13	47	24	110	88	140	198	269


Rod flange style: (F)




FT	-	

_	(mm)							
MGF	FZ	FY	FX	FT	FD	в	Stroke range	Bore size (mm)
MGZ	100	58	80	12	9	74	Up to 1000	40
	125	61	100	16	9	78	Up to 1000	50
MGT	138	75	112	16	12	100	Up to 1000	63
INIGI								

Head flange style: (G)



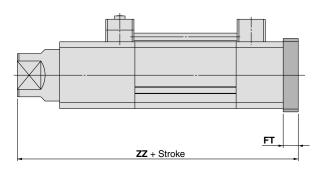

								(11111)	
Bore size	Stroke	в	FD	FT	FX	FY	FZ	zz	-X L
(mm)	range								Individual
40	Up to 1000	74	9	12	80	58	100	220	-X□
50	Up to 1000	78	9	16	100	61	125	244	
63	Up to 1000	100	12	16	112	75	138	270	



(mm)

D-🗆


Double Power Cylinder/ Without Non-rotating Mechanism Series MGZR ø20, ø25, ø32, ø40, ø50, ø63, ø80

How to Order Z - 100 - M9BW 40 MGZR Without Made to Order non-rotating mechanism For details, refer to page 439. Mounting style Number of auto switches Nil Basic style Nil 2 pcs. Transaxial foot style L S 1 pc. F Rod flange style n "n" pcs. G Head flange style D Double clevis style Auto switch Nil Without auto switch (Built-in magnet) Bore size • For the applicable auto switch model, refer to the 20 20 mm table below. Thread type 25 mm Cylinder stroke (mm) M5 x 0.8 ø20 32 32 mm Nil Refer to "Standard Stroke" on page 439. Rc ø25 40 40 mm TΝ Coil scraper NPT ø32 50 mm ø40 Nil Without coil scraper 63 63 mm ø50 With coil scraper Z 80 mm TF G ø63 ø80

Applicable Auto Switch/Refer to pages 1719 to 1827 for detailed specifications of auto switches.

		Electrical	tor	Wiring	L	oad volta	ge	Auto swit	ch model	Lead	wire le	ength	(m)	Pre-wired		
Туре	Special function	entry	Indicator light	(Output)	C	C	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)	connector	Applical	ble load
				3-wire (NPN)		5 V 10 V		M9NV	M9N				0	0	IC circuit	
ء	_			3-wire (PNP)		5 V,12 V		M9PV	M9P				0	0	IC circuit	
switch				2-wire		12 V		M9BV	M9B				0	0	—	
SV	Diagnastia indiastian			3-wire (NPN)		5 V,12 V		M9NWV	M9NW				0	0	IC circuit	Deleu
state	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (PNP)	24 V	5 V, 12 V	—	M9PWV	M9PW			٠	0	0		Relay, PLC
dst				2-wire		12 V		M9BWV	M9BW				0	0	_	FLO
Solid	Water registent			3-wire (NPN)		5 V,12 V		M9NAV	M9NA	0	0	٠	0	0	IC circuit	
S	Water resistant (2-color indication)			3-wire (PNP)		5 V, 12 V		M9PAV	M9PA	0	0		0	0	IC circuit	
				2-wire		12 V		M9BAV	M9BA	0	0	٠	0	0	—	
Reed switch		Grommet	Yes	3-wire (NPN equiv.)	—	5 V	_	A96V	A96	•	_	•	-	_	IC circuit	—
Re Švi		Gronmet		0 surino	24 V	12 V	100 V	A93V	A93		—		—	—	—	Relay,
,			No	2-wire	24 V	12 V	100 V or less	A90V	A90		—	•	—	_	IC circuit	PLC
* Lead	l wire length symbols: 0.5 m ·	N	lil (E	xample) M9NW	*	Solid stat	e auto switc	hes marked '	"O" are prod	uced up	on rec	eipt of	f orde	r.		

* Lead wire length symbols: 0.5 m Nil (Example) M9NW



* Refer to page 445 for applicable auto switches other than listed above.

Refer to pages 1784 and 1785 for details of auto switches with a pre-wired connector.
 Auto switches are shipped together (not assembled).

Double Power Cylinder/ Without Non-rotating Mechanism Series MGZR

Specifications



	ade to Order efer to page 2002 for details.)
Symbol	Specifications
-X1248	Rod end female thread: 4 pcs.

Bore size (m	ım)	20	20 25 32 40 50 63 80							
Action		Double acting, Single rod								
Fluid					Air					
Proof pressure					1.5 MPa					
Max. operating pre	essure	1.0 MPa								
Min energing are			Standard stroke: 0.08 MPa							
Min. operating pre	ssure		Long stroke: 0.12 MPa							
Ambient and fluid		Without auto switch: -10° to 70°C (With no freezing)								
temperature		v	Vith auto	switch: -	0° to 70°	C (With n	o freezing	J)		
Lubrication					Non-lube	1				
Distan anod	OUT			50	to 700 m	m/s				
Piston speed	IN	50 to 350 mm/s 50 to 450 mm/s								
Stroke length tole	rance	Up to $250^{+1.0}_{0}$, 251 to $1000^{+1.4}_{0}$								
Cushion		Rubber bumper								
Mounting		Basic style, Transaxial foot style, Rod flange style Head flange style, Double clevis style								

Standard Stroke

Bore sizes (mm)	Standard strokes (mm)	Long strokes (mm)
20, 25	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500 600, 700, 800
32, 40, 50 63, 80	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500, 600 700, 800, 900,1000

Intermediate strokes and strokes shorter than 75mm are also available.

Mass

Mass								(kg)	MGP
Bore siz	zes (mm)	20	25	32	40	50	63	80	1400
	Basic style	0.48	0.70	1.09	1.91	3.03	4.83	8.85	MGQ
Standard mass	Foot style	0.63	0.86	1.34	2.39	3.92	6.08	10.61	1400
Stanuaru mass	Flange style	0.59	0.83	1.32	2.34	3.79	5.83	9.92	MGG
	Double clevis style	0.58	0.83	1.32	2.19	3.47	5.62	10.66	1400
Mass per each	All mounting	0.19	0.22	0.29	0.39	0.59	0.78	1.21	MGC
50 mm of stroke	brackets	0.15	0.22	0.29	0.39	0.59	0.78	1.21	мог

Theoretical Output

Theore	Theoretical Output (N													
Model	Bore size	Rod size	Operating	Piston area	Operating pressure (MPa)									
woder	(mm)	(mm)	direction	(mm ²)	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	
MGZ20	20 x 25	10	OUT	726	145	218	290	363	436	508	581	653	726	
WGZ20	20	10	IN	236	47	71	94	118	141	165	189	212	236	
MGZ25	25 x 30	12	OUT	1085	217	326	434	543	651	760	868	977	1085	
WGZ25	25	12	IN	378	76	113	151	189	227	265	302	340	378	
MGZ32	36 x 32	16	OUT	1621	324	486	648	811	973	1135	1297	1459	1621	
WGZ3Z	32	10	IN	603	121	181	241	302	362	422	482	543	603	
MGZ40	45 x 40	20	OUT	2533	507	760	1013	1267	1520	1773	2026	2280	2533	
WGZ40	40	20	IN	942	188	283	377	471	565	659	754	848	942	
MGZ50	55 x 50	25	OUT	3848	770	1154	1539	1924	2309	2694	3078	3463	3848	
MGZ50	50	25	IN	1473	295	442	589	737	884	1031	1178	1326	1473	
MGZ63	68 x 63	20	OUT	5945	1189	1784	2378	2973	3567	4162	4756	5351	5945	
WGZ03	63	32	IN	2313	463	694	925	1157	1388	1619	1850	2082	2313	
MGZ80	87 x 80	0 40	OUT	9715	1943	2915	3886	4858	5829	6801	7772	8744	9715	
WGZ00	80	40	IN	3770	754	1131	1508	1885	2262	2639	3016	3393	3770	


IGQ IGG IGC MGF MGZ MGT


MGJ




Series MGZR

Construction: MGZR

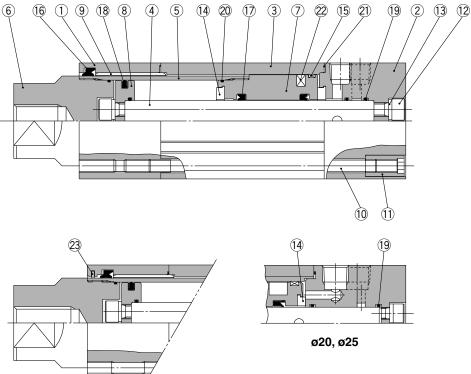







No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cylinder tube	Aluminum alloy	Hard anodized
4	Piston rod	Aluminum alloy	Hard anodized
5	Tube rod	Carbon steel	Hard chromium electroplated
6	Tube rod cover	Carbon steel	Electroless nickel plated
7	Piston	Aluminum alloy	Chromated
8	Stationary piston	Aluminum alloy	Chromated
9	Bushing	Lead bronze casted	
10	Tie-rod	Carbon steel	Corrosion resistant chromated
11	Tie-rod nut	Carbon steel	Nickel plated
12	Hexagon socket head screw	Chrome molybdenum steel	Nickel plated

No.	Description	Material	Note
13	Spring washer	Steel wire	Nickel plated
14	Bumper	Urethane rubber	
15	Wear ring	Resin	
16 [*]	Rod seal A	NBR	
17	Rod seal B	NBR	
18	Piston seal	NBR	
19	Piston gasket	NBR	
20	Tube rod gasket	NBR	
21*	Cylinder tube gasket	NBR	
22	Magnet	—	
23	Coil scraper	Metal	

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
20	MGZ20-PS	
25	MGZ25-PS	
32	MGZ32-PS	
40	MGZ40-PS	Items 16 and 21 from the above chart
50	MGZ50-PS	
63	MGZ63-PS	
80	MGZ80-PS	

* Seal kits consist of items (6) and (2), and can be ordered by using the seal kit number corresponding to each bore size.
* Seal kit includes a grease pack (ø20 to ø50: 10 g, ø63, 80: 20 g).


Order with the following part number when only the grease pack is needed. Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g) $\,$



Double Power Cylinder/ Without Non-rotating Mechanism Series MGZR

Dimensions

Basic style

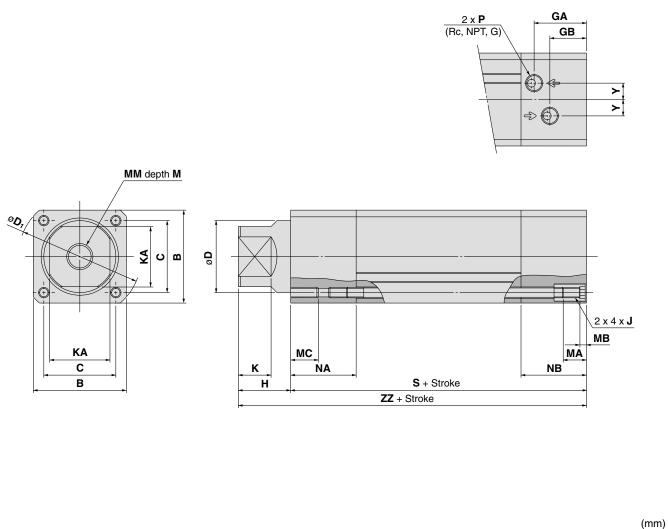

																						()	
Bore size (mm)	Stroke range	в	с	D	КА	GA	GB	н	D 1	ſ	к	м	МА	мв	мс	ММ	NA	NB	Р	s	Y	zz	MGF
20	Up to 800	39	29	25	21	16	12.5	20	51	M5 x 0.8	11	17	11	4	10	M8 x 1.25	19	21	M5 x 0.8	86	5	106	MGZ
25	Up to 800	43	33	30	24	26	18	21	57	M5 x 0.8	12	17	11	4	10	M8 x 1.25	26	34	1/8	107	6.5	128	
32	Up to 1000	49	38	36	30	28.5	19.5	35	66	M6 x 1	22	22	16	4	12	M10 x 1.5	3	37	1/8	120	8.5	155	MGT
40	Up to 1000	59	46	45	36	34.5	23.5	40	78	M6 x 1	25	30	16	4	12	M16 x 2	4	4	1/4	138	9.5	178	WUI
50	Up to 1000	71	55	55	46	40	28	45	92	M8 x 1.25	25	35	16	5	15	M20 x 2.5	5	50	1/4	150	12.5	195	
63	Up to 1000	82	66	68	53	46.5	34.5	50	110	M8 x 1.25	25	35	16	5	15	M20 x 2.5	5	6	1/4	171	15	221	
80	Up to 1000	106	86	87	65	54	36	50	144	M12 x 1.75	25	38	20	6	23	M22 x 2.5	6	6	3/8	198	20	248	

D- □
-X□
Individual
-X□

MGJ

MGP

MGQ


MGG

MGC

Series MGZR


Dimensions: With Mounting Bracket

Transaxial foot style: (L)

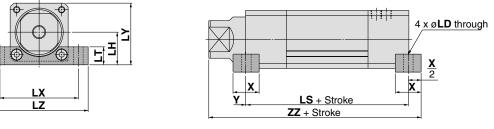


											(mm)
Bore size (mm)	Stroke range	х	Y	LD	LH	LT	LX	LY	LZ	LS	ZZ
20	Up to 800	16	0	6.6	22	13	58	41.5	72	86	114
25	Up to 800	16	0	6.6	24	14	62	45.5	75	107	136
32	Up to 1000	22	0	9	27.5	16	96	52	88	120	166
40	Up to 1000	24	0	9	34	19	110	63.5	100	138	190
50	Up to 1000	32	1	11	40	22	146	75.5	120	148	210
63	Up to 1000	36	3	13	47	24	110	88	140	165	236
80	Up to 1000	40	3	17	59	30	146	112	180	192	265

Rod flange style: (F)

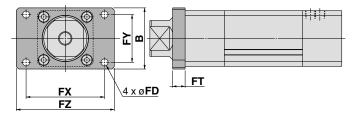


Head flange style: (G)

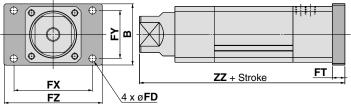

							(mm)
Bore size (mm)	Stroke range	в	FD	FT	FX	FY	FZ
20	Up to 800	44	5.5	8	50	34	60
25	Up to 800	48	6.6	8	57	36	70
32	Up to 1000	60	9	12	64	46	78
40	Up to 1000	74	9	12	80	58	100
50	Up to 1000	78	9	16	100	61	125
63	Up to 1000	100	12	16	112	75	138
80	Up to 1000	120	14	16	132	95	155

								(mm)
Bore size (mm)	Stroke range	в	FD	FT	FX	FY	FZ	zz
20	Up to 800	44	5.5	8	50	34	60	114
25	Up to 800	48	6.6	8	57	36	70	136
32	Up to 1000	60	9	12	64	46	78	167
40	Up to 1000	74	9	12	80	58	100	190
50	Up to 1000	78	9	16	100	61	125	211
63	Up to 1000	100	12	16	112	75	138	237
80	Up to 1000	120	14	16	132	95	155	264

Double clevis style: (D)

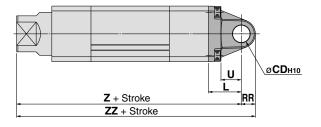



SMC


* A clevis pin and 2 cotter pins are included.

(mm)
77


Bore size (mm)	Stroke range	L	RR	U	CDH10	CX+0.3 +0.1	CZ	z	zz
20	Up to 250	23	8.5	14	10	14	28	129	137.5
25	Up to 350	23	11	14	10	14	28	151	162
32	Up to 600	30	12	17	14	20	40	185	197
40	Up to 600	30	15	17	14	20	40	208	223
50	Up to 700	42	18	26	22	30	60	237	255
63	Up to 900	42	23	26	22	30	60	263	286
80	Up to 900	50	28	30	25	32	64	298	326

Double Power Cylinder/ Without Non-rotating Mechanism Series MGZR

Double Clevis Bracket

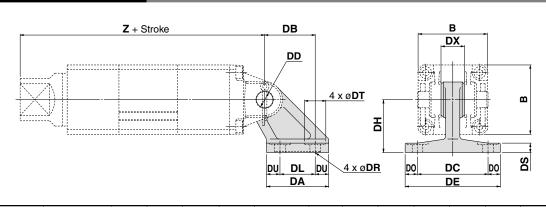

Model	Bore size (mm)	в	DA	DB	DC	DDH10	DE	DH	DL	DO	DR	DS	DT	DU	DX	z
	20	39	42	32	44	10 ^{+0.058}	62	33	22	9	6.6	7	15	10	14	129
MB-B03	25	43	42	32	44	10 ^{+0.058}	62	33	22	9	6.6	7	15	10	14	151
MB-B05	32	49	53	43	60	14 ^{+0.070}	81	45	30	10.5	9	8	18	11.5	20	185
WD-D05	40	59	53	43	60	14 ^{+0.070}	81	45	30	10.5	9	8	18	11.5	20	208
MB-B08	50	71	73	64	86	22 ^{+0.084}	111	65	45	12.5	11	10	22	14	30	237
WD-D00	63	82	73	64	86	22 ^{+0.084}	111	65	45	12.5	11	10	22	14	30	263
MB-B12	80	106	90	78	110	25 ^{+0.084}	136	75	60	13	13.5	14	24	15	32	298



Bore size (mm)	A°	B°	A ° + B ° + 90°						
20	35	50	175						
25	30	50	170						
32, 40	30	50	170						
50, 63	35	50	175						
80	30	35	155						
-									


MGJ

MGP

MGZ

MGT

Clevis Pin



М

Nominal Pitch

1.25

1.5

2.5

2.5

2

size

8

10

16

20

22

A

51

62.5 10

80.5 16

101

129

								MGQ	
Model	Bore size (mm)	Dd9	L	l	m	d (Drill through)	Cotter pin	MGG	
CD-M03	20, 25	10 ^{-0.040} -0.076	44	36	4	3	ø3 x 18 ℓ		
CD-M05	32, 40	14 ^{-0.050} -0.093	60	51	4.5	4	ø4 x 25 ℓ	MGC	
CD-M08	50, 63	22 ^{-0.065} -0.117	82	72	5	4	ø4 x 35 ℓ	mao	
CDP-7A	80	25-0.065	88	78	5	4	ø4 x 36 ℓ	MGF	
Note) Cotter pins and flat washers are included.									

Floating Joint

Applicable

bore size

20, 25

32

40

50, 63

80

Model


JB40-8-125

JB63-10-150

JB80-16-200

JB100-20-250

JB140-22-250

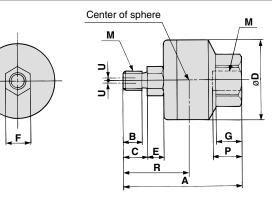

С

11

13

20

26


22

в

8.5

21

18



D	Е	F	G	н	Center of sphere		Allowable	Max. operati and compr		Mass	D- □
D	-	г	G	п	R	depth P		Compression		(kg)	-X□
31	6	11	11	22	29	13	0.75	6000	1300	0.15	-V□
41	7.5	14	13.5	27	35.5	15	1	11000	3100	0.29	Individual
50	9.5	19	16	32	47.5	18	1.25	18000	5000	0.56	-X□
59.5	11.5	24	20	41	59	24	2	28000	7900	1.04	
79	14	30	22	46	71.5	38	2.5	54000	15300	2.6	



(mm) _


Series MGZR

Minimum Stroke for Mounting

					-			(mm)
Model	No. of auto switches	ø 20	ø 25	ø 32	ø 40	ø 50	ø 63	ø 80
	2 pcs. (Same surface)		50			50		50
D-A9□	2 pcs. (Different surfaces)		15			15		15
	1 pc.		15			15		10
	2 pcs. (Same surface)		25		25			25
D-A9⊡V	2 pcs. (Different surfaces)		10			10		10
	1 pc.		5			5		5
	2 pcs. (Same surface)		30			30		30
D-M9⊡V	2 pcs. (Different surfaces)		10			10		10
	1 pc.		5			5		5
B. 140-	2 pcs. (Same surface)		55			55		55
D-M9□ D-M9□W	2 pcs. (Different surfaces)		15			15		15
	1 pc.		15			15		10
	2 pcs. (Same surface)		30		30			30
D-M9□WV	2 pcs. (Different surfaces)	15			15			15
	1 pc.		10			10		10
	2 pcs. (Same surface)	60			60		60	
D-M9□A	2 pcs. (Different surfaces)	20	1	15		15		15
	1 pc.		15		15			10
	2 pcs. (Same surface)		35			35		35
D-M9□AV	2 pcs. (Different surfaces)		15			15		15
	1 pc.		10			10		10
	2 pcs. (Same surface)		_			60		70
D-Z7□/Z80	2 pcs. (Different surfaces)					20		20
	1 pc.		_		20			20
	2 pcs. (Same surface)		_			60		65
D-Y59□/Y69□ D-Y7P/Y7PV	2 pcs. (Different surfaces)		_			20		20
D-1/P/1/PV	1 pc.					20		20
	2 pcs. (Same surface)		_			70		65
	2 pcs. (Different surfaces)		_			25		20
D-Y7□WV	1 pc.		_			25		20
	2 pcs. (Same surface)		_			70		75
D-Y7BAL	2 pcs. (Different surfaces)		_		25			20
	1 pc.		_			25		20

Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

(mm)

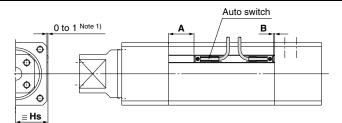

Auto Switch Proper Mounting Position

Auto switch model	D-A9⊡ D-A9⊡V		D-M9□/M9 D-M9□W/ D-M9□AL	M9⊡WV	D-Z7□/Z80 D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV D-Y7BAL		
Bore size	Α	В	Α	В	Α	В	
20	24	3	28	7	—	—	
25	24	3	28	7	—	—	
32	22	4	26	8	—	_	
40	24.5	2.5	28.5	6.5	23	0	
50	24.5	2.5	28.5	6.5	23	0	
63	33.5	2.5	37.5	6.5	32	0	
80	38	5	42	9	37	4	

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

Auto Switch Mounting Height (mm)

Auto switch model	D-A9 V Note 2) D-Y69 D-Y7PV D-Y7 WV	D-M9□V D-M9□WV D-M9□AVL
Bore size	Hs	Hs
20	25	28
25	27	30
32	30	33
40	28.5	31.5
50	38.5	41.5
63	44	47
80	56	59

Note 1) The above figures are when the in-line electrical entry type D-A9□/M9□/M9□W/M9□AL/Z7□/Z80/Y59□/Y7P/Y7□W/ Y7BAL auto switches are mounted.

Note 2) Z7□/Z80/Y59□/Y7P/Y7□W/Y7BAL cannot be mounted on ø20 to ø32.



Double Power Cylinder Series MGZ/MGZR

Operating Range

							(mm)		
	Bore size								
Auto switch model	20	25	32	40	50	63	80		
D-A9□/A9□V	8	9.5	8	8	8.5	9.5	9.5		
D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL	4.5	4.5	5	5	5	6.5	6		
D-Z7□/Z80			_	10	10	11	13		
D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV D-Y7BAL	_	_	_	6	5	6	8		

 \ast Hysteresis specifications are given as a guide, it is not a guaranteed range. (Tolerance $\pm 30\%$)


Hysteresis may fluctuate due to the operating environment.

Auto Switch Mounting Bracket: Part No.

Auto switch model	Bore size					
Auto switch model	Ø20 to Ø32	ø40 to ø80				
D-A9=/A9=V D-M9=/M9=V D-M9=W/M9=WV D-M9=AL/M9=AVL	BMY3-016	Note) ① BMP1-032 ② BMG2-012				
D-Z7 //Z80 D-Y5 //Y7P D-Y7 // W D-Y6 //Y7PV D-Y7 // WV D-Y7 // WV D-Y7BAL	_	① BMP1-032				

Note) Two kinds of auto switch mounting brackets are used as a set.

D-A9 \Box V/M9 \Box (V)/M9 \Box W(V)/M9 \Box A(V)L with bore sizes of ø40 to ø80.

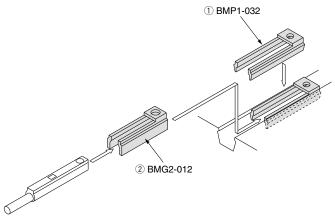

	1719 to 1827 for the de	der, the following auto sw tailed specifications.	and the second sec		1 [ľ
Auto switch type	Model	Electrical entry (Fetching direction)	Features	Applicable bore size	i (
Bood	D-Z73, Z76	Crommot (In line)	—		
Reed	D-Z80	Grommet (In-line)	Without indicator light]	i r
	D-Y69A, Y69B, Y7PV	Crammet (Perpendicular)	_	1	۱Ľ
	D-Y7NWV, Y7PWV, Y7BWV	Grommet (Perpendicular)	Diagnostic indication (2-color indication)	ø40 to ø80	!
Solid state	D-Y59A, Y59B, Y7P		_	1	
	D-Y7NW, Y7PW, Y7BW	Grommet (In-line)	Diagnostic indication (2-color indication)	1	: 1
	D-Y7BAL		Water resistant (2-color indication)		. 1

D- □	
-X □	
Individual -X□	

MGJ



Series MGZ/MGZR **Specific Product Precautions 1**

Be sure to read before handling. Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Selection

A Caution

1. Operate load within the range of the operating limits.


In accordance with the model selection procedure, operate within the operating limits of load weight, maximum speed, center of gravity position and allowable rotating torque. Operation beyond the operating limits can cause wear of the bearings and loosening of connections, leading to damage of machinery.

2. Compared to regular cylinders, at least twice the time is required for movement to begin in the retracting direction.

Cylinders featured in this catalog are filled with twice the amount of air at the extending compared to regular cylinders, therefore a longer time is required to exhaust the air before movement in the retracting direction begins.

3. Construct equipment so that reactive forces such as external stoppers and pressing are applied to the cylinder's central axis.


Design the external stopper or die so that when a cylinder stops before the stroke end on a stopper or press, the reactive force is applied to the cylinder's central axis. Off-center operation can cause wear of the bearings and loosening connections, leading to damage of machinery.



Incorrect

4. Under horizontal or downward operating conditions, lurch prevention measures may be required for the cylinder's extending operation.

Since the output force of the cylinders featured in this catalog in the extending direction is at least double that in the retracting direction, start-up operation for extension may exceed the control speed of the speed controller. In this case, provide a lurch prevention circuit within the pneumatic circuitry.



5. Do not over throttle the meter-in speed controller of the lurch prevention circuit.

Throttling the meter-in speed controller will make the start-up time for output in the extending direction longer.

Operation

A Caution

1. Do not apply more than the allowable rotating torque to the piston rod (for Series MGZ: with nonrotating mechanism).

If more than the allowable rotating torque is applied, the slide keys for non-rotation will be deformed and non-rotating accuracy will be lost. This may cause damage to machinery.


Mounting

\land Caution

1. When mounting the cylinder, use mounting bolts of a suitable length, and tighten them properly within the specified range of tightening torque.

Particularly in case of frequent operation or much vibration, emply measures to prevent loosening of the bolts, such as the application of a thread locker.

Model	Bolt	Proper tightening torque N·m	L1	L2
MGZ/MGZR20	M5 x 0.8	2.5 to 3.1	10	11
MGZ/MGZR25	M5 x 0.8	2.5 to 3.1	10	11
MGZ/MGZR32	M6 x 1	4.1 to 6.4	12	16
MGZ/MGZR40	M6 x 1	4.1 to 6.4	12	16
MGZ/MGZR50	M8 x 1.25	8.8 to 13.8	15	16
MGZ/MGZR63	M8 x 1.25	8.8 to 13.8	15	16
MGZ/MGZR80	M12 x 1.75	30.4 to 47.5	23	20




2. Do not gouge or scratch the mounting surfaces of the rod cover and head cover.

Evenness of mounting surfaces will be degraded, causing increased operating resistance and wear of the bearings etc.

3. Mounting of workpiece on the rod end

When screwing bolts into the threads of the table surface at the end of the piston rod, be sure the piston rod is fully retracted and use the wrench flats to hold the rod. Tighten the bolts in such a way that the tightening torque is not applied to the non-rotation slide keys. (for Series MGZ: with non-rotating mechanism).



4. Allowable angle displacement of $\Box E$ to $\Box B$ is $\pm 1.5^{\circ}$. (for Series MGZ: with non-rotating mechanism)



Applicable Floating Joint

A Caution

1. When using a floating joint at the end of the tube rod, use the model specified in the table below. (for Series MGZR: without non-rotating mechanism)

Applicable floating joint	
JB40-8-125	
JB80-16-200	
- JB100-20-250	





Series MGZ/MGZR Specific Product Precautions 2

Be sure to read before handling.


Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

End Lock Precautions

Use the Recommended Pneumatic Circuit.

A Caution

This is necessary for proper operation and release of the lock.



1. Do not use 3-position solenoid valve.

Avoid use in combination with 3-position selenoid valves (especially closed center metal seal types). If pressure is trapped in the port on the retracting side the cylinder cannot be locked. Furthermore, even after being locked, the lock may disengaged after some time, due to air leaking from the solenoid valve and entering the cylinder.

2. Back pressure is required when releasing the lock.

Before starting operation, be sure to control the system so that air is supplied to the extending side as shown in the figure above. Otherwise, there is a possibility that the lock may not be released. (Refer to the Releasing the Lock section.)

3. Release the lock when mounting or adjusting the cylinder.

The lock unit may be damaged if mounting or other work is performed when the cylinder is locked.

- **4. Operate with a load factor of 50% or less.** If the load ratio exceeds 50%, this may cause problems such as failure of the lock to release or damage to the lock unit.
- **5.** Do not operate multiple synchronized cylinders. Avoid applications in which two or more end lock cylinders are synchronized to move one work piece, as one of the cylinder locks may not be able to be released when required.
- 6. Use a speed controller with meter-out control. It may not be possible to release the lock with meter-in control.
- 7. Be sure to operate completely to the cylinder stroke end on the extending side. If the cylinder piston does not reach the end of the stroke, locking

and unlocking may not be possible. 8. Adjust the auto switch's position so that it operates

for movement to both the stroke end and backlash (2 mm) positions.

When a 2-color indication switch is adjusted for green indication at the stroke end, it may change to red after the backlash return, but this is not abnormal.

Operating Pressure

▲ Caution

Apply air pressure of at least 0.20 MPa to the port on the retracting side. This is necessary to release the lock.

Exhaust Speed

ACaution

Locking will occur automatically if the pressure applied to the port on the retracting side falls down to 0.05 MPa or less. In cases where the piping on the retracting side is long and thin, or the speed controller is some distance away from the cylinder port, the exhaust speed will be reduced and the lock may not engage right away. Furthermore, clogging of a silencer mounted on the exhaust port of the solenoid valve can produce the same result.

Releasing the Lock

\land Warning

Before releasing the lock, be sure to supply air to the extending side, so that there is no load applied to the lock mechanism when it is released. (Refer to the recommended pneumatic circuit.) If the lock is released when the port on the extending side is in an exhaust state and with a load applied to the lock mechanism, the lock mechanism may be subjected to an excessive force and be damaged. Also, remember that sudden erratic movement of the tube rod is very dangerous.

Manual Release


ACaution

Non-locking type manual release

Insert the accessory bolt from the top of the rubber cap (it is not necessary to remove the rubber cap), and after screw it into the lock piston, pull it to release the lock. If you stop pulling the bolt, the lock will return to an operational state. Thread sizes, pulling force and stroke are shown below.

Bore size (mm)	Screw size	Pulling force (N)	Stroke (mm)
40, 50, 63	M3 x 0.5 x 30 ℓ or more	10	3

* Remove the bolt for normal operation, otherwise it can cause lock malfunction or faulty release.



D--X□ Individual -X□

MGJ
MGP
MGQ
MGG
MGC
MGF
MGZ
MGT