3 Port Direct Operated Solenoid Valve Metal Seal, Body Ported/Base Mounted VS3115/3110

Multiple pressure supply is possible with balanced spool sleeve.

Any given port can accept high or low pressure supply without affecting the system life or operation.

No-lubrication and dry-air operation possible.





Base mounted

Standard Specifications

Fluid				Air/Inert gas				
Operating pressure range				0 to 1.0 MPa				
Proof pressure				1.5 MPa				
Ambient and fluid tempera	ture		-20 to 60°C (No freezing)					
Response time (1)			10	ms or less (AC), 45 ms or less (DC)				
Max. operating frequency	(2)		1	I,500 c.p.m. (AC), 180 c.p.m. (DC)				
Manual override				Non-locking				
Lubrication			Not required	I (Use turbine oil Class 1 ISO VG32, if lubricated.)				
Enclosure			D	ustproof [Degrees of protection 0] (4)				
Shock/Vibration resistance	(m/	S ²)		150/50 (5)				
Electrical entry			Grommet, DIN terminal					
		Standard		100, 200 VAC, 50/60 Hz; 24 VDC				
Coil rated voltage		0 ::	220, 110, 48, and 24 VAC (50/60 Hz)					
		Option	100, 48, and 12 VDC					
Allowable voltage fluctuation	on		-15 to -10% of rated voltage					
Coil insulation type				Class B or equivalent (130°C) (6)				
			50 Hz	51				
Apparent power (VA)	,_	Inrush	60 Hz	45				
(Power consumption (W))	AC	I I a I all as as	50 Hz	17 (5.3)				
		Holding	60 Hz	11 (2.9)				
Power consumption (W)		DC		5.5				
			В	racket (AXT338-11)/For body ported type				
Accessory (Option)			Indicator light					
				Manual override				

- Note 1) Based on JIS B 8375-1981. (at 0.5 MPa, without surge voltage suppressor)
- Note 2) Minimum operating frequency is once in 30 days. (Based on JIS B 8375.)
 - Note 3) "Note 1)" and "Note 2)" are with controlled clean air.

Note 4) Based on JIS C 0920.

Note 5) Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Flow Characteristics/Weight

		Port		Woight (kg)						
Body type	Valve model	size	F	$P \rightarrow A$		l l	Weight (kg)			
		Rc	C [dm3/(s·bar)]	b	Cv	C [dm³/(s·bar)]	b	Cv	AC	DC
Pody ported	VS3115-01□□	1/8	3.3	0.36	0.86	2.5	0.39	0.66	0.34	0.46
Body ported	VS3115-02□□	1/4	3.8	0.19	0.86	3.6	0.34	0.88	0.34	0.46
Base	VS3110-02□□	1/4	4.0	0.12	0.93	3.2	0.31	0.76	0.40	0.52
mounted	VS3110-03□□	3/8	4.0	0.15	0.94	3.6	0.18	0.82	0.40	0.52
For manifold use	VS3114-00□□		Without sub-plate 0							

JIS Symbol

For Safety Instructions and Solenoid Valve Precautions, refer to pages 4-18-2 to 4-18-6.

How to Calculate the Flow Rate

For obtaining the flow rate, refer to page 4-1-6.

V100 SY

SYJ

٧K

٧Z

۷G

۷P

S070

VQ VKF

VQZ


٧Z


VS

VFN

Series VS3115/3110

How to Order

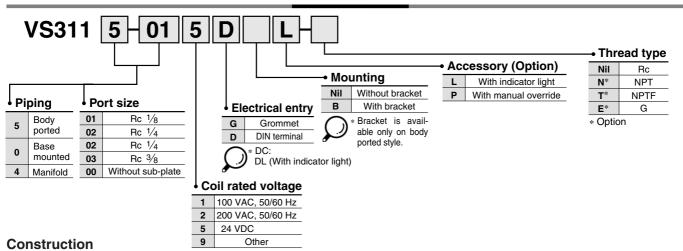

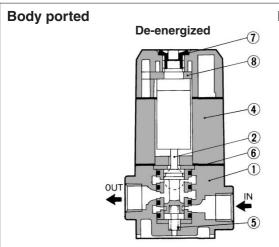

De-energized 7 8 4 1 2 5 Component Parts

No.	Description	Material	Note
1	Body	Aluminum die-casted	Platinum silver
2	Spool/Sleeve	Stainless steel	
3	Sub-plate	Aluminum die-casted	Platinum silver

Sub-plate Assembly Part No.: VS3110-S-02 No.: VS3110-S-02

Part No. for Mounting Bolt and Gasket

BG-VS3010

R	ер	lac	em	ent	Pa	rts
---	----	-----	----	-----	----	-----


No.	Decemination	Mat	oriol	Part no.									
INO.	Description	ivial	enai	VS3115-□G	VS3115-□D	VS3110-□G	VS3110-□D						
(4)	Solenoid	Α	С	SCA006-□	SCAD001-□	SCA006-□	SCAD001-□						
4)	capsule assembly	D	С	SCA001-□	SCAD001-□	SCA001-□	SCAD001-□						
(E)	Consissor	Piano	AC	AXT338-6									
5	Spring	wire	DC										
6	Gasket	NE	3R	AXT3	33-14	AXT338-15							
7	Plug for cap	Re	sin	AXT333-16									
0	Stopper	Resin	AC		AXT33	3-7-11							
8	Stopper	nesin	DC		AXT33	3-32-8							


) □: Enter the operating voltage.

Accessory (Option)

Indicator light

When solenoid is energized, indicator light illuminates, thus the electrical state of the solenoid can be seen from the outside.







Note) There is polarity of (1) +, (2) -.

Manual override

Remove the rubber plug on the top of the solenoid cap to mount the manual override. Push the override with a screwdriver to the required stroke and the valve will shift. Turn to the right or left at 90 degrees to lock it. Be sure to unlock the override before energizing the valve electrically.




•									
	Description	Part no.							
	Description	AC	DC						
	Manual override (With lock)	PB0111-3 (PB0111)	PB0111-1						
	Manual override (Non-locking)	PB0101	PB0101-1						





Series VS3115/3110

Dimensions

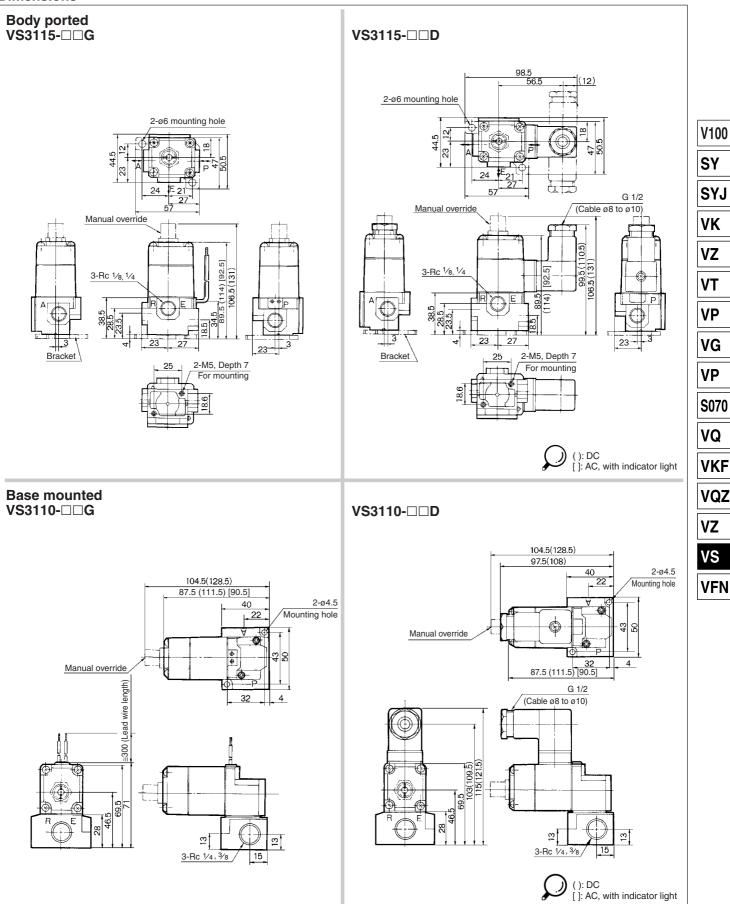

٧Z

VT

۷P

۷G

۷P

VQ

VKF

VQZ


3 Port Direct Operated Solenoid Valve Metal Seal, Body Ported

VS3135/3145





JIS Symbol



Specifications

Fluid			Air/Inert gas
Proof p	ressure		1.5 MPa
Operat	ing pressure range		0 to 1.0 MPa
Ambier	nt and fluid temperatur	e (°C) (1)	-20 to 60
Lubrica	ition (2)		Not required
Manua	Manual override		Option (Non-locking type available)
Floatric	ol ontra		Grommet, Conduit terminal,
Electric	al entry		Dripproof conduit terminal
Coil rot	ad voltage	AC	100, 200 V 50/60 Hz
Con rai	Coil rated voltage DC		24 V
Allowal	Allowable voltage fluctuation		-15 to -10% of rated voltage
Coil ins	Coil insulation type		Class B or equivalent (130°C) (3)
Shock/	Vibration resistance (n	n/s²)	150/50 ⁽⁴⁾

 \bigcirc

Note 1) If it is low temperature, dry air should be used. (No freezing)

Note 2) Use turbine oil Class 1 (ISO VG32), if lubricated.

Note 3) Based on JIS C 4003.

Note 4) Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both

energized and de-energized states every once for each condition. (Values

at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz.

Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature.

axial direction and at the right angles to the main valve and arma (Values at the initial period)

Model


Val	ve n	nodel				VS	135		VS3145							
				F	$P \rightarrow A$		P	$A \rightarrow E$			$P \rightarrow A$		$A \rightarrow E$			
Flow				C [dm³(s- <bar)]< td=""><td>b</td><td>Cv</td><td>C [dm³(s-<bar)]< td=""><td>b</td><td>Cv</td><td>C [dm³(s-<bar)]< td=""><td>b</td><td>Cv</td><td>C [dm³(s-<bar)]< td=""><td>b</td><td>Cv</td></bar)]<></td></bar)]<></td></bar)]<></td></bar)]<>	b	Cv	C [dm³(s- <bar)]< td=""><td>b</td><td>Cv</td><td>C [dm³(s-<bar)]< td=""><td>b</td><td>Cv</td><td>C [dm³(s-<bar)]< td=""><td>b</td><td>Cv</td></bar)]<></td></bar)]<></td></bar)]<>	b	Cv	C [dm³(s- <bar)]< td=""><td>b</td><td>Cv</td><td>C [dm³(s-<bar)]< td=""><td>b</td><td>Cv</td></bar)]<></td></bar)]<>	b	Cv	C [dm³(s- <bar)]< td=""><td>b</td><td>Cv</td></bar)]<>	b	Cv	
charact	eris	tics	1/4	6.1	0.3	1.5	6.1	0.4	1.6	_	_	_	_	_	_	
onaraot	00		3/8	7.2	0.2	1.8	7.3	0.2	1.8	_	_	_	_	_	_	
			1/2	9.0	0.2	2.3	9.0	0.3	2.4	18	0.27	4.8	16	0.34	4.1	
			3/4	_	_	_		_	_	20	0.21	5.1	15	0.46	4.5	
Respons	se ti	me ⁽¹⁾	AC	30 or less							30 or less					
(ms)					60 or less							80 o	r less			
Max. op			AC			300 c	r less					180 c	r less			
frequenc	cy (c	:.p.m.)	DC		r less	180 or less										
Weight ((ka)		AC		0.8	1.6										
vveignit ((kg)		DC	1.4							2.4					
Apparent		Inrush	50 Hz			10	0			300						
power	AC	IIIIusii	60 Hz			9	0			360						
(VA)	AC	Holding	50 Hz			2	0			50						
Power		Holding	60 Hz			1.	4					6	0			
consumption (W)		DC				1:	3.2					2	4			

 \bigcirc_{N}^{N}

Note 1) Based on JIS B 8375-1981. (at 0.5 MPa, without surge voltage suppressor)

Note 2) Min. operating frequency is once in 30 days. (Based on JIS B 8375.) Note 3) "Note 1)" and "Note 2)" are with controlled clean air.

are war controlled clear an:

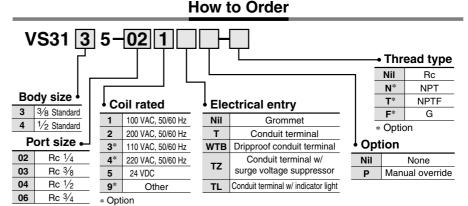

⚠ Caution

For Safety Instructions and Solenoid Valve Precautions, refer to pages 4-18-2 to 4-18-6.

How to Calculate the Flow Rate

For obtaining the flow rate, refer to page 4-1-6.

V100

SY

SYJ

٧K

٧Z

۷P

۷G

۷P

S070

VQ

VKF

VQZ


٧Z

٧S

VFN

Series **VS3135/3145**

Construction

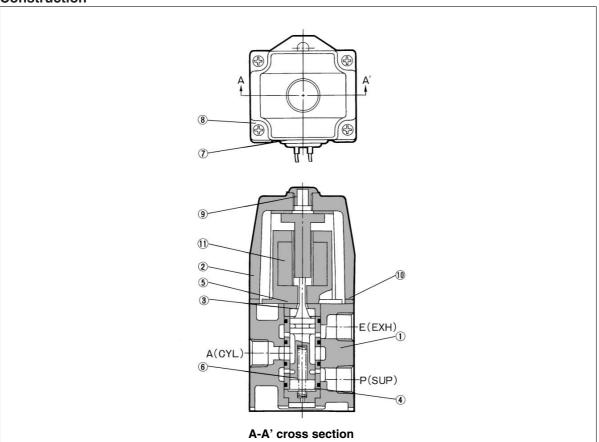

Component Parts

•	penener		
No.	Description	Material	Note
1	Body	Aluminum die-casted	Platinum silver
2	Solenoid cover	Aluminum die-casted	Platinum silver
(3)	Spool/Sleeve	Stainless steel	

11) Solenoid Coil Assembly Part No.

Electrical entry	Voltage	Part no.						
Electrical entry	Voltage	VS3135	VS3145					
	100 VAC	A01-01	A12-01					
Grommet	200 VAC	A01-02	A12-02					
	24 VDC	A07-52	A08-52					
Canaliii	100 VAC	A01-01-63	A12-01-63					
Conduit	200 VAC	A01-02-63	A12-02-63					
terminal	24 VDC	A07-52-63	A08-52-63					

Replacement Parts

No.	Description	Matarial	Part no.					
INO.	Description	Material	VS3135	VS3145				
4	Cap	Resin	XT019-6	AXT103-4				
(5)	Bushing	Resin	XT013-13-2	XT021-12				
6	Spring	Steel wire	XT010-15	XT103-5				
7	Rubber plug for wire	NBR	XT010-20	XT010-20				
8	Round head combination screw	Steel wire	XT010-21	XT010-21				
9	Plug for cover	NBR	XT041-1	XT041-1				
10	Gasket	NBR	XT013-31-2	NXT030-8				

Series VS3135/3145

V100

SY

SYJ

٧K

٧Z

VG

۷P

S070

VQ

VKF


VQZ

٧Z

٧S

VFN

Dimensions

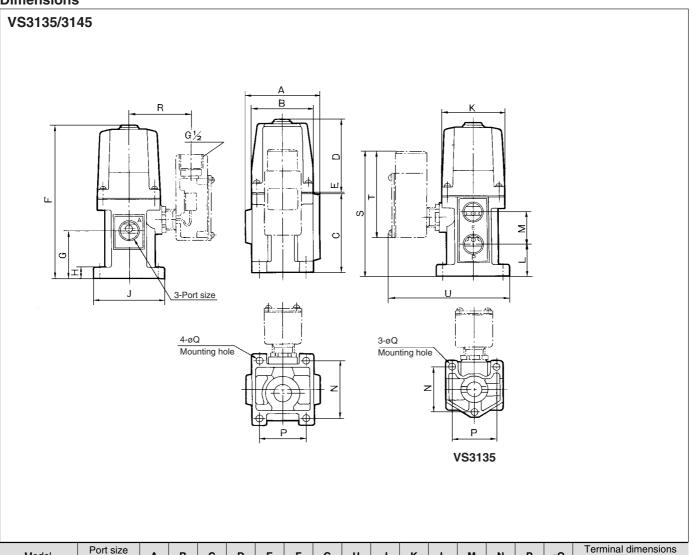

Model	Port size	۸	ь	_	D	_	_	G	ш		V		м	N	Р	øQ	Terminal dimensions				
Model	Rc	A				_	F	5	П	J 3	~		IVI	IN			R	S	Т	U	
VS3135-02																					
VS3135-03	1/4, 3/8, 1/2	64	64	65	70	1	136	35	9	64	54	19	32	50	50	7	60	120	96	118	
VS3135-04																					
VS3145-04	1/2,3/4	82	68	88	92	4	181	53	12	81	70	35	36	66	52	_	66	140	96	133	
VS3145-06	72, 74	02	00	00	92	'	101	53	12	01	70	35	30	00	52	9	00	140	90	133	

