

Fieldbus system Operation Manual



EX600-SDN□A

Thank you for purchasing an SMC EX600 Series Fieldbus system. Please read this manual carefully before operating the product and make sure you understand its capabilities and limitations. Please keep this manual handy for future reference.

To obtain more detailed information about operating this product, please refer to the SMC website (URL <http://www.smcworld.com>) or contact SMC directly.

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of "Caution", "Warning" or "Danger". They are all important notes for safety and must be followed in addition to International standards (ISO/IEC), Japan Industrial Standards (JIS) and other safety regulations.

Caution: CAUTION indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

Warning: WARNING indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

Danger: DANGER indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

Operator

- This operation manual is intended for those who have knowledge of machinery using pneumatic equipment, and have sufficient knowledge of assembly, operation and maintenance of such equipment. Only those persons are allowed to perform assembly, operation and maintenance.
- Read and understand this operation manual carefully before assembling, operating or providing maintenance to the product.

Safety Instructions

Warning

Do not disassemble, modify (including changing the printed circuit board) or repair. An injury or failure can result.

Do not operate the product outside of the specifications. Do not use for flammable or harmful fluids. Fire, malfunction, or damage to the product can result. Verify the specifications before use.

Do not operate in an atmosphere containing flammable or explosive gases. Fire or an explosion can result. This product is not designed to be explosion proof.

If using the product in an interlocking circuit: Provide a double interlocking system, for example a mechanical system. Check the product regularly for proper operation. Otherwise malfunction can result, causing an accident.

The following instructions must be followed during maintenance:

- Turn off the power supply.
- Stop the air supply, exhaust the residual pressure and verify that the air is released before performing maintenance. Otherwise an injury can result.

Caution

When handling the unit or assembling/replacing units: Do not touch the sharp metal parts of the connector or plug for connecting units. Take care not to hit your hand when disassembling the unit. The connecting portions of the unit are firmly joined with seals. When joining units, take care not to get fingers caught between units. An injury can result.

After maintenance is complete, perform appropriate functional inspections. Stop operation if the equipment does not function properly. Safety cannot be assured in the case of unexpected malfunction.

Provide grounding to assure the safety and noise resistance of the Fieldbus system. Individual grounding should be provided close to the product with a short cable.

NOTE

- The direct current power supply to combine should be UL1310 Class2 power supply when conformity to UL is necessary.


Maintenance

Maintenance should be performed according to the Safety Instructions. Perform regular maintenance and inspections. There is a risk of unexpected malfunction. Do not use solvents such as benzene, thinner etc. to clean each unit. They could damage the surface of the body and erase the markings on the body. Use a soft cloth to remove stains. For heavy stains, use a cloth soaked with diluted neutral detergent and fully squeezed, then wipe up the stains again with a dry cloth.

Refer to the SMC website (URL <http://www.smcworld.com>) to obtain more detailed information about maintenance.

Names and Functions of Product

Names of individual parts

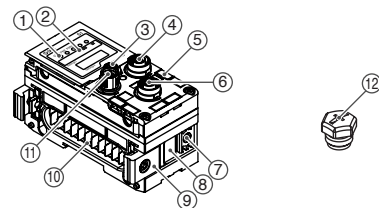

No.	Description	Function
1	Status display LED	Displays the status of the unit.
2	Display cover	Open for the setting of switch.
3	Display cover tightening screw	Loosen to open the display cover.
4	Connector (BUS OUT)	Connects the cable for fieldbus outputs.
5	Marker groove	Groove to mount a marker.
6	Connector (PCI)	Connects the cable of the handheld terminal.
7	Valve plate mounting screw hole	Fixes the valve plate.
8	Valve plate mounting groove	Groove to insert the valve plate into.
9	Joint bracket	Bracket for joining to adjacent units.
10	Unit connector (plug)	Transmits signals and power supplies to adjacent units.
11	Connector (BUS IN)	Connects the cable for fieldbus inputs.
12	Seal cap (2 pcs.)	Mounted on to unused connectors. (BUS OUT and PCI)

Assembly

Composing the unit as a manifold

- Connect the unit to the end plate. The Digital unit, Analog unit can be connected in any order. Tighten the bracket of the joint using tightening torque 1.5 to 1.6 Nm.
- Add more units. Up to 10 units (including the SI unit) can be connected to one manifold.
- Connecting the SI unit. After connecting the necessary units, connect the SI unit. Connecting method is the same as above (1), (2).
- Mounting the valve plate. Mount the valve plate (EX600-ZMV□) to the valve manifold using the valve set screws. (M3x8) Apply 0.6 to 0.7 Nm tightening torque to the screws.

- Connect the SI unit and the valve manifold. Insert the valve plate to the valve plate set groove on the side of SI unit. Then, tighten it with the valve plate set screws (M4x6) to fix the plate. Tightening torque for set screws 0.7 to 0.8 Nm.

Mounting and Installation

Installation


- Direct mounting**
 - When joining six or more units, fix the middle part of the complete EX600 unit with an intermediate reinforcing brace (EX600-ZMB1) before mounting using 2-M4x5 screws. Tightening torque: 0.7 to 0.8 Nm.
 - Fix and tighten the end plates at one end of the unit. (M4) Fix the end plate at the valve side while referring to the operation manual of the corresponding valve manifold.
- DIN rail mounting** (Available for series other than SY series. Refer to the catalog for SY series.)
 - When joining six or more units, fix the middle part of the complete EX600 unit with an intermediate reinforcing brace (EX600-ZMB2) before mounting, using 2-M4x6 screws. Tightening torque: 0.7 to 0.8 Nm.

- Mount the end plate bracket (EX600-ZMA2) to the end plate at the opposite end to the valves, using 2-M4x14 screws. Tightening torque: 0.7 to 0.8 Nm.

- Hook the DIN rail mounting groove to the DIN rail.


- Press the manifold using its side hooked to the DIN rail as a fulcrum until the manifold is locked.

- Fix the manifold by tightening the DIN rail fixing screws of the EX600-ZMA2. (M4x20) Tightening torque: 0.7 to 0.8 Nm. The tightening torque at the valve side depends on the valve type. Refer to the operation manual of the corresponding valve manifold.

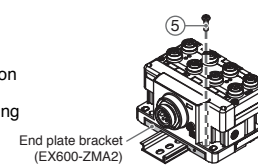

Wiring


- Connect the M12 connector cable. M12 connector is applicable for SPEEDCON connector. SPEEDCON connector wiring method is explained below.
 - Align the mark B on the metal bracket of the cable side connector (plug/socket) with the mark A.
 - Align the mark C on the unit and insert the connector into the unit vertically. If they are not aligned, the connector cannot be joined properly.
 - When the mark B of the connector has been turned 180 degrees (1/2 turn), wiring is completed. Confirm that the connection is not loose. If turned too far, it will become hard to remove the connector.

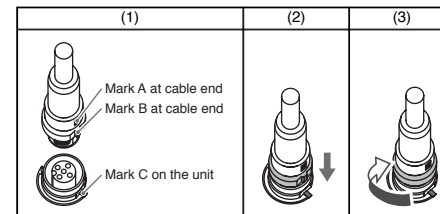


Connector pin assignment

Configuration		Pin number	Signal name
BUS IN	BUS OUT	1	DRAIN
		2	V+
		3	V-
		4	CAN_H
		5	CAN_L

- Mounting the marker** Signal name of the input or output devices and unit address can be written to the marker, and it can be installed to each unit. Mount the marker (EX600-ZT1) into the marker groove as required.



Setting and Adjustment

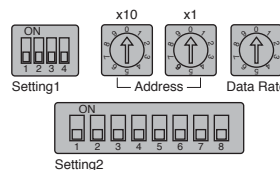

Address X10	Address X1	Node Address
0	0	0 (Default setting)
0	1	1
:	:	:
6	3	63
6	4	PGM
:	:	
9	9	

Data Rate	Communication speed
0	125 kbps (Default setting)
1	250 kbps
2	500 kbps
3	PGM
:	
9	

- V_SEL switch:** The number of outputs (size) occupied by the SI unit is selected.

Settings1	Content	SI unit output data size
1 2		
OFF OFF	Number of occupied valve 32 outputs	4 byte (Default setting)
OFF ON	Number of occupied valve 24 outputs	3 byte
ON OFF	Number of occupied valve 16 outputs	2 byte
ON ON	Number of occupied valve 8 outputs	1 byte

- Switch for diagnosis:** Allocates the diagnostic data to the input data.

Settings2	Mode	Content	Diagnostic size set for the input.
1 2			
OFF OFF	0	Input data only (Default setting)	0 byte
OFF ON	1	Input data + System diagnosis	4 byte
ON OFF	2	Input data + System diagnosis + Unit diagnosis (Up to 10 units)	6 byte

- HOLD/CLEAR switch:** Sets the output status when the Fieldbus has a communication error or is in idling state.

Settings2	Content
3	
OFF	Output is Off. (Default setting)
ON	Holds the output.

- HW/SW switch:** Select the selection method of the Fieldbus address and Data Rate.


Settings2	Content
4	
OFF	Address and Data Rate are set by the SI unit switch. (Hardware) (Default setting)
ON	Address and Data Rate are set via the PLC. (Software) *

*: In order to set software via PLC, set the address or Data Rate switch to PGM.

Refer to the SMC website (URL <http://www.smcworld.com>) to obtain more detailed information about setting and adjustment.

LED Display

The status display LED displays the power supply and communication status.



Display	Content
ST(M)	Displays the diagnosis status of the unit.
PWR	Displays the status of the power supply voltage for control and input.
PWR(V)	Displays the status of the power supply voltage for outputs.
MS	Displays the module status.
NS	Displays the network status.

SI unit common status

LED display	Content
ST(M) PWR PWR(V) Off	The power supply for control and input is Off.
ST(M) PWR PWR(V) Green LEDs are On	The unit is in normal operation.
ST(M) PWR PWR(V) Red ST(M) LED is On	A component failure inside the SI unit.
ST(M) PWR PWR(V) Red PWR LED is On	The power supply voltage for control and input is abnormal.
ST(M) PWR PWR(V) Red PWR(V) LED is On	The power supply voltage for output is abnormal.
ST(M) PWR PWR(V) Green ST(M) LED is flashing	A unit other than the SI unit has been diagnosed and detected.
ST(M) PWR PWR(V) Red ST(M) LED is flashing	Either of the following conditions: •The valve On/Off counter has exceeded the set value. •The valve is short circuited or disconnected.
ST(M) PWR PWR(V) Red/green ST(M) LED is flashing alternately	Connection error between units occurred.

DeviceNet™ status

LED display	Content
MS NS Off	The power supply for control and input is Off.
MS NS Green MS LED is On	•Double checking the node address. •Communication error.
MS NS Green MS and NS LEDs are both On	Communication is normal.
MS NS Green MS LED is On and green NS LED is flashing	Connection is not established.
MS NS Red MS LED is On	The element in SI unit is broken.
MS NS Green MS LED is On and red NS LED is On	Fatal communication error.

MS NS Green MS LED is On and red NS LED is flashing	Minor communication error.
MS NS Red/green MS LED is flashing alternately. Then, Red/green NS LED is flashing alternately	Flashes when performing self diagnosis test when the power supply starts.

Refer to the SMC website (URL <http://www.smcworld.com>) to obtain more detailed information about LED display.

Troubleshooting

Refer to the LED Display. Refer to the SMC website (URL <http://www.smcworld.com>) to obtain more detailed information about troubleshooting.

Specification

Power supply	Control and input	24 VDC Class2, 2 A
	Output	24 VDC Class2, 2 A
Connected load Solenoid valve with lamp and circuit of protection of surge voltage of 24 VDC 1.5 W (SMC)		
Operating temperature range -10 to 50 °C (Max. surrounding air temperature rating: 50 °C)		
Storage temperature range -20 to 60 °C		
Pollution degree For use in Pollution Degree 2 Environment (UL508)		
Vibration resistance 10 to 57 Hz: constant amplitude 0.75 mm p-p 57 to 150 Hz: constant acceleration 49 m/s ² for 2 hours each in direction X, Y and Z respectively (De-energized)		
Impact resistance 147 m/s ² : 3 times each in directions of X, Y and Z respectively (De-energized)		

Refer to the product catalog or SMC website (URL <http://www.smcworld.com>) to obtain more detailed information about product specifications.

Commissioning

Parameter Setting Hardware Configuration (EDS file) I/O Map Diagnostic DeviceNet™ Object Refer to the SMC website (URL <http://www.smcworld.com>) to obtain more detailed information about these setting above.

Outline with Dimensions

Refer to the product catalog or SMC website (URL <http://www.smcworld.com>) to obtain more detailed information about outline dimensions.

SMC Corporation URL <http://www.smcworld.com>

Akihabara UDX 15F, 4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN
Phone: +81 3-5207-8249 Fax: +81 3-5298-5362

Note: Specifications are subject to change without prior notice and any obligation on the part of the manufacturer. DeviceNet™ is a trademark of ODVA.
© 2009 SMC Corporation All Rights Reserved