

Compact Rotary Actuator

Series CRQ2

Rack & Pinion Style/Size: 10, 15, 20, 30, 40

Size

10: 17 mm

15: 20 mm

20: 29 mm


30: 33 mm

40: 37 mm



Rotation 360° type

360°

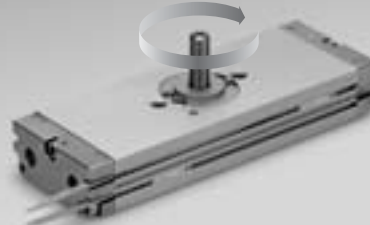

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX

MRQ

Series Variations

		Size					Page	
		10	15	20	30	40		
Standard	Rotating angle	80° to 100° 170° to 190° 350° to 370°					P. 246 to P. 253	
	Shaft type	Single shaft	S					
		Double shaft	W					
	Cushion	None						
		Rubber cushion						
		Air cushion						
Variations	With auto switch							
	Copper-free (Standard)	20-						
Made to Order	Shaft type	Single shaft with four chamfers	X				P. 254, P. 255	
		Double shaft key	Y					
		Double shaft with four chamfers	Z					
		Single round shaft	T					
		Double shaft (Without long shaft key)	J					
		Double round shaft	K					
Pattern	Shaft end form						P. 256 to P. 270	
	Rotating range							
Shaft and parallel key stainless steel spec.		-X6						

Compact Rotary Actuator

Rack & Pinion Style/Size: 10, 15, 20, 30, 40

Built-in cushion

10, 15 : Rubber bumper
20, 30, 40 : Air cushion

Equipped with an angle adjusting mechanism ($\pm 5^\circ$)


Piping can be installed from one end.

Double piston style
Compact, with no backlash

Both single shaft and double shaft are available in all sizes.

360° type application example

Complete external inspection of a work piece

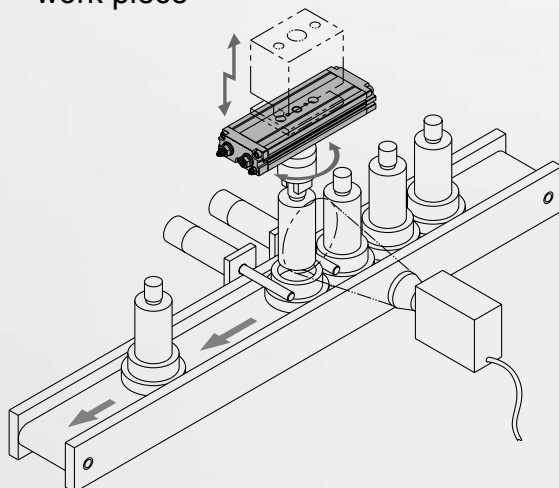

Rotary actuator body serves as a flange.

360° type

360°


Series CRQ2

2 auto switches are mountable on the same side.
(Mountable on the both sides.)

Mounting smaller auto switches prevents the auto switch from protruding from the body edge and realizes space-savings.

Centering is easy when mounting the main body.

Pin hole for positioning the main body

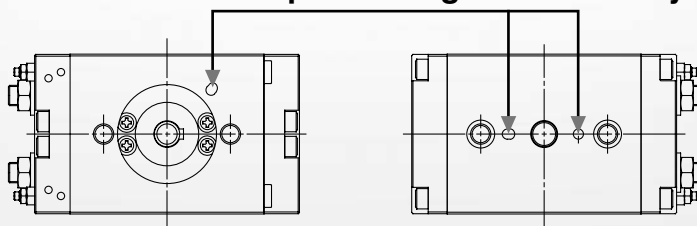

Series	Size	Shaft type	Rotating angle	Cushion	
				Rubber	Air
CRQ2	10	• Single • Double	• 80° to 100° • 170° to 190° • 350° to 370°	●	—
	15			●	—
	20			—	●
	30			—	●
	40			—	●

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX

MRQ

D-□

Compact Rotary Actuator Rack & Pinion Style Series *CRQ2*

How to Order

Without auto switch CRQ2B S 20 90

With auto switch CDRQ2B S 20 90 M9BW

Built-in magnet

Shaft type

S	Single shaft
W	Double shaft

* Refer to pages 254 and 255 for the shaft type variations.

Pattern

Nil	Standard
P	Combination of simple specials and Made to Order

* Refer to pages 256 to 270 for details.

Size

10
15
20
30
40

Port type

Size	Port type	
10, 15	Nil	M5
20, 30, 40	Nil	Rc 1/8
	TF	G 1/8
	TN	NPT 1/8
	TT	NPTF 1/8

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* For the applicable auto switch model, refer to the table below.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	n pcs.

Suffix symbol

Symbol	Cushion	Size				
		10	15	20	30	40
Nil	Without cushion	—	—	●	●	●
	Rubber bumper	●	●	—	—	—
C	Air cushion	—	—	●	●	●

Rotating angle

90	80° to 100°
180	170° to 190°
360	350° to 370°

Made to order
Refer to page 247 for details.

Applicable Auto Switches/Refer to pages 761 to 809 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24V	5V, 12V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
	3-wire (PNP)			M9PV				M9P	●	●	●	○	○			
	2-wire			M9BV				M9B	●	●	●	○	○	—		
	3-wire (NPN)			M9NWV				M9NW	●	●	●	○	○	IC circuit		
	3-wire (PNP)			M9PWV				M9PW	●	●	●	○	○			
	2-wire			M9BWV				M9BW	●	●	●	○	○	—		
	3-wire (NPN)			M9NAV**				M9NA**	○	○	●	○	○	IC circuit		
	3-wire (PNP)			M9PAV**				M9PA**	○	○	●	○	○			
2-wire	M9BAV**	M9BA**	○	○	●	○	○	—								
Reed switch	—	Grommet	Yes	3-wire (NPN equiv.)	—	5V	—	A96V	A96	●	—	●	—	—	IC circuit	—
				2-wire	24V	12V	100V	A93V	A93	●	—	●	—	—	—	—
			No	2-wire	100 V or less	A90V	A90	●	—	●	—	—	—	—	IC circuit	

** Although it is possible to mount water resistant type auto switches, note that the rotary actuator itself is not of water resistant construction.


* Lead wire length symbols: 0.5 m Nil (Example) M9NW
1 m M (Example) M9NWM
3 m L (Example) M9NWL
5 m Z (Example) M9NWZ

* Auto switches marked with "O" are made to order specification.


* Auto switches are shipped together, (but not assembled).

 Refer to pages 796 and 797 for the details of solid state auto switch with pre-wired connector.

Specifications

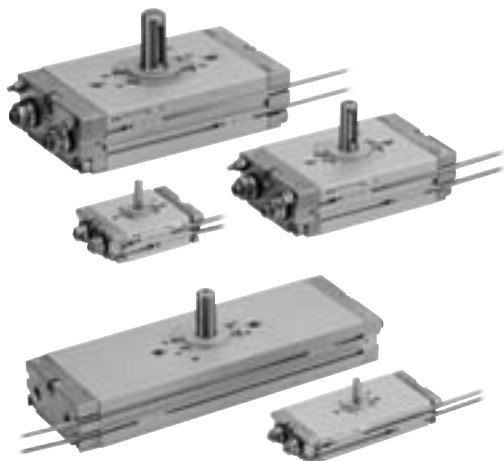

JIS Symbol



Made to order

Refer to pages 256 to 270 for details.

Symbol	Specifications/Content	Applicable shaft type
—	Shaft type variation	X, Y, Z, T, J, K
XA1 to XA24	Shaft pattern sequencing I	S, W
XA31 to XA59	Shaft pattern sequencing II	X, Y, Z, T, J, K
XC7	Reversed shaft	S, W, X, T, J
XC8 to XC11	Change of rotating range	S, W, Y X*, Z*, T*, J*, K*
XC12 to XC15	Change of angle adjustable range (0° to 100°)	
XC16, XC17	Change of angle adjustable range (90° to 190°)	
XC18, XC19	Change of rotating range	
XC20, XC21	Change of angle adjustable range (90° to 190°)	
XC22	Without inner rubber bumper	S, W, X, Y, Z, T, J, K
XC30	Fluorine grease	
XC69	Fluororubber seal	
X6	Shaft and parallel key made of stainless steel	

* Among the symbols XC8 to XC21, only XC12 and XC16 are compatible with shaft types X, Z, T, J and K.

Size	10	15	20	30	40
Fluid	Air (Non-lube)				
Max. operating pressure	0.7 MPa		1.0 MPa		
Min. operating pressure	0.15 MPa		0.1 MPa		
Ambient and fluid temperature	0° to 60°C (No freezing)				
Cushion	Rubber bumper		Not attached, Air cushion		
Angle adjustment range	Rotation end ±5°				
Rotation	90°, 180°, 360°				
Port size	M5 x 0.8		Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8		
Output (N·m)*	0.3	0.75	1.8	3.1	5.3

* Output under the operating pressure at 0.5 MPa. Refer to page 30 for further information.

Allowable Kinetic Energy and Rotation Time Adjustment Range

Size	Allowable kinetic energy				Stable operational rotation time adjustment range
	Allowable kinetic energy (J)			Cushion angle	
	Without cushion	Rubber bumper	With air cushion*		Rotation time (s/90°)
10	—	0.00025	—	—	0.2 to 0.7
15	—	0.00039	—	—	0.2 to 0.7
20	0.025	—	0.12	40°	0.2 to 1
30	0.048	—	0.25	40°	0.2 to 1
40	0.081	—	0.4	40°	0.2 to 1

* Allowable kinetic energy for the bumper equipped type

Maximum absorbed energy under proper adjustment of the cushion needles.

If operated where the kinetic energy exceeds the allowable value, this may cause damage to the internal parts and result in product failure. Please pay special attention to the kinetic energy levels when designing, adjusting and during operation to avoid exceeding the allowable limit.

Mass

Size	Standard mass* (g)		
	90°	180°	360°
10	120	150	200
15	220	270	380
20	600	700	1000
30	900	1100	1510
40	1400	1600	2280

* Excluding the mass of auto switch.

⚠ Precautions

Be sure to read before handling.
Refer to front matters 38 and 39 for Safety Instructions and pages 4 to 13 for Rotary Actuator and Auto Switch Precautions.

⚠ Caution

(1) The angle adjusting screw (angle adjustment bolt) is set at random within the adjustable rotating range. Therefore, it must be readjusted to obtain the angle that suits your application.

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX


MRQ

D-□


Series CRQ2

Construction

Basic style
Size 10/15

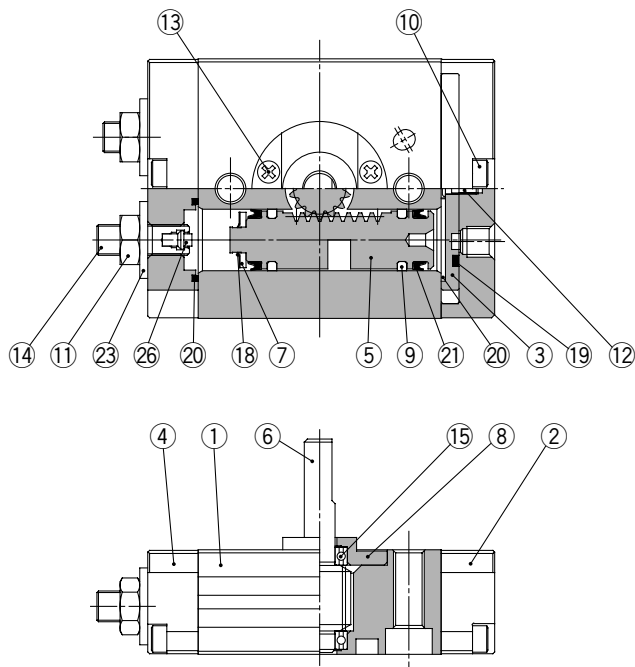

Basic style
Size 20/30/40

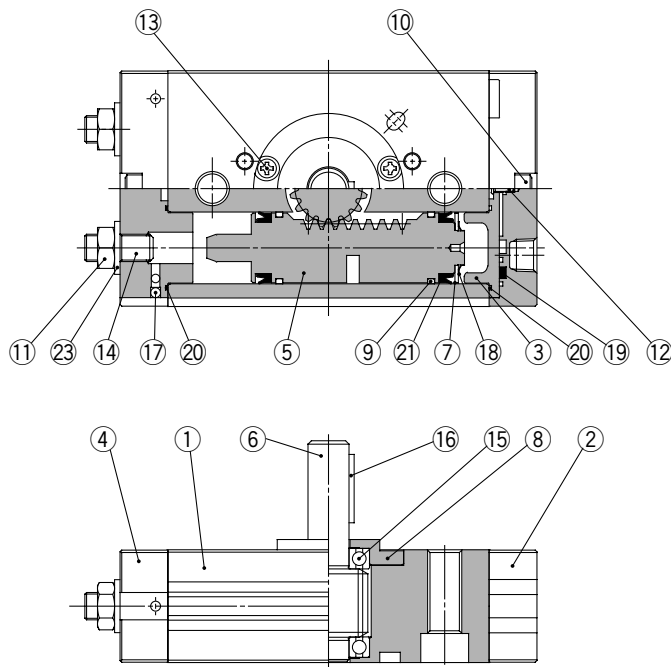

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Cover	Aluminum alloy	Chromated, painted
3	Plate	Aluminum alloy	Chromated
4	End cover	Aluminum alloy	Chromated, painted
5	Piston	Stainless steel	
6	Shaft	Stainless steel	Size: 10, 15
		Chrome molybdenum steel	Size: 20, 30, 40
7	Seal retainer	Aluminum alloy	Chromated
8	Bearing retainer	Aluminum alloy	Chromated
9	Wearing	Resin	
10	Hexagon socket head cap screw	Stainless steel	
11	Hexagon nut	Steel wire	Size: 10, 15 Zinc chromated
	Small hexagon nut		Size: 20, 30, 40 Zinc chromated
12	Cross recessed No. 0 screw	Steel wire	Zinc chromated
13	Cross recessed No. 0 screw	Steel wire	Size: 10, 15 Zinc chromated
	Cross recessed screw		Size: 20, 30, 40 Zinc chromated

Component Parts

No.	Description	Material	Note
14	Hexagon socket head set screw	Chrome molybdenum steel	Electroless nickel plated
15	Bearing	Bearing steel	
16	Parallel key	Carbon steel	Size: 20, 30, 40 only
17	Steel ball	Stainless steel	Size: 20, 30, 40 only
18	Type CS retaining ring	Stainless steel	
19	Seal	NBR	
20	Gasket	NBR	
21	Piston seal	NBR	
22	Cushion seal	Rubber material	Size: 20, 30, 40 only with cushion
23	Seal washer	NBR	
24	Magnet	—	With auto switch only
25	Cushion valve assembly		Size: 20, 30, 40 with cushion only
26	Cushion pad	Rubber material	Size: 10, 15

Replacement Parts

Description	Part no.				
	10	15	20	30	40
Seal kit	P473010-1	P473020-1	P473030-1	P473040-1	P473050-1

A grease pack (10 g) is included. When you need a grease pack only, order with the following part number.



Grease pack part no: GR-S-010 (10g)

	No.	Description	Qty.	Note
Applicable parts	19	Seal	1	
	20	Gasket for cover	2	Size: 10, 15
		Gasket for endcover	1	
		Gasket	4	Size: 20, 30, 40
	21	Piston seal	4	
	23	Seal washer	2	



* A set includes all parts above.

Construction



With auto switch
Size 10/15

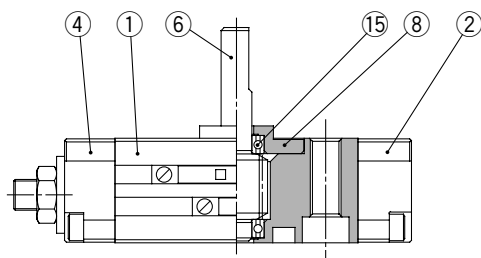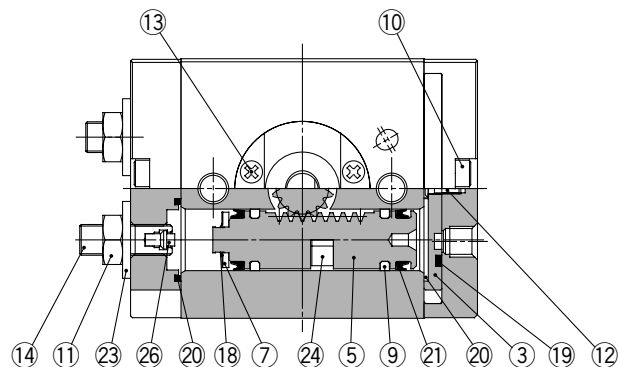



With auto switch
Size 20/30/40

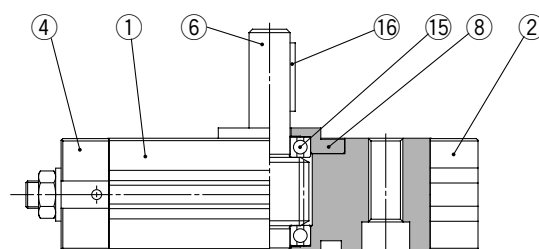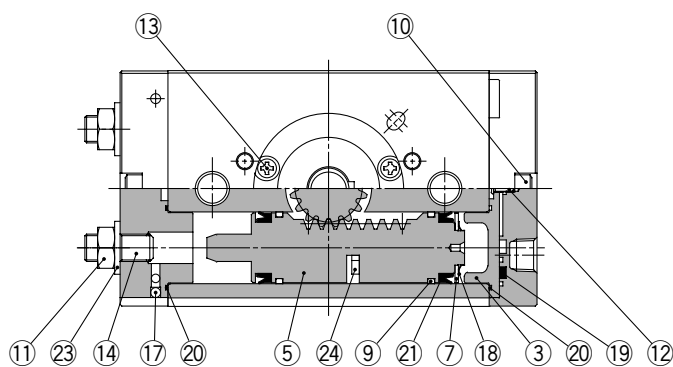

With cushion
Size 20/30/40

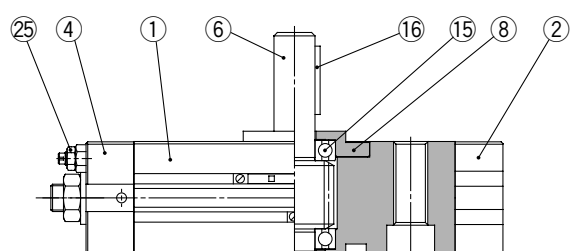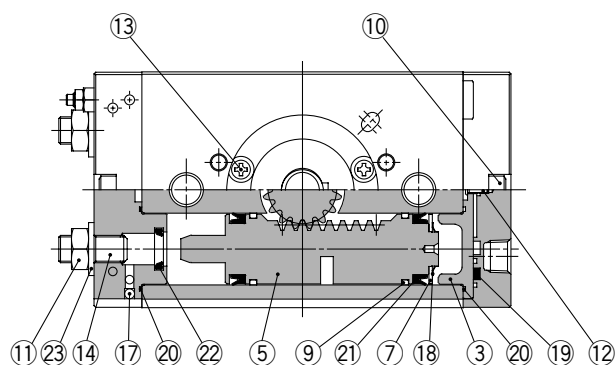

With auto switch and cushion
Size 20/30/40

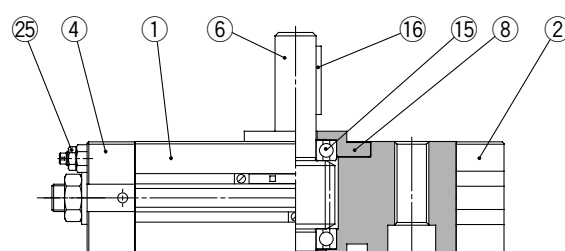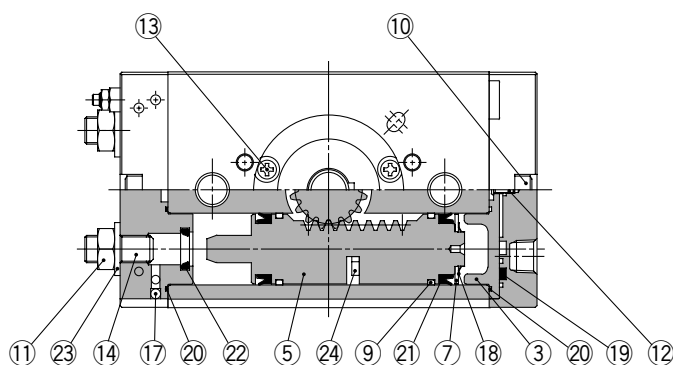

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX




MRQ

D-□



Series CRQ2

Dimensions

Size 10/15

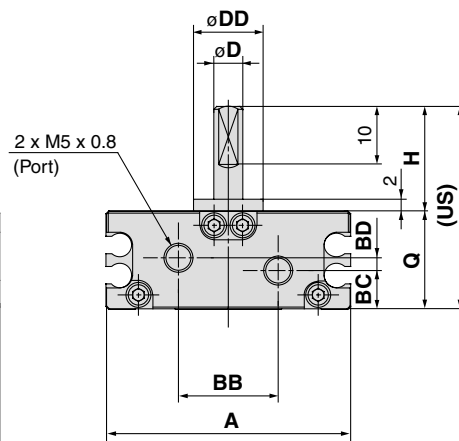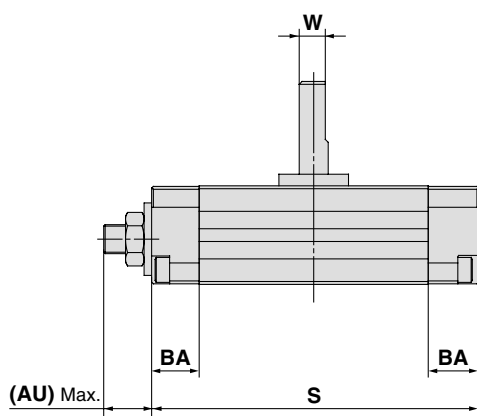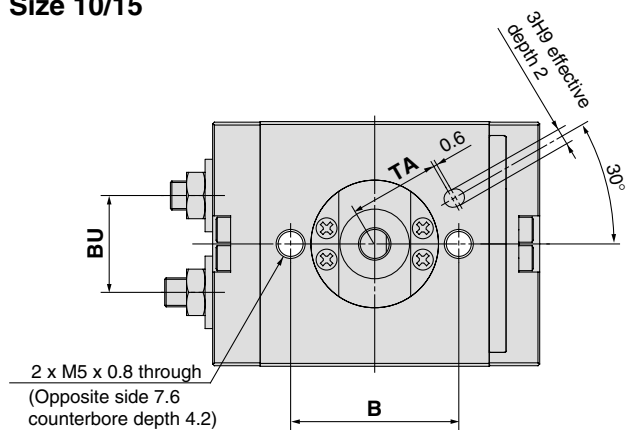

With double shaft

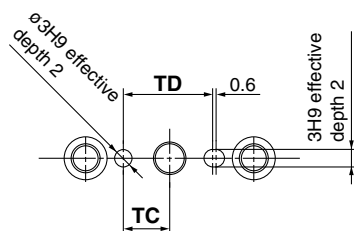

(mm)												
Size	Rotating angle	A	AU*	B	BA	BB	BC	BD	BU	D (g6)	DD (h9)	H
10	90°, 180°, 360°	42.4	(8.5)	29	8.5	17	6.7	2.2	16.7	5	12	18
15	90°, 180°, 360°	53.6	(9.5)	31	9	26.4	10.6	—	23.1	6	14	20

Size	Rotating angle	W	Q	S	US	UW	ab	M	TA	TC	TD
10	90°	4.5	17	56	35	44	6	9	15.5	8	15.4
	180°			69							
	360°			97							
15	90°	5.5	20	65	40	50	7	10	16	9	17.6
	180°			82							
	360°			116							




* AU dimension is not the dimension at the time of shipment, since its dimension is for adjustment parts.

S: Upper 90°, Middle 180°, Lower 360°



Dimensions

Size 20/30/40

These parts are not attached when a model without air cushion is selected.

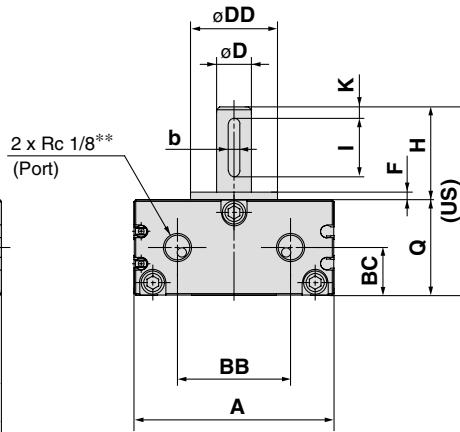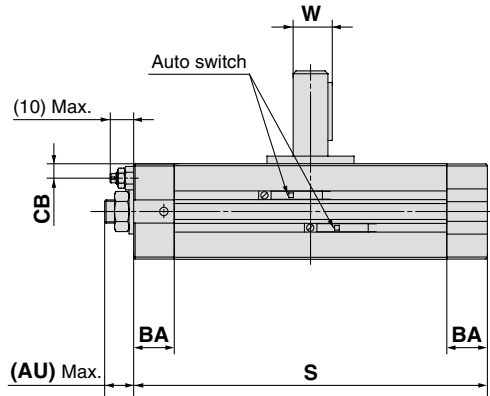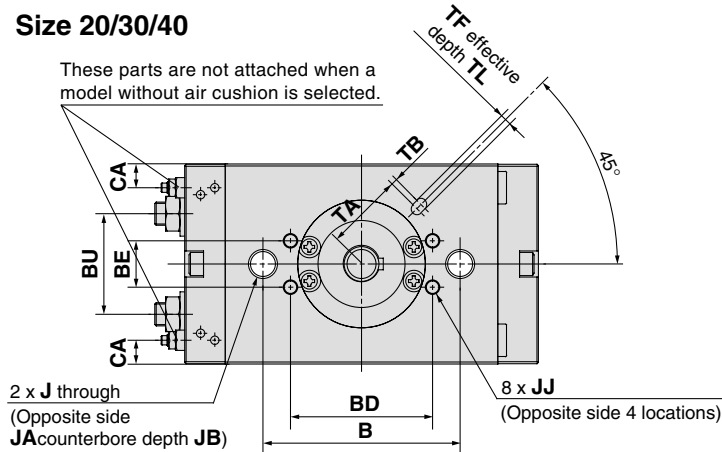

With double shaft

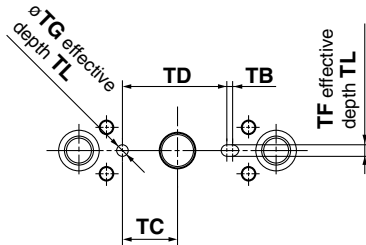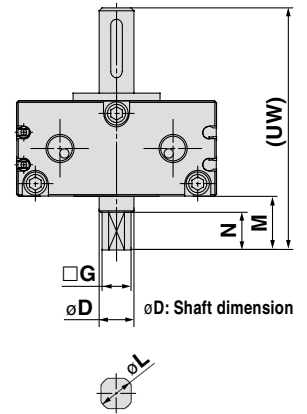

Size	Rotating angle	A	AU*	B	BA	BB	BC	BD	BE	BU	CA	CB	D (g6)	DD (h9)	F	H	J	JA	JB
20	90°, 180°, 360°	63	(11)	50	14	34	14.5	—	—	30.4	7	4.7	10	25	2.5	30	M 8 x 1.25	11	6.5
30	90°, 180°, 360°	69	(11)	68	14	39	16.5	49	16	34.7	8.1	4.9	12	30	3	32	M10 x 1.5	14	8.5
40	90°, 180°, 360°	78	(13)	76	16	47	18.5	55	16	40.4	8.3	5.2	15	32	3	36	M10 x 1.5	14	8.6

Size	Rotating angle	JJ	K	Q	S	W	Key dimensions		US	TA	TB	TC	TD	TF (H9)	TG (H9)	TL	UW	G	M	N	L
							b	I													
20	90°	—	3	29	104	11.5	4 ⁰ _{-0.03}	20	59	24.5	1	13.5	27	4	4	2.5	74	8 ⁰ _{-0.1}	15	11	9.6 ⁰ _{-0.1}
	180°				130																
	360°				180																
30	90°	M5 x 0.8 depth 6	4	33	122	13.5	4 ⁰ _{-0.03}	20	65	27	2	19	36	4	4	2.5	83	10 ⁰ _{-0.1}	18	13	11.4 ⁰ _{-0.1}
	180°				153																
	360°				216																
40	90°	M6 x 1 depth 7	5	37	139	17	5 ⁰ _{-0.03}	25	73	32.5	2	20	39.5	5	5	3.5	93	11 ⁰ _{-0.1}	20	15	14 ⁰ _{-0.1}
	180°				177																
	360°				253																

* AU dimension is not the dimension at the time of shipment, since its dimension is for adjustment parts.


** In addition to Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8 are also available.

S: Upper 90°, Middle 180°, Lower 360°


Rotation Range

When pressurized from the port indicated by the arrow, the shaft will rotate in a clockwise direction.


Rotating angle: 90°

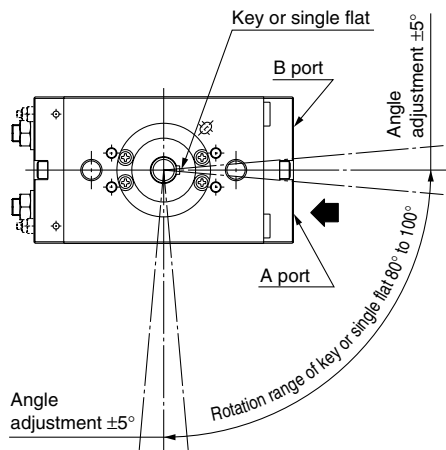

Rotating angle: 180°

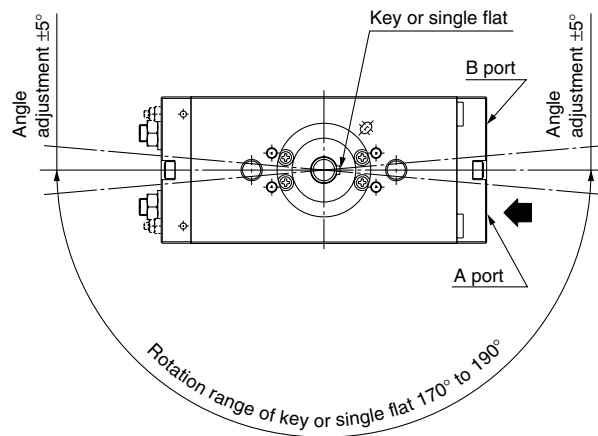


Rotating angle: 360°

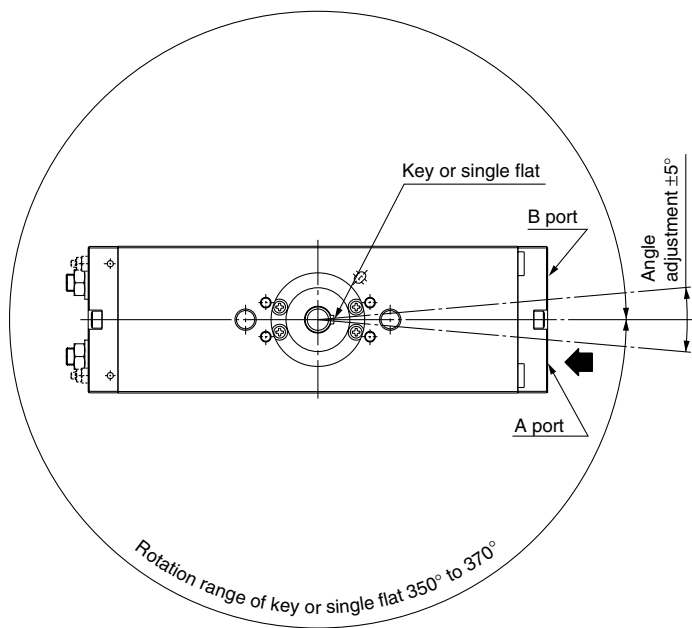

Unit Used as Flange Mount

The L dimensions of this unit are shown in the table below. When hexagon socket head cap bolt of the JIS standard is used, the head of the bolt will recess into the groove of actuator.

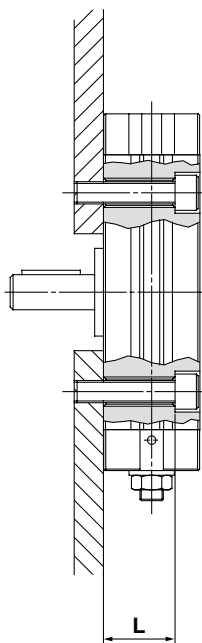

Size	L	Screw
10	13	M4
15	16	M4
20	22.5	M6
30	24.5	M8
40	28.5	M8

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2


MSQ

MSZ

CRQ2X
MSQX

MRQ

Auto Switch Proper Mounting Position at Rotation End

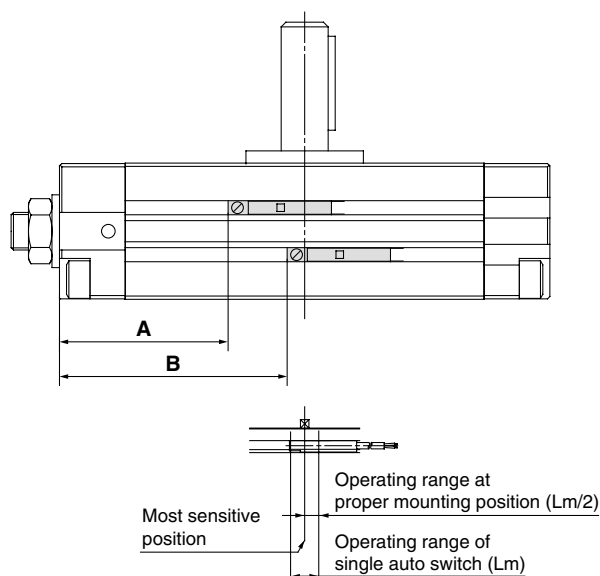

Size	Rotating angle	Solid state switch				Reed switch			
		A	B	Operating angle (θ m)	Hysteresis angle	A	B	Operating angle (θ m)	Hysteresis angle
10	90°	19	25.5	61°	5°	15	21.5	63°	12°
	180°	22	35			18	31		
	360°	29	56.5			25	52.5		
15	90°	22.5	31	47°	4°	18.5	27	52°	9°
	180°	26.5	43.5			22.5	39.5		
	360°	34.5	68.5			30.5	64.5		
20	90°	40	52.5	40°	4°	36	48.5	41°	9°
	180°	46	71.5			42	67.5		
	360°	59.5	110			55.5	106		
30	90°	47	63	29°	2°	43	59	32°	7°
	180°	55	86			51	82		
	360°	66	129.5			62	125.5		
40	90°	54	73	24°	2°	50	69	24°	5°
	180°	63.5	101.5			59.5	97.5		
	360°	76.5	156			72.5	152		

Operating angle θ m: The value of the individual switch's movement range Lm as represented by an angle.

Hysteresis angle: Value of the switch's hysteresis as represented by an angle.

Note) Since the above values are only provided as a guideline, they are not guaranteed. In the actual setting, adjust them after confirming the auto switch performance.

D-□

Series CRQ2

1 Shaft Type Variation, Four Chamfers (Size 20/30/40)

Shaft Type: X, Z

C RQ2B
CDRQ2B

Shaft type — Size — Rotating angle

• Refer to “How to Order” on page 246 for further information.



• Shaft type

X	Single shaft with four chamfers
Z	Double shaft with four chamfers

Specifications

Fluid	Air (Non-lube)
Applicable shaft type	Single w/ four chamfers (X), Double w/ four chamfers (Z)
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached, Air cushion
Rotation	80° to 100°, 170° to 190°, 350° to 370°
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable

Dimensions

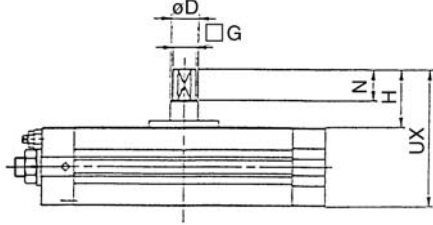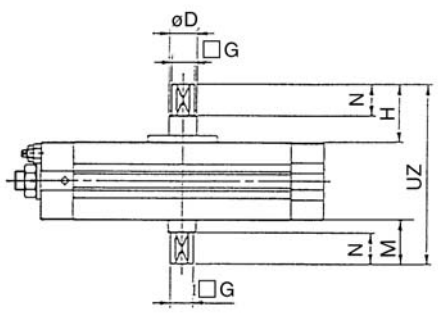Shaft type	X				Z			
Form								
Size	D (g6)	G	H	N	UX	UZ	M	
20	10	8 ⁰ _{-0.1}	21	11	50	65	15	
30	12	10 ⁰ _{-0.1}	24	13	57	75	18	
40	15	11 ⁰ _{-0.1}	27	15	64	84	20	

(mm)

2 Shaft Type Variation, Double Shaft With Key (Size 20/30/40)

Shaft Type: Y

C RQ2B
CDRQ2B

Y — Size — Rotating angle


• Refer to “How to Order” on page 246 for further information.

• Shaft type

Y	Double shaft with key
----------	-----------------------

Dimensions

Y

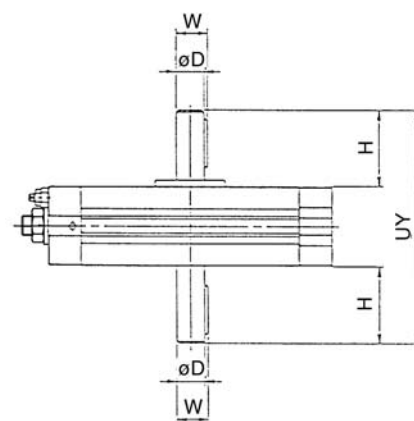

(mm)

Specifications

Fluid	Air (Non-lube)
Applicable shaft type	Double shaft with key (Y)
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached, Air cushion
Rotating angle	80° to 100°, 170° to 190°, 350° to 370°
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable

Size	D (g6)	W	H	UY
20	10	11.5	30	89
30	12	13.5	32	97
40	15	17	36	109

3 Shaft Type Variation/Without Keyway

Shaft Type: T, J, K

C RQ2B
CDRQ2B

Shaft type	Size	Rotating angle
------------	------	----------------

● Shaft type





● Refer to “How to Order” on page 246 for further information.

T	Single round shaft
J	Double shaft (Without long shaft key, with four chamfers on short shaft, one chamfer on short shaft for 10 and 15.
K	Double round shaft

Specifications

Fluid	Air (Non-lube)	
Applicable shaft type	Single round shaft (T), Double shaft (J), Double round shaft (K)	
Applicable size	10, 15	20, 30, 40
Max. operating pressure	0.7 MPa	1.0 MPa
Min. operating pressure	0.15 MPa	0.1 MPa
Cushion	Rubber bumper	Not attached, Air cushion
Rotating angle	80° to 100°, 170° to 190°, 350° to 370°	
Port size	M5 x 0.8	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable	

Dimensions

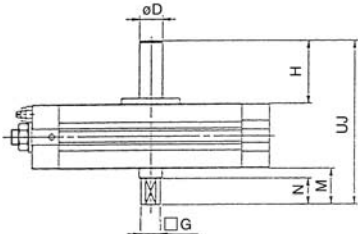Shaft type	T				J			K		
Form					Size 20, 30, 40  Size 10, 15 					
	Size	D (g6)	G	W	H	M	N	UT	UJ	UK
10	5	—	4.5	18	9	6	35	44	53	
15	6	—	5.5	20	10	7	40	50	60	
20	10	8 ⁰ _{-0.1}	—	30	15	11	59	74	89	
30	12	10 ⁰ _{-0.1}	—	32	18	13	65	83	97	
40	15	11 ⁰ _{-0.1}	—	36	20	15	73	93	109	

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX

MRQ

D-□

Series **CRQ2** (Size: 10, 15, 20, 30, 40)

Simple Specials:

-XA1 to -XA24: Shaft Pattern Sequencing I

Shaft pattern sequencing is dealt with a simple made-to-order system. (Refer to front matter 33.)
Please contact SMC for a specification sheet when placing an order.

Shaft Pattern Sequencing I

-XA1 to XA24

Applicable shaft type: S, W

How to Order

C D RQ2B S P 20 90 C M9BW X A2 A24 C30 -X6

- Built-in magnet**

Nil	None
D	Built-in magnet
- Shaft type**

S	Single shaft
W	Double shaft
- Pattern**
- Size**

10
15
20
30
40
- Auto switch**
Refer to page 246 for the part no. of auto switches.
- Air cushion**

Size	Air cushion
10, 15	None
20, 30, 40	Attached
- Rotating angle**

90	80° to 100°
180	170° to 190°
360	350° to 370°
- Thread type**

Size	Port type
10, 15	Nil M5
20, 30, 40	Nil Rc 1/8
	TF G 1/8
	TN NPT 1/8
	TT NPTF 1/8
- Combination 3 Types**

A 1	A24	C30
A 2	A24	-X 6
A13	C 8	C30
A14	C30	-X 6
- Combination of Applicable Chart**

Chart 1, 2
Chart 1
Chart 2, 5
Chart 2
- Combination 4 Types**

A 1	A 2	C 8	C30
A 2	A24	C10	-X 6
A14	C11	C30	-X 6
A14	C 8	C12	C30
- Combination of Applicable Chart**

Chart 1, 2, 5
Chart 1, 2
Chart 2, 5
Chart 2, 5

How to order model with auto switches
Refer to page 246 for "How to Order" products with auto switch.

Combination of simple specials and made-to-order, it is possible for up to 4 types.

Combination Chart of Simple Specials for Tip End Shape

Chart 1. Combination between -XA□ and -XA□ (S, W shaft)

Symbol	Description	Top port	Shaft type	Applicable size	Combination
		Upper	Lower		
XA 1	Female thread at the end	●	—	10, 15	XA 1
XA 2	Female thread at the end	—	●	20, 30, 40	XA 2
XA 3	Tip end of male thread	—	—	10, 15	XA 3
XA 4	Tip end of male thread	—	—	20, 30, 40	XA 4
XA 5	Stepped round shaft	—	—	10, 15	XA 5
XA 6	Stepped round shaft	—	—	20, 30, 40	XA 6
XA 7	Round shaft with steps and male thread	—	—	10, 15	XA 7
XA 8	Round shaft with steps and male thread	—	—	20, 30, 40	XA 8
XA 9	Change of the length of standard chamfered face	—	—	10, 15	XA 9
XA10	Change of the length of standard chamfered face	—	—	20, 30, 40	XA10
XA11	Two-sided chamfer	—	—	10, 15	XA11
XA12	Two-sided chamfer	—	—	20, 30, 40	XA12
XA13	Shaft through-hole	—	—	10, 15	XA13
XA14	Shaft through-hole and female thread	—	—	20, 30, 40	XA14
XA15	Shaft through-hole and female thread	—	—	10, 15	XA15
XA16	Shaft through-hole and female thread	—	—	20, 30, 40	XA16
XA17	Shortened shaft	—	—	10, 15	XA17
XA18	Shortened shaft	—	—	20, 30, 40	XA18
XA19	Shortened shaft	—	—	10, 15	XA19
XA20	Reversed shaft	—	—	20, 30, 40	XA20
XA21	Stepped round shaft with double-sided chamfer	—	—	10, 15	XA21
XA22	Stepped round shaft with double-sided chamfer	—	—	20, 30, 40	XA22
XA23	Right-angle chamfer	—	—	10, 15	XA23
XA24	Double key	—	—	20, 30, 40	XA24

* Describes the combination available for corresponding shaft shapes.

Combination Chart of Made to Order

Chart 2. Combination between -XA□ and -XC□ (Made to Order/ Details of -XC□, refer to page 266.)

Symbol	Description	Applicable size	Combination XA1 to XA24	Symbol	Description	Applicable size	Combination XA1 to XA24
XC 7	Reversed shaft	10, 15 20, 30, 40	—	XC18	Change of rotating range	20, 30, 40	●
XC 8	Change of rotating range		●	XC19			●
XC 9			●	XC20			●
XC10			●	XC21	●		
XC11			●	XC22	Without inner rubber bumper	10, 15	●
XC12	Change in angle adjustable range 0° to 100°		●	XC30	Fluorine grease	10, 15, 20, 30, 40	●
XC13			●	XC69	Fluororubber seal	10, 15, 20, 30, 40	●
XC14			●				
XC15			●				
XC16	Change in angle adjustable range 90° to 190°		●				
XC17		●					

* Chart 5. Refer to page 266 for combination available between -XC

* Chart 5. Refer to page 266 for combination available between -XC□ and -XC□.

Shaft Pattern Sequencing I


-XA1 to XA8

Additional Reminders

1. Enter the dimensions within a range that allows for additional machining.
2. SMC will make appropriate arrangements if no dimensional, tolerance, or finish instructions are given in the diagram.
3. The length of the unthreaded portion is 2 to 3 pitches.
4. Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
5. Enter the desired figures in the portion of the diagram.
6. XA1 to XA24 are the standard products that have been additionally machined.
7. Chamfer face of the parts machining additionally is C0.5.

Symbol: A1


Machine female threads into the long shaft.
The maximum dimension L1 is, as a rule, twice the thread size (Example) For M3: L1 = 6
• Applicable shaft types: S, W

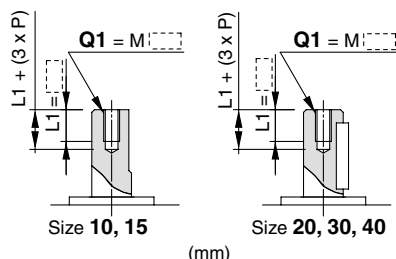

Size	Q1
10	M3
15	M3, M4
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A2


Machine female threads into the short shaft.
The maximum dimension L2 is, as a rule, twice the thread size. (Example) For M4: L2 = 8
• Applicable shaft types: S, W

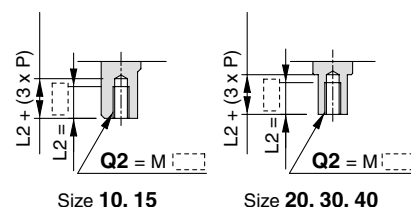

Size	Q2
10	M3
15	M3, M4
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A3


The long shaft can be further shortened by machining male threads into it.
(If shortening the shaft is not required, indicate "*" for dimension X.)
• Applicable shaft types: S, W

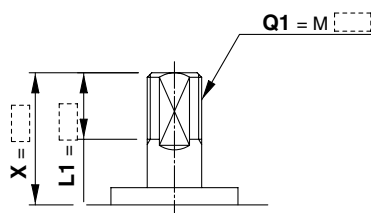

Size	X	L1 max	Q1
10	9 to 18	X - 4	M5
15	10 to 20	X - 4	M6

Symbol: A4


The short shaft can be further shortened by machining male threads into it.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
• Applicable shaft type: W

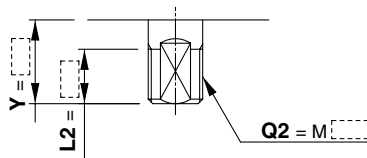

Size	Y	L2 max	Q2
10	7 to 9	Y - 2	M5
15	8 to 10	Y - 3	M6

Symbol: A5


The long shaft can be further shortened by machining it into a stepped round shaft.
(If shortening the shaft is not required, indicate "*" for dimension X.)
(If not specifying dimension C1, indicate "*" instead.)
• Applicable shaft types: S, W
• Equal dimensions are indicated by the same marker.

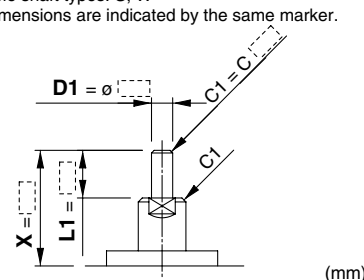

Size	X	L1 max	D1
10	3 to 18	X - 2	ø3.5 to ø4.9
15	3 to 20	X - 2	ø3.5 to ø5.9

Symbol: A6


The short shaft can be further shortened by machining it into a stepped round shaft.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
(If not specifying dimension C2, indicate "*" instead.)
• Applicable shaft type: W
• Equal dimensions are indicated by the same marker.

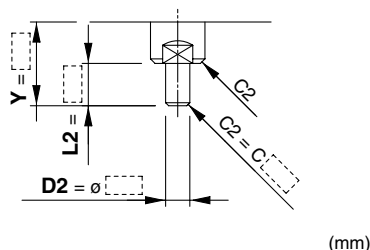

Size	Y	L2 max	D2
10	1 to 9	Y	ø3.5 to ø4.9
15	1 to 10	Y	ø3.5 to ø5.9

Symbol: A7


The long shaft can be further shortened by machining it into a stepped round shaft with male threads.
(If shortening the shaft is not required, indicate "*" for dimension X.)
(If not specifying dimension C1, indicate "*" instead.)
• Applicable shaft types: S, W

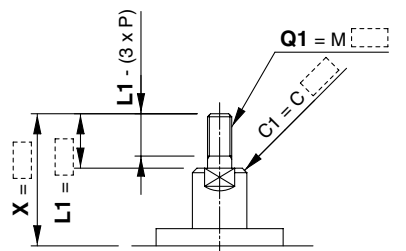

Size	X	L1 max	Q1
10	8 to 18	X - 2	M3, M4
15	9.5 to 20	X - 2	M3, M4, M5

Symbol: A8

The short shaft can be further shortened by machining it into a stepped round shaft with male threads.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
(If not specifying dimension C2, indicate "*" instead.)
• Applicable shaft type: W

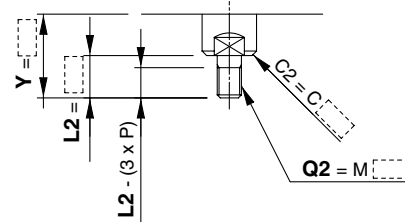

Size	Y	L2 max	Q2
10	6 to 9	Y	M3, M4
15	7.5 to 10	Y	M3, M4, M5

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X

MSQX

MRQ

D-□

Series **CRQ2** (Size: 10, 15, 20, 30, 40)

Simple Specials:

-XA1 to -XA24: Shaft Pattern Sequencing I

Shaft pattern sequencing is dealt with a simple made-to-order system. (Refer to front matter 33.)
Please contact SMC for a specification sheet when placing an order.

Shaft Pattern Sequencing I


Additional Reminders

1. Enter the dimensions within a range that allows for additional machining.
2. SMC will make appropriate arrangements if no dimensional, tolerance, or finish instructions are given in the diagram.
3. The length of the unthreaded portion is 2 to 3 pitches.
4. Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
5. Enter the desired figures in the portion of the diagram.
6. XA9 to XA24 are the standard products that have been additionally machined.
7. Chamfer face of the parts machining additionally is C0.5.

Symbol: A9

The long shaft can be further shortened by changing the length of the standard chamfer on the long shaft side.
(If shortening the shaft is not required, indicate "*" for dimension X.)

- Applicable shaft types: S, W




Size	X	L1
10	8 to 18	{10 - (18 - X)} to (X - 2)
15	10 to 20	{10 - (20 - X)} to (X - 2)

Symbol: A10

The short shaft can be further shortened by changing the length of the standard chamfer.
(If shortening the shaft is not required, indicate "*" for dimension Y.)

- Applicable shaft type: W




Size	Y	L2
10	3 to 9	6 - (9 - Y) to Y
15	3 to 10	7 - (10 - Y) to Y

Symbol: A11

The long shaft can be further shortened by machining a double-sided chamfer on to it.

- Since L1 is a standard chamfer, dimension E1 is 0.5 or more.
(If altering the standard chamfer and shortening the shaft are not required, indicate "*" for both the L1 and X dimensions.)
- Applicable shaft types: S, W

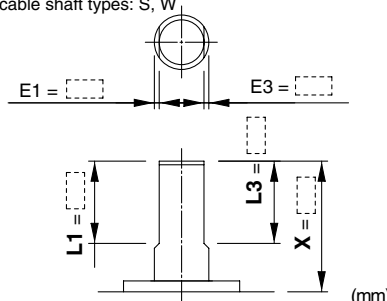


Size	X	L1	L3 max
10	8 to 18	{10 - (18 - X)} to (X - 2)	X - 2
15	10 to 20	{10 - (20 - X)} to (X - 2)	X - 2

Symbol: A12

The short shaft can be further shortened by machining a double-sided chamfer on to it.

- Since L2 is a standard chamfer, dimension E2 is 0.5 or more.
(If altering the standard chamfer and shortening the shaft are not required, indicate "*" for both the L2 and Y dimensions.)
- Applicable shaft type: W

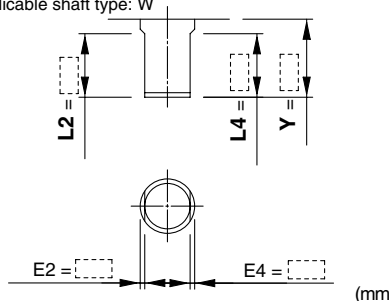


Size	Y	L2	L4 max
10	3 to 9	6 - (9 - Y) to Y	Y
15	3 to 10	7 - (10 - Y) to Y	Y

Symbol: A13

Shaft with through-hole
Minimum machining diameter for d1 is 0.1.

- Applicable shaft types: S, W

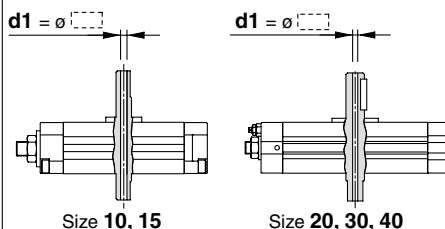


Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø3.5
30	ø3 to ø5.5
40	ø4 to ø7

Symbol: A14

A special end is machined onto the long shaft, and a through-hole is drilled into it. Female threads are machined into the through-hole, whose diameter is equivalent to the pilot hole diameter.

- The maximum dimension L1 is, as a rule, twice the thread size.
(Example) For M3: L1 = 6
- Applicable shaft types: S, W

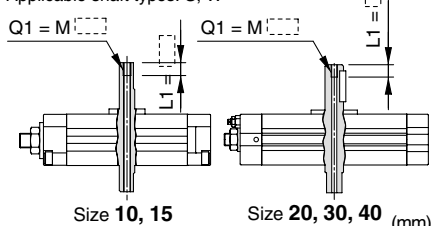


Size	10	15	20	30	40
Thread					
M3 x 0.5	ø2.5	ø2.5	ø2.5	—	—
M4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5

Symbol: A15

A special end is machined onto the short shaft, and a through-hole is drilled into it. Female threads are machined into the through-hole, whose diameter is equivalent to the pilot hole diameter.

- The maximum dimension L2 is, as a rule, twice the thread size. (Example) For M4: L2 = 8
- Applicable shaft types: S, W

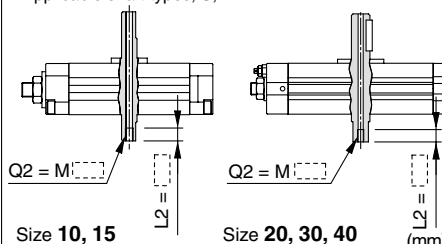


Size	10	15	20	30	40
Thread					
M3 x 0.5	ø2.5	ø2.5	ø2.5	—	—
M4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5

Symbol: A16

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size. (Example) For M5: L1 = 10
- Applicable shaft types: S, W
- Equal dimensions are indicated by the same marker.

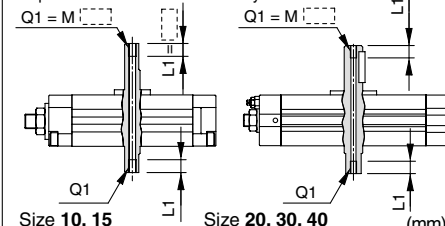


Size	10	15	20	30	40
Thread					
M3 x 0.5	ø2.5	ø2.5	ø2.5	—	—
M4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5

Symbol: **A17**

Shorten the long shaft.

- Applicable shaft types: S, W




Size	X (mm)
10	2 to 18
15	2 to 20
20	17 to 30
30	18 to 32
40	18.5 to 36

Symbol: **A18**

Shorten the short shaft.

- Applicable shaft type: W

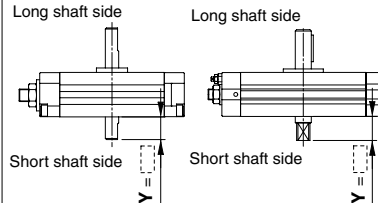


Size	Y (mm)
10, 15	1 to 9
20, 30, 40	1 to 10
10	1 to 9
15	1 to 10
20	1 to 15
30	1 to 18
40	1 to 20

Symbol: **A19**

Both the long shaft and short shaft are shortened.

- Applicable shaft type: W




Size	X (mm)	Y (mm)
10	2 to 18	1 to 9
15	2 to 20	1 to 10
20	17 to 30	1 to 15
30	18 to 32	1 to 18
40	18.5 to 36	1 to 20

Symbol: **A20**

Reverse the assembly of the shaft. (Thus shortening the long end and the short end of the shaft.)
(If shortening the shaft is not required, indicate "*" for dimension X and Y.)

- Applicable shaft types: S, W

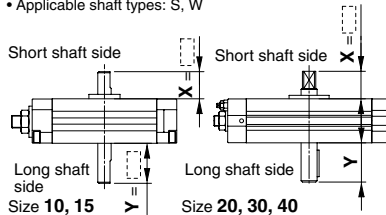


Size	X (mm)	Y (mm)
10	2 to 10	1 to 17
15	2 to 11	1 to 19
20	2.5 to 16.5	16 to 28.5
30	3 to 20	16 to 30
40	3 to 22	16.5 to 34

Symbol: **A21**

The long shaft can be further shortened by machining it into a stepped round shaft with a double-sided chamfer.
(If shortening the shaft is not required, indicate "*" for dimension X.) (If not specifying dimension C1, indicate "*" instead.)

- Applicable shaft types: S, W
- Equal dimensions are indicated by the same marker.

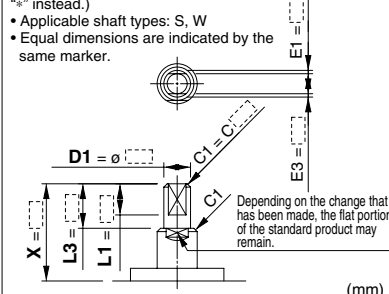


Size	X (mm)	L1 max (mm)	L3 (mm)	D1 (mm)
10	5 to 18	X - 3.5	L1 + 1.5	ø3.5 to ø4.9
15	5.5 to 20	X - 4	L1 + 2	ø3.5 to ø5.9

Symbol: **A22**

The short shaft can be further shortened by machining it into a stepped round shaft with a double-sided chamfer.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
(If not specifying dimension C2, indicate "*" instead.)

- Applicable shaft type: W
- Equal dimensions are indicated by the same marker.

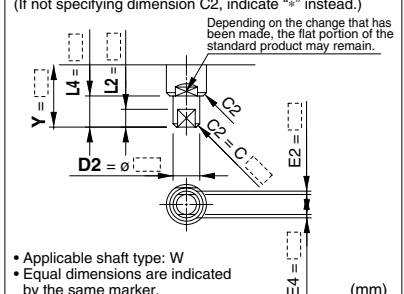


Size	Y (mm)	L2 max (mm)	L4 (mm)	D2 (mm)
10	3 to 9	Y - 1.5	L1 + 1.5	ø3.5 to ø4.9
15	3.5 to 10	Y - 2	L1 + 2	ø3.5 to ø5.9

Symbol: **A23**

The long shaft can be further shortened by machining right-angle double-sided chamfer onto it.

- Since L1 is a standard chamfer, dimension E1 is 0.5 or more.
(If altering the standard chamfer and shortening the shaft is not required, indicate "*" for both the L1 and X dimensions.)
- Applicable shaft types: S, W




Size	X (mm)	L1 (mm)	L3 max (mm)
10	8 to 18	{10 - (18 - X)} to (X - 2)	X - 2
15	10 to 20	{10 - (20 - X)} to (X - 2)	X - 2

Symbol: **A24**

Double key

Keys and keyways are machined at 180° from the standard position.

- Applicable shaft types: S, W
- Equal dimensions are indicated by the same marker.



Size	Key dimensions (mm)	LL (mm)
20	4 x 4 x 20	3
30	4 x 4 x 20	4
40	5 x 5 x 25	5

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X

MSQX

MRQ

D-□

Series **CRQ2** (Size: 10, 15, 20, 30, 40)

Simple Specials:

-XA31 to -XA59: Shaft Pattern Sequencing II

Shaft pattern sequencing is dealt with a simple made-to-order system. (Refer to front matter 33.)
Please contact SMC for a specification sheet when placing an order.

Shaft Pattern Sequencing II

Applicable shaft type: X, Y, Z, T, J and K

How to Order

C **D** **RQ2B** **T** **P** **20** **90** **C** **-M9BW** **-X** **A34** **A37** **C30** **-X6**

Built-in magnet

Nil	None
D	Built-in magnet

Shaft type

X	Single shaft with four chamfers
Y	Double shaft key
Z	Double shaft with four chamfers
T	Single round shaft
J	Double shaft
K	Double round shaft

* Refer to pages 254 and 255 for the shaft type variations.

Size

10
15
20
30
40

Auto switch

Refer to page 246 for "How to Order" products with auto switches.

Air cushion

Size	Air cushion	
	None	Attached
10, 15	Nil	—
20, 30, 40		C

Rotating angle

90	80° to 100°
180	170° to 190°
360	350° to 370°

Pattern

How to order model with auto switches

Refer to page 246 for "How to Order" products with auto switches.

Thread type

Size	Port type	
10, 15	Nil	M5
	Nil	Rc 1/8
20, 30, 40	TF	G 1/8
	TN	NPT 1/8
	TT	NPTF 1/8

Symbol for simple specials, made to order products

- When number of combinations is 1 or 2, refer to chart 3 and 4.
- Combination of XA is possible for up to 2 types.
- Combination of -X6 (shaft, parallel key stainless spec) is available for all the types.

Combination 3 Types

A33	A34	C30
A34	A37	-X6
A35	C30	C12
A40	C8	-X6

Combination of Applicable Chart

Chart 3, 4
Chart 3
Chart 4, 5
Chart 4, 5

Combination is available only when all the conditions are fulfilled among the nation chart above.

Combination 4 Types

A33	A34	C30	C12
A34	A37	C12	-X6
A43	C12	C30	-X6

Combination of Applicable Chart

Chart 3, 4, 5
Chart 3, 4
Chart 4, 5

Combination is available only when all the conditions are fulfilled among the nation chart above.

* Combination of simple specials and made-to-order, it is possible for up to 4 types.

-XA31 to XA59

Combination Chart of Simple Specials for Tip End Shape

Chart 3. Combination between -XA□ and -XA□ (X, Y, Z, T, J, K shafts)

Symbol	Description	Top port		Shaft type							Applicable size	Combination															
		Upper	Lower	J	K	T	X	Y	Z																		
XA31	Female thread at the end	●	—	—	—	—	—	●	—	20, 30, 40	XA31	* Corresponding shafts type available for combination															
XA32	Female thread at the end	—	●	—	—	—	—	●	—		Y *															XA32	
XA33	Female thread at the end	●	—	●	●	●	—	—	—	10, 15, 20, 30, 40	—	—	XA33														
XA34	Female thread at the end	—	●	—	●	●	●	—	—		—	—	—	K, T *	XA34												
XA35	Female thread at the end	●	—	—	—	—	—	●	—	20, 30, 40	—	—	—	—	XA35												
XA36	Female thread at the end	—	●	●	—	—	—	—	●		—	—	—	J *	—	X, Z *	XA36										
XA37	Stepped round shaft	●	—	●	●	●	—	—	—	10, 15, 20, 30, 40	—	—	—	KT *	—	J *	XA37										
XA38	Stepped round shaft	—	●	—	●	—	—	—	—		—	—	—	K *	—	—	—	K *									
XA39	Shaft through hole	●	●	—	—	—	—	—	●	20, 30, 40	—	—	—	—	—	—	—										
XA40	Shaft through hole	●	●	—	●	●	—	—	—		10, 15, 20, 30, 40	—	—	—	—	—	—	—									
XA41	Shaft through hole	●	●	●	—	—	—	●	—	20, 30, 40	—	—	—	—	—	—	—										
XA42	Shaft through hole and female thread	●	●	—	—	—	—	—	●		20, 30, 40	—	—	—	—	—	—	—									
XA43	Shaft through hole and female thread	●	●	—	●	●	—	—	—	10, 15, 20, 30, 40	—	—	—	—	—	—	—										
XA44	Shaft through hole and female thread	●	●	●	—	—	—	●	—		●	—	—	—	—	—	—	—									
XA45	Middle-cut chamfer	●	—	●	●	●	—	—	—	20, 30, 40	—	—	—	K *	—	J *	—	K *	XA38	XA39	XA40	XA41	XA45				
XA46	Middle-cut chamfer	—	●	—	●	—	—	—	—		—	—	—	K *	—	—	—	K *	—	—	—	—	K *	XA46			
XA48	Change of long shaft length	●	—	—	—	—	—	—	●	20, 30, 40	—	Y *	Y *	—	—	—	—	—	Y *	—	—	—	—				
XA49	Change of short shaft length	—	●	—	—	—	—	—	●		—	Y *	—	—	—	—	—	—	—	Y *	—	—	—	—			
XA50	Change of double shaft length	●	●	—	—	—	—	—	●	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	Y *	—	—	—	—				
XA51	Change of long shaft length	●	—	●	●	●	—	—	—		—	—	—	K, T *	—	J *	—	K *	—	K, T *	—	—	K *				
XA52	Change of short shaft length	—	●	—	●	—	—	—	—	20, 30, 40	—	—	K *	—	—	—	K *	—	K *	—	K, T *	—	—				
XA53	Change of double shaft length	●	●	—	●	—	—	—	—		—	—	—	—	—	—	—	—	K *	—	—	—	—				
XA54	Change of long shaft length	●	—	—	—	—	—	●	—	20, 30, 40	—	—	—	X *	—	Z *	—	—	—	—	X, Z *	—	—				
XA55	Change of short shaft length	—	●	●	—	—	—	—	●		—	—	—	J *	—	Z *	—	J *	—	—	—	J, Z *	—	J *			
XA56	Change of double shaft length	●	●	—	—	—	—	—	●	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	Z *	—	—				
XA57	Change of double shaft length	●	●	●	—	—	—	—	—		—	—	—	—	—	—	—	—	—	—	J *	—	—				
XA58	Reversed shaft, Change of double shaft length	●	●	●	—	●	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	T *	J *	—	—				
XA59	Reversed shaft, Change of double shaft length	●	●	—	—	—	●	—	—		—	—	—	—	—	—	—	—	—	—	X *	—	—				

Combination Chart of Made to Order

Chart 4. Combination between -XA□ and -XC□ (Made to Order/Details of -XC□, refer to page 266.)

Symbol	Description	Applicable size	Combination
			XA31 to XA59
XC 7	Reversed shaft	10, 15, 20, 30, 40	—
XC 8	Change of rotating range		●
XC 9			●
XC10			●
XC11			●
XC12			●
XC13	Change in angle adjustable range 0° to 100°		●
XC14			●
XC15			●
XC16	Change in angle adjustable range 90° to 190°		●
XC17			●
XC18	Change of rotating range	20, 30, 40	●
XC19			●
XC20	Change in angle adjustable range 90° to 190°		●
XC21			●
XC22	Without inner rubber bumper	10, 15	●
XC30	Fluorine grease	10, 15, 20, 30, 40	●
XC69	Fluororubber seal	10, 15, 20, 30, 40	●

* Chart 5. Refer to page 266 for combination available between -XC□ and -XC□.

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX

MRQ

D-□

Simple Specials:

-XA31 to -XA59: Shaft Pattern Sequencing II

Shaft pattern sequencing is dealt with a simple made-to-order system. (Refer to front matter 33.)
Please contact SMC for a specification sheet when placing an order.


Shaft Pattern Sequencing II

Additional Reminders

1. Enter the dimensions within a range that allows for additional machining.
2. SMC will make appropriate arrangements if no dimensional, tolerance, or finish instructions are given in the diagram.
3. The length of the unthreaded portion is 2 to 3 pitches.
4. Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
5. Enter the desired figures in the [] portion of the diagram.
6. XA31 to XA59 are the standard products that have been additionally machined.
7. Chamfer face of the parts machining additionally is C0.5.

Symbol: A31


- Machine female threads into the long shaft.
- The maximum dimension L1 is, as a rule, twice the thread size.
(Example) For M3: L1 = 6
 - Applicable shaft type: Y



Size	Q1
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A32


- Machine female threads into the short shaft.
- The maximum dimension L2 is, as a rule, twice the thread size.
(Example) For M4: L2 = 8
 - Applicable shaft type: Y

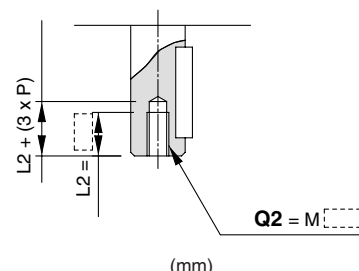

Size	Q2
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A33


- Machine female threads into the long shaft.
- The maximum dimension L1 is, as a rule, twice the thread size.
(Example) For M3: L1 = 6
 - Applicable shaft types: J, K, T

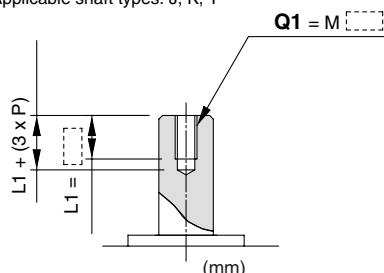

Size	Q1
10	M3
15	M3, M4
20	M3, M4, M5, M6
30	M4, M5, M6, M8
40	M4, M5, M6, M8, M10

Symbol: A34


- Machine female threads into the short shaft.
- The maximum dimension L2 is, as a rule, twice the thread size.
(Example) For M5: L2 = 10
 - Applicable shaft types: K, T, X

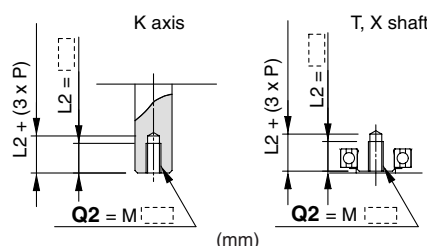

Size	Q2
10	M3
15	M3, M4
20	M3, M4, M5, M6
30	M4, M5, M6, M8
40	M4, M5, M6, M8, M10

Symbol: A35


- Machine female threads into the long shaft.
- The maximum dimension L1 is, as a rule, twice the thread size.
(Example) For M3: L1 = 6
 - Applicable shaft types: X, Z

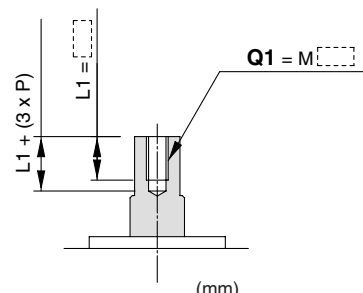

Size	Q1
20	M3, M4
30	M3, M4, M5, M6
40	M4, M5, M6, M8

Symbol: A36


- Machine female threads into the short shaft.
- The maximum dimension L2 is, as a rule, twice the thread size.
(Example) For M4: L2 = 8
 - Applicable shaft types: J, Z



Size	Q2
20	M3, M4
30	M3, M4, M5, M6
40	M4, M5, M6, M8

Symbol: A37


- The long shaft can be further shortened by machining it into a stepped round shaft. (If shortening the shaft is not required, indicate "*" for dimension X.) (If not specifying dimension C1, indicate "*" instead.)
- Applicable shaft types: J, K, T
 - Equal dimensions are indicated by the same marker.



Size	X	L1 max	D1
10	3 to 18	X - 2	ø3.5 to ø4.9
15	3 to 20	X - 2	ø3.5 to ø5.9
20	3.5 to 30	X - 2.5	ø5 to ø9.9
30	4 to 32	X - 3	ø5 to ø11.9
40	4 to 36	X - 3	ø5 to ø14.9

Symbol: A38

- The short shaft can be further shortened by machining it into a stepped round shaft. (If shortening the shaft is not required, indicate "*" for dimension Y.) (If not specifying dimension C2, indicate "*" instead.)
- Applicable shaft type: K
 - Equal dimensions are indicated by the same marker.




Size	Y	L2 max	D2
10	1 to 18	Y	ø3.5 to ø4.9
15	1 to 20	Y	ø3.5 to ø5.9
20	1 to 30	Y	ø5 to ø9.9
30	1 to 32	Y	ø5 to ø11.9
40	1 to 36	Y	ø5 to ø14.9

-XA31 to XA48

Symbol: A39


Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft type: Y



Size	d1
20	ø2.5 to ø3.5
30	ø3 to ø5.5
40	ø4 to ø7

Symbol: A40


Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft types: K, T

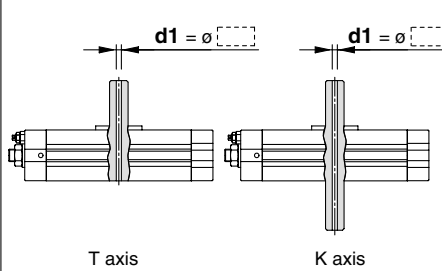

Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø6
30	ø3 to ø8
40	ø4 to ø10

Symbol: A41


Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft types: J, X, Z

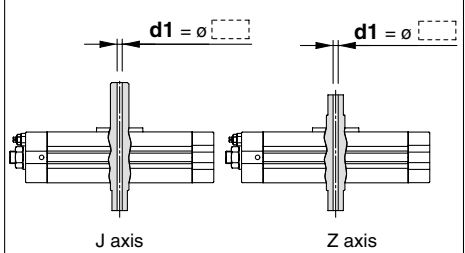

Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø5
30	ø3 to ø7
40	ø4 to ø8

Symbol: A42


A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts.
Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.
• The maximum dimension L1 is, as a rule, twice the thread size.
• Applicable shaft type: Y
• Equal dimensions are indicated by the same marker.

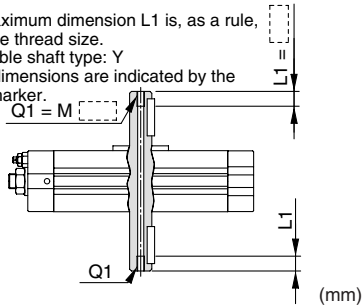

Size	20	30	40
Thread			
M3 x 0.5	ø2.5	—	—
M4 x 0.7	ø3.3	ø3.3	—
M5 x 0.8	—	ø4.2	ø4.2
M6 x 1	—	—	ø5

Symbol: A43


A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts.
Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.
• The maximum dimension L1 is, as a rule, twice the thread size.
• Applicable shaft types: K, T
• Equal dimensions are indicated by the same marker.

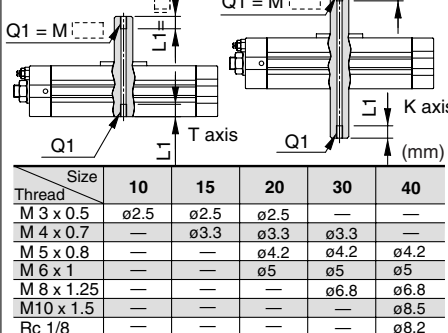

Size	10	15	20	30	40
Thread					
M3 x 0.5	ø2.5	ø2.5	ø2.5	—	—
M4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M5 x 0.8	—	—	ø4.2	ø4.2	ø4.2
M6 x 1	—	—	ø5	ø5	ø5
M8 x 1.25	—	—	—	ø6.8	ø6.8
M10 x 1.5	—	—	—	—	ø8.5
Rc 1/8	—	—	—	—	ø8.2

Symbol: A44


A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts.
Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.
• The maximum dimension L1 is, as a rule, twice the thread size.
• Applicable shaft types: J, X, Z
• Equal dimensions are indicated by the same marker.

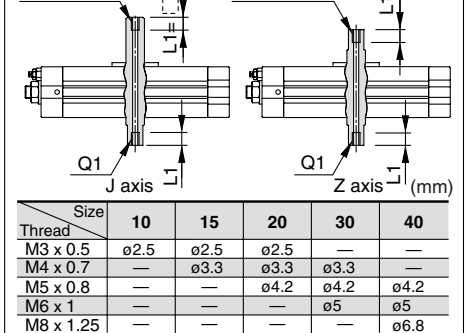

Size	10	15	20	30	40
Thread					
M3 x 0.5	ø2.5	ø2.5	ø2.5	—	—
M4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M5 x 0.8	—	—	ø4.2	ø4.2	ø4.2
M6 x 1	—	—	—	ø5	ø5
M8 x 1.25	—	—	—	—	ø6.8

Symbol: A45


The long shaft can be further shortened by machining a middle-cut chamfer into it.
(If shortening the shaft is not required, indicate "*" for dimension X.)
(The position is that of the standard flat at the keyway portion.)
• Applicable shaft types: J, K, T

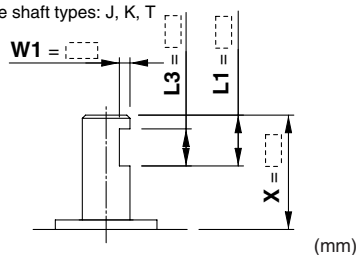

Size	X	W1	L1 max	L3 max
10	6 to 18	0.5 to 1.5	X - 2	L1 - 1
15	6.5 to 20	0.5 to 1.5	X - 2	L1 - 1
20	9.5 to 30	1 to 2	X - 2.5	L1 - 2
30	11.5 to 32	1 to 2	X - 3	L1 - 2
40	12.5 to 36	1 to 2	X - 3	L1 - 2

Symbol: A46


The short shaft can be further shortened by machining a middle-cut chamfer into it.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
(The position is that of the standard flat at the keyway portion.)
• Applicable shaft type: K

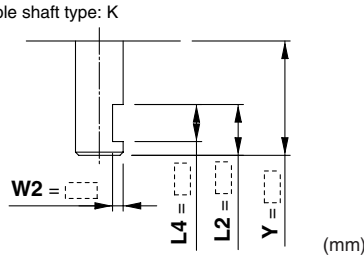

Size	Y	W2	L2 max	L4 max
10	4 to 18	0.5 to 1.5	Y	L2 - 1
15	4.5 to 20	0.5 to 1.5	Y	L2 - 1
20	6.5 to 30	1 to 2	Y	L2 - 2
30	8.5 to 32	1 to 2	Y	L2 - 2
40	9.5 to 36	1 to 2	Y	L2 - 2

Symbol: A48

Shorten the long shaft.
• Applicable shaft type: Y



Size	X
20	17 to 30
30	18 to 32
40	18.5 to 36

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X

MSQX

MRQ


D-□

Shaft Pattern Sequencing II

Symbol: A49

Shorten the short shaft.

- Applicable shaft type: Y




Size	Y (mm)
20	17 to 30
30	18 to 32
40	18.5 to 36

Symbol: A50

Both the long shaft and short shaft are shortened.

- Applicable shaft type: Y




Size	X (mm)	Y (mm)
20	17 to 30	17 to 30
30	18 to 32	18 to 32
40	18.5 to 36	18.5 to 36

Symbol: A51

Shorten the long shaft.

- Applicable shaft types: J, K, T

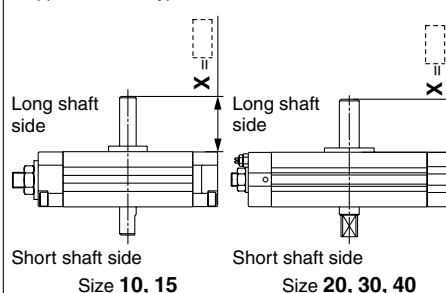


Size	X (mm)
10	3 to 18
15	3 to 20
20	3.5 to 30
30	4 to 32
40	4 to 36

Symbol: A52

Shorten the short shaft.

- Applicable shaft type: K

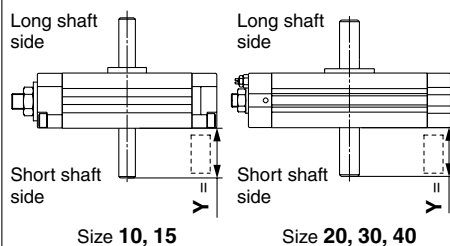


Size	Y (mm)
10	1 to 18
15	1 to 20
20	1 to 30
30	1 to 32
40	1 to 36

Symbol: A53

Both the long shaft and short shaft are shortened.

- Applicable shaft type: K

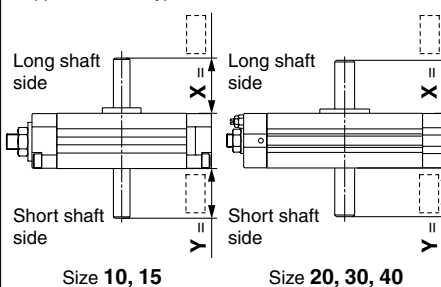


Size	X (mm)	Y (mm)
10	3 to 18	1 to 18
15	3 to 20	1 to 20
20	3.5 to 30	1 to 30
30	4 to 32	1 to 32
40	4 to 36	1 to 36

Symbol: A54

Shorten the long shaft.

- Applicable shaft types: X, Z

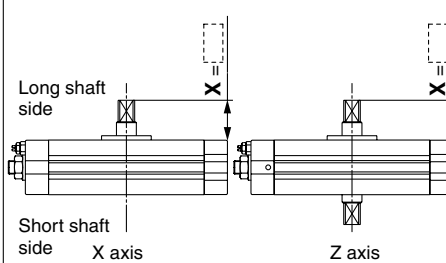


Size	X (mm)
20	3.5 to 21
30	4 to 24
40	4 to 27

Symbol: A55

Shorten the short shaft.

- Applicable shaft type: J, Z

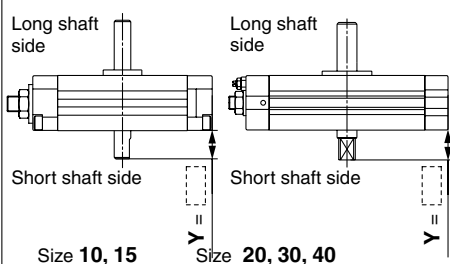


Size	Y (mm)
10	1 to 9
15	1 to 10
20	1 to 15
30	1 to 18
40	1 to 20

Symbol: A56

Both the long shaft and short shaft are shortened.

- Applicable shaft type: Z

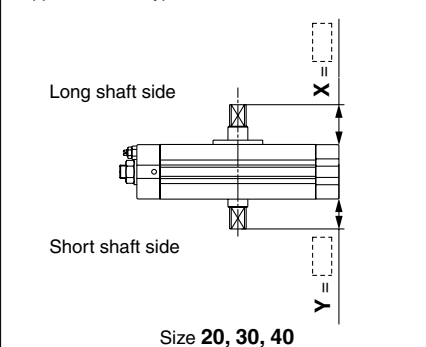


Size	X (mm)	Y (mm)
20	3.5 to 21	1 to 15
30	4 to 24	1 to 18
40	4 to 27	1 to 20

Symbol: A57

Both the long shaft and short shaft are shortened.

- Applicable shaft type: J

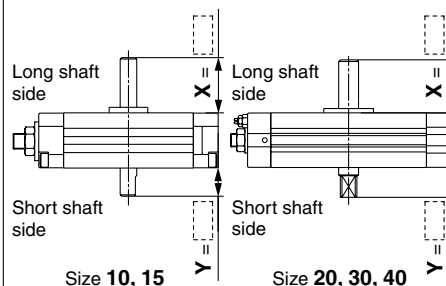


Size	X (mm)	Y (mm)
10	3 to 18	1 to 9
15	3 to 20	1 to 10
20	3.5 to 30	1 to 15
30	4 to 32	1 to 18
40	4 to 36	1 to 20

-XA49 to XA59

Symbol: **A58**

The rotation axis is reversed, and then shorten the long and short shafts.

- Applicable shaft type: J, T

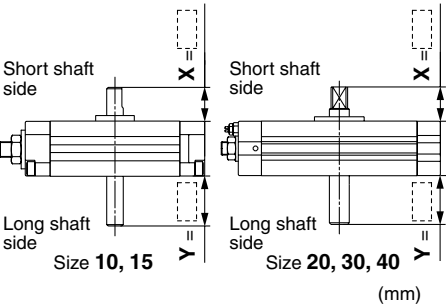


Size	X	Y
10	3 to 10	1 to 17
15	3 to 11	1 to 19
20	3.5 to 16.5	1 to 28.5
30	4 to 20	1 to 30
40	4 to 22	1 to 34

Symbol: **A59**

The rotation axis is reversed, and then shorten the long shaft.

- Applicable shaft type: X



Size	Y
20	1 to 19.5
30	1 to 22
40	1 to 25

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX

MRQ

D-□

Series **CRQ2** (Size: 10, 15, 20, 30, 40)

Made to Order Specifications: -XC7 to -XC22/XC30/XC69

XC7 to XC22, XC30, XC69

How to Order

C **D** **RQ2B** **S** **P** **20** **90** **M9BW** **X** **C7** **C12** **C30** **-X6**

- Built-in magnet**

Nil	None
D	Built-in magnet
- Shaft type**

Standard	Shaft type
S	Single shaft
W	Double shaft
X	Single shaft with four chamfers
Y	Double shaft key
Z	Double shaft with four chamfers
T	Single round shaft
J	Double shaft
K	Double round shaft
- Size**

10
15
20
30
40
- Auto switch**
Refer to page 246 for the part no. of auto switches.
- Air cushion**

Size	Air cushion	
	None	Attached
10, 15	Nil	—
20, 30, 40	Nil	C
- Rotating angle**

90	80° to 100°
180	170° to 190°
360	350° to 370°
- Thread type**

Size	Port type	
10, 15	Nil	M5
20, 30, 40	Nil	Rc 1/8
	TF	G 1/8
	TN	NPT 1/8
	TT	NPTF 1/8
- Symbol for simple specials, Made-to-order products**
 - When number of combinations is 1 or 2, refer to chart 2, 4 and 5.
 - * Combination of XA is possible for up to 2 types.
 - * Combination of -X6 (shaft, parallel key stainless spec.) is available for all the types.
- Combination 3 Types**
C7 C30 C22 C22 -X6 → Chart 5
- Combination of Applicable Chart**
Chart 5
- Combination 4 Types**
C7 C12 C30 -X6 → Chart 5
- Combination of Applicable Chart**
Chart 5

How to order model with auto switches
Refer to page 246 for "How to Order" products with auto switches.

Combination Chart of Made to Order

Combination Chart of Made to Order

Chart 5. Combination between -XC□ and -XC□

Symbol	Description	Applicable size	Combination			
XC7	Reversed shaft	10, 15, 20, 30, 40				
XC8 to XC11	Change of rotating range					
XC12 to XC15	Change in angle adjustable range 0° to 100°					
XC16 to XC17	Change in angle adjustable range 90° to 190°					
XC18	Change of rotating range					
XC19 to XC21	Change in angle adjustable range 90° to 190°	20, 30, 40	XC7 to XC17	XC18 to XC21		
XC22	Without inner rubber bumper	10, 15	●	XC21	XC22	
XC30	Fluorine grease	10, 15, 20, 30, 40	●	●	●	XC30
XC69	Fluororubber seal	10, 15, 20, 30, 40	●	●	●	●

Series **CRQ2** (Size: 10, 15, 20, 30, 40) Made to Order Specifications: **-XC7**

Please consult with SMC for further information on specifications, dimensions and delivery.

1 Reversed Shaft

-XC7

CRQ2B
CDRQ2B → Refer to "How to Order" on page 256. — **XC7**

Reversed shaft ●

Specifications

Applicable size	10, 15, 20, 30, 40
Applicable shaft type	S, W, X, T, J shaft

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1


CRQ2

MSQ


MSZ

CRQ2X
MSQX

MRQ

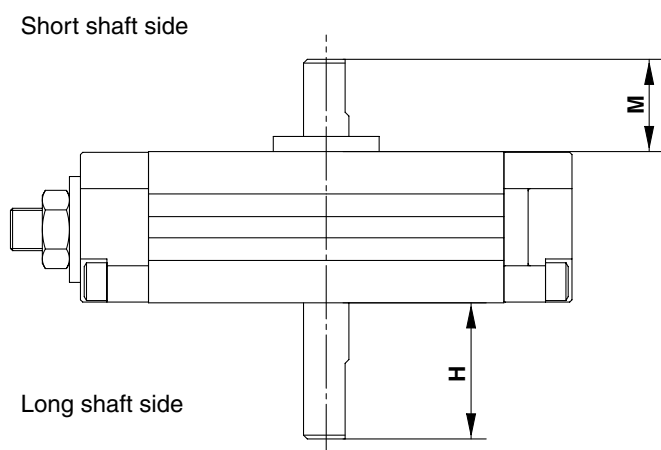

Size 10, 15

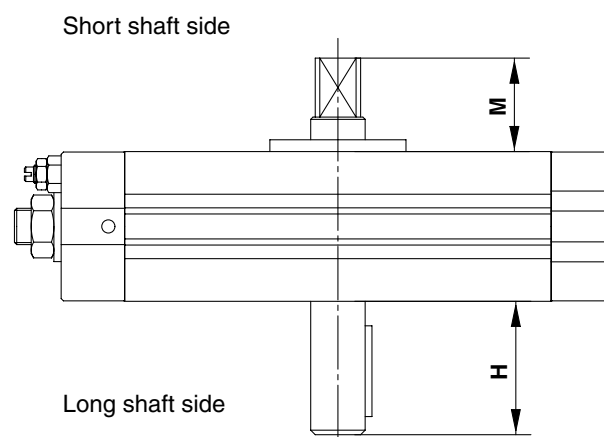

Size 20, 30, 40

Size	M	H	(mm)
10	10	17	(—)*
15	11	19	(—)*
20	16.5	28.5	(19.5)*
30	20	30	(22)*
40	22	34	(25)*

* For X shaft

D-□

2 Change of Rotating Range

-XC8 to XC11, XC18/XC19

CRQ2B
CDRQ2B

→ Refer to "How to Order" on page 256.

—X C8

Specifications

Applicable shaft type S, W, Y


Symbol
-XC8 to XC11, XC18/XC19

Additional Reminders

The rotation starting point shows the positions of one flat chamfering and the key groove when pressurized to the connecting port (B).

Symbol: **C8**


Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$.
Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$.
The rotation starting point is on the perpendicular line (down).

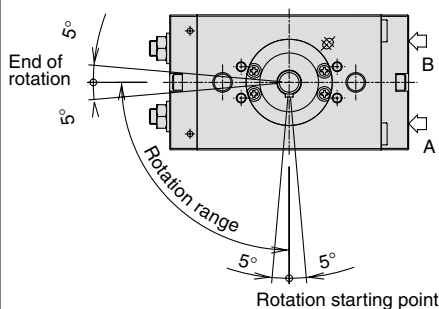

The figure shows the view from the long shaft end.

Symbol: **C9**


Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$.
Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$.
The rotation starting point is on the horizontal line (left).

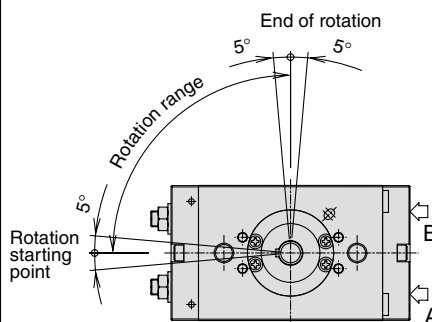

The figure shows the view from the long shaft end.

Symbol: **C10**


Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$.
Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$.
The rotation starting point is on the perpendicular line (up).

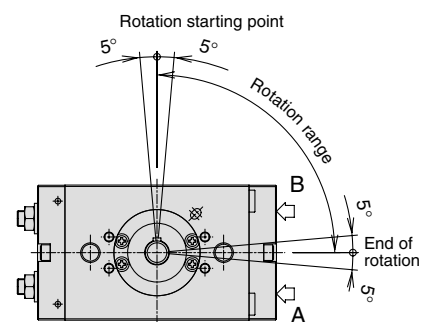

The figure shows the view from the long shaft end.

Symbol: **C11**


Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$.
Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$.
The rotation starting point is on the horizontal line (left).

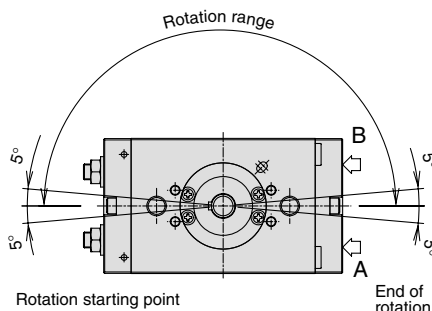

The figure shows the view from the long shaft end.

Symbol: **C18**


Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$.
Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$.
The rotation starting point is on the perpendicular line (down).

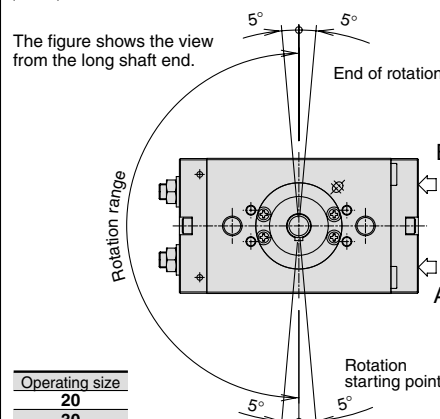

Operating size
20
30
40

Symbol: **C19**

Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$.
Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$.
The rotation starting point is on the perpendicular line (up).

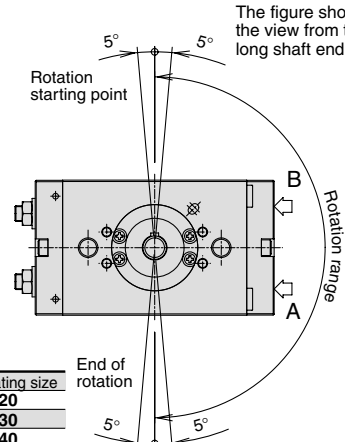

The figure shows the view from the long shaft end.

Operating size
20
30
40

Series **CRQ2** (Size: 10, 15, 20, 30, 40)

Made to Order Specifications:

-XC12 to XC17, XC20/XC21: Change of Angle Adjusting Range (0° to 100°, 90° to 190°)

Please consult with SMC for further information on specifications, dimensions and delivery.

3 Change of Angle Adjustable Range (0° to 100°, 90° to 190°)

-XC12 to XC17, XC20/XC21

CRQ2B
CDRQ2B → Refer to "How to Order" on page 256.

Symbol: **C12**

-XC12 to XC17, XC20/XC21

Specifications

Applicable shaft type S, W, Y, X*, Z*, T*, J*, K*

Additional Reminders


The rotation starting point is the position of the flat and the key groove when the actuator is pressurized through connection port B.

There are no air cushion effects in the rotating ranges of 70° or 160° shown in the diagram.

* Only XC12 and XC16 are compatible with shaft types X, Z, T, J and K.

Symbol: **C12**


The rotation angle can be adjusted between 0° and 100°.

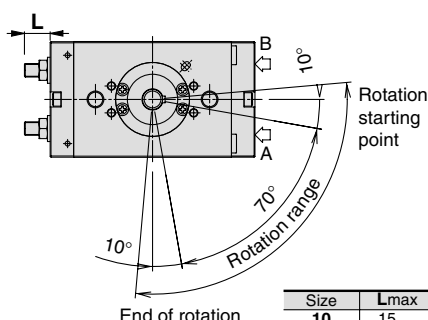

The figure shows the view from the long shaft end.

Symbol: **C13**


The rotation angle can be adjusted between 0° and 100°.

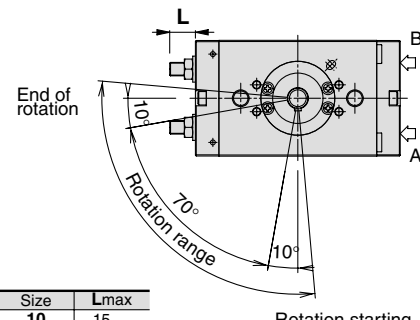

The figure shows the view from the long shaft end.

Symbol: **C14**


The rotation angle can be adjusted between 0° and 100°.

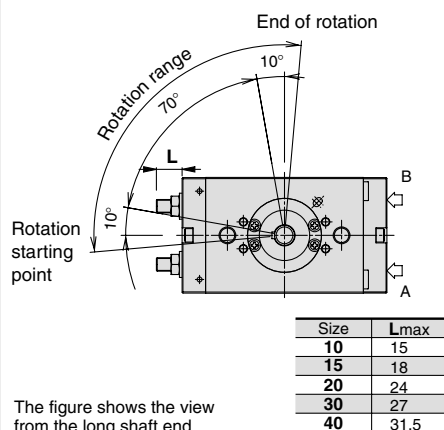

The figure shows the view from the long shaft end.

Symbol: **C15**


The rotation angle can be adjusted between 0° and 100°.

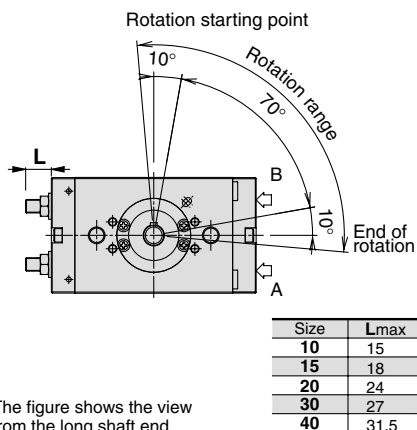

The figure shows the view from the long shaft end.

Symbol: **C16**


The rotation angle can be adjusted between 90° and 190°.

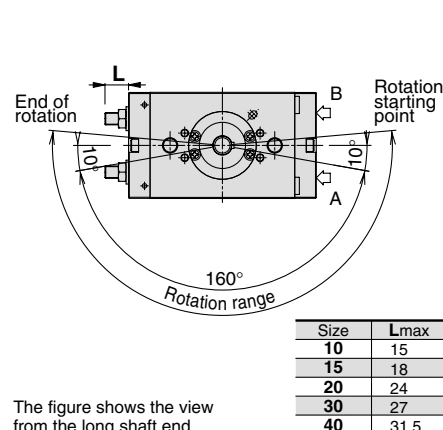

The figure shows the view from the long shaft end.

Symbol: **C17**


The rotation angle can be adjusted between 90° and 190°.

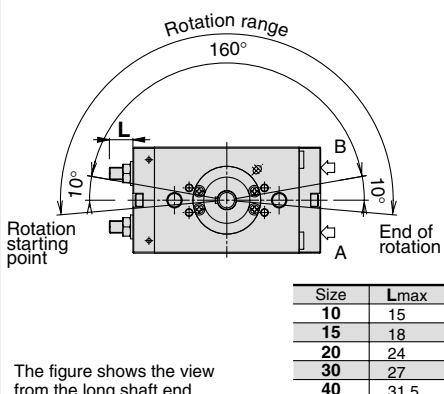

The figure shows the view from the long shaft end.

Symbol: **C20**


The rotation angle can be adjusted between 90° and 190°.

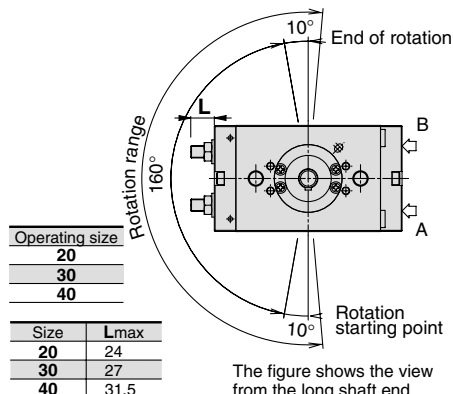

The figure shows the view from the long shaft end.

Symbol: **C21**

The rotation angle can be adjusted between 90° and 190°.

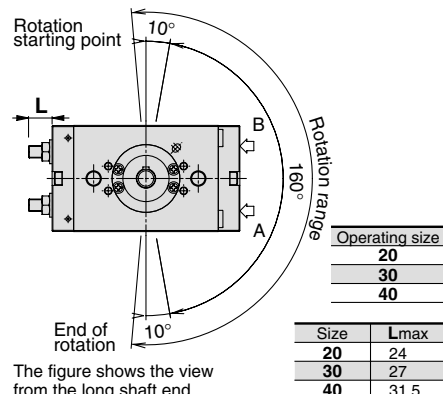

The figure shows the view from the long shaft end.

CRB2

CRBU2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X

MSQX

MRQ

D-□

Series CRQ2 (Size: 10, 15, 20, 30, 40)

Made to Order Specifications:

-XC22: Without Inner Rubber Bumper, -XC30: Fluorine Grease

-XC69: Fluororubber Seal, -X6: Shaft, Parallel Key Made of Stainless Steel Spec.

Please consult with SMC for further information on specifications, dimensions and delivery.

4 Without Inner Rubber Bumper -XC22

C RQ2B → Refer to “How to Order” on page 256. — XC22
CDRQ2B

Without inner rubber bumper

5 Fluorine Grease -XC30

C RQ2B → Refer to “How to Order” on page 256. — XC30
CDRQ2B

Fluorine grease

Fluorine grease is used as lubricant oil in seal part of packing and inner wall of cylinder. (Not for low-speed specification.)

Specifications

Fluid	Air (Non-lube)
Applicable size	10, 15
Max. operating pressure	0.7 MPa
Min. operating pressure	0.15 MPa
Port size	M5 x 0.8
Rotation	80° to 100°, 170° to 190°, 350° to 370°
Applicable shaft type	S, W, X, Y, Z, T, J, K
Auto switch	Mountable

*Refer to page 247 for other specifications.

Refer to page 250 for other specifications.

6 Fluororubber Seal -XC69

C RQ2B → Refer to “How to Order” on page 256. — XC69
CDRQ2B

Fluororubber seal

Seal material is changed to fluororubber.

7 Shaft, Parallel Key Made of Stainless Steel Spec. -X6

C RQ2B Shaft type Size — Rotation S-X6
CDRQ2B

Refer to “How to Order” on page 246 for further information.

Shaft, parallel key made of stainless steel

Stainless steel is used as a substitute material for standard parts when used under conditions with a possibility of oxidization or decay.

Fluid	Air (Non-lube)
Applicable shaft type	S, W, X, Y, Z, T, J, K
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached, Air cushion
Rotation range	80° to 100°, 170° to 190°, 350° to 370°
Stainless steel part	Shaft, Parallel key
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable